

DOT POST

E9B271-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Dot
Partner: Platek
Division: Exterior
Installation: Post
Product Type: Bollard - Garden
Mounting Location: Above Ground
Light Distribution: Direct

PHYSICAL

Shape: Disc
Diameter (mm): 32
Diameter (in): 1 ¼
Height (mm): 600
Height (in): 23 ⅝
Extension (mm): 177
Extension (in): 6 15⁄16
Screws: No visible screws
Fixture Finish: SST
Fixture Material: Stainless Steel AISI 316L
Primary Material: Stainless Steel

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 2.9
Total Output Wattage (W): 2.3
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: 0-10V/Phase Dimming Upon Request

LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 145
Nominal Lumen (lm): 175
CRI: >90 CRI
Lamp Life (hrs): 60000


OPTICAL

Optic°: 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK05
Upon Request: Higher Maximum Ambient Temperature


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

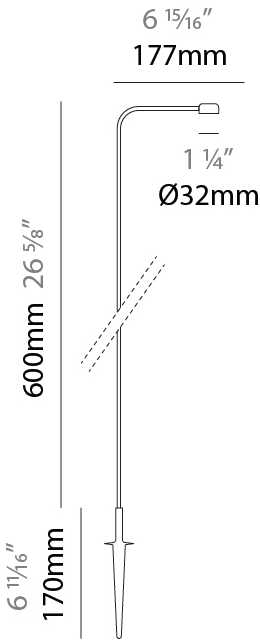

DOT POST

E9B271-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

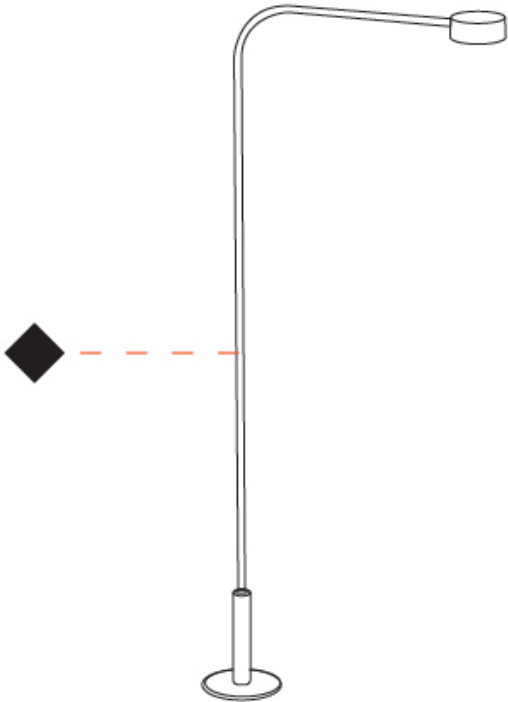

DOT POST

E9B272-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Dot
Partner: Platek
Division: Exterior
Installation: Post
Product Type: Bollard - Garden
Mounting Location: Above Ground
Light Distribution: Direct

PHYSICAL

Shape: Disc
Diameter (mm): 32
Diameter (in): 1 ¼
Height (mm): 800
Height (in): 31 ½
Extension (mm): 177
Extension (in): 6 15/16
Screws: No visible screws
Fixture Finish: SST
Fixture Material: Stainless Steel AISI 316L
Primary Material: Stainless Steel

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 2.9
Total Output Wattage (W): 2.3
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: 0-10V/ Phase Dimming Upon Request

LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 145
Nominal Lumen (lm): 175
CRI: >90 CRI
Lamp Life (hrs): 60000



OPTICAL

Optic°: 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK05
Upon Request: Higher Maximum Ambient Temperature


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

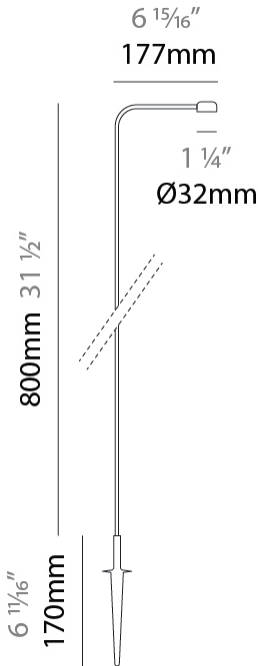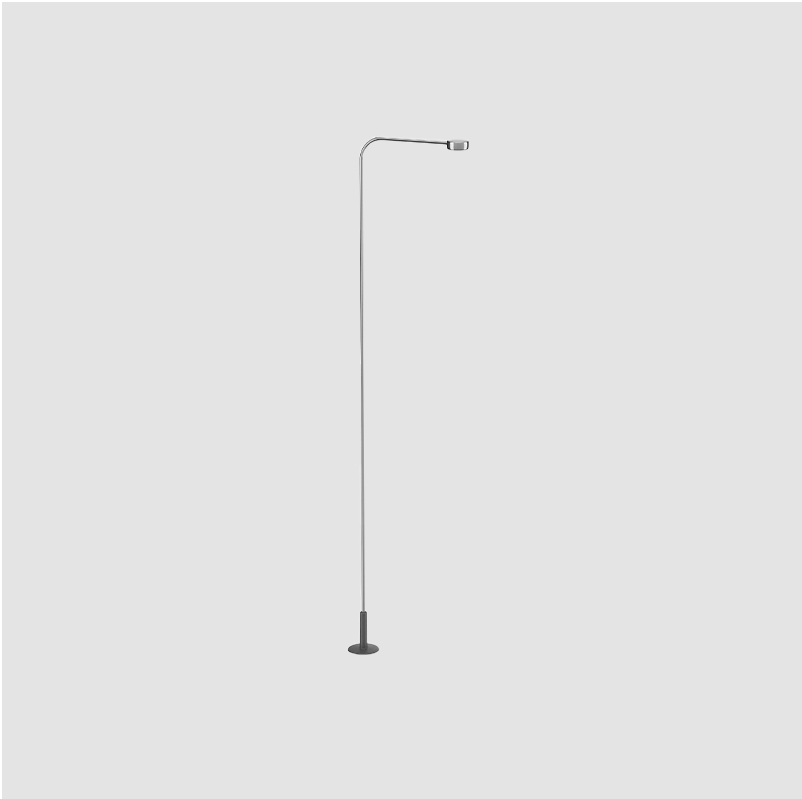

DOT POST

E9B272-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

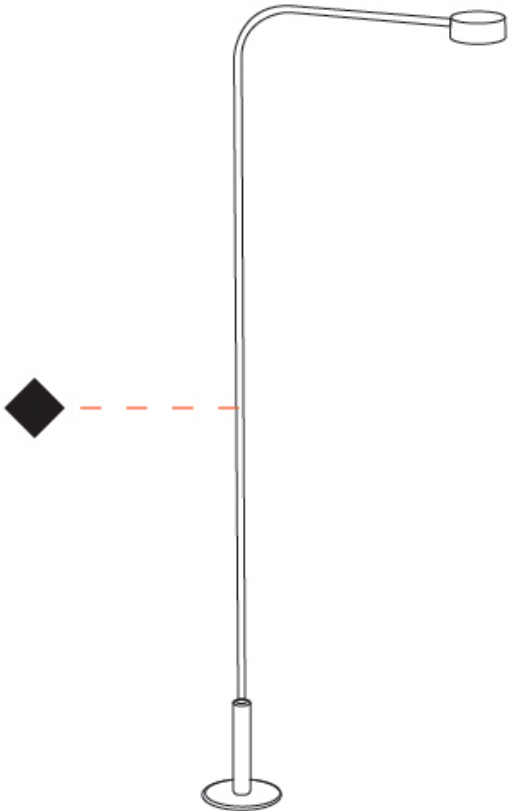

DOT POST

E9B273-

base number Color
Temperature

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Dot
Partner: Platek
Division: Exterior
Installation: Post
Product Type: Bollard - Garden
Mounting Location: Above Ground
Light Distribution: Direct

PHYSICAL

Shape: Disc
Diameter (mm): 32
Diameter (in): 1 ¼
Height (mm): 1000
Height (in): 39 ¾
Extension (mm): 177
Extension (in): 6 15/16
Screws: No visible screws
Fixture Finish: SST
Fixture Material: Stainless Steel AISI 316L
Primary Material: Stainless Steel

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 2.9
Total Output Wattage (W): 2.3
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: 0-10V/ Phase Dimming Upon Request

LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 145
Nominal Lumen (lm): 175
CRI: >90 CRI
Lamp Life (hrs): 60000



OPTICAL

Optic°: 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK05
Upon Request: Higher Maximum Ambient Temperature

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

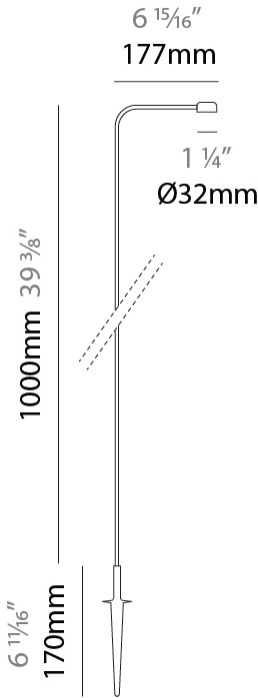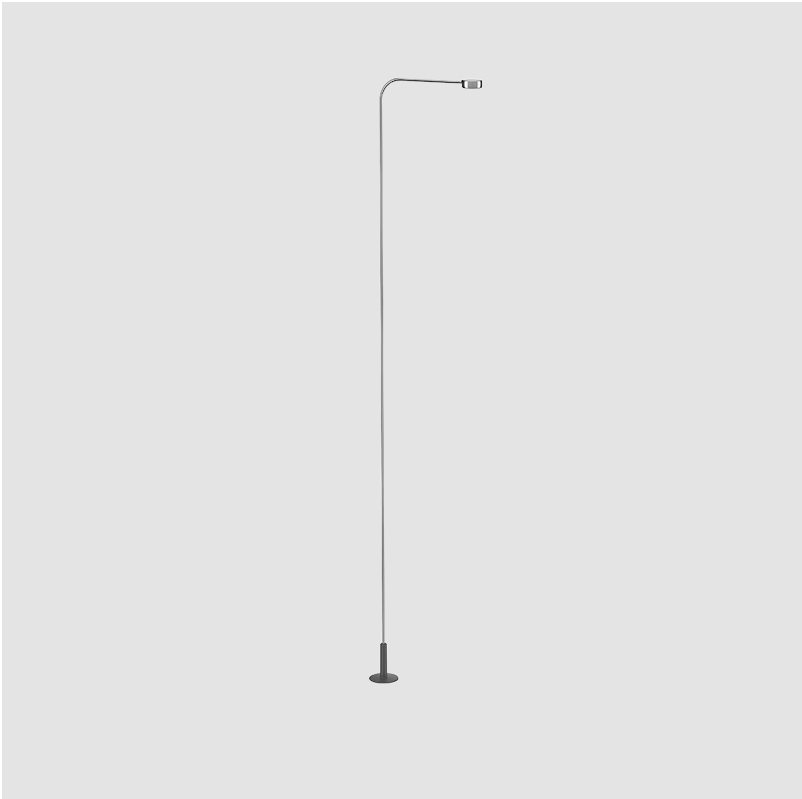

DOT PORTABLE

E9P002-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Dot
Partner: Platek
Division: Exterior
Installation: Portable
Product Type: Floor
Mounting Location: Above Ground
Light Distribution: Direct

PHYSICAL

Shape: Disc
Diameter (mm): 255.5
Diameter (in): 10 1/16
Height (mm): 1105
Height (in): 43 1/2
Extension (mm): 302.5
Extension (in): 11 15/16
Screws: No visible screws
Fixture Finish: SST
Fixture Material: Stainless Steel AISI 316L
Primary Material: Stainless Steel

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 5
Total Output Wattage (W): 4
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Inline Transformer Plug
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 215
Nominal Lumen (lm): 240
CRI: >90 CRI
Lamp Life (hrs): 60000



OPTICAL

Optic°: 120


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK05
Upon Request: Higher Maximum Ambient Temperature

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

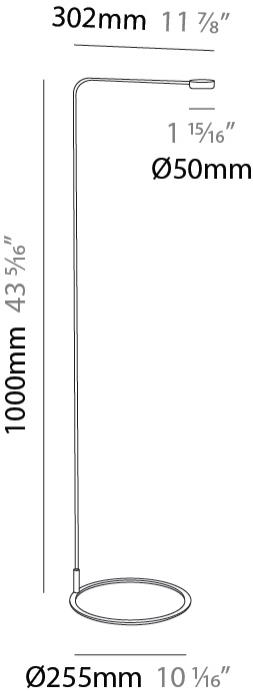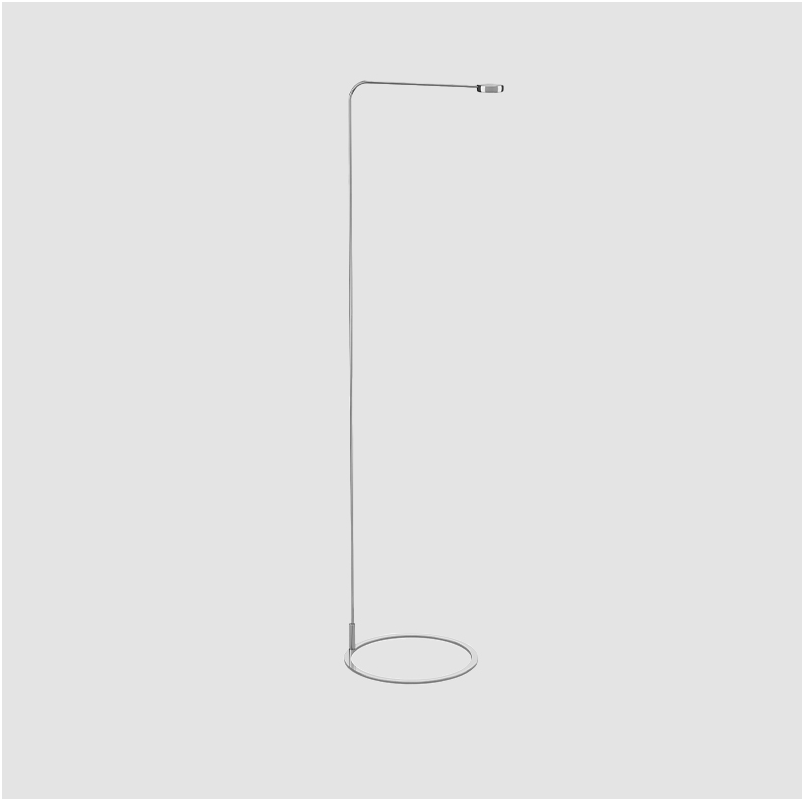

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

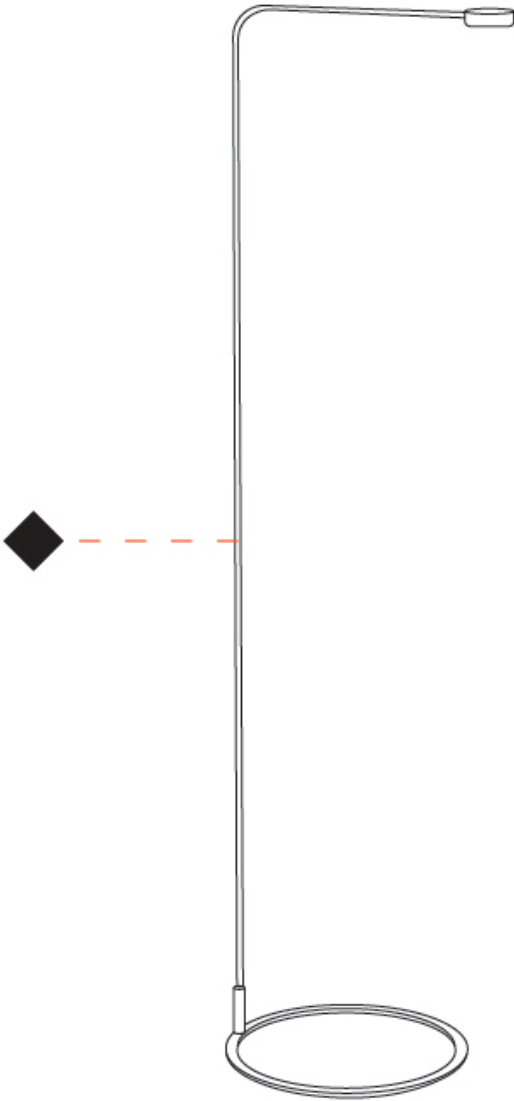

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)