

D112012-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcategory: Ambient
PHYSICAL
Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 470
Height (in): 18 ½
Light Distribution: Direct
Weight (kg): 3.3
Weight (lbs): 7.3
Diffuser: PMMA - Opal
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: BLK

Fixture Material: Fabric Cord / Metal Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards














D112012-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

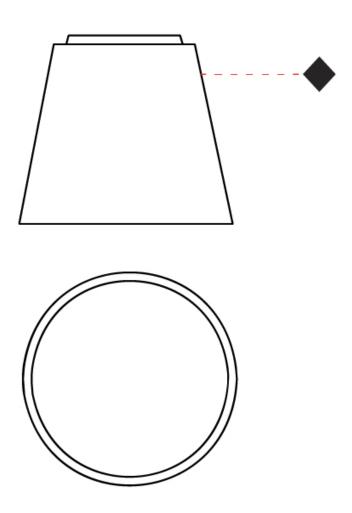





D112013-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcategory: Ambient
PHYSICAL
Shape: Drum
Diameter (mm): 600
Diameter (in): 23 ⁵ / ₈
Height (mm): 180
Height (in): 7 ½
Light Distribution: Direct
Weight (kg): 3
Weight (lbs): 6.6
Diffuser: PMMA - Opal
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: BLK

Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)


FLECTRICAL

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

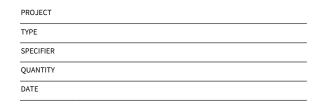










D112013-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

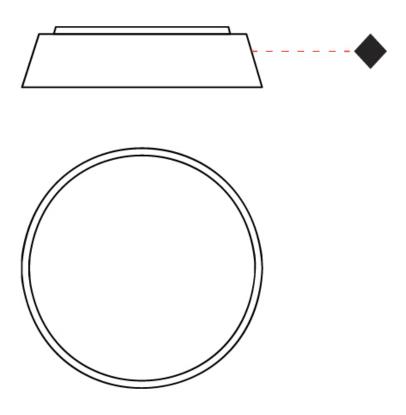





D112014-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum Brand: Ole Division: Design Mounting Type: Surface Mounting Location: Ceiling

Subcategory: Ambient **PHYSICAL** Shape: Drum Diameter (mm): 800 Diameter (in): 31 $\frac{1}{2}$ Height (mm): 280 Height (in): 11 Light Distribution: Direct Weight (kg): 4.4 Weight (lbs): 9.7 Diffuser: PMMA - Opal Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI Holder Finish: Black

Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 4 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D112014-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

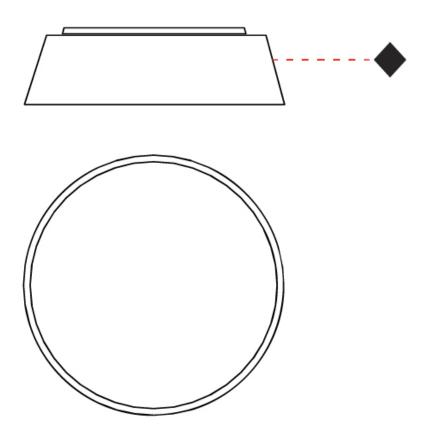





D114008-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Ambient	

PHYSICAL
Shape: Drum
Diameter (mm): 300
Diameter (in): 11 ¹³ / ₁₆
Height (mm): 490
Height (in): 19 ⁵ / ₁₆
Light Distribution: Direct / Indirect
Weight (kg): 1.7
Weight (lbs): 3.7

Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green / Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT


Fixture Material: Fabric Cord / Metal

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	


LED

OPTICAL **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

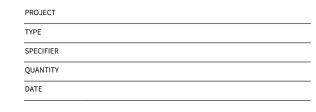















D114008-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	









D114009-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL

Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 1680
Height (in): 66 1/8
Light Distribution: Direct / Indirect
Weight (kg): 6
Weight (lbs): 13.2

weight (ibs): 13.2

Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green / Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

PROJECT			
TYPE	-		
SPECIFIER			
QUANTITY			
DATE			



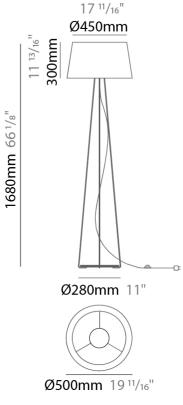







D114009-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

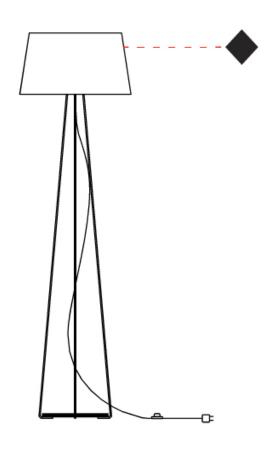







D114010-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Ambient	

PHYSICAL
Shape: Drum
Diameter (mm): 300
Diameter (in): 11 ¹³ / ₁₆
Height (mm): 340
Height (in): 13 3/8
Light Distribution: Direct / Indirect
Weight (kg): 1.7
Weight (lbs): 3.7
Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White
Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

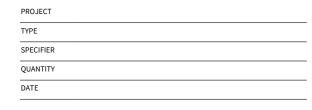















D114010-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	









D114011-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL
Shape: Drum
Diameter (mm): 500
Diameter (in): 19 ¹¹ / ₁₆
Height (mm): 1670
Height (in): 65 ³ / ₄
Light Distribution: Direct / Indirect
Weight (kg): 6
Weight (lbs): 13.2
Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24
1 0 17

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



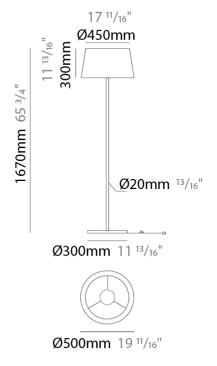







D114011-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

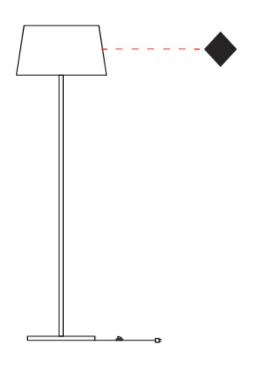







DRUM


COLOR FINISH CHART


-	PROJECT
-	ТҮРЕ
,	SPECIFIER
-	QUANTITY
ı	DATE

Fixture Finish

































Holder Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT
TYPE
NOTES
QUANTITY
DATE





















OLIVE - OLV Pant. 5625C	323
6	ALL STATES
¥	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	





PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











DRUM

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

					T
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	℀	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
M	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out	Ċ	free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	0	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d ←,+	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
\pm	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C. CO	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to $5.0 kg$ mass dropped from $400 mm$ above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) $\,$