

D114008-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Drum
Ī	Brand: Ole
Ī	Division: Design
Ī	Mounting Type: Portable
Ī	Mounting Location: Table
	Subcategory: Ambient

PHYSICAL
Shape: Drum
Diameter (mm): 300
Diameter (in): 11 ¹³ / ₁₆
Height (mm): 490
Height (in): 19 ⁵ / ₁₆
Light Distribution: Direct / Indirect
Weight (kg): 1.7
Weight (lbs): 3.7

Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green / Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal


ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

Certified By: Certified for North American Standards

RATINGS AND CERTIFICATIONS

















D114008-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	









D114009-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL

Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 1680	
Height (in): 66 ½	
Light Distribution: Direct / Indirect	
Weight (kg): 6	
Weight (lbs): 13.2	

Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green / Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



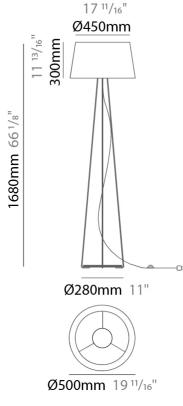







D114009-

ROJECT	
уре	
PECIFIER	_
UANTITY	
ATE	

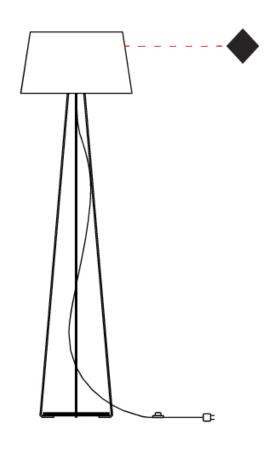







D114010-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Ambient	

PHYSICAL	
Shape: Drum	
Diameter (mm): 300	
Diameter (in): 11 ¹³ / ₁₆	
Height (mm): 340	
Height (in): 13 3/8	
Light Distribution: Direct / Indirect	
Weight (kg): 1.7	
Weight (lbs): 3.7	
Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / G Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White	reen

Fixture Finish: GWT
Fixture Material: Fabric Cord / Metal


ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

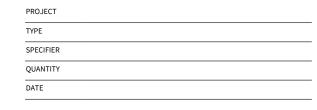















D114010-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	









D114011-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL
Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 1670
Height (in): 65 ³ / ₄
Light Distribution: Direct / Indirect
Weight (kg): 6
Weight (lbs): 13.2
Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Material: Fabric Cord / Metal

Fixture Finish: GWT

ELECTRICAL Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



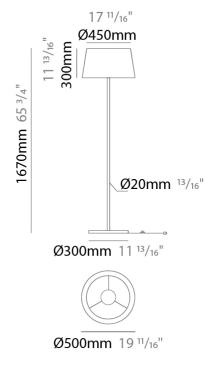







D114011-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

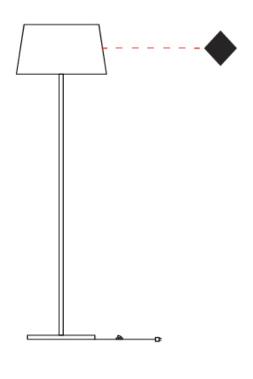







DRUM

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish

Granulated White - GWT

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











DRUM

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

LEGEND

F		_			special LED (upon request) RGR_RGRW_tunable
<u></u>	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	←	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	℃ K	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ā	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
Z)	square wall or ceiling cut-out	Ġ	free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	6	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□+ *	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
₩	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	\oplus	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

100000	288 (400 C) - 26 5 (100 C) - 26 5 (
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)			
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)			
IK04	otected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm ove the surface)			
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)			
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)			
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$			
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)			
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)			

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm