DRUM SUSPENSION

D111058-

base number	Finish	Finish
	Options	Options

 To build a product code in our configurator select the specify button on the base model # product page
To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Up/Down Light	
PHYSICAL	
Shape: Drum	
Diameter (mm): 300	
Diameter (in): 11 ¹³ / ₁₆	
Height (mm): 200	
Height (in): $7\frac{7}{8}$	
Max. Overall Height (mm): 2200	
Max. Overall Height (in): 86 ⅔	
Light Distribution: Direct / Indirect	
Weight (kg): 2	
Weight (lbs): 4.4	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MU OLV / SIL / STN / TER / WHI	JS /
Holder Finish: BLK	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2000mm Cable	
Upon Request: Other fabric cord colors available upon request (se downloadable finish chart)	e
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	

Lamp Base: E26

Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

FROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			







Ø300mm 11 ¹³/16″

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



D111058-

PROJECT

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			
			-

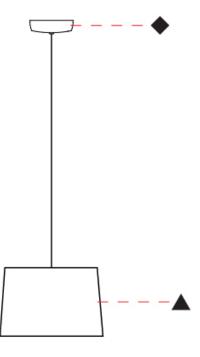

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 2/17

DRUM SUSPENSION

D111060-

base number	Finish	Finish
	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page

_

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: S	uspension
Mounting Locatio	n: Ceiling
Subcategory: Up/	Down Light
PHYSICAL	
Shape: Drum	
Diameter (mm): 5	00
Diameter (in): 19	¹¹ / ₁₆
Height (mm): 300	
Height (in): 11 ¹³ / ₁₆	
Max. Overall Heig	ht (mm): 2300
Max. Overall Heig	ht (in): 90 [%] / ₁₆
Light Distribution	: Direct / Indirect
Weight (kg): 2.8	
Weight (lbs): 6.2	
Fixture Finish: BE OLV / SIL / STN / 1	I / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / FER / WHI
Holder Finish: BL	К
Fixture Material: I	Fabric Cord / Metal
Cable Details: 200)0mm Cable
Upon Request: Of downloadable fin	ther fabric cord colors available upon request (see iish chart)
ELECTRICAL	
Number of Lamps	s: 1
Lamp Type: LED F	Retrofit
Lamp Shape: A19	
Bulb Included: Bu	ılb Not Included
Max. Wattage Per	Lamp (W): 15
Lamp Base: E26	
Input Voltage (V):	120

Upon Request: 277Vac / GU24


LED


OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			







Ø500mm 19 11/16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.






D111060-

PROJECT

ROJECT
YPE
PECIFIER
UANTITY
ATE

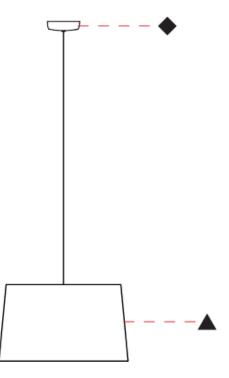

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

_

DRUM SUSPENSION

D111062-

base number	Finish	Finish
	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Up/Down Light	
PHYSICAL	
Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 ¹¹ / ₁₆	
Height (mm): 450	
Height (in): 17 ¹¹ / ₁₆	
Max. Overall Height (mm): 2450	
Max. Overall Height (in): 96 $\frac{7}{16}$	
Light Distribution: Direct / Indirect	
Weight (kg): 4	
Weight (lbs): 8.8	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS OLV / SIL / STN / TER / WHI	5/
Holder Finish: BLK	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2000mm Cable	
Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)	!
ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Valtage (V), 120	

Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

PRUJECI		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		







Ø500mm 19 11/16"


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



D111062-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			
	-		

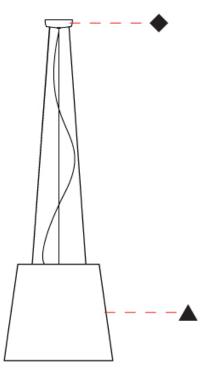

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

|)

DRUM SUSPENSION

D111063-

base number	Finish	Finish
	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Input Voltage (V): 120 Upon Request: 277Vac / GU24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

LED


OPTICAL

IP rating: IP20

Series: Drum
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Up/Down Light
PHYSICAL
Shape: Drum
Diameter (mm): 600
Diameter (in): 23 $\frac{5}{8}$
Height (mm): 160
Height (in): $6\frac{5}{16}$
Max. Overall Height (mm): 2160
Max. Overall Height (in): 85 $\frac{1}{16}$
Light Distribution: Direct / Indirect
Weight (kg): 3.3
Weight (lbs): 7.26
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: BLK
Fixture Material: Fabric Cord / Metal
Cable Details: 2000mm Cable
Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)
ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26

PROJECT TYPE SPECIFIER QUANTITY DATE






Ø600mm 23 5/8"

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



D111063-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

DRUM SUSPENSION

D111064-

base number	Finish	Finish
	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Up/Down Light	
PHYSICAL	
Shape: Drum	
Diameter (mm): 800	
Diameter (in): 31 ¹ / ₂	
Height (mm): 260	
Height (in): 10 ¹ / ₄	
Max. Overall Height (mm): 2260	
Max. Overall Height (in): 89	
Light Distribution: Direct / Indirect	
Weight (kg): 4.6	
Weight (lbs): 10.12	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / M OLV / SIL / STN / TER / WHI	IUS /
Holder Finish: BLK	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2000mm Cable	
Upon Request: Other fabric cord colors available upon request (s downloadable finish chart)	see
ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT

PROJECT			
ТҮРЕ	 	 	
SPECIFIER	 	 	
QUANTITY			
DATE	 		



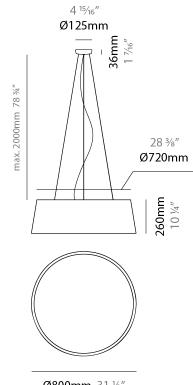

Ø800mm 31 1/2"


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



D111064-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




DRUM

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Fixture Finish

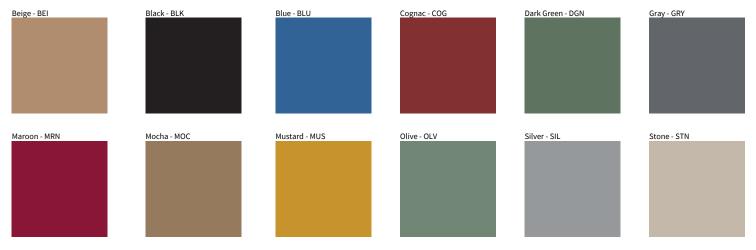



White - WHI

Holder Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



COLOR FINISH CHART

PROJECT NOTES



MOCHA - MOC Pant. 7504C 175



TERRACOTTA - TER Pant. 153C



COGNAC - COG Pant. BLACK C 255

TYPE

QUANTITY DATE



MUSTARD - MUS Pant. 1245C 168



WHITE- WHI Pant. WHITE



DARK GREEN - DGN Pant. 5616C 301



OLIVE - OLV Pant. 5625C 323



BEIGE - BEI Pant. 727C 196





120

129

SILVER - SIL Pant. 7C





211

BLACK- BLK

Pant. BLACK C

STONE - STN Pant. 7528C 1196





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding (INT at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT	
TYPE	
NOTES	

QUANTITY
DATE

COMPLETE COLOR FINISH CHART

71

2621

S - WHITE- WHI Pant. WHITE



LITIO* Pant. 5425C



S - BLACK- BLK Pant. BLACK C 211



PACIFIC Pant. 2767C 68

AZUL ROYAL Pant. 288C 1075



BLAVINA



CRYSTAL Pant. GLASS



75

DELHIN Pant. 430C 126

BOREAL Pant. 7547C 1786



S - BLUE (INDIGO) Pant. 653C 61





67

60



ESCARCHA Pant. 2707C



ALPACA Pant. 429C



S - GRAY- GRY Pant. 10C 120



NOCTURNO Pant. 7547C

66



ALITALIA Pant. 646C



AZUL ELECTRICO Pant. 2945



LAGO Pant. 324C



S - SILVER - SIL





MARINO Pant. 289C



63

MEDAS Pant. 295C 24





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

PROJECT	
TYPE	
NOTES	
OUANTITY	

QUAN DATE

COMPLETE COLOR FINISH CHART



MUSGO Pant. 5535C



LAVANDA Pant. 374C 2214



ASTRACAN Pant. 7529C

101

187



MARRON Pant. 476C



AVELLANA Pant. 729C



VERDE BILLAR 353 Pant. 340C



S - DARK GREEN Pant. 5616C 301



CRUDO Pant. 7401C 170



CAMELLO Pant. 731C

161



MARRON SUPER Pant. BLACK 4C 189



S - BEIGE - BEI Pant. 7270 196







S - OLIVE Pant. 5625C 323



OPALE Pant. 402 1442



CASTANO Pant. 4625C 1674



MADERA Pant. 7519C



2183

ARENA Pant. 465C







S - STONE - STN Pant. 7528C 1196



TABACO Pant. 1545C 203

S - MOCHA Pant. 7504C



175

BEIGE / CAMEL Pant. 1265C



Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

PROJECT QUANTITY

DATE

TYPE NOTES

COMPLETE COLOR FINISH CHART

15



MIMOSA Pant. 108C



NARANJA Pant. 164C 87



ROJO Pant. 186C 241

CLARETE Pant. 209C



PURPURA





AMARILLO Pant. 109U



S - TERRACOTTA Pant. 153C 205



FUEGO Pant. 185C

245



BURDEOS Pant. 188C 163

CICLAMOR Pant. 2050

264









CALABAZA Pant. 158C



SATAN Pant. 207C 19



FUCSIA Pant. 212C









S- MAROON Pant. 1955C 224





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com



PROJECT	
ТҮРЕ	
NOTES	
QUANTITY	
DATE	

COMPLETE COLOR FINISH CHART



AMORATADO Pant. 265C 135



ALEJANDRIA Pant. 196C 261



LAPIZLAZULI Pant. 2745C

62



CANET Pant. 2717C



VIOLETA Pant. 7676C





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

DRUM

PROJECT

TYPE

SPECIFIER QUANTITY

DATE

LEGEND

_		_			
↓	floor-mounted	¥	pivotable	\circledast	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
$\overline{}$	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	K	illuminate tilted	Ø	rechargeable battery powered
\rightarrow	wall-mounted	T	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	→	length of suspension cable	CRI	color rendering index
	direct light distribution	Δ	reflector degree selection	€К	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	L₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\mathbf{\lambda}$	aura light distribution	0	shine ring	318	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	٢	walk on
5	square wall or ceiling cut-out	Ċ	free individual colors 01-29	۲	drive on
d d	the supplied jig specifies the cutout dimensions	i Co	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
(++)	minimum distance (meters) lamp - object	۲	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
£	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
[↓	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)	●)	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
<u>لي</u>	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
У	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
シリ	sensor	D	direct diffuser	c (U) us	UL Certified to UL and CSA Standards
	remote control	$\boldsymbol{\Theta}$	ball-proof (upon request)	SP:	CSA Certified to UL and CSA Standards
2	available upon request	U	accessory	\mathbb{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
1966	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
КОб	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)