

D54006-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table


Subcategory: Table	
PHYSICAL	
Shape: Cylinder	
Diameter (mm): 380	
Diameter (in): 14 15/16	
Height (mm): 700	
Height (in): 27 %	
Light Distribution: Direct	
Diffuser: Cotton Shade	
Fixture Finish: WHI / BLK	
Fixture Material: Metal	
Upon Request: Bolt Down	

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24


LED

OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54006-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

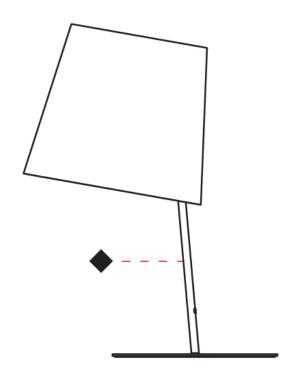





D54007-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table	
PHYSICAL	
Shape: Cylinder	
Diameter (mm): 230	
Diameter (in): 9 ½	
Height (mm): 440	
Height (in): 17 1/16	
Light Distribution: Direct	
Diffuser: Cotton Shade	
Fixture Finish: WHI / BLK	
Holder Finish: WHI / BLK	
Fixture Material: Metal	
Upon Request: Bolt Down	
FLECTRICAL	

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	


LED

OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54007-

PROJECT	
ГҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_







D54008-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

PHYSICAL	
Subcategory: Table	
Mounting Location: Table	
Mounting Type: Portable	
Division: Design	
Brand: Fambuena	
Series: Excentrica	

Mounting Type: Portable
Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 ½
Height (mm): 510
Height (in): 20 ½
Extension (mm): 740
Extension (in): 29 1/8
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

opon request. Bott bown
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards











D54008-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

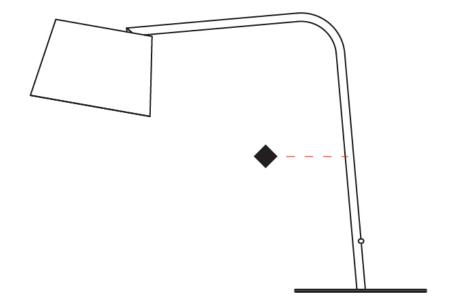





D54009-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica
Brand: Fambuena
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Abstract
Diameter (mm): 380
Diameter (in): 14 15/16
Height (mm): 1700
Height (in): 66 15/16
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

	ELECTRICAL
	Number of Lamps: 1
	Lamp Type: LED Retrofit
	Lamp Shape: A19
	Bulb Included: Bulb Not Included
	Max. Wattage Per Lamp (W): 12
	Lamp Base: E26
	Input Voltage (V): 120
	Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





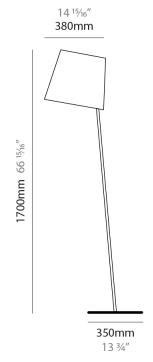






D54009-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

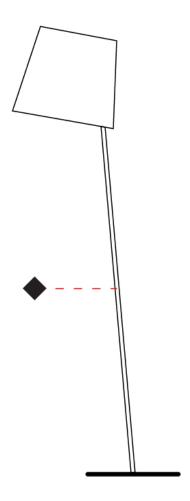





D54010-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	
DUVEICAL	

Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Abstract
Diameter (mm): 380
Diameter (in): 14 ¹⁵ / ₁₆
Height (mm): 1840
Height (in): 72 1/16
Extension (mm): 1920
Extension (in): 75 % 16
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: WHI / BLK
Holder Finish: WHI / BLK
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 12	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	












D54010-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

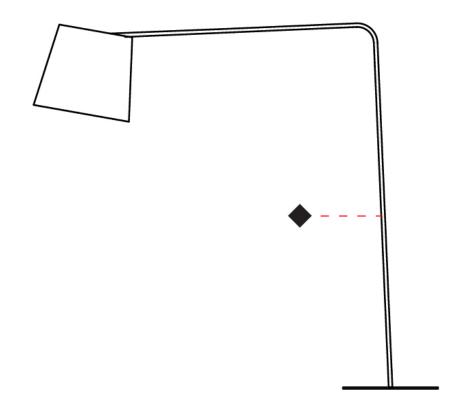





D54046-

base number Finis

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Excentrica
	Brand: Fambuena
	Division: Design
	Mounting Type: Portable
	Mounting Location: Table
	Subcategory: Table

Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 380
Diameter (in): 14 ¹⁵ / ₁₆
Height (mm): 700
Height (in): 27 % 16
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54046-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

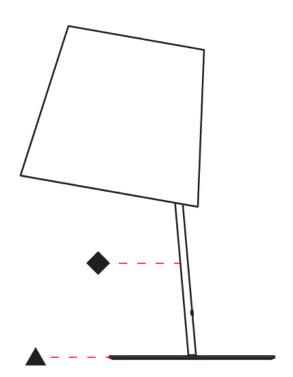





D54047-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	CLITETOLE
	Series: Excentrica
	Brand: Fambuena
	Division: Design
	Mounting Type: Portable
	Mounting Location: Table
	Subcategory: Table

	Subcategory: Table
ı	PHYSICAL
	Shape: Cylinder
Ī	Diameter (mm): 230
ı	Diameter (in): 9 ½
į	Height (mm): 440
ı	Height (in): 17 ⁵ / ₁₆
Ī	Light Distribution: Direct
Ī	Diffuser: Cotton Shade
Ì	Fixture Finish: BRA / PWT
į	Holder Finish: BLM / WHM
į	Fixture Material: Metal / Marble
Į	Upon Request: Bolt Down
	ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	


LED

OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D54047-









D54048-

base number Finish Options

F

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Mounting Type: Portable
Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 $\frac{1}{1_{16}}$
Height (mm): 510
Height (in): 20 ½
Extension (mm): 740
Extension (in): 29 ½
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONSCertified By: Certified for North American Standards

ID retire a ID20








740mm 29 1/8"





D54048-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

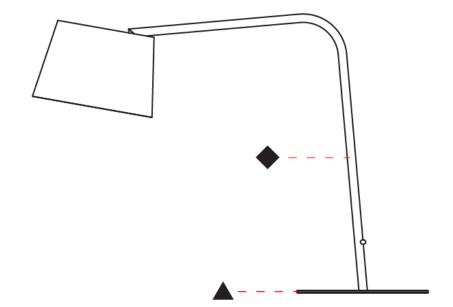





D54049-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Abstract
Diameter (mm): 380
Diameter (in): 14 15/16
Height (mm): 1700
Height (in): 66 15/16
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 12	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





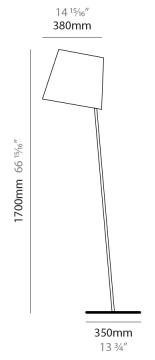






D54049-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

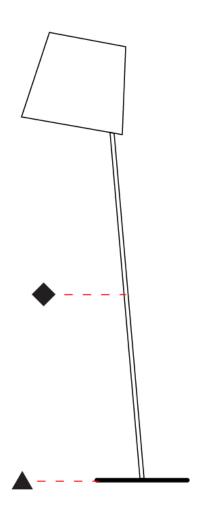





D54051-

base number F

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Excentrica	
Brand: Fambuena	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

Subcategory. 1 tool
PHYSICAL
Shape: Cylinder
Diameter (mm): 230
Diameter (in): 9 ½
Height (mm): 1350
Height (in): 53 1/8
Light Distribution: Direct
Diffuser: Cotton Shade
Fixture Finish: BRA / PWT
Holder Finish: BLM / WHM
Fixture Material: Metal / Marble

ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE










D54051-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

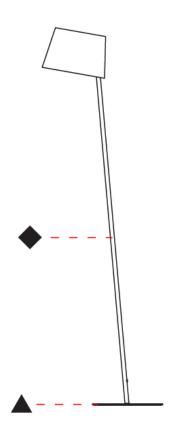





EXCENTRICA

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish

White - WHI		







Holder Finish









Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





EXCENTRICA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

140		_		1	: 1150 / DOD DOD DODW
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	0	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
M	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d •,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
主	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
E NORTH	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
४	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c (U) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	® :	CSA Certified to UL and CSA Standards
J	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm