

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300712-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 446

Diameter (in): 17 9/16

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 701 / 708 / 730 / 751

Nominal Lumen (lm): 855 / 864 / 890 / 916

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

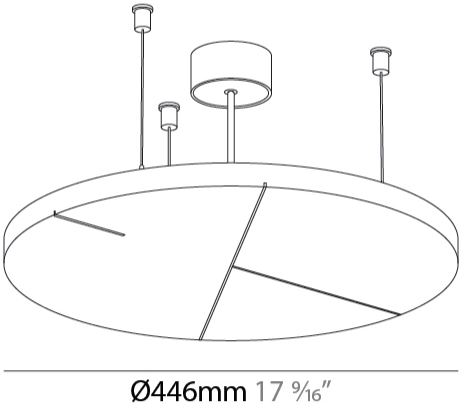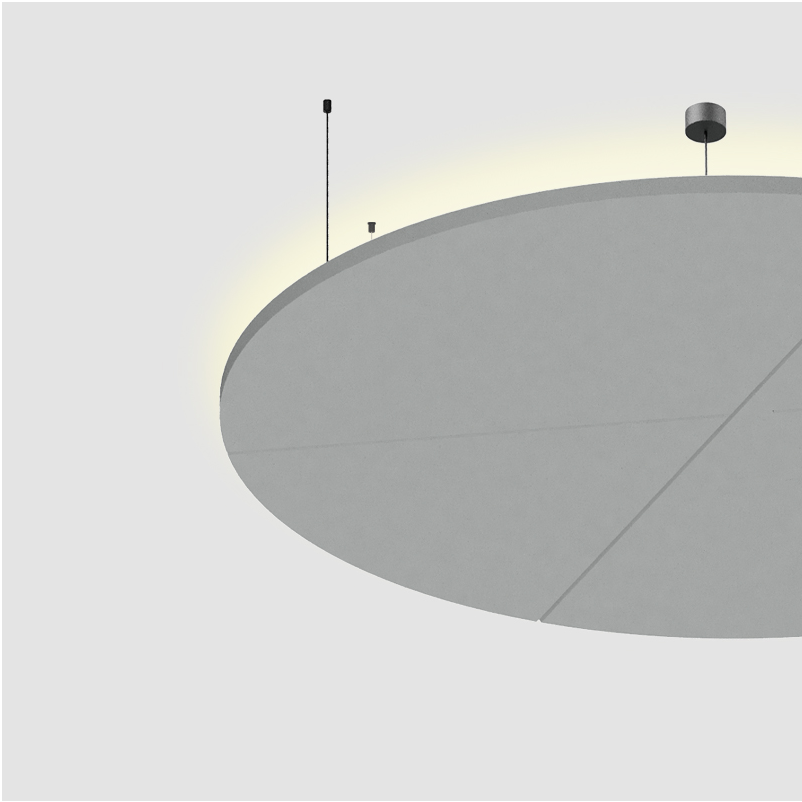

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300712-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

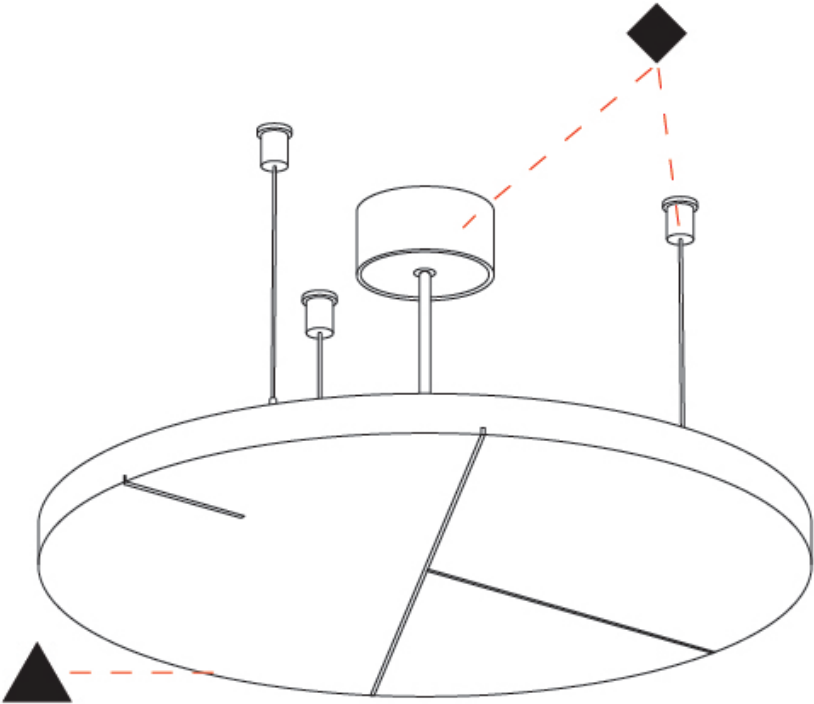

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300713-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 646

Diameter (in): 27 7/16

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 701 / 708 / 730 / 751

Nominal Lumen (lm): 855 / 864 / 890 / 916

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

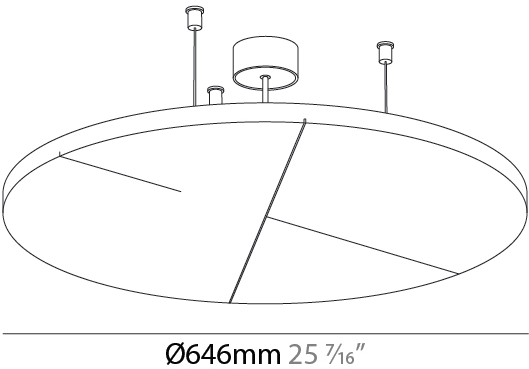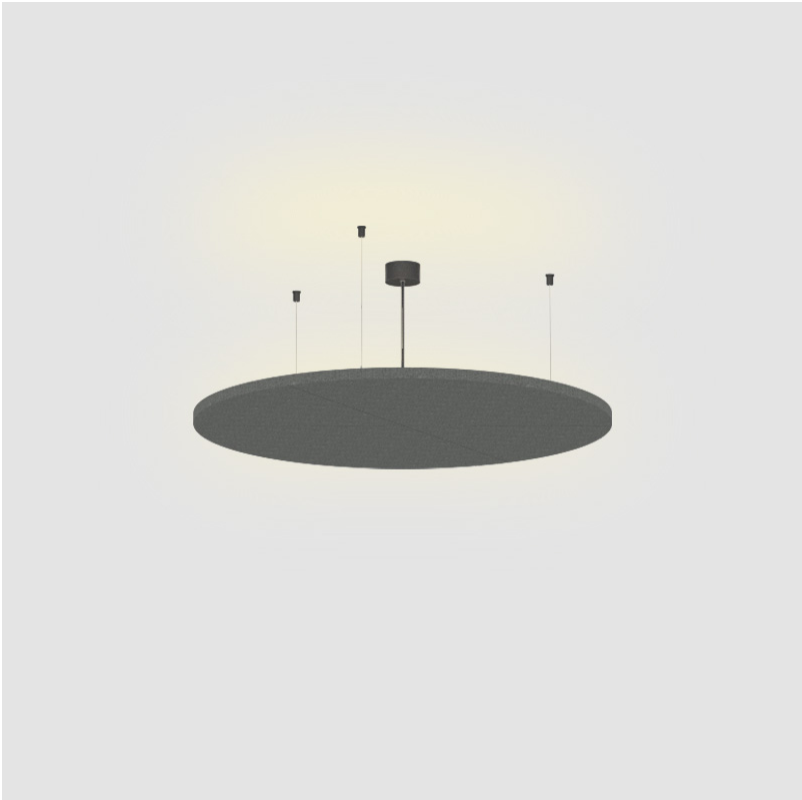

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300713-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

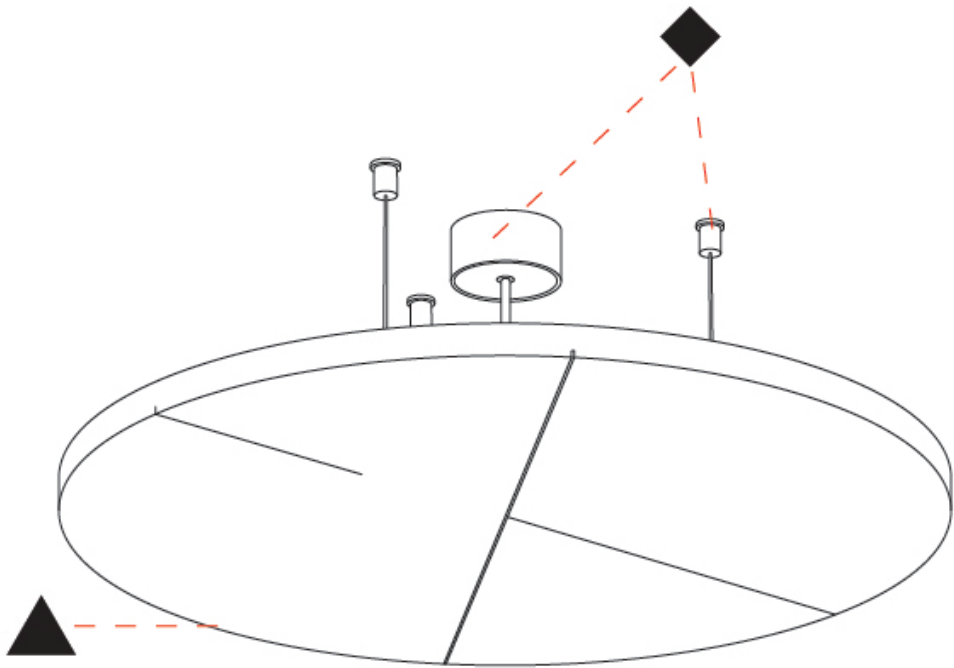

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300714-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 946

Diameter (in): 37 1/4

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 24

Total Output Wattage (W): 21.8

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 1753 / 1771 / 1824 / 1877

Nominal Lumen (lm): 2138 / 2160 / 2225 / 2290

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

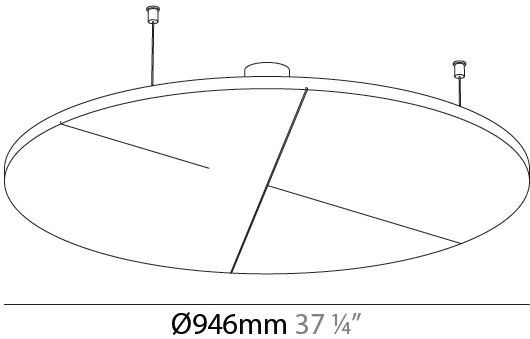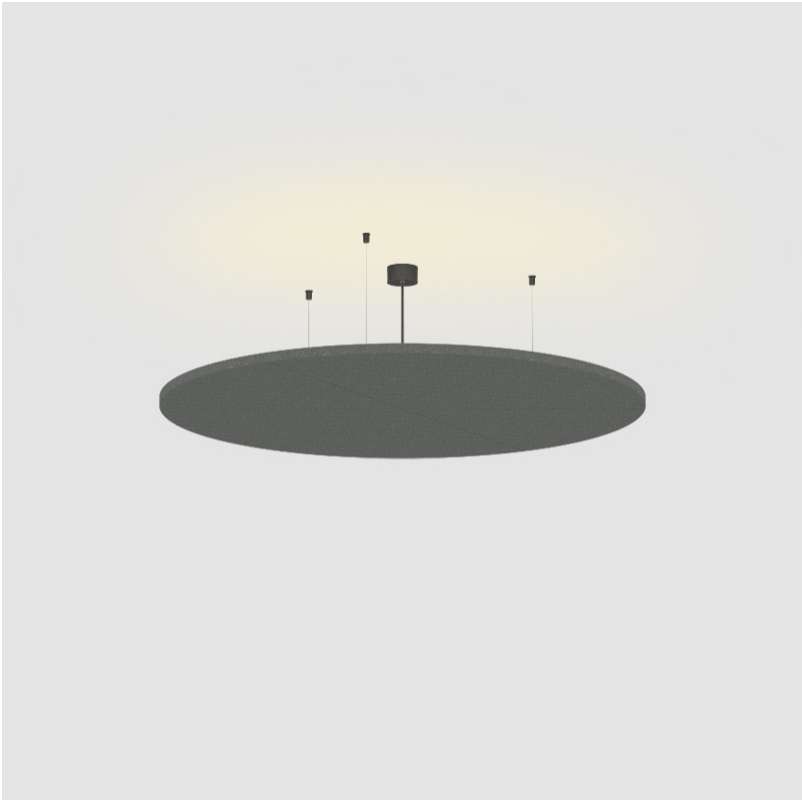

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300714-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

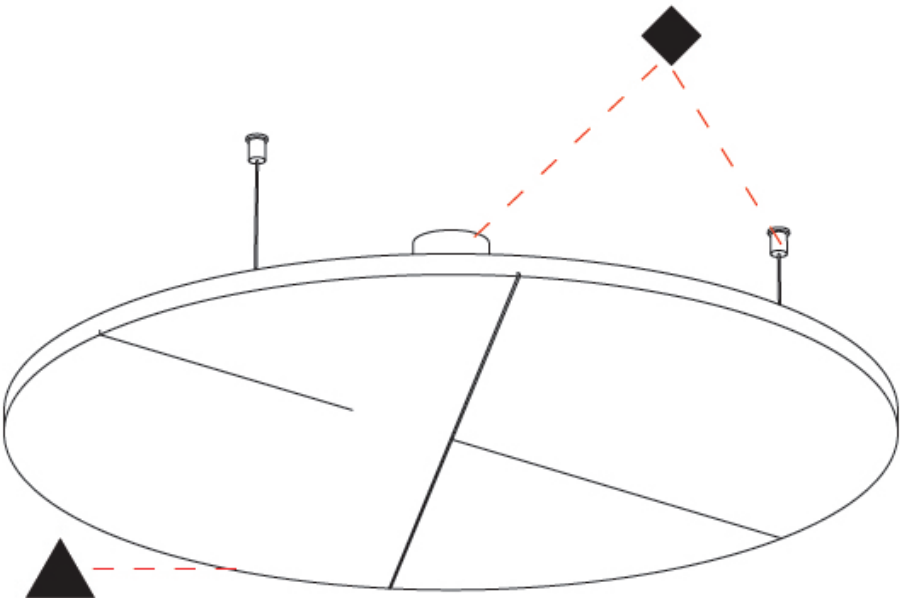

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300715-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 1246

Diameter (in): 49 1/16

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 23.8

Total Output Wattage (W): 21.8

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 1753 / 1771 / 1824 / 1877

Nominal Lumen (lm): 2138 / 2160 / 2225 / 2290

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

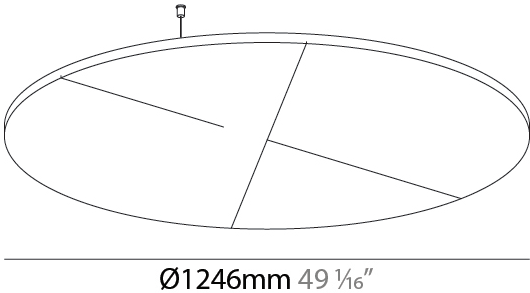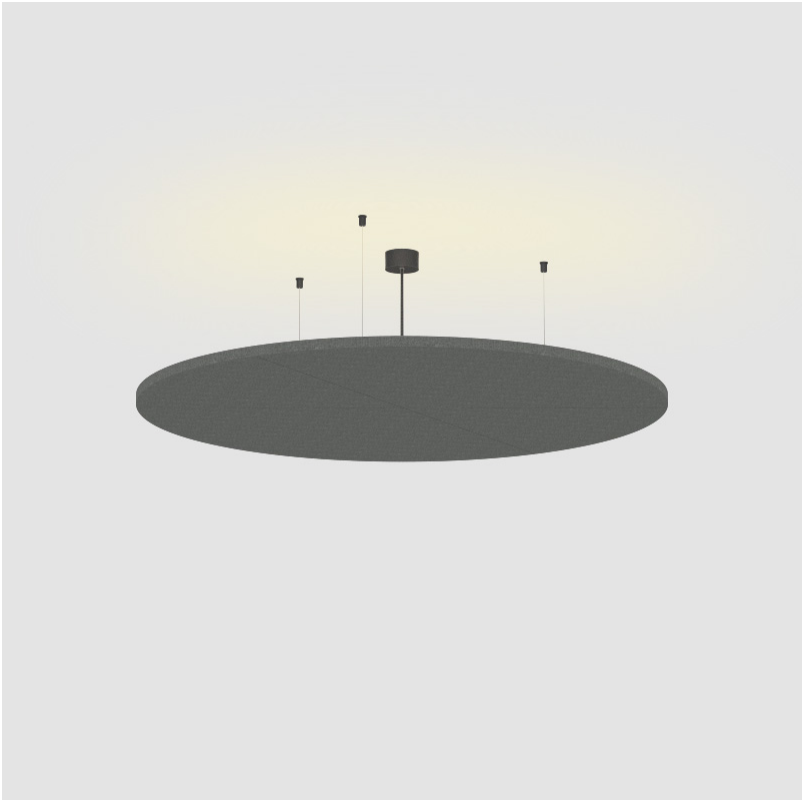

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300715-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

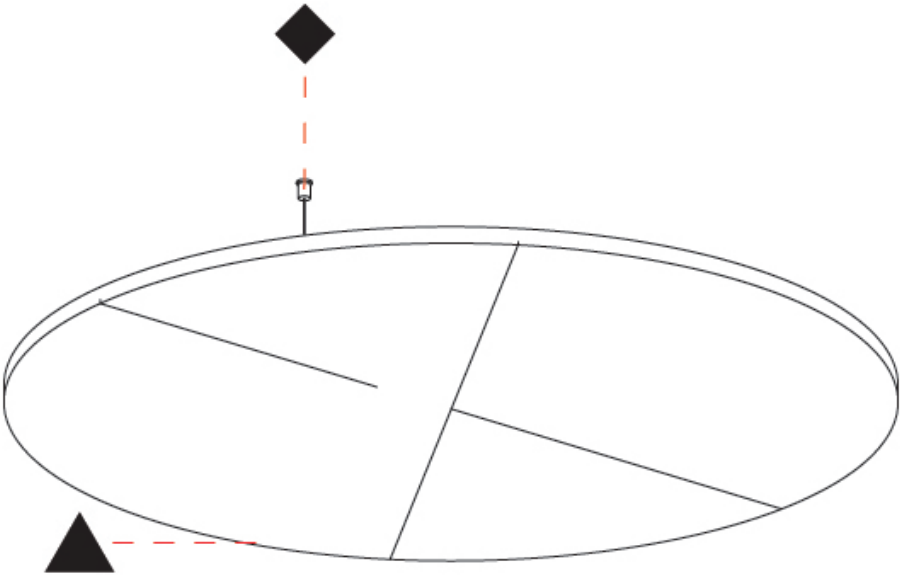

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300716-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 1416

Diameter (in): 65 3/4

Width (mm): 54

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 23.8

Total Output Wattage (W): 21.8

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 1753 / 1771 / 1824 / 1877

Nominal Lumen (lm): 2138 / 2160 / 2225 / 2290

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

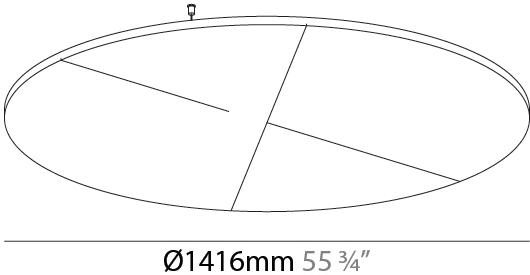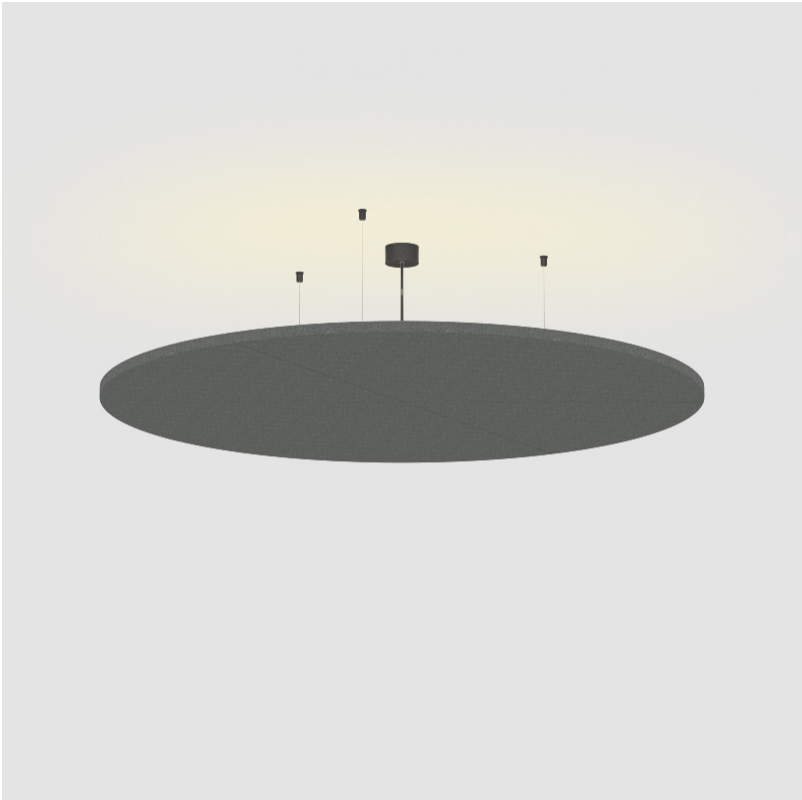

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300716-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

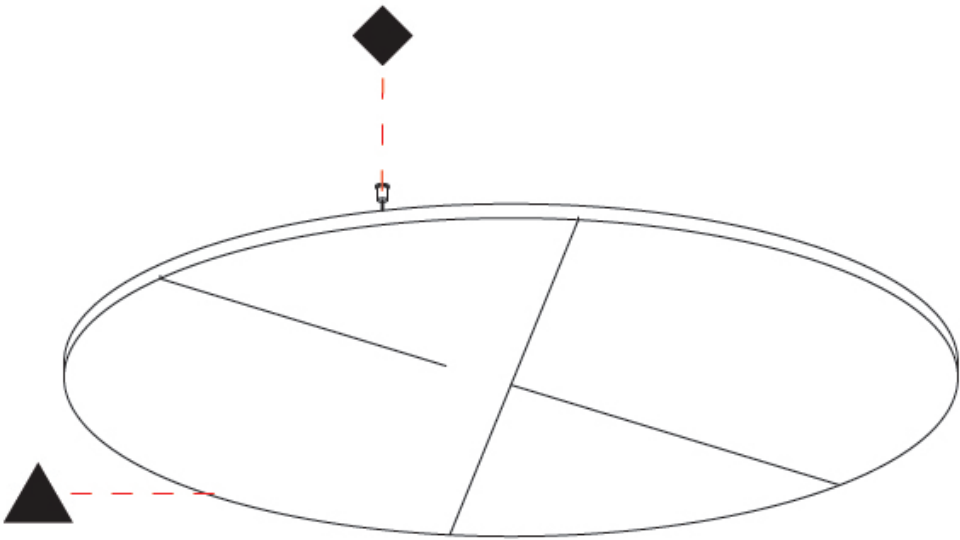

GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION

A300717-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Acoustic Options	Cable Length
-------------	----------------	----------------------	-----------------------	---------------------	-----------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Glorious Acoustic Light Panel

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Round

Diameter (mm): 1796

Diameter (in): 70 11/16

Height (mm): 54

Height (in): 2 1/8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Aluminum

Primary Material: Acoustic

Cable Details: 2000mm / 78 3/4" or 6000mm / 236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 43

Total Output Wattage (W): 39.1

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: Metal driver box rests directly on the acoustic panel

Input Voltage (V): 120 - 277

LED

Max. Delivered Lumen (lm): 2156 / 3188 / 3284 / 3379

Nominal Lumen (lm): 3849 / 3888 / 4005 / 4121

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

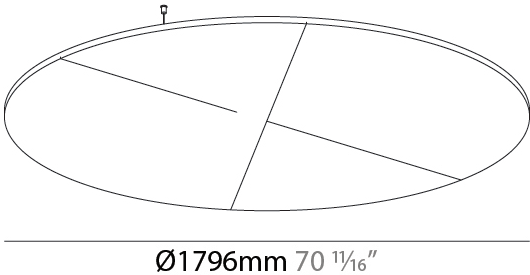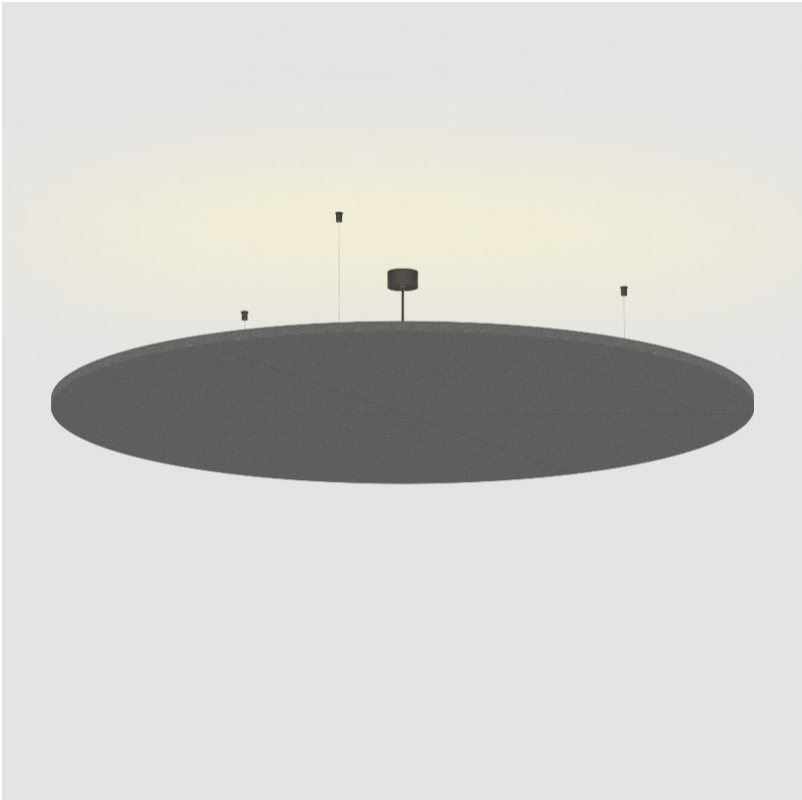












PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

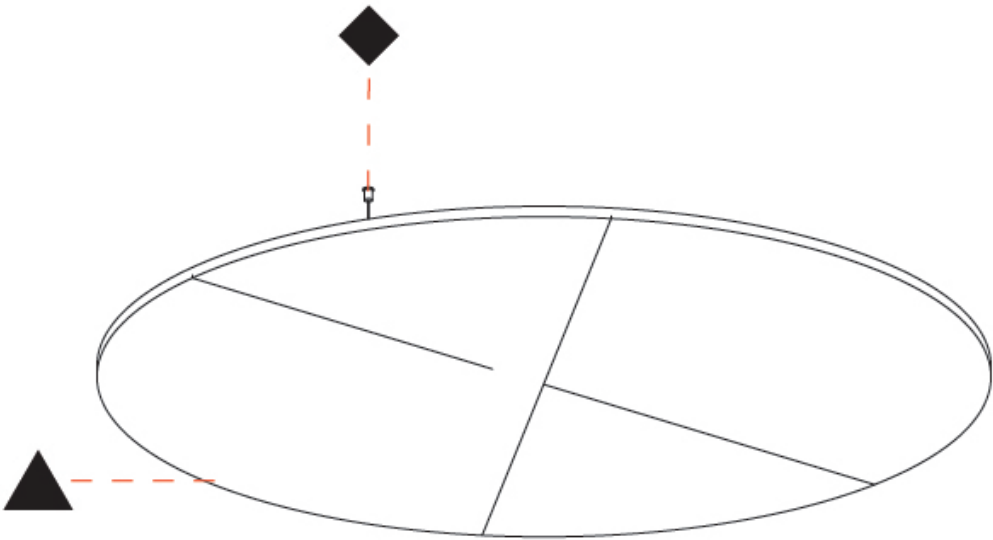

GLORIOUS ACOUSTIC LIGHT PANEL
COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish

Sparkling Silver - 01 (SSR) 	Black Velvet - 02 (BKV) 	Crystal White - 03 (CWI) 	Creamy - 04 (CRY) 	Hampton Bay - 05 (HAB) 	Urban Forest - 07 (UFT) 
In the Army - 08 (ITA) 	Rusty Angel - 09 (RUA) 	Fade to Gray - 12 (FTG) 	Mysterious Gray - 13 (MYG) 	Lost Dream - 15 (LOD) 	Purple Sky - 16 (PUS) 
Fresh Oh - 17 (FRO) 	Funky P. - 18 (FUP) 	Kissing Aphrodite - 19 (KIA) 	Poseidon's Paradise - 20 (POP) 	Blue Sky - 21 (BLS) 	Spring Green - 22 (SPG) 
Mellow Yellow - 23 (MEY) 	Golden Heart - 24 (GOH) 	Champagne Cream - 26 (CHC) 	Copper Mine - 27 (COM) 	Ancient Bronze - 28 (ABZ) 	Jazz Gold - 29 (JAG) 
Olive Breeze - 30 (OBR) 	Moonlight Silver - 31 (MOS) 	Rosewood Red - 32 (ROR) 	Gun Metal Solid - 33 (GMS) 		

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.
Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.



GLORIOUS ACOUSTIC LIGHT PANEL SUSPENSION
COLOR FINISH CHART


PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Acoustic Finish


Snowfall White - 44 (SFW)




Creamy White - 97 (CYW)




Stone Echo - 83 (SEE)




Smoky Iron - 50 (SYN)




Midnight Stone - 51 (MTS)



Phantom Black - 71 (PMB)




Twilight Navy - 69 (TTN)




Cloudy Blue - 73 (CYB)




Soft Olive - 82 (STO)



Deep Evergreen - 91 (DPE)




Bronze Shadow - 87 (BES)



Savannah Brown - 42 (SHB)




Amber Earth - 55 (ARE)



Autumn Ember - 90 (ANE)



Vintage Red - 99 (VRD)



Coral Reef - 98 (CRF)



GLORIOUS ACOUSTIC LIGHT PANEL

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)