

HARMONY SQUARE SURFACE

A52046-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 610

Length (in): 24

Width (mm): 610

Width (in): 24

Height (mm): 27

Height (in): 1 1/16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 48

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 13 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 3456 / 3600 / 3816

Nominal Lumen (lm): 5760 / 6000 / 6360

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

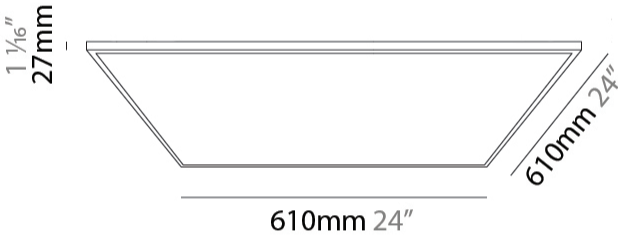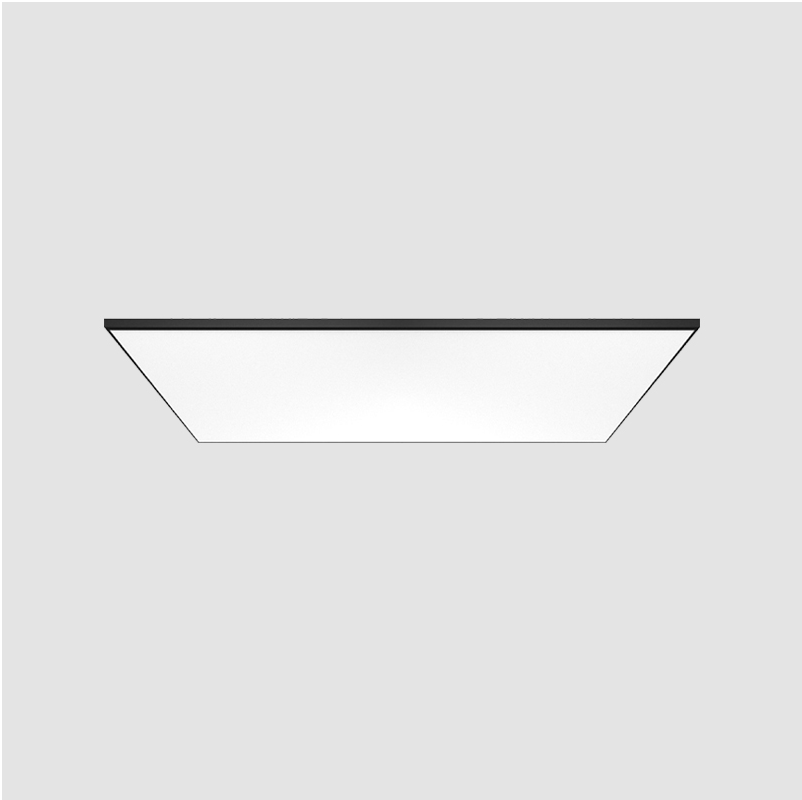

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



HARMONY SQUARE SURFACE

A52047- - -

base number

Color
Temperature

Finish
Options

Diffuser
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 910

Length (in): 35 13/16

Width (mm): 910

Width (in): 35 13/16

Height (mm): 27

Height (in): 1 1/16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 72

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 5184 / 5400 / 5724

Nominal Lumen (lm): 8640 / 9000 / 9540

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

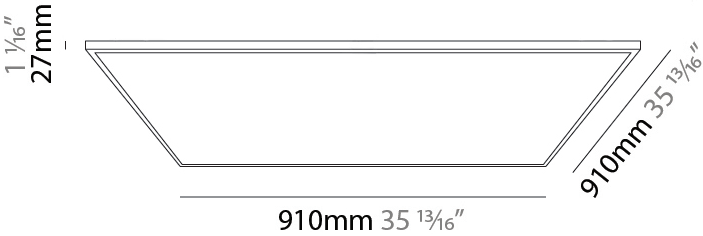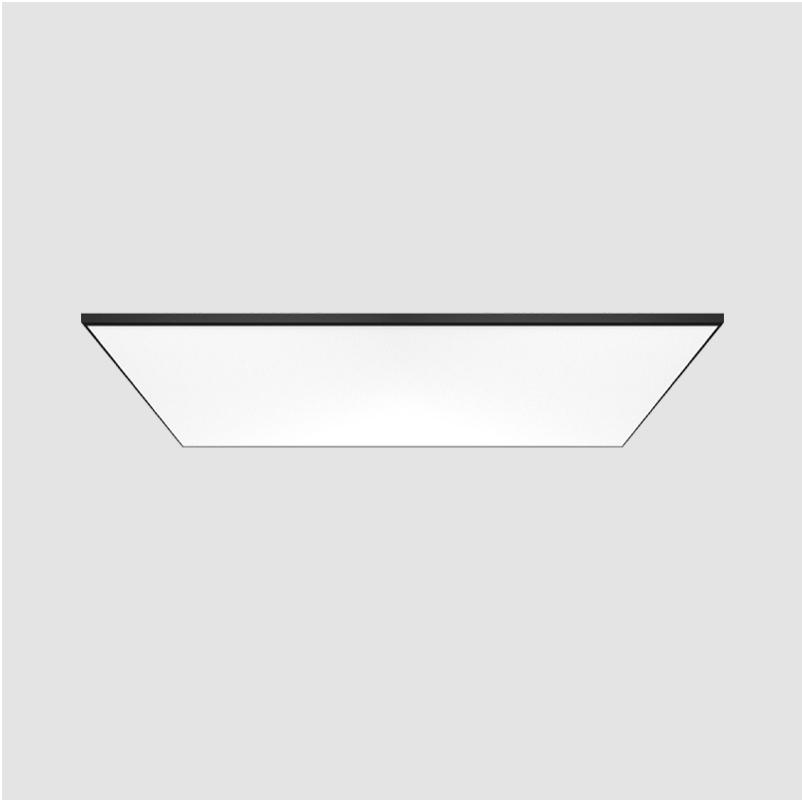

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



HARMONY SQUARE SURFACE

A52048-

-

-

-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1110

Length (in): 43 11⁄16

Width (mm): 1110

Width (in): 43 11⁄16

Height (mm): 27

Height (in): 1 1⁄16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 80

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 6336 / 6600 / 6996

Nominal Lumen (lm): 10560 / 11000 / 11660

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

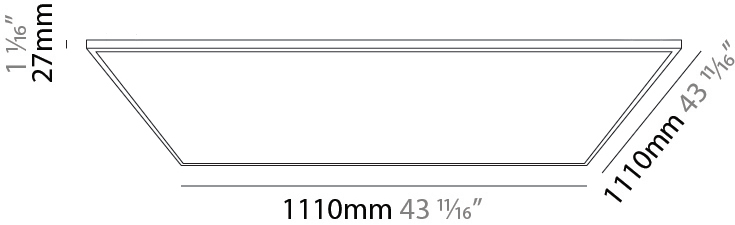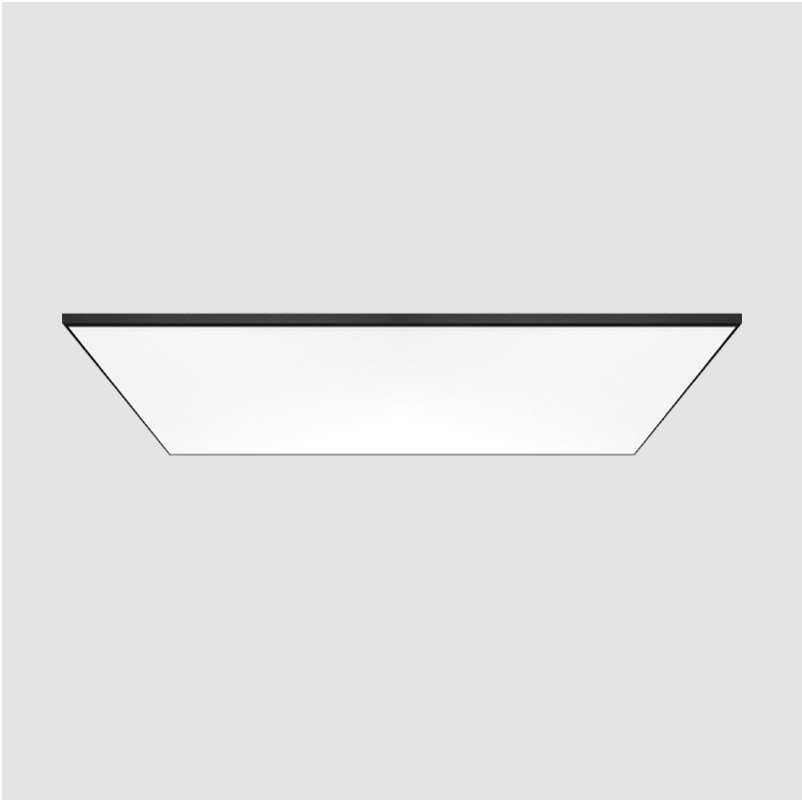

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



HARMONY SQUARE SURFACE

A52049-

-

-

-

base number

Color

Temperature

Finish

Options

Diffuser

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1210

Length (in): 47 5⁄8

Width (mm): 610

Width (in): 24

Height (mm): 27

Height (in): 1 1⁄16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 48

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 13 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 3456 / 3600 / 3816

Nominal Lumen (lm): 5760 / 6000 / 6178 / 6360

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

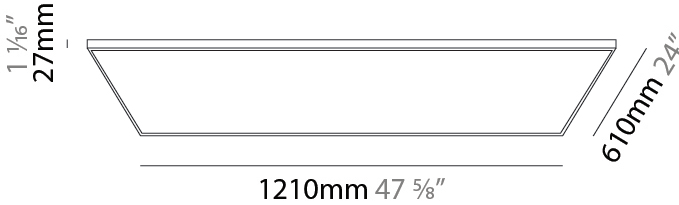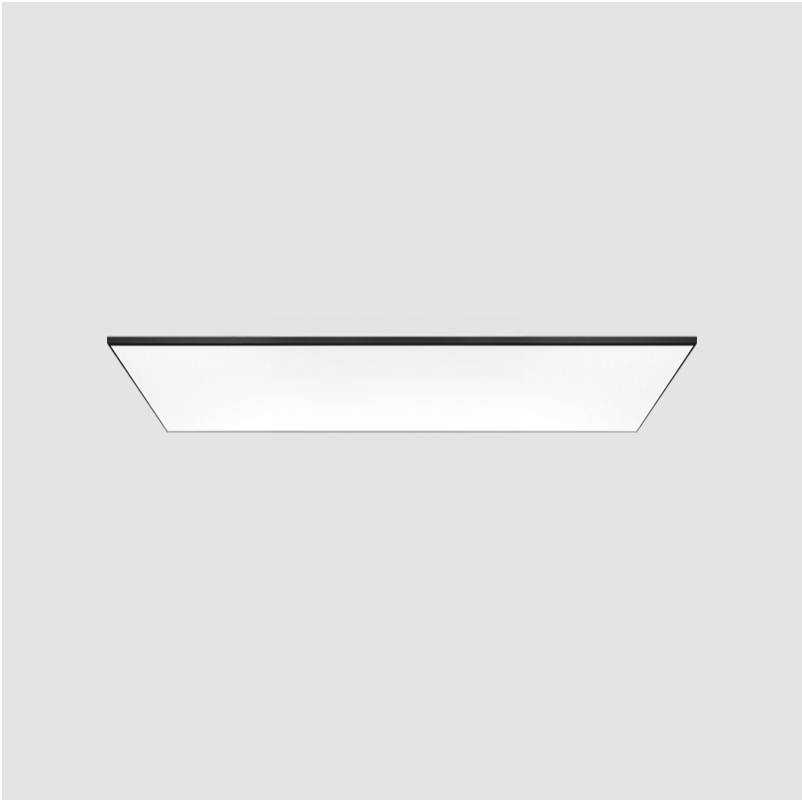

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

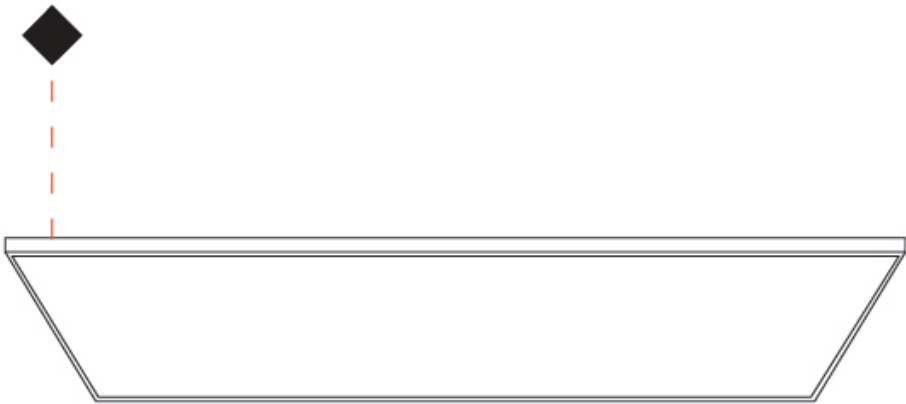

HARMONY SQUARE SURFACE

A52050-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1510

Length (in): 59 7/16

Width (mm): 910

Width (in): 35 13/16

Height (mm): 27

Height (in): 1 1/16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 60

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4320 / 4500 / 4634 / 4770

Nominal Lumen (lm): 7200 / 7500 / 7950

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

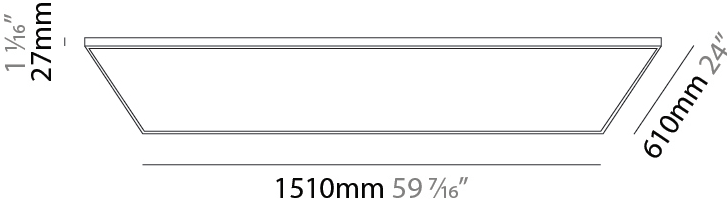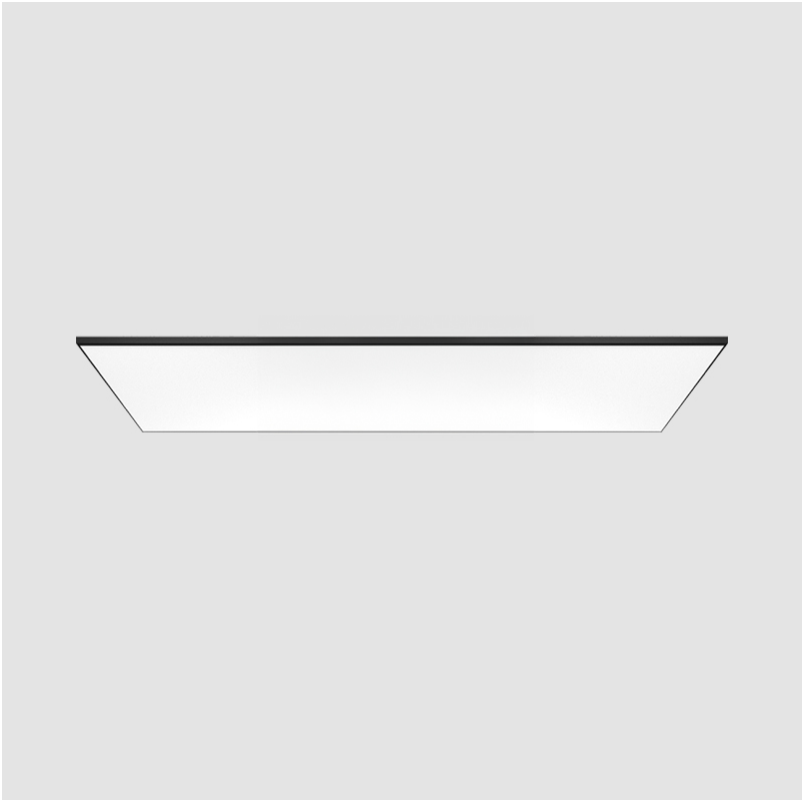

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

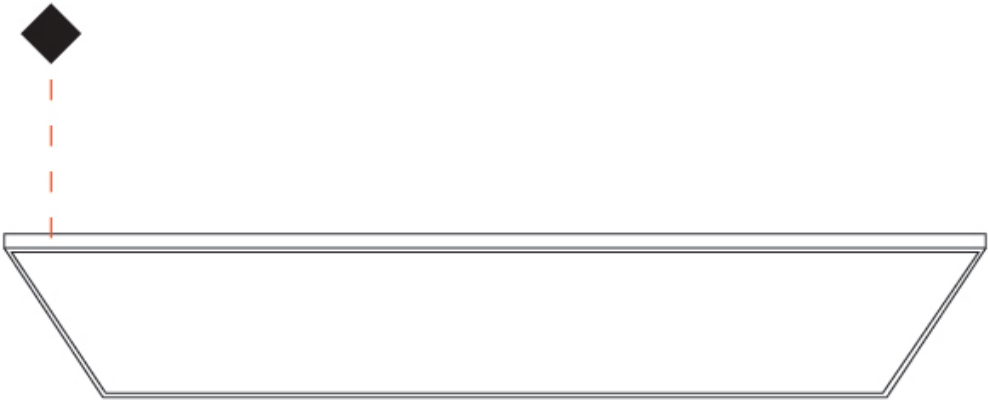

HARMONY SQUARE SURFACE

A52051-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Surface

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1810

Length (in): 71 1/4

Width (mm): 610

Width (in): 24

Height (mm): 27

Height (in): 1 1/16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 72

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4320 / 4500 / 4635 / 4770

Nominal Lumen (lm): 7200 / 7500 / 7950

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

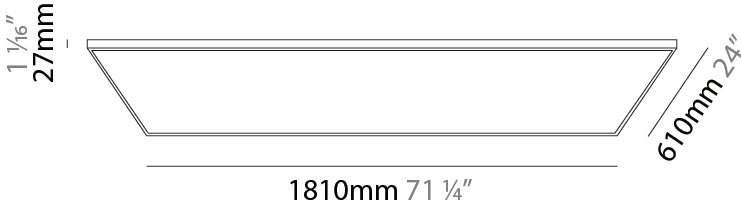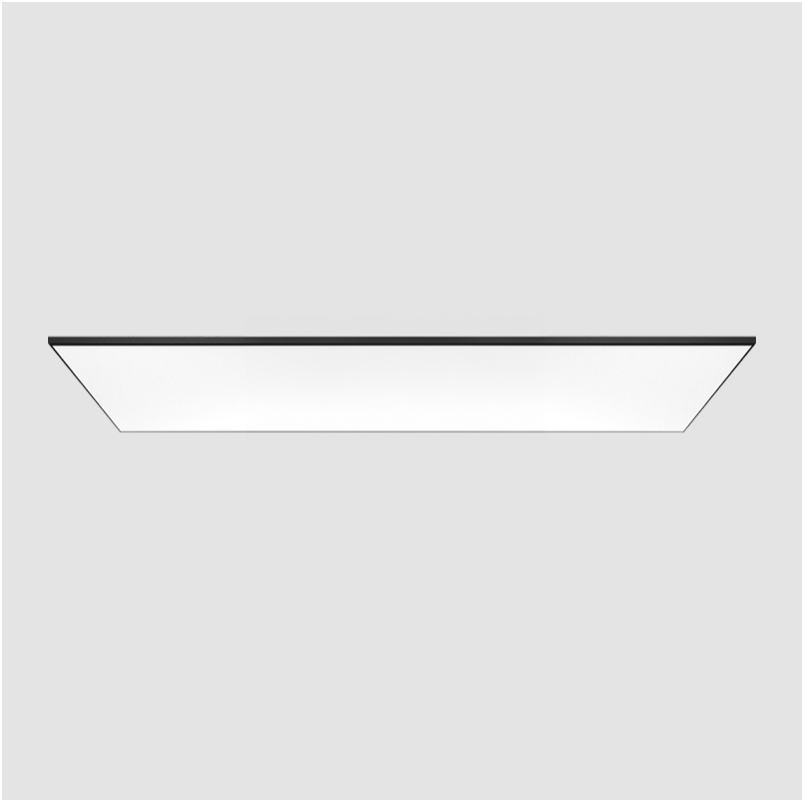

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

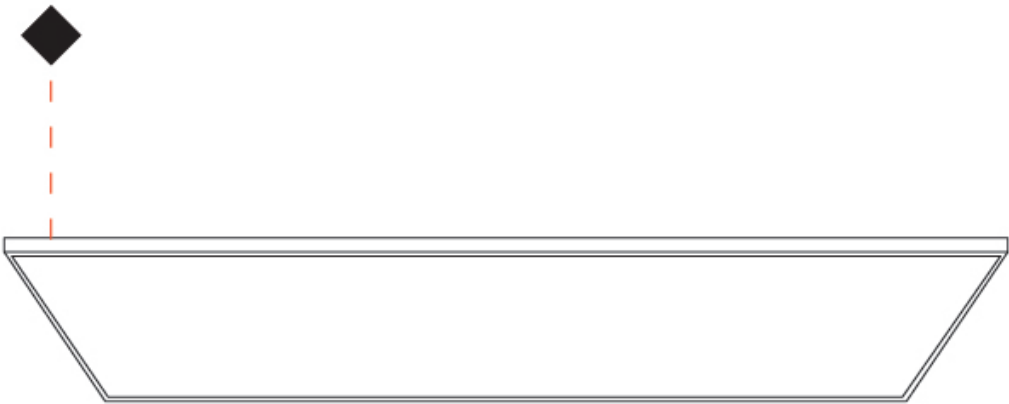

HARMONY SQUARE RECESSED

A56188-

base number

Color
Temperature

Finish
Options

Diffuser
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Recessed

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 610

Length (in): 24

Width (mm): 610

Width (in): 24

Height (mm): 27

Height (in): 1 1⁄16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 48

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 13 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 3456 / 3600 / 3707 / 3816

Nominal Lumen (lm): 5760 / 6000 / 6178 / 6360

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

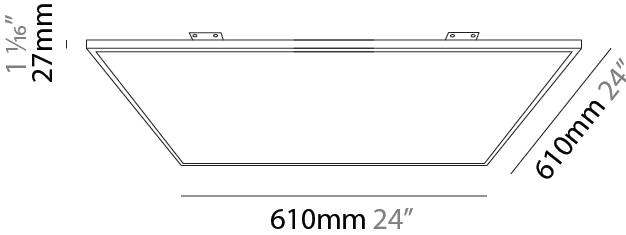

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

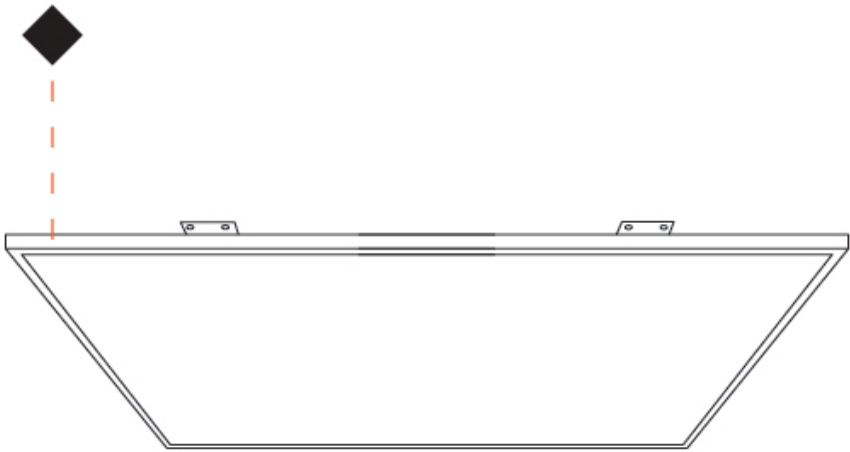

HARMONY SQUARE RECESSED

A56189-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Recessed

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 910

Length (in): 35 13/16

Width (mm): 910

Width (in): 35 13/16

Height (mm): 27

Height (in): 1 1/16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 72

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 5184 / 5400 / 5560 / 5724

Nominal Lumen (lm): 8640 / 9000 / 9268 / 9540

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

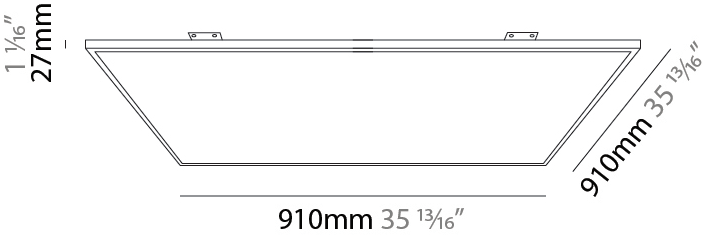

HARMONY SQUARE RECESSED

A56189-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



HARMONY SQUARE RECESSED

A56190-

base number

Color

Finish

Diffuser

Temperature

Options

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Harmony Square

Partner: Ivela

Division: Architectural

Installation: Recessed

Product Type: Panels

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1110

Length (in): 43 11⁄16

Width (mm): 1110

Width (in): 43 11⁄16

Height (mm): 27

Height (in): 1 1⁄16

Diffuser: PMMA - Opal

Fixture Finish: WHI / BLK / GLD

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 80

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP 5 (ERP) ENCP 8 (SC Power)

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6336 / 6600 / 6796 / 6996

Nominal Lumen (lm): 10560 / 11000 / 11327 / 11660

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

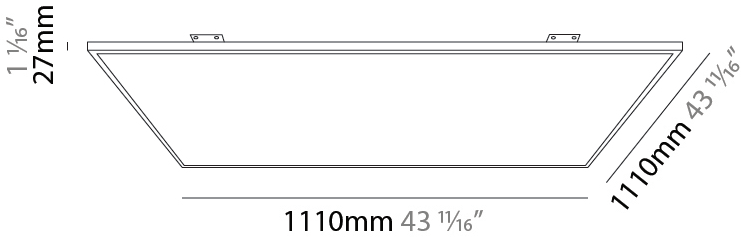

HARMONY SQUARE RECESSED

A56190-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE




PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish

White - WHI



Black - BLK



Gold - GLD



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)