

## HILOW SUSPENSION

### D81701-

base number \_\_\_\_\_  
 Finish Options \_\_\_\_\_

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: HiloW  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Abstract  
 Length (mm): 1130  
 Length (in): 44 ½"  
 Width (mm): 820  
 Width (in): 32 5/16"  
 Height (mm): 70  
 Height (in): 2 ¾"  
 Max. Overall Height (mm): 5070  
 Max. Overall Height (in): 199 5/8"  
 Light Distribution: Direct / Indirect  
 Weight (kg): 2.80  
 Diffuser: Polycarbonate - Opal  
 Fixture Finish: WHI / MBK / BRZ / MBR / TIM  
 Fixture Material: Metal

Cable Details: Reversible suspension kit with grip locks and 5000mm (196.9") long steel cables; 5000mm / 196 7/8" transparent PVC power cable.

#### ELECTRICAL

Lamp Type: LED  
 Input Wattage (W): 72.74  
 Total Output Wattage (W): 60.75  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24  
 Upon Request: Remote: Phase dimming 120Vac



#### LED

Color Temperature (°K): 2700  
 Max. Delivered Lumen (lm): 5045  
 Nominal Lumen (lm): 9072  
 CRI: >90 CRI  
 Lamp Life (hrs): 60000

#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

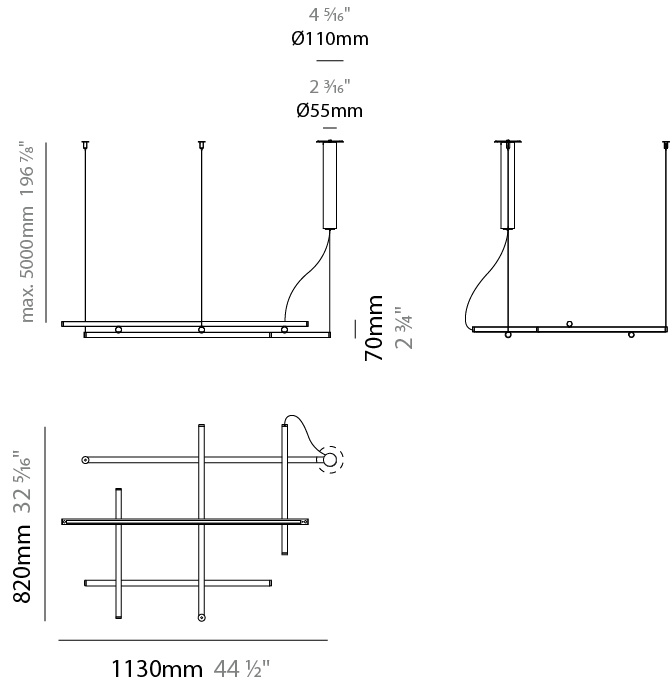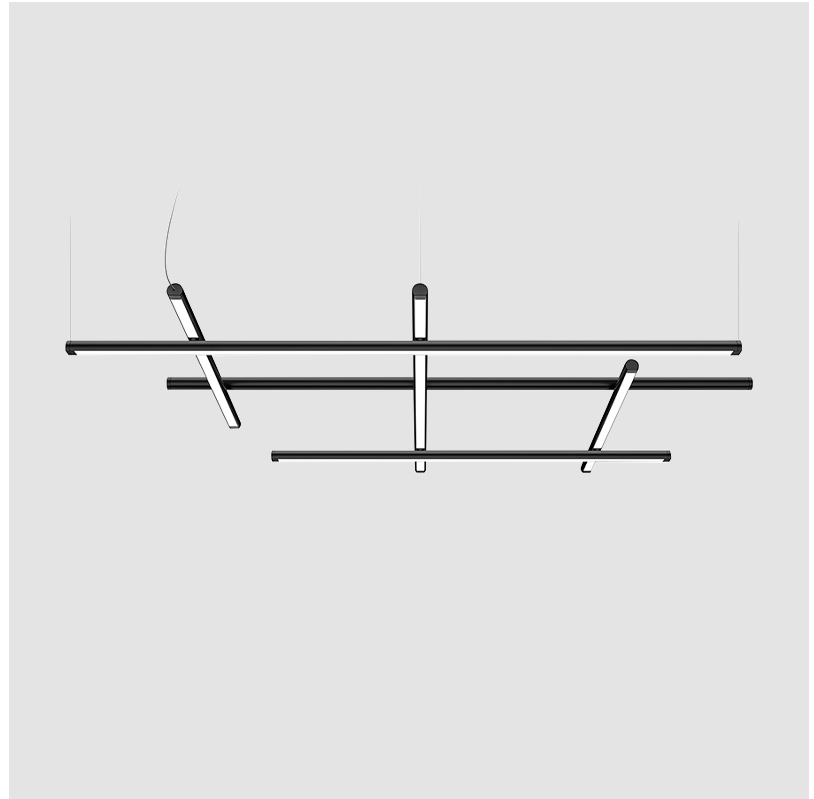

## HILOW SUSPENSION

D81701-


PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

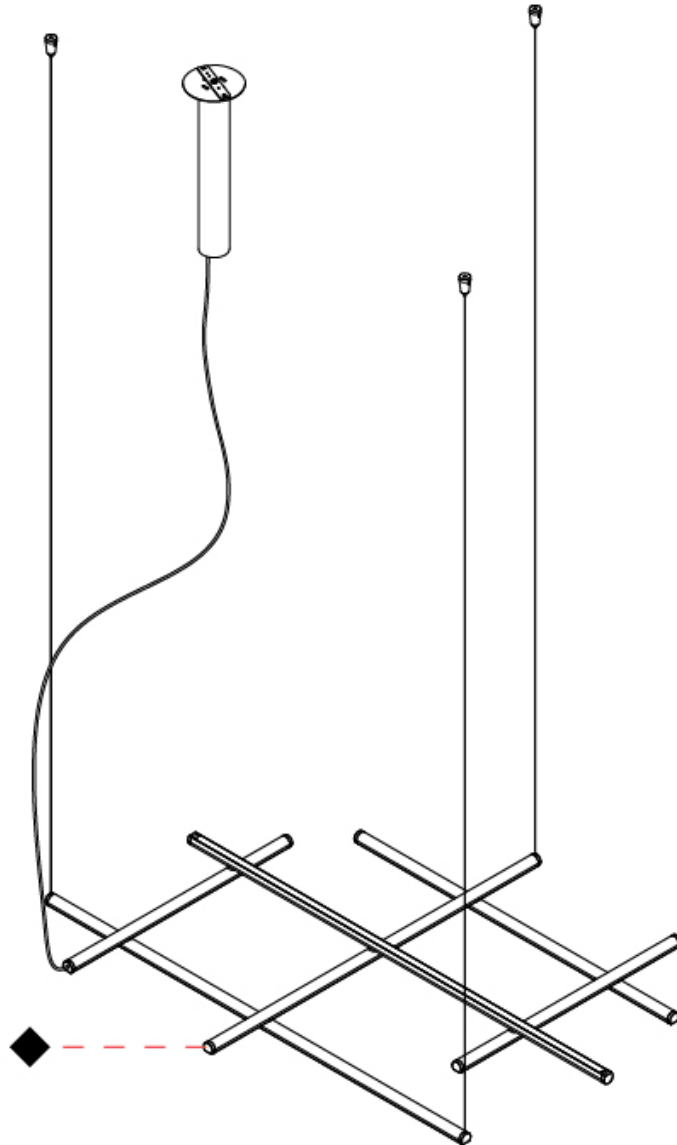

D

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

## HILOW SUSPENSION

### D81702-

base number            Finish             
Options           

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: HiloW  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Suspension  
 Mounting Location: Ceiling  
 Subcategory: Pendant

#### PHYSICAL

Shape: Abstract  
 Length (mm): 1130  
 Length (in): 44 ½"  
 Width (mm): 820  
 Width (in): 32 5/16"  
 Height (mm): 70  
 Height (in): 2 ¾"  
 Max. Overall Height (mm): 5070  
 Max. Overall Height (in): 199 5/8"  
 Light Distribution: Direct / Indirect  
 Weight (kg): 2.80  
 Weight (lbs): 6.17  
 Diffuser: Polycarbonate - Black Screen  
 Fixture Finish: WHI / MBK / BRZ / MBR / TIM  
 Fixture Material: Metal  
 Cable Details: Reversible suspension kit with grip locks and 5000mm (196.9") long steel cables; 5000mm / 196 7/8" transparent PVC power cable.

#### ELECTRICAL

Lamp Type: LED  
 Input Wattage (W): 72.74  
 Total Output Wattage (W): 60.75  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24  
 Upon Request: Remote: Phase dimming 120Vac




#### LED

Color Temperature (°K): 2700  
 Max. Delivered Lumen (lm): 2118  
 Nominal Lumen (lm): 9072  
 CRI: >90 CRI  
 Lamp Life (hrs): 60000

#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

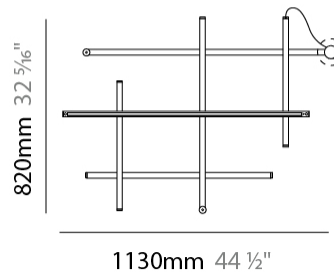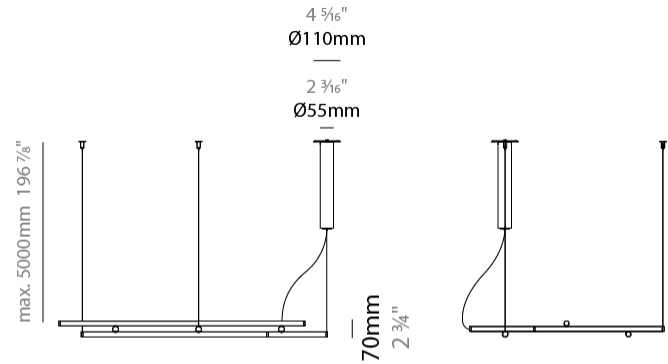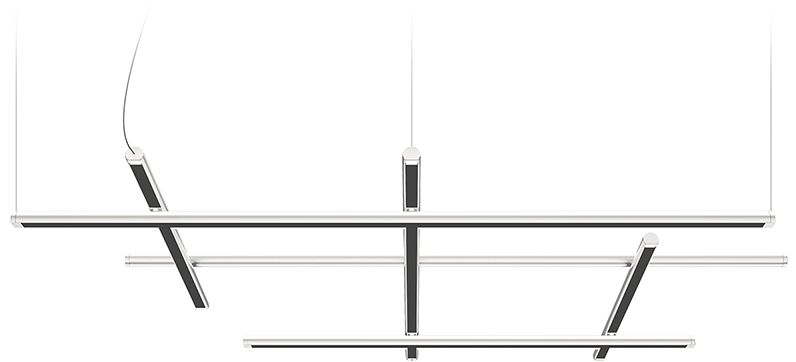

## HILOW SUSPENSION

D81702-


PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

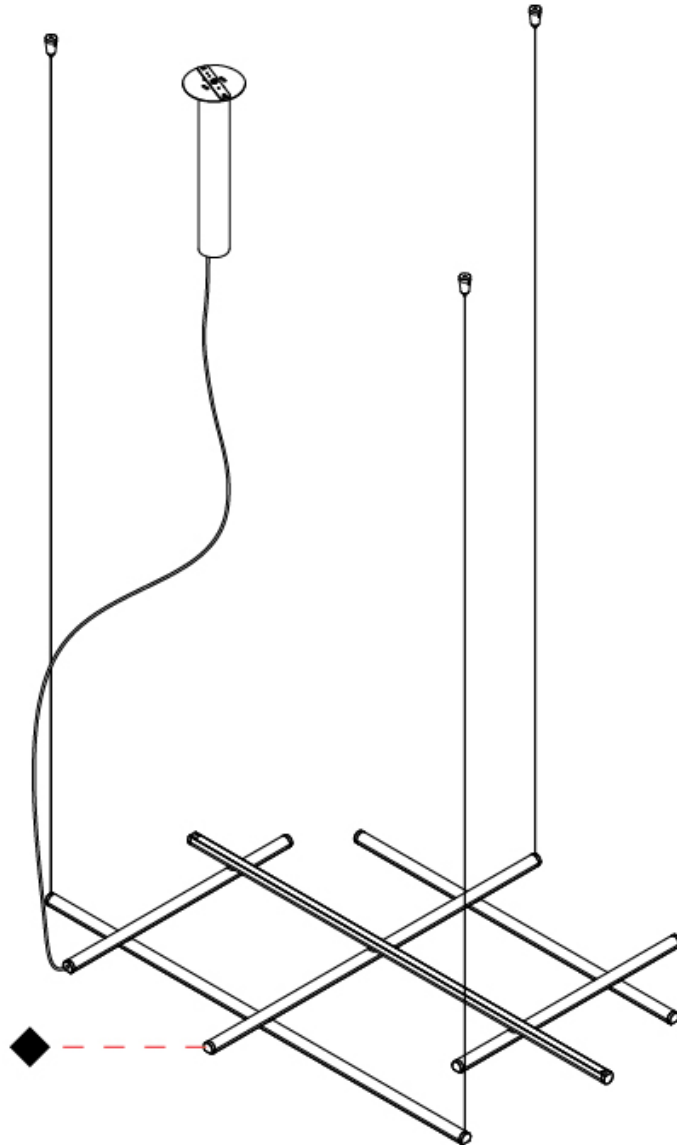

D

## HILOW SURFACE

### D82353-

base number            Finish             
Options           

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Hilow             
Brand: Panzeri             
Division: Design             
Mounting Type: Surface             
Mounting Location: Ceiling             
Subcategory: Pendant           

#### PHYSICAL

Shape: Abstract             
Length (mm): 1130             
Length (in): 44 ½             
Width (mm): 820             
Width (in): 32 ⅝             
Height (mm): 130             
Height (in): 5 ⅙             
Light Distribution: Direct / Indirect             
Weight (kg): 2.97             
Weight (lbs): 6.55             
Diffuser: Polycarbonate - Opal             
[Fixture Finish: WHI / MBK / BRZ / MBR / TIM](#)             
Fixture Material: Metal           

#### ELECTRICAL

Lamp Type: LED             
Input Wattage (W): 72.74             
Total Output Wattage (W): 60.75             
Dimming: Non-Dimmable / 0-10V Dimming             
Driver Included: Yes             
Driver Location: Integrated             
Driver Type: Constant Voltage - Universal             
Driver Class: Class 2             
Input Voltage (V): 120 - 277             
Output Voltage (V): 24             
Upon Request: Remote: Phase dimming 120Vac           

#### LED



Color Temperature (°K): 2700             
Max. Delivered Lumen (lm): 5045             
Nominal Lumen (lm): 9072             
CRI: >90 CRI             
Lamp Life (hrs): 60000           

#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards             
IP rating: IP20           

PROJECT	_____
TYPE	_____
SPECIFIER	_____
QUANTITY	_____
DATE	_____

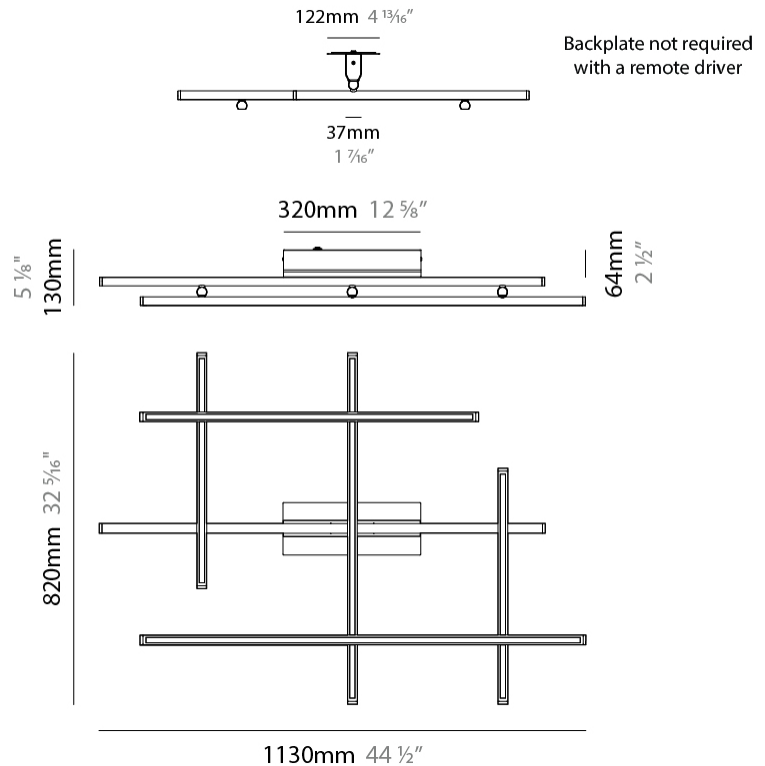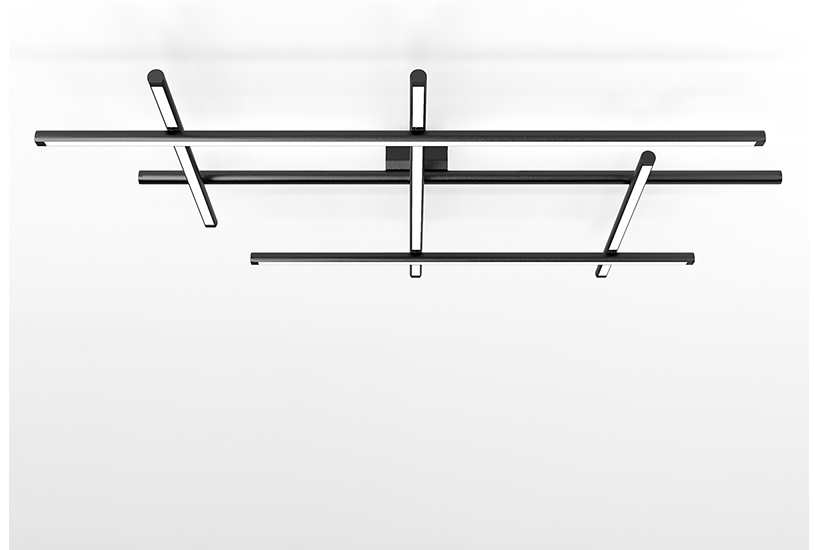

## HILOW SURFACE

D82353-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

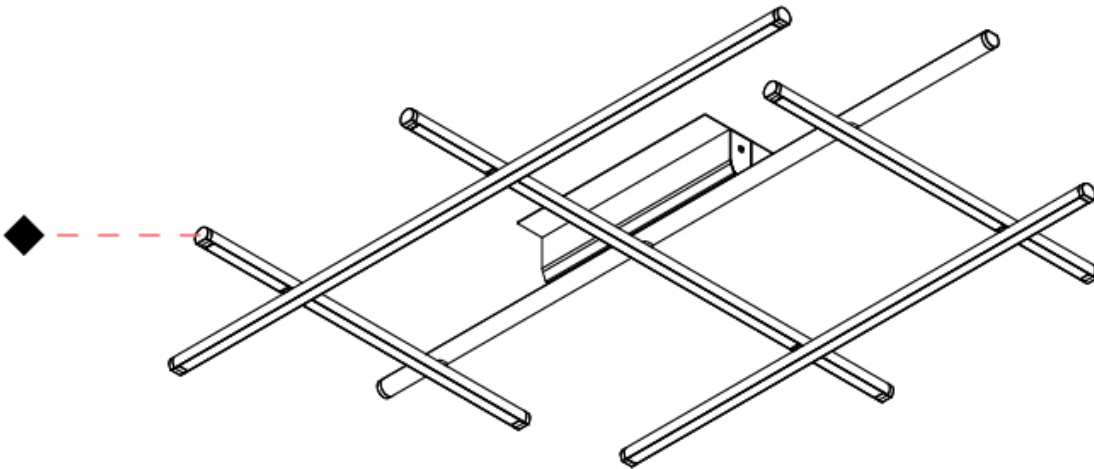

D

## HILOW SURFACE

### D82354-

base number            Finish             
Options           

PROJECT	_____
TYPE	_____
SPECIFIER	_____
QUANTITY	_____
DATE	_____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Hilow  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Surface  
 Mounting Location: Ceiling  
 Subcategory: Up/Down Light

#### PHYSICAL

Shape: Abstract  
 Length (mm): 1130  
 Length (in): 44 1/2  
 Width (mm): 820  
 Width (in): 32 5/16  
 Height (mm): 130  
 Height (in): 5 1/8  
 Light Distribution: Direct / Indirect  
 Weight (kg): 2.97  
 Weight (lbs): 6.55  
 Diffuser: Polycarbonate - Black Screen  
 Fixture Finish: WHI / MBK / BRZ / MBR / TIM  
 Fixture Material: Metal

#### ELECTRICAL

Lamp Type: LED  
 Input Wattage (W): 72.74  
 Total Output Wattage (W): 60.75  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24  
 Upon Request: Remote: Phase dimming 120Vac


#### LED

Color Temperature (°K): 2700  
 Max. Delivered Lumen (lm): 2118  
 Nominal Lumen (lm): 9072  
 CRI: >90 CRI  
 Lamp Life (hrs): 60000

#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

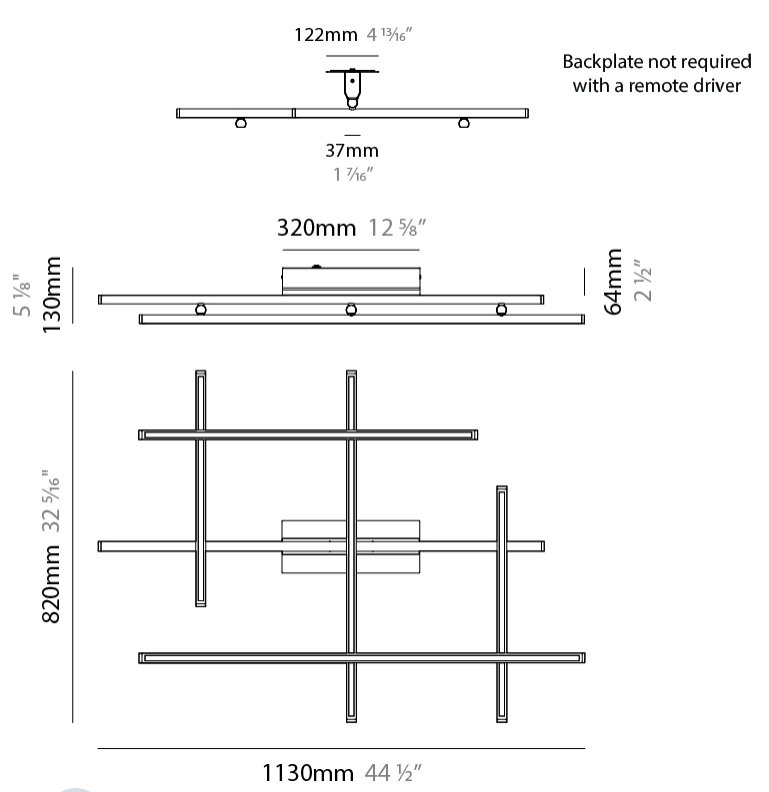

## HILOW SURFACE

D82354-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

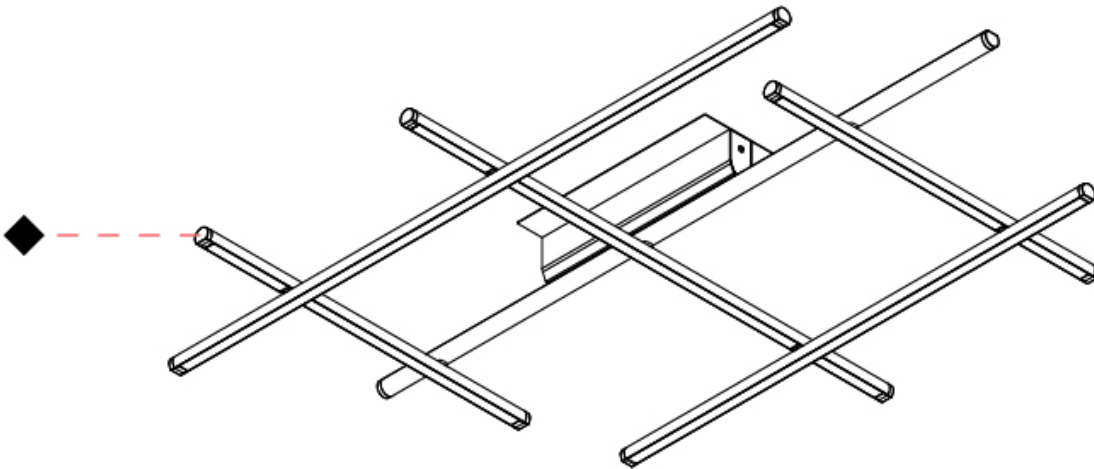

D



## HILOW SURFACE

### D83347-

base number            Finish             
Options           

PROJECT	_____
TYPE	_____
SPECIFIER	_____
QUANTITY	_____
DATE	_____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Hilow  
 Brand: Panzeri  
 Division: Design  
 Mounting Type: Surface  
 Mounting Location: Wall  
 Subcategory: Up/Down Light

#### PHYSICAL

Shape: Abstract  
 Length (mm): 1130  
 Length (in): 44 1/2  
 Width (mm): 820  
 Width (in): 32 5/16  
 Height (mm): 130  
 Height (in): 5 1/8  
 Light Distribution: Direct / Indirect  
 Weight (kg): 2.97  
 Weight (lbs): 6.55  
 Diffuser: Polycarbonate - Black Screen  
 Fixture Finish: [WHI](#) / [MBK](#) / [BRZ](#) / [MBR](#) / [TIM](#)  
 Fixture Material: Metal

#### ELECTRICAL

Lamp Type: LED  
 Input Wattage (W): 72.74  
 Total Output Wattage (W): 60.75  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 24  
 Upon Request: Remote: Phase dimming 120Vac


#### LED

Color Temperature (°K): 2700  
 Max. Delivered Lumen (lm): 3812  
 Nominal Lumen (lm): 8064  
 CRI: >90 CRI  
 Lamp Life (hrs): 60000


#### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

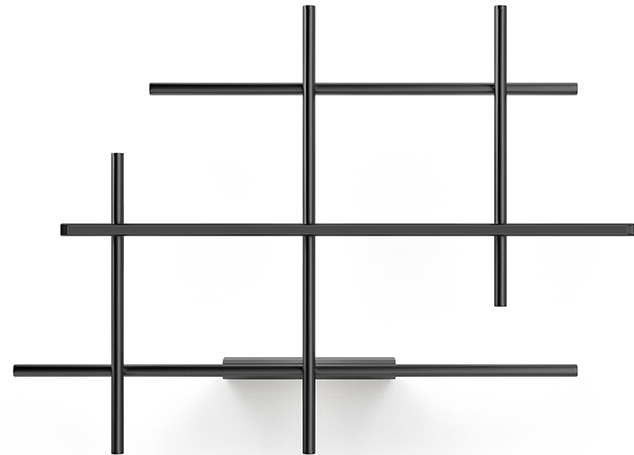

Backplate not required with a remote driver

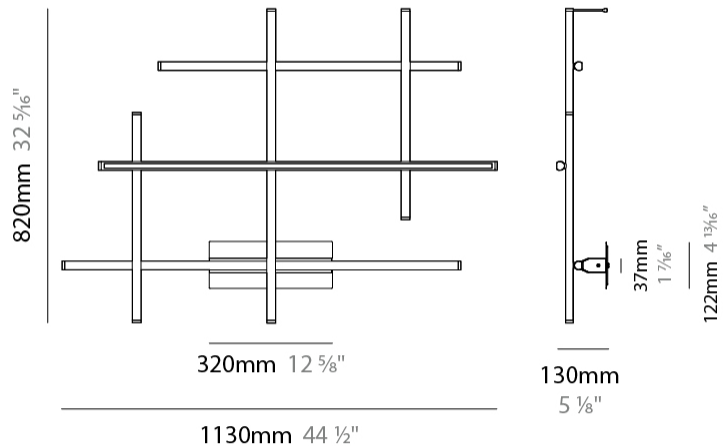

## HILOW SURFACE

D83347-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

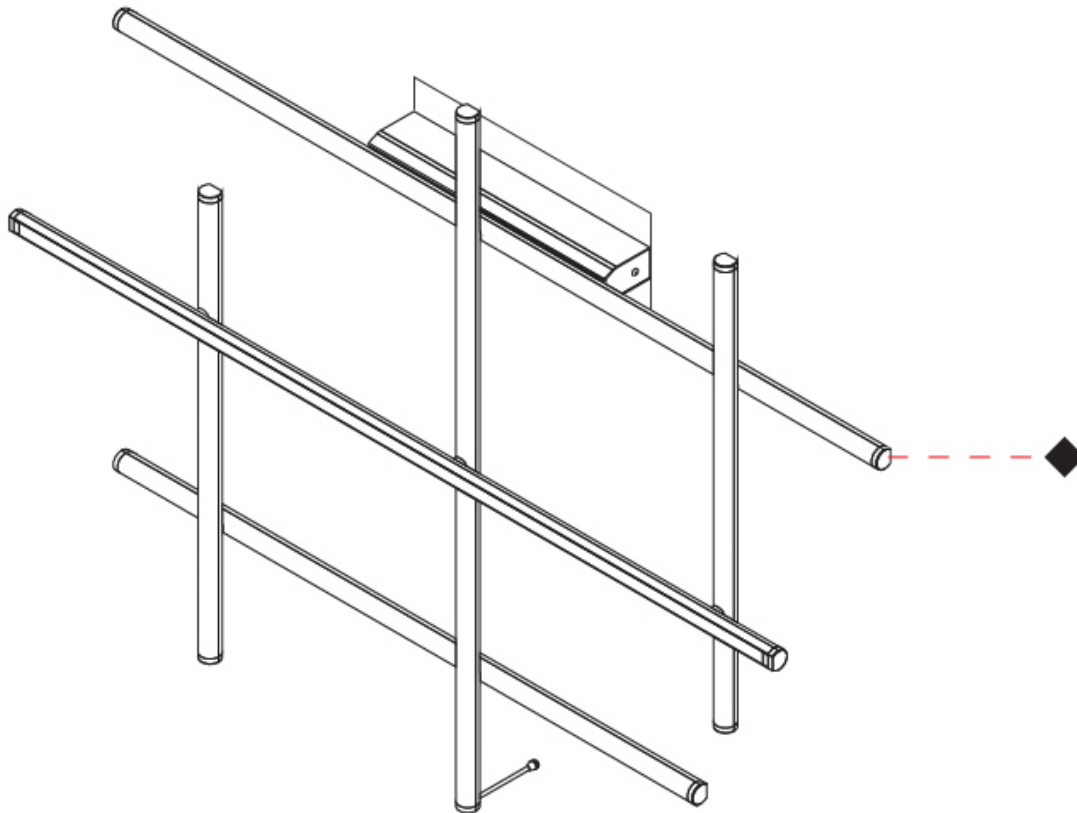

D

## HILOW COLOR FINISH CHART

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_


DATE \_\_\_\_\_

### Fixture Finish

White - WHI



Matte Black - MBK



Bronze - BRZ



Matte Brass - MBR



Titanium - TIM



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)