IDAHO 40 SUSPENSION

A300054

A300034	-		-	-	-	-	-	
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser Options	Cable Length	-

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

Subseries: Idaho 40 Brand: Prolicht Division: Architectural Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Profile PHYSICAL Shape: Rectangle Length (mm): 740 Length (in): 29 $\frac{1}{9_8}$ Width (mm): 39 Width (in): 1 $\frac{3}{16}$ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (los): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
Division: Architectural Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Profile PHYSICAL Shape: Rectangle Length (mm): 740 Length (in): 29 ½ Width (mm): 39 Width (in): 1 ½ Height (mm): 76 Height (in): 3 Max. Overall Height (in): 81 ¼ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Subseries: Idaho 40
Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Profile PHYSICAL Shape: Rectangle Length (mm): 740 Length (in): 29 $\frac{1}{6}$ Width (mm): 39 Width (in): 1 $\frac{9}{16}$ Height (mm): 76 Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{9}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Brand: Prolicht
Mounting Location: Ceiling Subcategory: Profile PHYSICAL Shape: Rectangle Length (mm): 740 Length (in): 29 $\frac{1}{6}$ Width (mm): 39 Width (in): 1 $\frac{1}{716}$ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Division: Architectural
Subcategory: Profile PHYSICAL Shape: Rectangle Length (mm): 740 Length (in): 29 ¹ / ₈ Width (mm): 39 Width (in): 1 ⁹ / ₁₆ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ³ / ₄ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Mounting Type: Suspension
PHYSICAL Shape: Rectangle Length (im): 740 Length (in): 29 ½ Width (mm): 39 Width (in): 1 ½ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ¾ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Mounting Location: Ceiling
Shape: Rectangle Length (mm): 740 Length (in): 29 ½ Width (mm): 39 Width (in): 1 ½ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ¾ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Subcategory: Profile
Length (mm): 740 Length (in): 29 $\frac{1}{6}$ Width (mm): 39 Width (in): 1 $\frac{9}{16}$ Height (mm): 76 Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	PHYSICAL
Length (in): 29 $\frac{1}{8}$ Width (mm): 39 Width (mm): 39 Width (in): 1 $\frac{1}{16}$ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Shape: Rectangle
Width (mm): 39 Width (in): 1 ¹ / ₄₆ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ³ / ₄ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Length (mm): 740
Width (in): 1 ¹ / ₁₆ Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ³ / ₄ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Length (in): 29 $\frac{1}{8}$
Height (mm): 76 Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Width (mm): 39
Height (in): 3 Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Width (in): 1 [%] / ₁₆
Max. Overall Height (mm): 2076 Max. Overall Height (in): 81 ³ / ₄ Light Distribution: Direct Weight (kg): 2.027 Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Height (mm): 76
Max. Overall Height (in): 81 $\frac{3}{4}$ Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Height (in): 3
Light Distribution: Direct Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Max. Overall Height (mm): 2076
Weight (kg): 2.027 Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Max. Overall Height (in): 81 $\frac{3}{4}$
Weight (lbs): 4.44 Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Light Distribution: Direct
Diffuser: PMMA - Opal or Micro-Prism Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Weight (kg): 2.027
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Weight (lbs): 4.44
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	Diffuser: PMMA - Opal or Micro-Prism
COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
Fixture Material: Aluminum Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
Cable Details: 2000mm or 6000mm Transparent Cable ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
ELECTRICAL Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.5	
Input Wattage (W): 17.5	
Total Output Wattage (W): 15	
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V	
Dimming	
Driver Included: Yes	Driver Included: Yes
Driver Location: Integrated	Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac	

Driver Class: Class 2 Input Voltage (V): 120 - 277

Constant Current (MA): 350 LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1400 / 1490 / 1529 / 1560	

CRI: >80 CRI Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PRO IECT

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



IDAHO 40 SUSPENSION

A300054-

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 SUSPENSION

A300055-

base number Finishes Diffuser Cable Color Finishes Finishes Dimming Temperature (Diamond) (Triangle) (Circle) Options Length

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Profile	
PHYSICAL	
Shape: Rectangle	
Length (mm): 1440	
Length (in): 56 ¹¹ / ₁₆	
Width (mm): 39	
Width (in): 1 %_16	
Height (mm): 76	
Height (in): 3	
Max. Overall Height (mm): 2076	
Max. Overall Height (in): 81 ¾	
Light Distribution: Direct	
Weight (kg): 3.329	
Weight (lbs): 7.32	
Diffuser: PMMA - Opal or Micro-Prism	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / COM / ABZ / JAG / OBR / MOS / ROR	
Fixture Material: Aluminum	
Cable Details: 2000mm or 6000mm Transparent Cable	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 35	
Total Output Wattage (W): 30	
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-	-10V
Dimming	
Driver Included: Yes	
Driver Location: Integrated	

Driver Location: Integrated	
Driver Type: Constant Current - 120 / 277Vac	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 350	

LED

Max. Delivered Lumen (lm): 2800 / 2990 / 3048 / 3110	

CRI: >80 CRI


Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

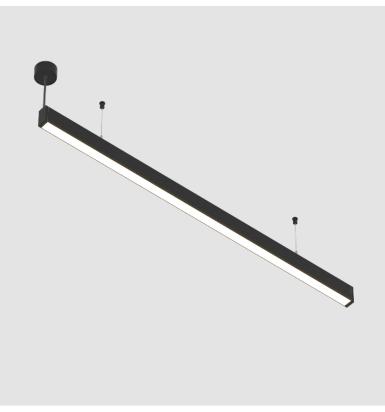





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 3/34



IDAHO 40 SUSPENSION

A300055-

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 SUSPENSION

A300056-

M200020	-		-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser	Cable
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	Options	Length

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Idaho	
Subseries: Idaho	o 40
Brand: Prolicht	
Division: Archite	ectural
Mounting Type:	Suspension
Mounting Locat	ion: Ceiling
Subcategory: Pr	rofile
PHYSICAL	
Shape: Rectang	le
Length (mm): 21	150
Length (in): 84 ½	8
Width (mm): 39	
Width (in): 1 [%] / ₁₆	
Height (mm): 76	5
Height (in): 3	
Max. Overall He	ight (mm): 2076
Max. Overall He	ight (in): 81 ¾
Light Distributio	on: Direct
Weight (kg): 4.83	37
Weight (lbs): 10.	.64
Diffuser: PMMA	- Opal or Micro-Prism
LOD / PUS / FRC	SR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / D / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / G / OBR / MOS / ROR
Fixture Material	
	000mm or 6000mm Transparent Cable
ELECTRICAL	
Lamp Type: LED) (Zhaga Standard)
Input Wattage (W): 52.5
Total Output Wa	attage (W): 45
Dimming: Non-I Dimming	Dimming / Phase Dimming (120Vac only) / 0-10V
Driver Included:	Yes
Driver Location:	Integrated
Driver Type: Cor	nstant Current - 120 / 277Vac

Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Color Temperature	(°K): 2700 /	3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4200 / 4480 / 4566 / 4660


CRI: >80 CRI Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

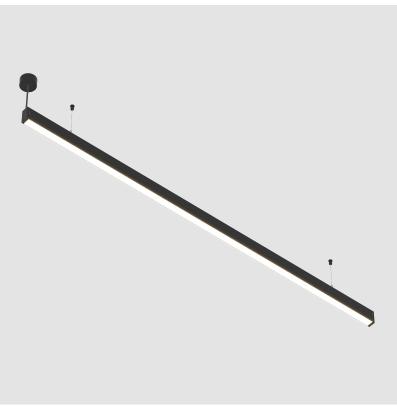



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



IDAHO 40 SUSPENSION

A300056-

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 RECESSED

A35591-


base number	LED	Color	Finishes	Diffuser	-
	Dimming	Temperature	(Diamond)	Options	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

VENERAL
Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 756
Length (in): 29 ³ / ₄
Width (mm): 51
Width (in): 2
Height (mm): 77
Height (in): $3\frac{1}{16}$
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1
Min. Recessing Depth (mm): 100
Min. Recessing Depth (ini): $3\frac{15}{16}$
Light Distribution: Direct
Weight (kg): 1.733
Weight (lbs): 3.81
Diffuser: PMMA - Opal or Micro-Prism
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC
COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cut-out Measurements: 745mm / 29 5/16" x 43mm / 1 11/16"
ELECTRICAL
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 17.5
Total Output Wattage (W): 15
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V
Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 1400 / 1490 / 1529 / 1560
CRI: >80 CRI





OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
iP rauling. IP20

PROJECT

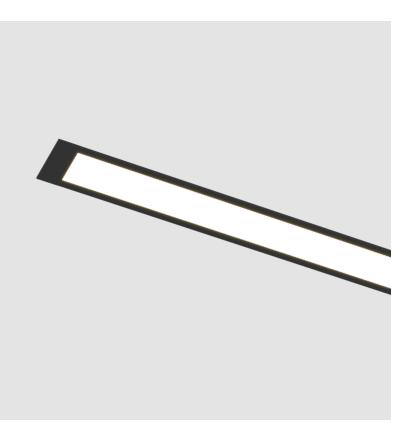



A

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 RECESSED

A35591-

PROJECT

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

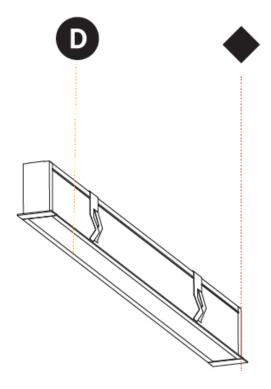

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 RECESSED

A35592-

base number	LED	Color	Finishes	Diffuser	_
	Dimming	Temperature	(Diamond)	Options	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Nounting Type: Recessed
Nounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
.ength (mm): 1456
ength (in): 57 ⁵ / ₁₆
Vidth (mm): 51
Vidth (in): 2
Height (mm): 77
Height (in): 3 ¹ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1
/in. Recessing Depth (mm): 100
۸in. Recessing Depth (in): 3 ¹⁵ / ₁₆
ight Distribution: Direct
Veight (kg): 3.088
Veight (lbs): 6.79
Diffuser: PMMA - Opal or Micro-Prism
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB /MSR / UFT / ITA / RUA / DGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
ixture Material: Aluminum
Cut-out Measurements: 1445mm / 56 7/8" x 43mm / 1 11/16"
ELECTRICAL
.amp Type: LED (Zhaga Standard)
nput Wattage (W): 35

Input Wattage (W): 35
Total Output Wattage (W): 30
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V
Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 2800 / 2990 / 3048 / 3110
CRI: >80 CRI

Lamp Life (hrs): 50000


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			

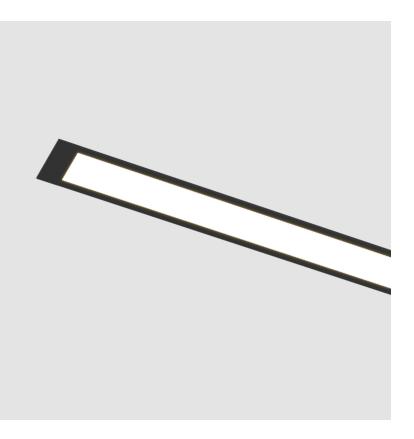





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 RECESSED

A35592-

PROJECT

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

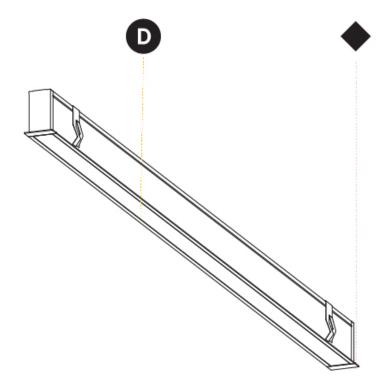

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 RECESSED

A35593-

1.00000				
base number	LED	Color	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Profile	
PHYSICAL	
Shape: Rectangle	
Length (mm): 2166	
Length (in): 85 1/4	
Width (mm): 51	
Width (in): 2	
Height (mm): 77	
Height (in): 3 ¹ / ₁₆	
Ceiling Thickness (mm): 10 / 25	
Min. Recessing Depth (mm): 100	
Min. Recessing Depth (in): 3 ¹⁵ / ₁₆	
Light Distribution: Direct	
Weight (kg): 4.442	
Weight (lbs): 9.77	
Diffuser: PMMA - Opal or Micro-Prism	
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB /MSR / UFT / ITA OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR	

Fixture Material: Aluminum

Cut-out Measurements: 2155mm	/ 84 13/16" x 43mm	/ 1 11/16"
eut out meusurements. 2155mm		/ 1 11/10

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 52.5
Total Output Wattage (W): 45
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Color Temperature	(°K): 2700 / 3	3000/3	3500 / 4000
-------------------	----------------	--------	-------------


Max. Delivered Lumen (lm): 4200 / 4480 / 4566 / 4660	
CRI: >80 CRI	
Lamp Life (hrs): 50000	


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

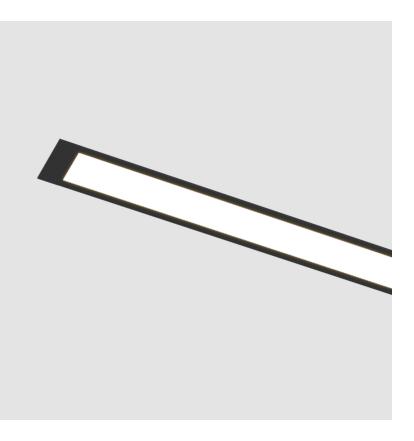



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 RECESSED

A35593-

PROJECT

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

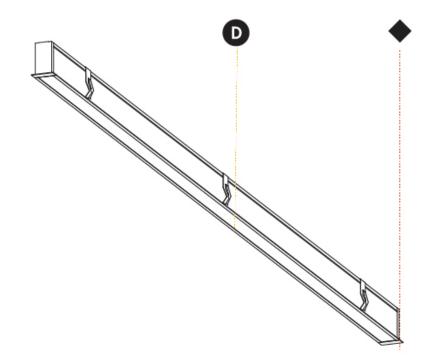

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

IDAHO 40 TRIMLESS

A35664-

base number	LED	Color	Ceiling
	Dimming	Temperature	Thickness

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 880
Length (in): 34 ⁵ / ₈
Width (mm): 42
Width (in): 1 ⁵ / ₈
Height (mm): 97
Height (in): 3 ¹³ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 135
Min. Recessing Depth (in): 5 $\frac{5}{16}$
Light Distribution: Direct
Weight (kg): 2.477
Weight (lbs): 5.48
Diffuser: PMMA - Opal
Fixture Material: Aluminum
Cut-out Measurements: 888mm / 34 15/16" x 55mm / 2 3/16"
Upon Request: Unique Sizes Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 14
Total Output Wattage (W): 12
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED


LED


Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 730 / 755 / 770
CRI: >80 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (n minimum qty) price increase + longer lead time
OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE







Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 TRIMLESS

A35664-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

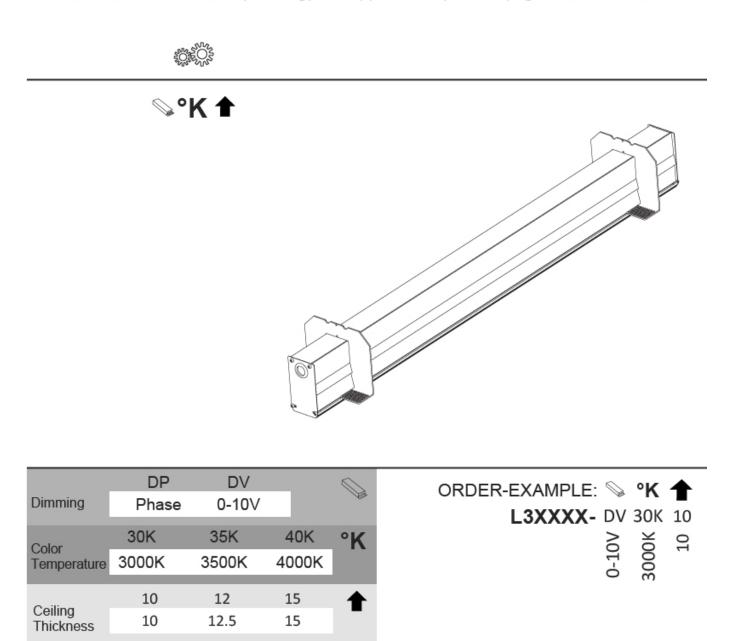

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 TRIMLESS

A35665-

base number	LED	Color	Ceiling
	Dimming	Temperature	Thickness

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 1160
Length (in): 45 ¹¹ / ₁₆
Width (mm): 42
Width (in): 1 ⁵ / ₈
Height (mm): 97
Height (in): 3 ¹³ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 135
Min. Recessing Depth (in): 5 ⁵ / ₁₆
Light Distribution: Direct
Weight (kg): 3.244
Weight (lbs): 7.14
Diffuser: PMMA - Opal
Fixture Material: Aluminum
Cut-out Measurements: 1168mm / 46" x 55mm / 2 3/16"
Upon Request: Unique Sizes Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 17.5
Total Output Wattage (W): 15
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V
Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED
Color Temperature (%), 2000 / 2500 / 4000

LED


Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 970 / 1009 / 1030
CRI: >80 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time
OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			







Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 TRIMLESS

A35665-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

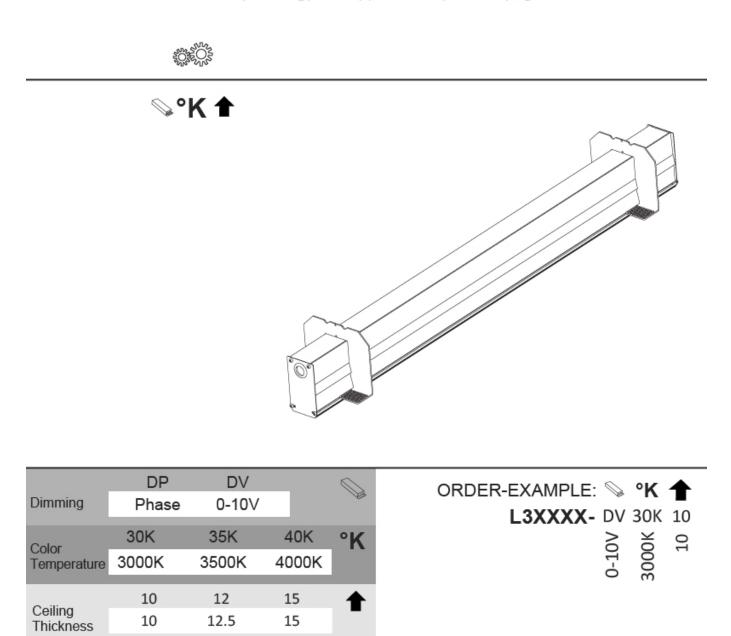

Page 16/34

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 TRIMLESS

A35666-

base number	LED	Color	Ceiling
	Dimming	Temperature	Thickness

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 1440
Length (in): 56 ¹¹ / ₁₆
Width (mm): 42
Width (in): 1 ⁵ / ₈
Height (mm): 97
Height (in): 3 ¹³ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 135
Min. Recessing Depth (in): 5 ⁵ / ₁₆
Light Distribution: Direct
Weight (kg): 3.866
Weight (lbs): 8.51
Diffuser: PMMA - Opal
Fixture Material: Aluminum
Cut-out Measurements: 1448mm / 57" x 55mm / 2 3/16"
Upon Request: Unique Sizes Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 21
Total Output Wattage (W): 18
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED
Calas Tarras anataras (814) 2000 (2500 / 4000

LED

Color Temperature (°K): 3000 / 3500 / 4000	
Max. Delivered Lumen (lm): 1210 / 1254 / 1280	
CRI: >80 CRI	
Lamp Life (hrs): 50000	
Upon Request: Special Color Temperature RGB-W Tunable Wi minimum qty) price increase + longer lead time	nite CRI (no
OPTICAL	


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			







Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 TRIMLESS

A35666-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

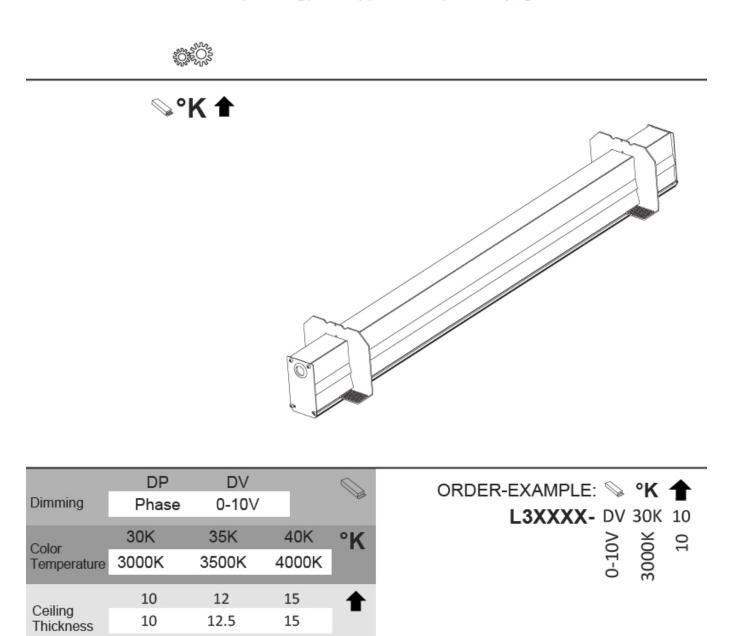

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 TRIMLESS

A35667-

base number	LED	Color	Ceiling
	Dimming	Temperature	Thickness

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 1720
Length (in): 67 ¹¹ / ₁₆
Width (mm): 42
Width (in): 1 ⁵ / ₈
Height (mm): 97
Height (in): 3 ¹³ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 135
Min. Recessing Depth (in): 5 ⁵ / ₁₆
Light Distribution: Direct
Weight (kg): 4.662
Weight (lbs): 10.26
Diffuser: PMMA - Opal
Fixture Material: Aluminum
Cut-out Measurements: 1728mm / 68 1/16" x 55mm / 2 3/16"
Upon Request: Unique Sizes Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 24.5
Total Output Wattage (W): 21
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED

LED


Color Temperature (°K): 3000 / 3500 / 4000	
Max. Delivered Lumen (lm): 1460 / 1509 / 1540	
CRI: >80 CRI	
Lamp Life (hrs): 50000	
Upon Request: Special Color Temperature RGB-W Tunable White minimum qty) price increase + longer lead time	CRI (no


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



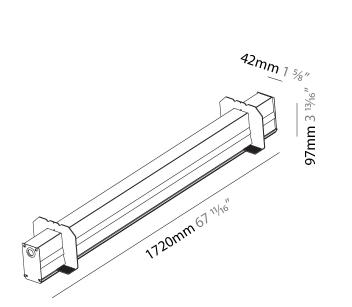



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 TRIMLESS

A35667-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

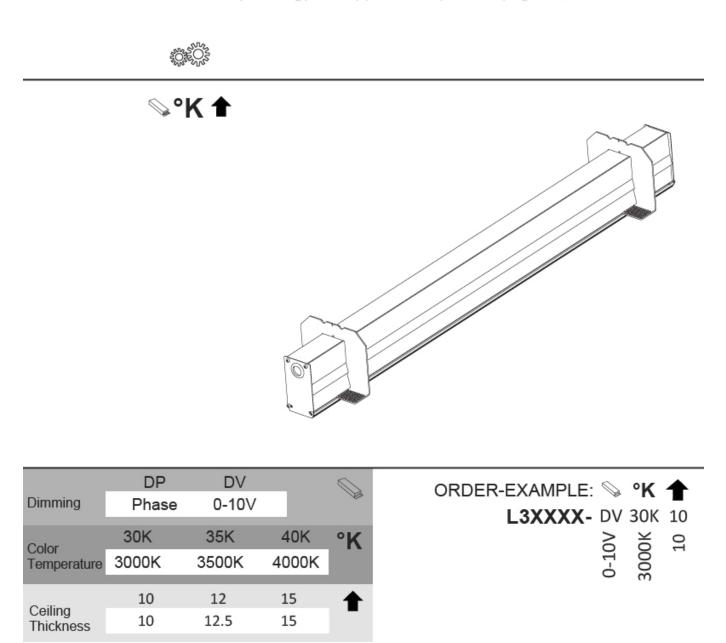

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 TRIMLESS

A35668-

base number	LED	Color	Ceiling
	Dimming	Temperature	Thickness

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 ³ / ₄
Width (mm): 42
Width (in): $1\frac{5}{8}$
Height (mm): 97
Height (in): 3 ¹³ / ₁₆
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 135
Min. Recessing Depth (in): 5 ⁵ / ₁₆
Light Distribution: Direct
Weight (kg): 5.284
Weight (lbs): 11.62
Diffuser: PMMA - Opal
Fixture Material: Aluminum
Cut-out Measurements: 2008mm / 79 1/16" x 55mm / 2 3/16"
Upon Request: Unique Sizes Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 28
Total Output Wattage (W): 24
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED
Color Terrer eveture (9K): 2000 / 2500 / 4000

LED


Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 1700 / 1764 / 1800
CRI: >80 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature RGB-W Tunable White CRI (r minimum qty) price increase + longer lead time
OPTICAL


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			



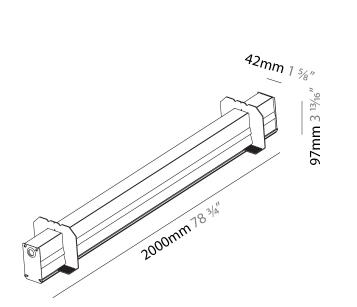



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 21/34




IDAHO 40 TRIMLESS

A35668-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

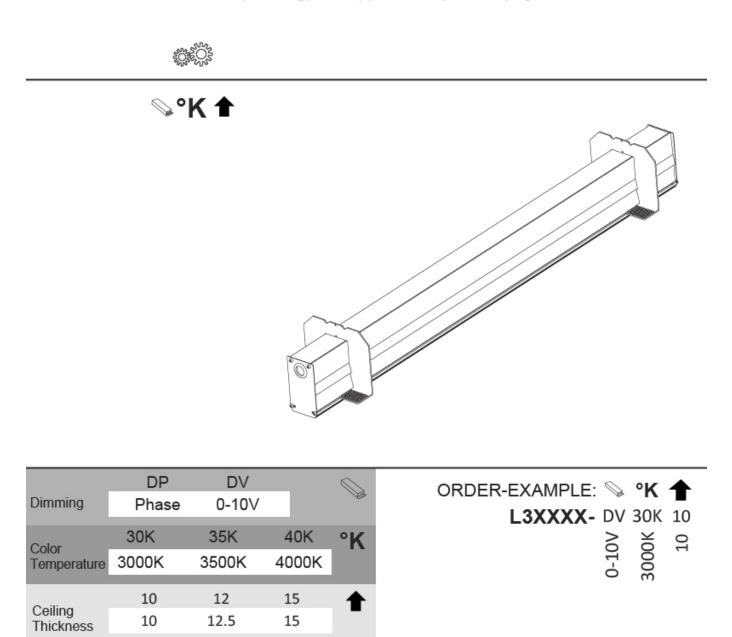

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 SURFACE

A3D134-

////					
base number	LED	Color	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho
Subseries: Idaho 40
Brand: Prolicht
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall / Ceiling
Subcategory: Profile
PHYSICAL
Shape: Rectangle
Length (mm): 740
Length (in): 29 $\frac{1}{8}$
Width (mm): 39
Width (in): 1 ⁹ / ₁₆
Height (mm): 76
Height (in): 3
Light Distribution: Direct
Weight (kg): 1.675
Weight (lbs): 3.69
Diffuser: PMMA - Opal or Micro-Prism
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 17.5
Total Output Wattage (W): 15
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1400 / 1490 / 1529 / 1560
CRI: >80 CRI
Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

TYPE SPECIFIER QUANTITY DATE





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 SURFACE

A3D134-

PROJECT

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

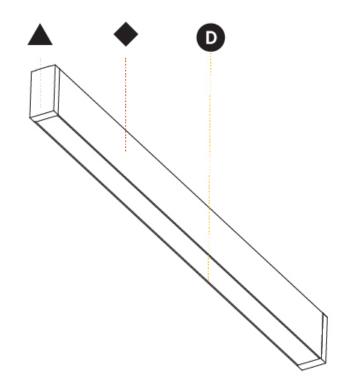

Α

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

IDAHO 40 SURFACE

A3D135-

base number	LED	Color	Finishes	Finishes	Diffuser	_
	Dimming	Temperature	(Diamond)	(Triangle)	Options	

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho)
Subseries: Id	aho 40
Brand: Prolic	ht
Division: Arc	hitectural
Mounting Ty	pe: Surface
Mounting Lo	cation: Wall / Ceiling
Subcategory	: Profile
PHYSICAL	
Shape: Recta	angle
Length (mm)	: 1440
Length (in): 5	56 ¹¹ / ₁₆
Width (mm):	39
Width (in): 1	9/16
Height (mm)	: 76
Height (in): 3	
Light Distrib	ution: Direct
Weight (kg):	2.977
Weight (lbs):	6.55
Diffuser: PMI	MA - Opal or Micro-Prism
LOD / PUS / I	h: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / JAG / OBR / MOS / ROR
Fixture Mate	rial: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 35
Total Output Wattage (W): 30
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2800 / 2990 / 3048 / 3110	
CRI: >80 CRI	
lamp Life (hrs): 50000	

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT	
ТҮРЕ	
SPECIFIER	



QUANTITY DATE



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

October 19, 2024, 6:00 pm




IDAHO 40 SURFACE

A3D135-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

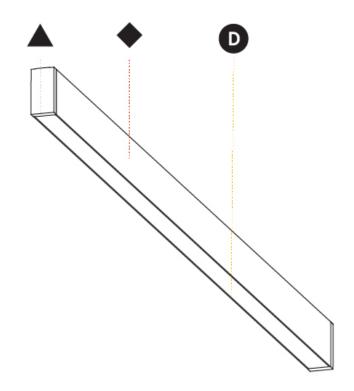

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А

Page 26/34

IDAHO 40 SURFACE

A3D136-

base number	LED	Color	Finishes	Finishes	Diffuser	
	Dimming	Temperature	(Diamond)	(Triangle)	Options	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho)
Subseries: Id	aho 40
Brand: Prolic	ht
Division: Arcl	nitectural
Mounting Ty	pe: Surface
Mounting Lo	cation: Wall / Ceiling
Subcategory	: Profile
PHYSICAL	
Shape: Recta	ingle
Length (mm)	: 2150
Length (in): 8	34 ⁵ / ₈
Width (mm):	39
Width (in): 1	9/16
Height (mm)	: 76
Height (in): 3	
Light Distribu	ution: Direct
Weight (kg):	4.278
Weight (lbs):	9.41
Diffuser: PMN	MA - Opal or Micro-Prism
LOD / PUS / F	n: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / JAG / OBR / MOS / ROR
Fixture Mate	rial: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 52.5
Total Output Wattage (W): 45
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4200 / 4480 / 4566 / 4660	
CRI: >80 CRI	
Lamp Life (hrs): 50000	


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE





А

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.




IDAHO 40 SURFACE

A3D136-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

For Color / Finish Chart & Symbology see Appendix or product page downloadable area.

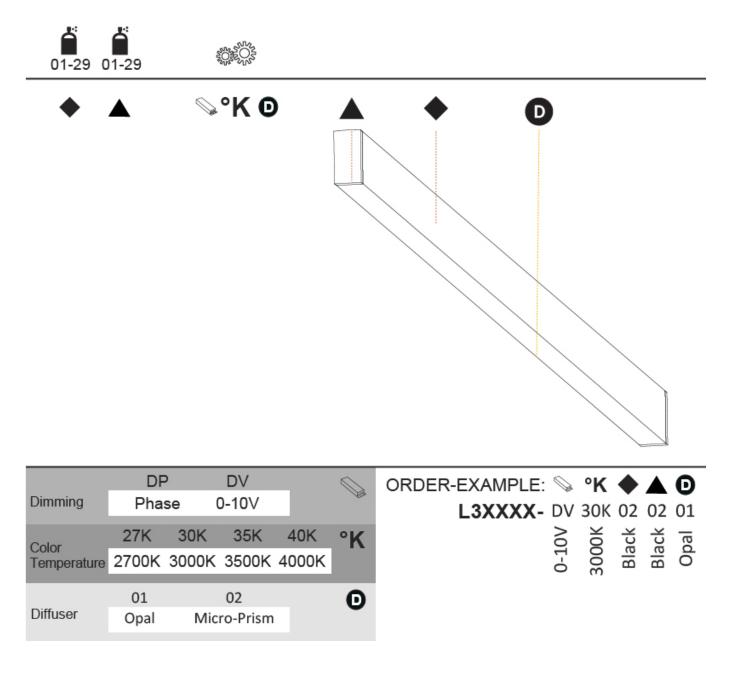

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO 40 RECESSED

A3ID40-REC-SYS

base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Profile	

PHYSICAL

Length (mm): Custom length

Length (in): Custom length

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Lamp Life (hrs): 50000 Upon Request: Color Temperature RGB-W Tunable CRI (no minimum

qty) price increase + longer lead time


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PRO IECT

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

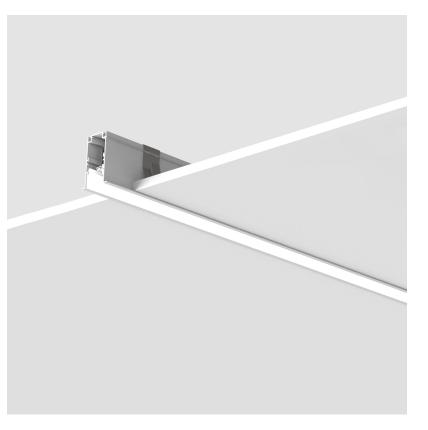

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

IDAHO 40 SURFACE

A3ID40-SUR-SYS

base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Surface	
Mounting Location: Wall / Ceiling	
Subcategory: Profile	

PHYSICAL

Length (mm): Custom length

Length (in): Custom length Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Lamp Life (hrs): 50000 Upon Request: Color Temperature RGB-W Tunable CRI (no minimum

qty) price increase + longer lead time

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE



IDAHO 40 SUSPENSION

A3ID40-SUS-SYS

base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Profile	

PHYSICAL

Length (mm): Custom length

Length (in): Custom length Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

ELECTRICAL

Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350
LED

Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 31/34

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

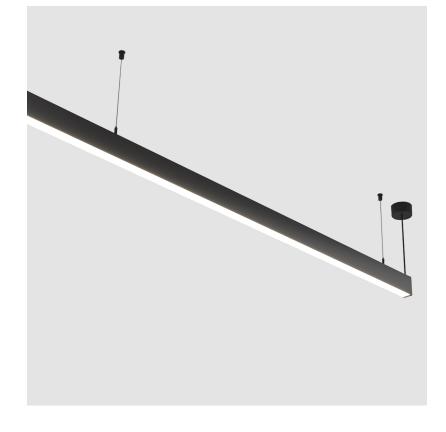



IDAHO 40 TRIMLESS

A3ID40-TRI-SYS

base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Idaho	
Subseries: Idaho 40	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Trimless	
Mounting Location: Ceiling	
Subcategory: Profile	

PHYSICAL

Length (mm): Custom length

Length (in): Custom length

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Upon Request: Unique Ceiling Thickness
--

ELECTRICAL

Lamp Type: LED	(Zhaga Standard)
----------------	------------------

Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming	
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - 120 / 277Vac	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 350	

LED

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature RGB-W Tunable White CRI (no minimum qty) price increase + longer lead time


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20



PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

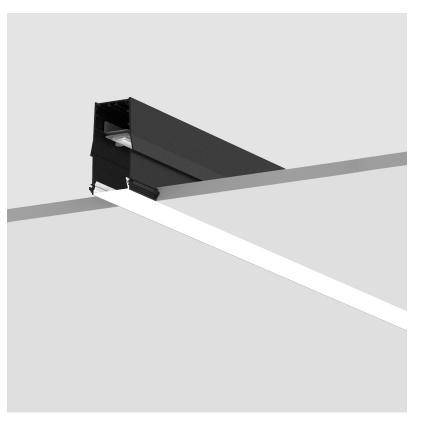





Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO

PROJECT

FROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

Fixture Finish

Sparkling Silver - 01 (SSR)	Black Velvet - 02 (BKV)	Crystal White - 03 (CWI)	Creamy - 04 (CRY)	Hampton Bay - 05 (HAB)	Urban Forest - 07 (UFT)
In the Army - 08 (ITA)	Rusty Angel - 09 (RUA)	Fade to Gray - 12 (FTG)	Mysterious Gray - 13 (MYG)	Lost Dream - 15 (LOD)	Purple Sky - 16 (PUS)
Fresh Oh - 17 (FRO)	Funky P 18 (FUP)	Kissing Aphrodite - 19 (KIA)	Poseidon's Paradise - 20 (POP)	Blue Sky - 21 (BLS)	Spring Green - 22 (SPG)
Mellow Yellow - 23 (MEY)	Golden Heart - 24 (GOH)	Gun Metal - 25 (GUM)	Champagne Cream - 26 (CHC)	Copper Mine - 27 (COM)	Ancient Bronze - 28 (ABZ)
Jazz Gold - 29 (JAG)	Olive Breeze - 30 (OBR)	Moonlight Silver - 31 (MOS)	Rosewood Red - 32 (ROR)	Aluminum Natural Anodized - 00 (ANA)	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

IDAHO

LEGEND

PROJECT

TYPE

SPECIFIER QUANTITY

DATE

1

6

SP

(Z)

special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ 1 floor-mounted Y pivotable 1 0 wall and ceiling: recessed and surface mounted rotating warm dim / natural dimming LED Œ illuminate tilted Î ceiling-mounted and wall-mounted rechargeable battery powered Ø Ţ wall-mounted color of suspension cable fixture with natural vivid LED (upon request) -> 1 \mathbb{Y} omni-directional light distribution 1 CRI length of suspension cable color rendering index Ä direct light distribution Δ reflector degree selection °K color temperature direct/indirect light distribution s s LM) super spot lumen (luminous flux) Å Y LM indirect light distribution lens efficacy (lumens per watt) asymmetric light distribution Q UGR Unified Glare Rating (UGR) range from 5-40 lens pack 0 ÷ marine grade (AISI 316 stainless steel) Ă aura light distribution shine ring 9 round wall or ceiling cut-out lacksquareintegrated shine ring with diffuser 1 walk on 5 square wall or ceiling cut-out ĥ free individual colors 01-29 . drive on individual colors: 00 (free of charge), 01-25 (extra d the supplied jig specifies the cutout dimensions Ċ DSC Dark Sky Compliance charge) Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) (++) M minimum distance (meters) lamp - object luminaire part to be colored (F1) Ġ • Î lamp protected against explosion recessed depth luminaire part to be colored (F2) blown glass using traditional methods by master € ceiling thickness in mm luminaire part to be colored (F3) A glass blower T ceiling thickness selection luminaire part to be colored (F4) 1) acoustic material dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) luminaire part to be colored (F5) protection class I, protection insulation included or excluded LED driver/transformer/ control gear color of 3-circuit adaptor protection class II, protection insulation \odot

indirect diffuser

ball-proof (upon request)

direct diffuser

accessory

D

 \odot

U

IP RATING

sensor

separately switchable

available upon request

remote control

У

2

0

2

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
1954	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
1965	protected against ingress of dust protected against jets of water
1966	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
КОб	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

ETL Certified to UL and CSA Standards

UL Certified to UL and CSA Standards

CSA Certified to UL and CSA Standards

Certified for North American Standards

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.