ZANEEN

IMAGINE ROUND TRIMLESS

A35389		-	-	-	-
base number	Color	Finishes	Finishes	Finishes	Reflector

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Imagine	
Subseries: Imagine Round	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Trimless	
Mounting Location: Ceiling	
Subcategory: Spots	

Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Spots
PHYSICAL
Shape: Round
Diameter (mm): 110
Diameter (in): 4 ⁵ / ₁₆
Length (mm): 220
Length (in): 8 11/16
Width (mm): 220
Width (in): 8 11/16
Depth (mm): 174
Depth (in): 6 1/8
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25 / 30
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1 or 1 3/16
Min. Recessing Depth (mm): 145
Min. Recessing Depth (in): 5 11/16
Light Distribution: Adjustable / Direct
Weight (kg): 1.9
Weight (lbs): 4.18

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 225mm / 8 7/8" x 225mm / 8 7/8"

Upon Request: Unique Sizes

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20.9

Total Output Wattage (W): 18.7

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See components

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1490 / 1530 / 1607 / 1640

CRI: >90 CRI

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature

OPTICAL


Reflector°: 16 / 32


Adjustability: Rotational 355°; Tilt 45°

Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS 3382, F 416-247-9319, www.zaneen.com

PROJECT TYPE SPECIFIER QUANTITY DATE

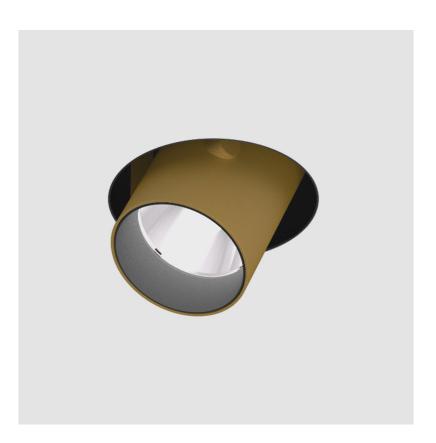
























IMAGINE ROUND TRIMLESS

A35389-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

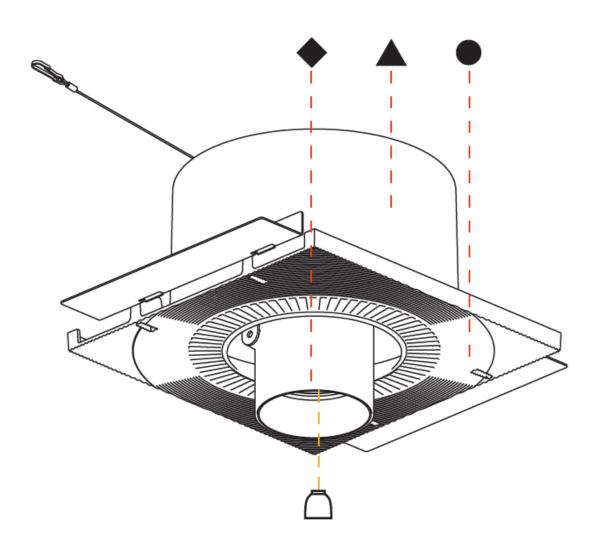





IMAGINE SQUARE TRIMLESS

Λ	2	_	Л	n	1	_
н			4	u	1	-

base number

Temperature (Diamond)

(Triangle)

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Imagine Subseries: Imagine Square Brand: Prolicht Division: Architectural Mounting Type: Trimless Mounting Location: Ceiling

PHYSICAL

Shape: Square

Subcategory: Spots

Length (mm): 220 Length (in): 8 11/16

Width (mm): 220

Width (in): 8 11/16

Height (mm): 174

Height (in): $6\frac{7}{8}$

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25 / 30

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1 or 1 3/16

Min. Recessing Depth (mm): 145 Min. Recessing Depth (in): $5^{11}/_{16}$

Light Distribution: Adjustable / Direct

Weight (kg): 2.21

Weight (lbs): 4.86

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / $\verb|MIC/FTG/MYG/TWT/LOD/PUS/FRO/FUP/KIA/POP/BLS/SPG/|$ MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 225mm / 8 7/8" x 225mm / 8 7/8"

Upon Request: Unique Sizes

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 23.1

Total Output Wattage (W): 18.7

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See components

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1490 / 1530 / 1607 / 1640

CRI: >90 CRI

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature

Reflector°: 20 / 40 / 60

Adjustability: Rotational 355°; Tilt 45°


Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Eartified By: Certified for North American Standardsww.zaneen.com

PROJECT TYPE SPECIFIER QUANTITY DATE



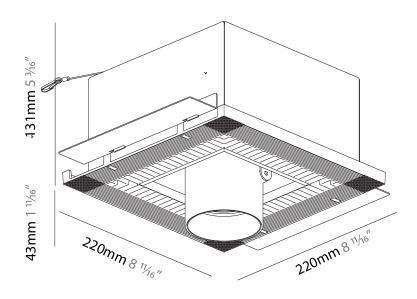


















IMAGINE SQUARE TRIMLESS

A35401-

PROJECT	
ТҮРЕ	
SPECIFIER	_
QUANTITY	_
DATE	

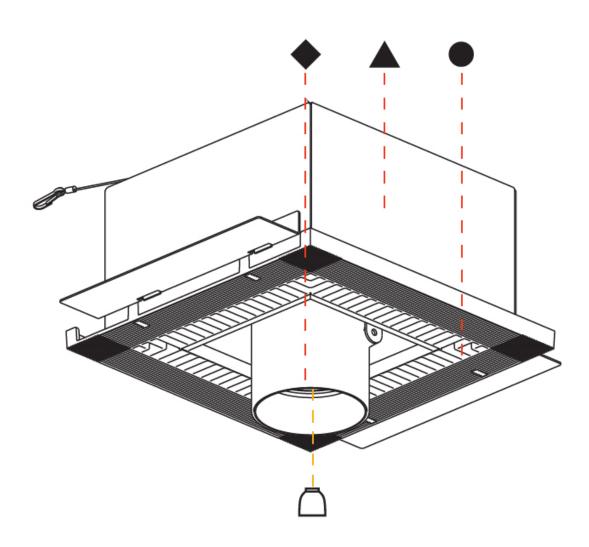



ZANEEN

IMAGINE SQUARE TRIMLESS

A35404	-	-	_	-	-
base number	LED	Color	Finishes	Finishes	Finishes
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Imagine	
Subseries: Imagine Square	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Trimless	
Mounting Location: Ceiling	
Subcategory: Spots	

Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Spots
PHYSICAL
Shape: Square
Length (mm): 220
Length (in): $8^{11}/_{16}$
Width (mm): 220
Width (in): 8 11/16
Height (mm): 174
Height (in): 6 1/8
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25 / 30
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1 or 1 3/16
Min. Recessing Depth (mm): 145
Min. Recessing Depth (in): 5 11/16
Light Distribution: Adjustable / Direct
Weight (kg): 2.253
Weight (lbs): 4.96

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 225mm / 8 7/8" x 225mm / 8 7/8"

Upon Request: Unique Sizes

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 13.2 (2700K) / 16.5 Total Output Wattage (W): 12 (2700K) / 15 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) Driver Included: No Driver Location: Recessed Housing Driver Type: Constant Current - Universal Driver Class: Class 2 Housing: See components Input Voltage (V): 120 - 277 Constant Current (MA): 350

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 870 / 970 / 1038 / 1060

CRI: >90 CRI

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature

Reflector°: 10

Adjustability: Rotational 355°; Tilt 45°


Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Sectified By: Certified for North American Standards.ww.zaneen.com

PROJECT TYPE SPECIFIER QUANTITY DATE



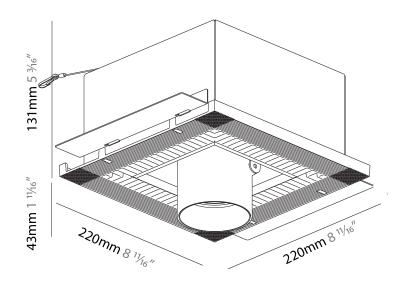




Page 5/8



IMAGINE SQUARE TRIMLESS

A35404-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

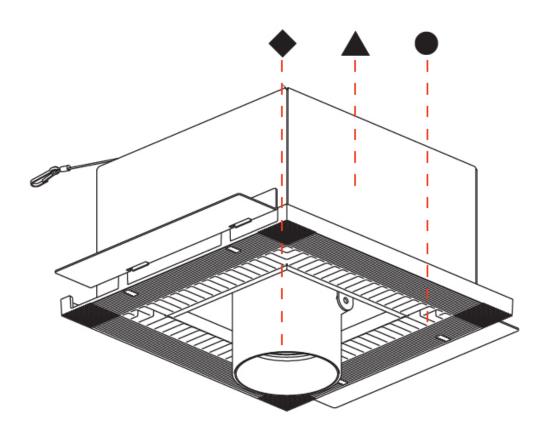





IMAGINE

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently betwee Physical: When texture is involved, there will be variations in color, character and tone within a pro



and between product families.



IMAGINE

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

100				-	1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	℃	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ←,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	()	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm