

D101672-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1300
Diameter (in): 51 ³ / ₁₆
Height (mm): 2050
Height (in): 80 11/16
Max. Overall Height (mm): 5050
Max. Overall Height (in): 198 $^{13}\!\!/_{16}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL
Number of Lamns: 9

ELECTRICAL
Number of Lamps: 9
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 36
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

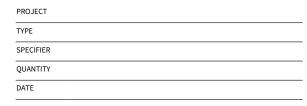



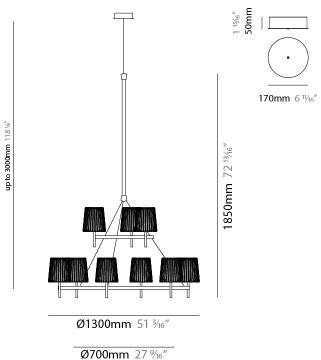






D101672-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

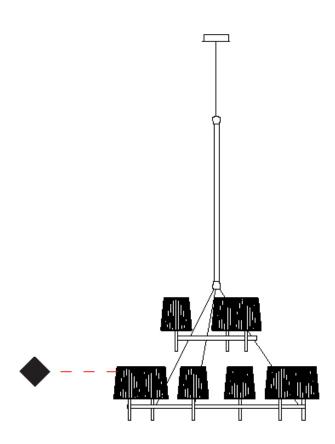



ZANEEN®

JULIA OVAL SUSPENSION

D101674-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1850
Length (in): 72 ¹³ / ₁₆
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 3/4
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 8
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 32
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20



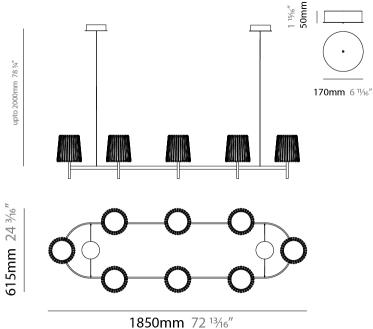






JULIA OVAL SUSPENSION

D101674-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

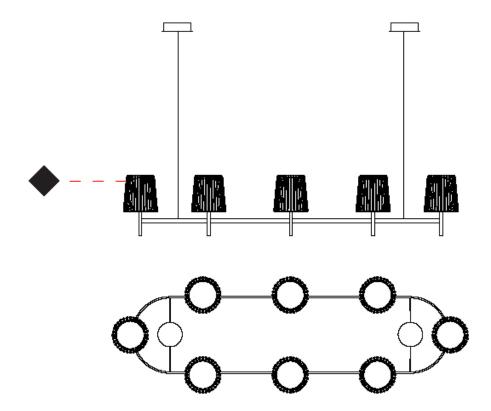





D101747-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategony: Ambient	

Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 700
Diameter (in): 27 % 16
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Weight (kg): 10
Weight (lbs): 22.05
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Cable Details: 2000mm Cable

Certified By: Certified for North American Standards
IP rating: IP20
















D101747-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

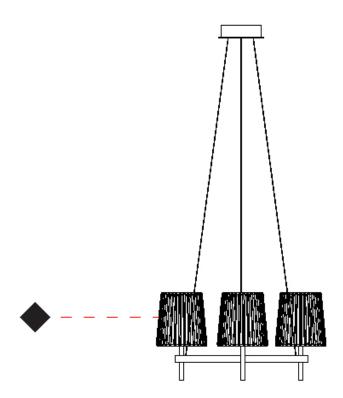





D101749-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL

Diameter (mm): 1000

Diameter (in): 39 3/8
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 3/4
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












D101749-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

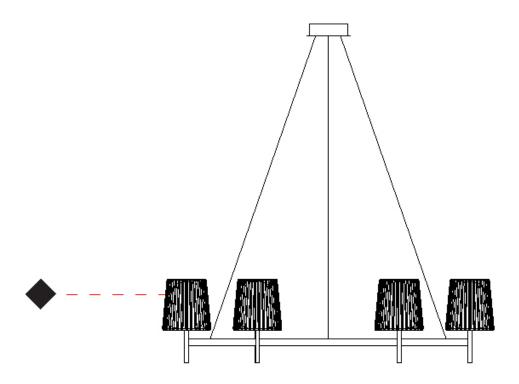





D101751-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Subcategory: Ambient	
PHYSICAL	
Shape: Round	
Diameter (mm): 1300	
Diameter (in): 51 ³ / ₁₆	
Height (mm): 350	
Height (in): 13 ³ / ₄	
Max. Overall Height (mm): 2350	
Max. Overall Height (in): 92 ½	
Light Distribution: Omnidirectional	
Weight (kg): 17	
Weight (lbs): 37.48	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	
ELECTRICAL	


ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20












D101751-

PROJECT	
TYPE	-
SPECIFIER	_
QUANTITY	-
DATE	-

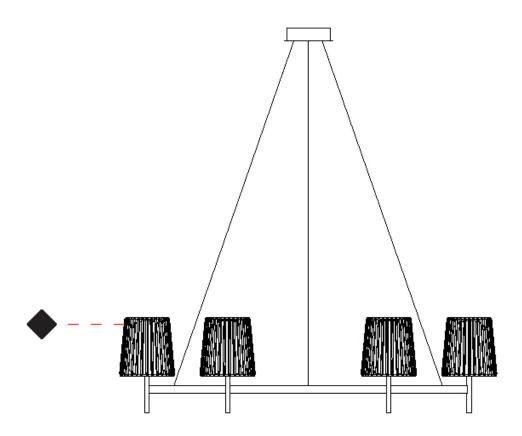



ZANEEN®

JULIA OVAL SUSPENSION

D101755-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Shape: Oval	
Length (mm): 1000	
Length (in): 39 ³ / ₈	
Width (mm): 600	
Width (in): 23 ⁵ / ₈	
Height (mm): 350	
Height (in): 13 ³ / ₄	
Max. Overall Height (mm): 2350	
Max. Overall Height (in): 92 $\frac{1}{2}$	
Light Distribution: Omnidirectional	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	

ELECTRICAL

ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 16	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












JULIA OVAL SUSPENSION

D101755-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

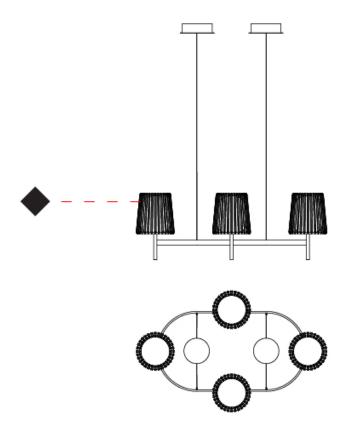





D101757-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cubantaman a Amabiant	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1300
Length (in): 51 ³ / ₁₆
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ¾
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 ¾
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20











D101757-

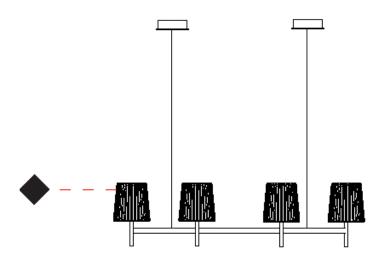







D101759-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1600
Diameter (in): 63
Height (mm): 1850
Height (in): 72 ¹³ / ₁₆
Max. Overall Height (mm): 4850
Max. Overall Height (in): 190 $^{15}\!\!/_{16}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL
Morellan of Lanca 15

Cable Details. 2000iiiii Cable	
ELECTRICAL	
Number of Lamps: 15	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 60	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



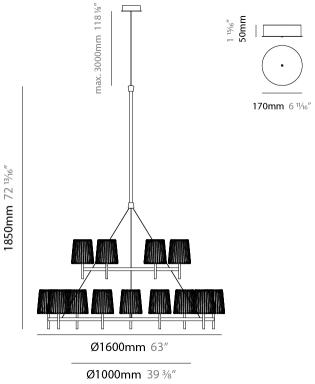






D101759-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

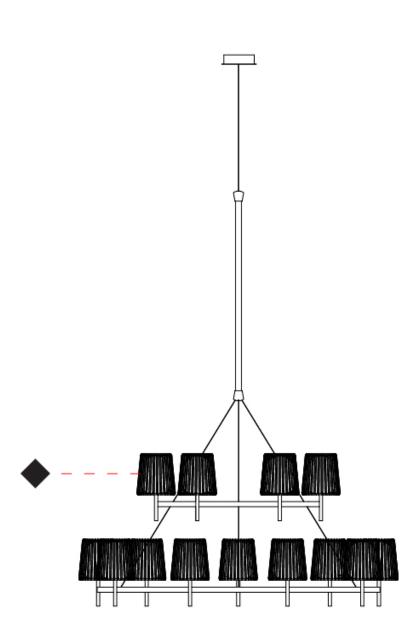



ZANEEN_®

JULIA SURFACE

D103138-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Brand: Quasar	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

PHYSICAL

Width (mm): 250	
Height (mm): 350	
Light Distribution: Omnidirectional	
Weight (kg): 1.5	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	

ELECTRICAL

Fixture Material: Metal


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

Max. Delivered Lumen (lm): 260

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20












JULIA SURFACE

D103138-

PROJECT	
TYPE	
SPECIFIER	_
QUANTITY	
DATE	_







D104200-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Brand: Quasar	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Mounting Type: Portable
Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Round
Diameter (mm): 190
Diameter (in): 7 ½
Height (mm): 350
Height (in): 13 ¾
Light Distribution: Omnidirectional
Weight (kg): 2
Weight (lbs): 4.41
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Upon Request: "Modification to be fixed to surface"
ELECTRICAL
Number of Lamps: 1

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Upon Request: Bolt Down


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

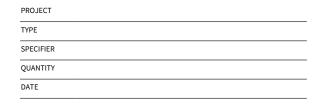










D104200-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

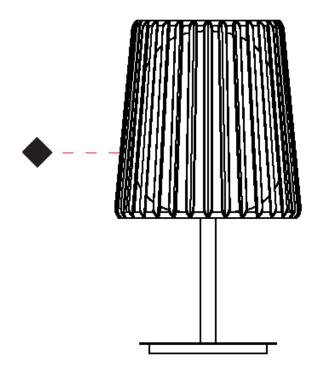





D104202-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Brand: Quasar	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Table	

Mounting Location: Floor
Subcategory: Table
PHYSICAL
Shape: Round
Diameter (mm): 190
Diameter (in): 7 ½
Height (mm): 1100
Height (in): 43 ⁵ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 5
Weight (lbs): 11.02
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Upon Request: Bolt Down
ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20










D104202-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

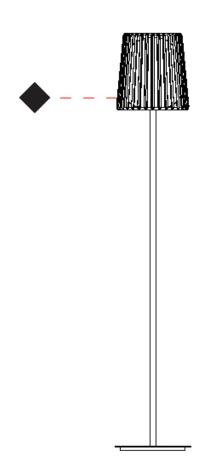






JULIA

COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.





JULIA

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

LEGEND

100				-	1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	℃	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ←,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	()	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

100000	288 (400 C) - 26 5 (100 C) - 26 5 (
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)