

D101672-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cook and a mark Amala in me	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 1300
Diameter (in): 51 ³ / ₁₆
Height (mm): 2050
Height (in): 80 11/16
Max. Overall Height (mm): 5050
Max. Overall Height (in): 198 ¹³ / ₁₆
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 9	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 36	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



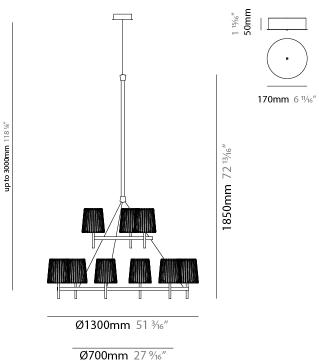






D101672-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	

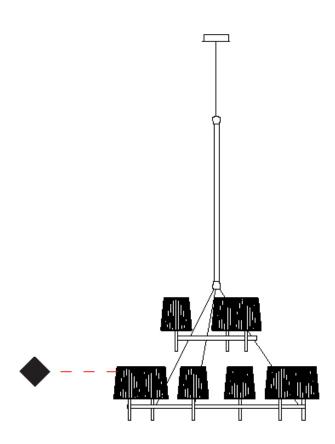





JULIA OVAL SUSPENSION

D101674-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subsatagon: Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1850
Length (in): 72 ¹³ / ₁₆
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ¾
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 $\frac{1}{2}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 8
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 32
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20



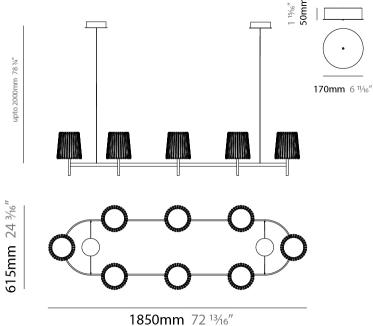






JULIA OVAL SUSPENSION

D101674-

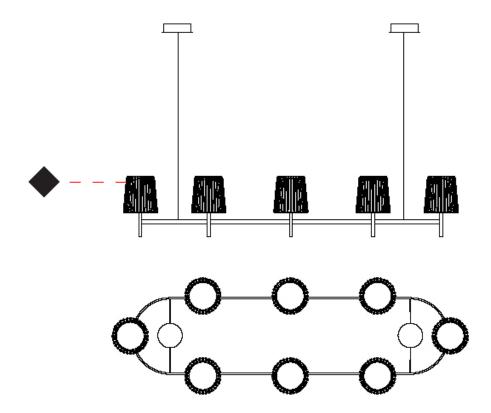





D101747-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cubactacan Ambiant	

Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 700
Diameter (in): 27 % 16
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Weight (kg): 10
Weight (lbs): 22.05
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 12	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Fixture Material: Metal
Cable Details: 2000mm Cable

Certified By: Certified for North American Standards
IP rating: IP20














D101747-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

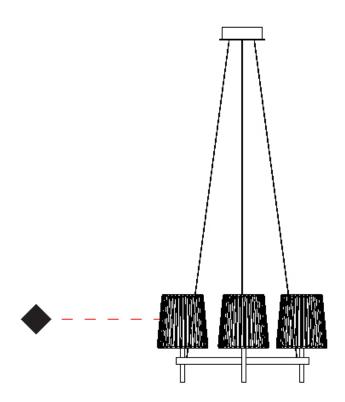





D101749-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Julia
	Subseries: Julia Round
	Brand: Quasar
	Division: Design
	Mounting Type: Suspension
	Mounting Location: Ceiling
	Subcategory: Ambient

PHYSICAL

Diameter (mm): 1000

Diameter (in): 39 ³ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2000
Max. Overall Height (in): 78 $\frac{3}{4}$
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL			
Number of Lamps: 6			
Lamp Type: LED Retrofit			
Lamp Shape: B10			
Bulb Included: Bulb Not Included			
Total Output Wattage (W): 24			
Max. Wattage Per Lamp (W): 4			
Lamp Base: E12			
Input Voltage (V): 120			
Lamp Voltage (V): 120			


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

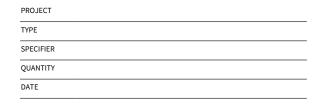










D101749-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

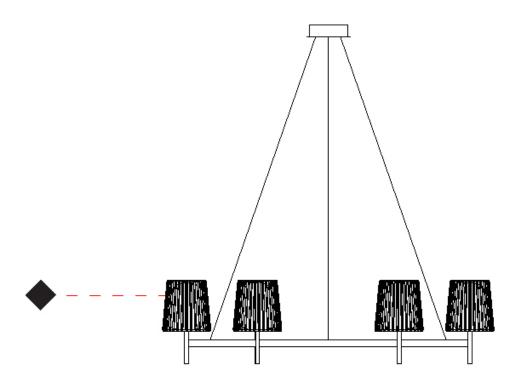





D101751-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Round	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Subcategory: Ambient		
PHYSICAL		
Shape: Round		
Diameter (mm): 1300		
Diameter (in): 51 ³ / ₁₆		
Height (mm): 350		
Height (in): 13 ³ / ₄		
Max. Overall Height (mm): 2350		
Max. Overall Height (in): 92 ½		
Light Distribution: Omnidirectional		
Weight (kg): 17		
Weight (lbs): 37.48		
Diffuser: Stainless Steel / Brass & Transparent		
Fixture Finish: PCH / BRA		
Fixture Material: Metal		
Cable Details: 2000mm Cable		
ELECTRICAL		


ELECTRICAL		
Number of Lamps: 6		
Lamp Type: LED Retrofit		
Lamp Shape: B10		
Bulb Included: Bulb Not Included		
Total Output Wattage (W): 24		
Max. Wattage Per Lamp (W): 4		
Lamp Base: E12		
Input Voltage (V): 120		
Lamp Voltage (V): 120		
·		

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

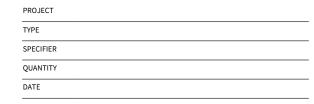










D101751-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

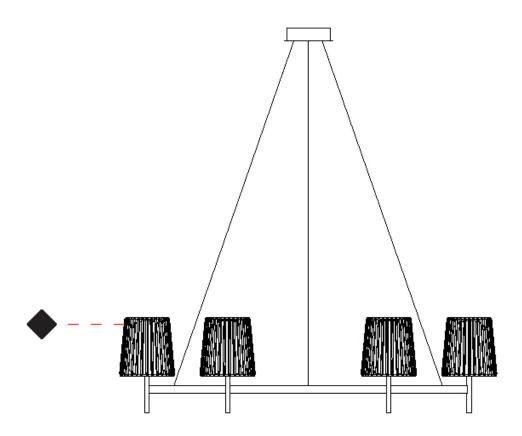





D101753-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	eries: Julia		
Subseries: Julia Round			
Brand: Quasar			
Division: Design			
Mounting Type: Suspension			
Mounting Location: Ceiling			

Division, Design			
Mounting Type: Suspension			
Mounting Location: Ceiling			
Subcategory: Ambient			
PHYSICAL			
Shape: Round			
Diameter (mm): 1600			
Diameter (in): 63			
Height (mm): 350			
Height (in): 13 ¾			
Max. Overall Height (mm): 2350			
Max. Overall Height (in): 92 ½			
Light Distribution: Omnidirectional			
Diffuser: Stainless Steel / Brass & Transparent			
Fixture Finish: PCH / BRA			
Fixture Material: Metal			
Cable Details: 2000mm Cable			
ELECTRICAL			
Number of Lamps: 9			

ELECTRICAL
Number of Lamps: 9
Lamp Type: LED
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 36
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Driver Included: No
Input Voltage (V): 120
Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			










D101753-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

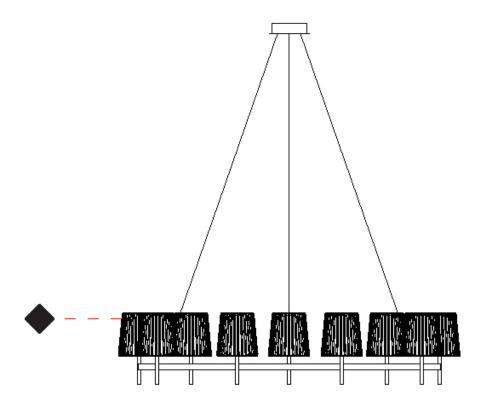



ZANEEN®

JULIA OVAL SUSPENSION

D101755-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Oval	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

mounting Location, octing
Subcategory: Ambient
PHYSICAL
Shape: Oval
Length (mm): 1000
Length (in): 39 ³ / ₈
Width (mm): 600
Width (in): 23 ⁵ / ₈
Height (mm): 350
Height (in): 13 ³ / ₄
Max. Overall Height (mm): 2350
Max. Overall Height (in): 92 ½
Light Distribution: Omnidirectional
Diffuser: Stainless Steel / Brass & Transparent
Fixture Finish: PCH / BRA
Fixture Material: Metal
Cable Details: 2000mm Cable
FLECTDICAL

ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: B10	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 16	
Max. Wattage Per Lamp (W): 4	
Lamp Base: E12	
Input Voltage (V): 120	
Lamp Voltage (V): 120	


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20










JULIA OVAL SUSPENSION

D101755-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

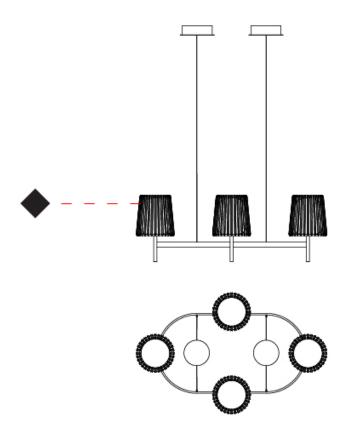





D101757-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia
Subseries: Julia Chandelier
Brand: Quasar
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient

Mounting Lo	cation: Ceiting
Subcategory	: Ambient
PHYSICAL	
Shape: Oval	
Length (mm)	: 1300
Length (in): 5	1 3/16
Width (mm):	600
Width (in): 23	5/8
Height (mm):	: 350
Height (in): 1	3 ¾
Max. Overall	Height (mm): 2000
Max. Overall	Height (in): 78 ¾
Light Distribu	ution: Omnidirectional
Diffuser: Stai	nless Steel / Brass & Transparent
Fixture Finish	n: PCH / BRA
Fixture Mater	ial: Metal
Cable Details	:: 2000mm Cable
FLECTRICAL	


ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20









1300mm 51 3/16"





D101757-

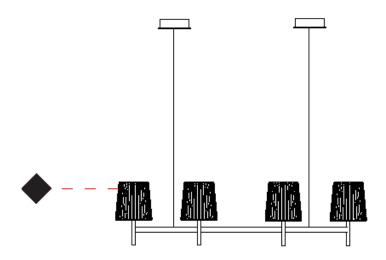







D101759-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Julia	
Subseries: Julia Chandelier	
Brand: Quasar	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Shape: Round	
Diameter (mm): 1600	
Diameter (in): 63	
Height (mm): 1850	
Height (in): 72 ¹³ / ₁₆	
Max. Overall Height (mm): 4850	
Max. Overall Height (in): 190 $^{15}\!\!/_{16}$	
Light Distribution: Omnidirectional	
Diffuser: Stainless Steel / Brass & Transparent	
Fixture Finish: PCH / BRA	
Fixture Material: Metal	
Cable Details: 2000mm Cable	

Cable Details. 2000iiiii Cable
ELECTRICAL
Number of Lamps: 15
Lamp Type: LED Retrofit
Lamp Shape: B10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 60
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120
Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			
			_



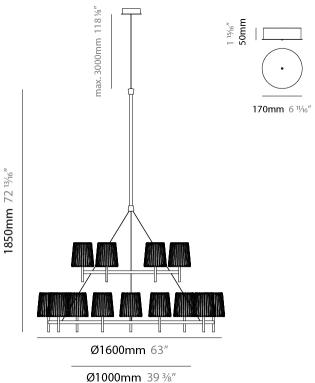






D101759-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

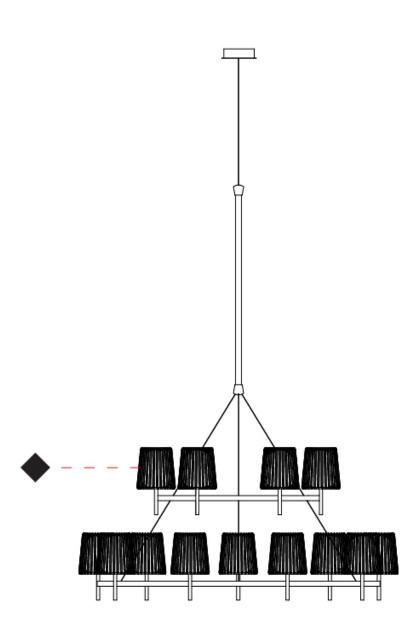






JULIA

COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.





JULIA

PRC	JECT			
TYP	E			
SPE	CIFIER			
QUA	ANTITY			
DAT	E			

LEGEND

F		_			special LED (upon request) RGR_RGRW_tunable
<u></u>	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	←	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	℃ K	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ā	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
Z)	square wall or ceiling cut-out	Ġ	free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	6	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□+ *	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
₩	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	\oplus	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
[P43]	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
[P44]	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm