JULIA CHANDELIER SUSPENSION

D101672-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Chandelier |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 1300 |
| Diameter (in): 51 $\frac{3}{16}$ |
| Height (mm): 2050 |
| Height (in): 80 ¹¹ / ₁₆ |
| Max. Overall Height (mm): 5050 |
| Max. Overall Height (in): 198 ¹³ / ₁₆ |
| Light Distribution: Omnidirectional |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 3000mm Cable |
| ELECTRICAL |
| Number of Lamps: 9 |
| Lamp Type: LED Retrofit |
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 36 |
| Max. Wattage Per Lamp (W): 4 |

Lamp Base: E12

Input Voltage (V): 120 Lamp Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

| Certified By: Certified for North American Standards | |
|--|--|
| IP rating: IP20 | |

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |





Ø700mm 27 %16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA CHANDELIER SUSPENSION

D101672-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

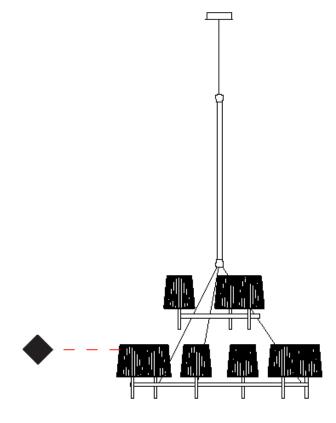



JULIA OVAL SUSPENSION

D101674-

base number Finish Options

Total Output Wattage (W): 32 Max. Wattage Per Lamp (W): 4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

Lamp Base: E12 Input Voltage (V): 120

IP rating: IP20

LED OPTICAL

Lamp Voltage (V): 120

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #


GENERAL

| Series: Julia | |
|---|--|
| Subseries: Julia Oval | |
| Brand: Quasar | |
| Division: Design | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Ambient | |
| PHYSICAL | |
| Shape: Oval | |
| Length (mm): 1850 | |
| Length (in): 72 ¹³ / ₁₆ | |
| Width (mm): 600 | |
| Width (in): 23 $\frac{5}{8}$ | |
| Height (mm): 350 | |
| Height (in): 13 ³ / ₄ | |
| Max. Overall Height (mm): 2350 | |
| Max. Overall Height (in): 92 ½ | |
| Light Distribution: Omnidirectional | |
| Diffuser: Stainless Steel / Brass & Transparent | |
| Fixture Finish: PCH / BRA | |
| Fixture Material: Metal | |
| Cable Details: 2000mm Cable | |
| ELECTRICAL | |
| Number of Lamps: 8 | |
| Lamp Type: LED Retrofit | |
| Lamp Shape: B10 | |
| Bulb Included: Bulb Not Included | |

| SPECIFIER | | |
|-----------|--|--|
| QUANTITY | | |
| DATE | | |



PROJECT

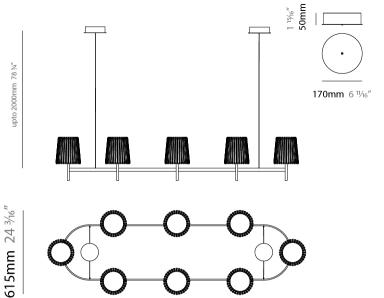

1850mm 72 13/16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA OVAL SUSPENSION

D101674-

PROJECT

| PRUJ | ECT | | | |
|------|-------|--|--|--|
| TYPE | | | | |
| SPEC | IFIER | | | |
| QUAN | ΝΤΙΤΥ | | | |
| DATE | | | | |
| | | | | |

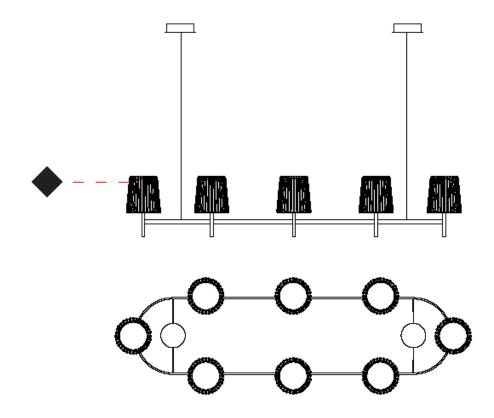

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

 \square

JULIA ROUND SUSPENSION

D101747-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Round |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 700 |
| Diameter (in): 27 ⁹ / ₁₆ |
| Height (mm): 350 |
| Height (in): 13 $\frac{3}{4}$ |
| Max. Overall Height (mm): 2350 |
| Max. Overall Height (in): 92 $\frac{1}{2}$ |
| Light Distribution: Omnidirectional |
| Weight (kg): 10 |
| Weight (lbs): 22.05 |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 2000mm Cable |
| ELECTRICAL |
| |

| Lamp Type: LED Retrofit Lamp Shape: B10 Bulb Included: Bulb Not Included |
|--|
| |
| Bulb Included: Bulb Not Included |
| |
| Total Output Wattage (W): 12 |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Input Voltage (V): 120 |
| Lamp Voltage (V): 120 |

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | | |
|-----------|--|--|
| ТҮРЕ | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |
| | | |







Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 5/20

JULIA ROUND SUSPENSION

D101747-

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

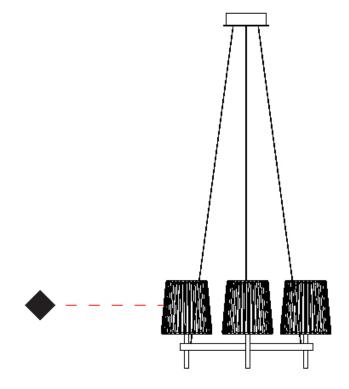

JULIA ROUND SUSPENSION

D101749-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia | |
|--|--|
| Subseries: Julia Round | |
| Brand: Quasar | |
| Division: Design | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Ambient | |
| PHYSICAL | |
| Diameter (mm): 1000 | |
| Diameter (in): 39 ¾ | |
| Height (mm): 350 | |
| Height (in): 13 ³ / ₄ | |
| Max. Overall Height (mm): 2000 | |
| Max. Overall Height (in): 78 $^{3}\!\!/_{\!\!\!4}$ | |
| Light Distribution: Omnidirectional | |
| Diffuser: Stainless Steel / Brass & Transparent | |
| Fixture Finish: PCH / BRA | |
| Fixture Material: Metal | |
| Cable Details: 2000mm Cable | |
| ELECTRICAL | |
| Number of Lamps: 6 | |
| Lamp Type: LED Retrofit | |
| Lamp Shape: B10 | |
| Bulb Included: Bulb Not Included | |
| Total Output Wattage (W): 24 | |
| Max. Wattage Per Lamp (W): 4 | |

Lamp Base: E12 Input Voltage (V): 120

Lamp Voltage (V): 120 LED


OPTICAL

RATINGS AND CERTIFICATIONS

| Certified By: Certified for North American Standards | |
|--|--|
| IP rating: IP20 | |

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |





Ø1000mm 39 3/8"


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA ROUND SUSPENSION

D101749-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

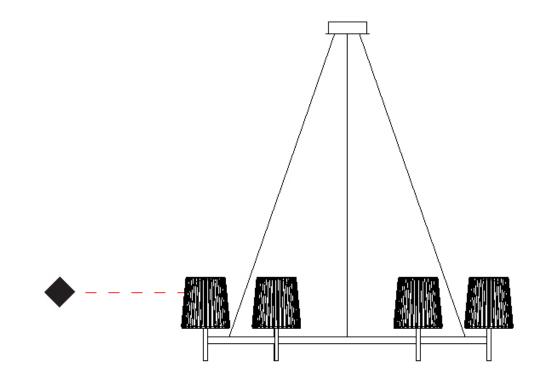

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA ROUND SUSPENSION

D101751-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia | |
|---|--|
| Subseries: Julia Round | |
| Brand: Quasar | |
| Division: Design | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Ambient | |
| PHYSICAL | |
| Shape: Round | |
| Diameter (mm): 1300 | |
| Diameter (in): 51 ³ / ₁₆ | |
| Height (mm): 350 | |
| Height (in): 13 ³ / ₄ | |
| Max. Overall Height (mm): 2350 | |
| Max. Overall Height (in): 92 ½ | |
| Light Distribution: Omnidirectional | |
| Weight (kg): 17 | |
| Weight (lbs): 37.48 | |
| Diffuser: Stainless Steel / Brass & Transparent | |
| Fixture Finish: PCH / BRA | |
| Fixture Material: Metal | |
| Cable Details: 2000mm Cable | |
| | |

ELECTRICAL

| Number of Lamps: 6 |
|----------------------------------|
| Lamp Type: LED Retrofit |
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 24 |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Input Voltage (V): 120 |
| Lamp Voltage (V): 120 |

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

| PROJECT | |
|-----------|--|
| ТҮРЕ | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |





Ø1300mm 51 3/16"

upto 2000mm 78 3/4"

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 9/20

JULIA ROUND SUSPENSION

D101751-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

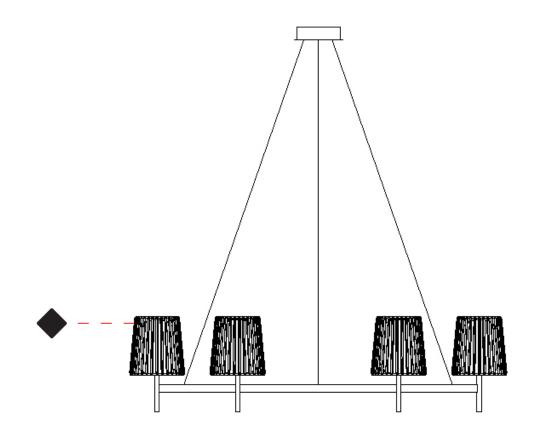

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 10/20

JULIA ROUND SUSPENSION

D101753-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Round |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 1600 |
| Diameter (in): 63 |
| Height (mm): 350 |
| Height (in): 13 ³ / ₄ |
| Max. Overall Height (mm): 2350 |
| Max. Overall Height (in): 92 ½ |
| Light Distribution: Omnidirectional |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 2000mm Cable |
| ELECTRICAL |
| Number of Lamps: 9 |
| Lamp Type: LED |
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 36 |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Driver Included: No |
| Input Voltage (V): 120 |

LED

OPTICAL


Lamp Voltage (V): 120

RATINGS AND CERTIFICATIONS

| Certified By: Certified for North American Standards | |
|--|--|
| IP rating: IP20 | |

PROJECT TYPE SPECIFIER QUANTITY DATE






Ø1600mm 63"

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA ROUND SUSPENSION

D101753-

| TYPE SPECIFIER QUANTITY DATE | PROJECT | | | |
|---------------------------------------|-----------|--|--|--|
| QUANTITY | TYPE | | | |
| | SPECIFIER | | | |
| DATE | QUANTITY | | | |
| | DATE | | | |

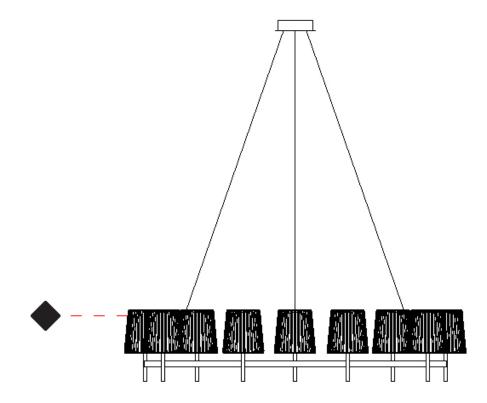

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

Page 12/20

JULIA OVAL SUSPENSION

D101755-

Finish base number Options

Total Output Wattage (W): 16 Max. Wattage Per Lamp (W): 4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

Lamp Base: E12 Input Voltage (V): 120

IP rating: IP20

LED OPTICAL

Lamp Voltage (V): 120

1. To build a product code in our configurator select the specify button on the base model # product page


2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Oval |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Oval |
| Length (mm): 1000 |
| Length (in): 39 ³ / ₈ |
| Width (mm): 600 |
| Width (in): 23 ⁵ / ₈ |
| Height (mm): 350 |
| Height (in): 13 ³ / ₄ |
| Max. Overall Height (mm): 2350 |
| Max. Overall Height (in): 92 ½ |
| Light Distribution: Omnidirectional |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 2000mm Cable |
| ELECTRICAL |
| Number of Lamps: 4 |
| Lamp Type: LED Retrofit |
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |

| DATE | | | |
|-----------|--|--|--|
| QUANTITY | | | |
| SPECIFIER | | | |
| TYPE | | | |
| PROJECT | | | |





1000mm 39 3/8"


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA OVAL SUSPENSION

D101755-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |
| | | | |

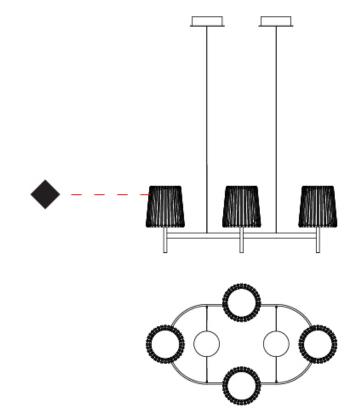

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|)

Page 14/20

JULIA CHANDELIER SUSPENSION

D101757-

Finish base number Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Chandelier |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Oval |
| Length (mm): 1300 |
| Length (in): 51 ³ / ₁₆ |
| Width (mm): 600 |
| Width (in): 23 ⁵ / ₈ |
| Height (mm): 350 |
| Height (in): 13 ³ / ₄ |
| Max. Overall Height (mm): 2000 |
| Max. Overall Height (in): 78 ¾ |
| Light Distribution: Omnidirectional |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 2000mm Cable |
| ELECTRICAL |
| Number of Lamps: 6 |
| Lamp Type: LED Retrofit |
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 24 |

| Lamp | Base: | E12 |
|----------|--------|-----|
| المديمين | Valtar | /\ |

Input Voltage (V): 120 Lamp Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS


Max. Wattage Per Lamp (W): 4

Certified By: Certified for North American Standards IP rating: IP20

| - |
|---|







1300mm 51 ³/16"

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA CHANDELIER SUSPENSION

D101757-

PROJECT

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

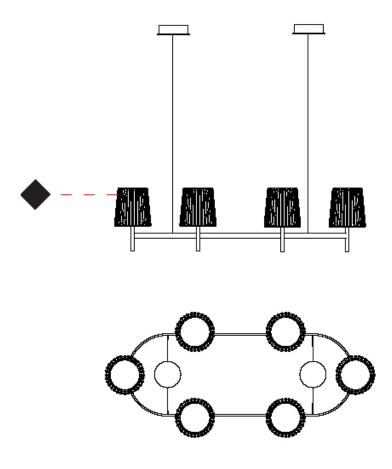

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|)

JULIA CHANDELIER SUSPENSION

D101759-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Julia |
|---|
| Subseries: Julia Chandelier |
| Brand: Quasar |
| Division: Design |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 1600 |
| Diameter (in): 63 |
| Height (mm): 1850 |
| Height (in): 72 ¹³ / ₁₆ |
| Max. Overall Height (mm): 4850 |
| Max. Overall Height (in): 190 ¹⁵ / ₁₆ |
| Light Distribution: Omnidirectional |
| Diffuser: Stainless Steel / Brass & Transparent |
| Fixture Finish: PCH / BRA |
| Fixture Material: Metal |
| Cable Details: 2000mm Cable |
| ELECTRICAL |
| Number of Lamps: 15 |
| Lamp Type: LED Retrofit |
| Lamp Shape: P10 |

| Lamp Type: LED Retrofit |
|----------------------------------|
| Lamp Shape: B10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 60 |
| Max. Wattage Per Lamp (W): 4 |
| Lamp Base: E12 |
| Input Voltage (V): 120 |
| Lamp Voltage (V): 120 |
| |

LED


OPTICAL

RATINGS AND CERTIFICATIONS

| Certified By: Certified for North American Standards | |
|--|--|
| IP rating: IP20 | |

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |



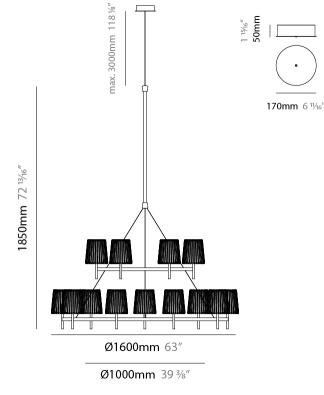


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

JULIA CHANDELIER SUSPENSION

D101759-

| PROJECT | | | |
|-----------|--|--|--|
| ТҮРЕ | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

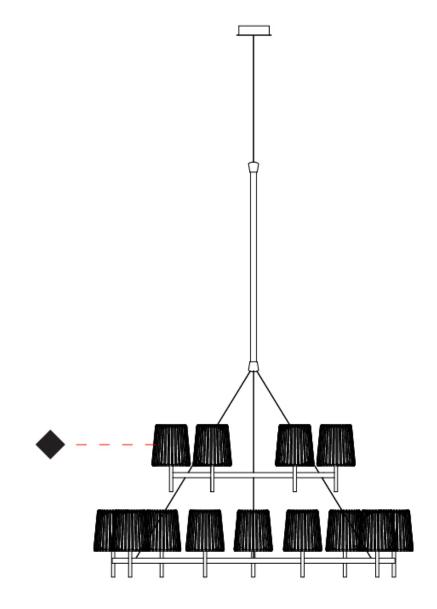

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com



JULIA

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

Fixture Finish







Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.

JULIA

PROJECT

TYPE

SPECIFIER

QUANTITY DATE

LEGEND

| _↓_ | floor-mounted | | pivotable | \circledast | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|---------------|--|-----------------------|--|---------------|--|
| 7 | wall and ceiling: recessed and surface mounted | | rotating | 0 | warm dim / natural dimming LED |
| Î | ceiling-mounted and wall-mounted | ¢ | illuminate tilted | 0 | rechargeable battery powered |
| \rightarrow | wall-mounted | T | color of suspension cable | 1111 1140 | fixture with natural vivid LED (upon request) |
| Y | omni-directional light distribution | ↓ | length of suspension cable | CRI | color rendering index |
| | direct light distribution | \Box | reflector degree selection | °К | color temperature |
| | direct/indirect light distribution | s s | super spot | LM | lumen (luminous flux) |
| | indirect light distribution | Å | lens | ₩. | efficacy (lumens per watt) |
| | asymmetric light distribution | Ð | lens pack | UGR | Unified Glare Rating (UGR) range from 5-40 |
| | aura light distribution | 0 | shine ring | 318 | marine grade (AISI 316 stainless steel) |
| R | round wall or ceiling cut-out | \odot | integrated shine ring with diffuser | ٢ | walk on |
| 5 | square wall or ceiling cut-out | Ó | free individual colors 01-29 | ۲ | drive on |
| d d | the supplied jig specifies the cutout dimensions | Ĩ | individual colors: 00 (free of charge), 01-25 (extra charge) | BSC | |
| (++) M++ | minimum distance (meters) lamp - object | ۲ | luminaire part to be colored (F1) | Ġ | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| £ | recessed depth | | luminaire part to be colored (F2) | | lamp protected against explosion |
| 1 | ceiling thickness in mm | | luminaire part to be colored (F3) | | blown glass using traditional methods by master glass blower |
| 1 | ceiling thickness selection | | luminaire part to be colored (F4) | ۥ | acoustic material |
| | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) | | luminaire part to be colored (F5) | | protection class I, protection insulation |
| с <u>т</u> | included or excluded LED driver/transformer/ control gear | | color of 3-circuit adaptor | | protection class II, protection insulation |
| প | separately switchable | \odot | indirect diffuser | | ETL Certified to UL and CSA Standards |
| シリ | sensor | D | direct diffuser | c (UL) us | UL Certified to UL and CSA Standards |
| (.)» | remote control | $\boldsymbol{\Theta}$ | ball-proof (upon request) | SP: | CSA Certified to UL and CSA Standards |
| 2 | available upon request | U | accessory | 2 | Certified for North American Standards |

IP RATING

| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
|------|--|
| IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
| 1965 | protected against ingress of dust protected against jets of water |
| IP66 | protected against ingress of dust protected against powerful jets of water or heavy seas |
| IP67 | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
| IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| КО1 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|------|---|
| IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
| КОЗ | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
| КО5 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
| КОб | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
| IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
| КОВ | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
| 1609 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
| IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |