

D114021-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Kora	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Culturate and Table	

Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Abstract
Diameter (mm): 240
Diameter (in): $9\frac{7}{16}$
Height (mm): 480
Height (in): 18 ⁷ / ₈
Light Distribution: Direct / Indirect
Weight (kg): 2
Weight (lbs): 4.4
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: Granulated White Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL


LEECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

IP rating: IP20

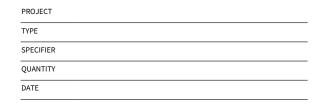












D114021-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

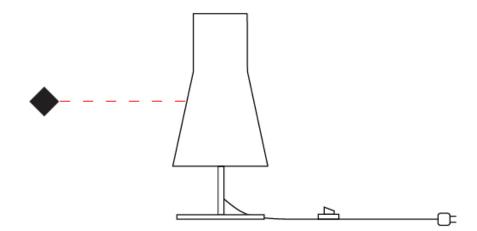





D114022-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Kora
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

PHYSICAL

Shape: Abstract
Diameter (mm): 350
Diameter (in): $13\frac{3}{4}$ Height (mm): 1750
Height (in): $68\frac{7}{8}$ Light Distribution: Direct / Indirect
Weight (kg): 9
Weight (lbs): 19.8

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: Granulated White
Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





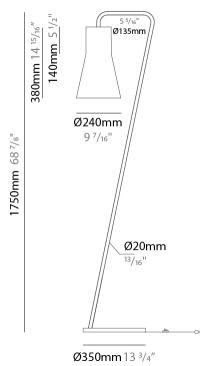






D114022-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

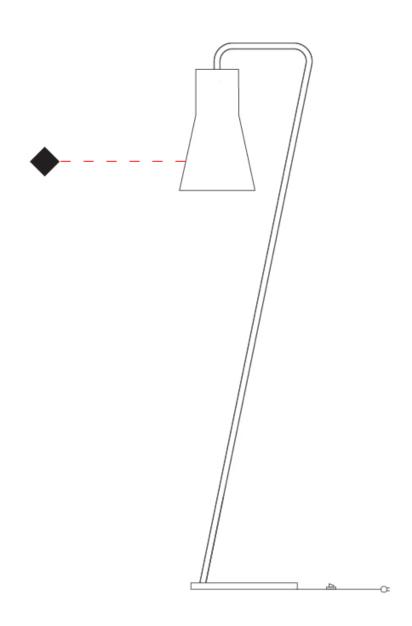





D114023-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Kora
	Brand: Ole
	Division: Design
	Mounting Type: Portable
	Mounting Location: Floor
	Subcategory: Floor

DUVCICAL

PHYSICAL
Shape: Abstract
Diameter (mm): 500
Diameter (in): 19 ² / ₃
Height (mm): 1680
Height (in): 66 1/8
Light Distribution: Direct / Indirect
Weight (kg): 8
Weight (lbs): 17.6
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI

Holder Finish: Granulated White Fixture Material: Fabric Cord / Metal Upon Request: Other fabric cord colors available upon request (see

downloadable finish chart)

ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



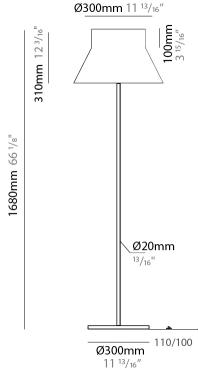






D114023-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

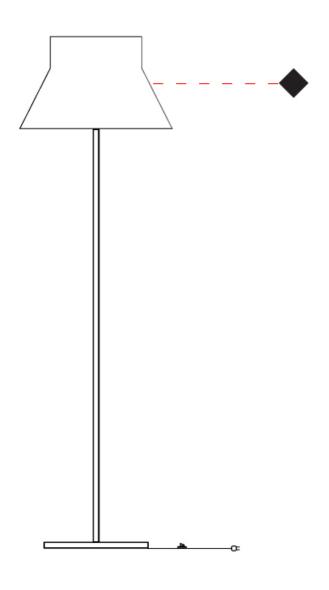






KORA

COLOR FINISH CHART

	PROJECT
	ТУРЕ
	SPECIFIER
	QUANTITY
	DATE

Fixture Finish

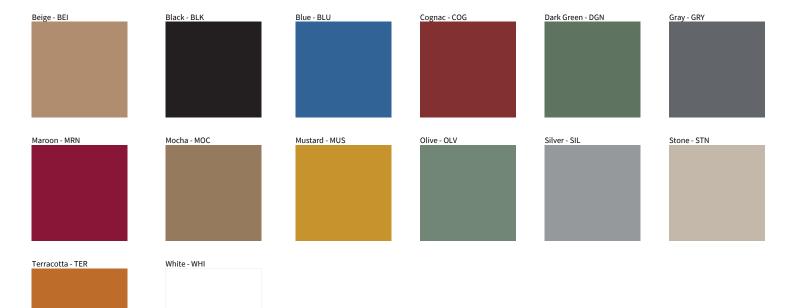

Holder Finish

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











KORA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

					special LED (upon request) PGB_PGBW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ←,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	● ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C. CO	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	շ (Մը) us	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	® :	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	②	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm