ZANEEN®

MAGIQ 2 CELL KORONA TRIMLESS

A35569		-	-	-
base number	Color	Finishes	Finish	Reflector
	Temperature	(Diamond)	Ontions	Ontions

 ${\it 1. To \ build \ a \ product \ code \ in \ our \ configurator \ select \ the \ specify \ button \ on}}$ the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Magiq	
Subseries: Magiq 2 Cell Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Trimless	
Mounting Location: Ceiling	
Subcategory: Downlight	

Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Downlight
PHYSICAL
Shape: Rectangle
Length (mm): 70
Length (in): 2 ³ / ₄
Width (mm): 35
Width (in): 1 3/8
Height (mm): 65
Height (in): 2 ⁹ / ₁₆
Ceiling Thickness (mm): 12.5
Ceiling Thickness (in): 1/2
Min. Recessing Depth (mm): 100
Min. Recessing Depth (in): 3 ¹⁵ / ₁₆
Light Distribution: Direct
Weight (kg): 0.246
Weight (lbs): 0.54
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG ,

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK Fixture Material: Aluminum Die Cast Cut-out Measurements: 82mm / 3 1/4" x 42mm / 1 5/8" Upon Request: Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 7.7
Total Output Wattage (W): 6.6
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 1050


Constant Current (MA): 1050
LED
Number of LEDs: 2
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 319 / 348 / 356 / 363
Nominal Lumen (lm): 440 / 480 / 490 / 500
CRI: >90 CRI
Lamp Life (hrs): 50000
Upon Request: Special Color Temperature
OPTICAL


Reflector°: 8 / 18 / 34 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Sartified By i CSA Sertified to 361 and FSA Standard Sww.zaneen.com

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

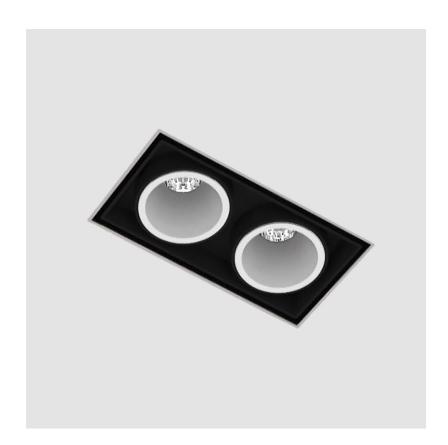

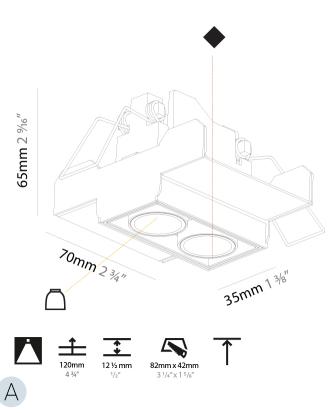


Page 1/6



MAGIQ 2 CELL KORONA TRIMLESS

A35569-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

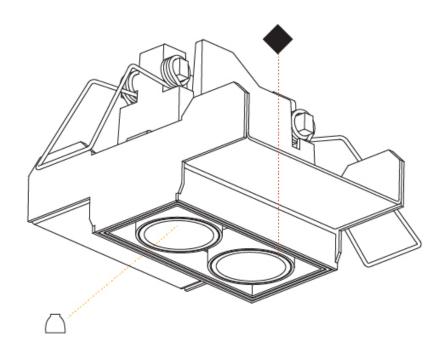



ZANEEN_®

MAGIQ 2 CELL TRIMLESS

Λ:	25	61	6-
—	.,	C) I	

base number

1.To build a product code in	our configurator	select the specif	y button or
the base model # product po	age		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Magiq	
Subseries: Magiq 2 Cell	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Trimless	
Mounting Location: Ceiling	
Subcategory: Downlight	

Division: Architectural
Mounting Type: Trimless
Mounting Location: Ceiling
Subcategory: Downlight
PHYSICAL
Shape: Rectangle
Length (mm): 70
Length (in): 2 ³ / ₄
Width (mm): 35
Width (in): $1\frac{3}{8}$
Height (mm): 65
Height (in): 2 % 16
Ceiling Thickness (mm): 12.5
Ceiling Thickness (in): 1/2
Min. Recessing Depth (mm): 100
Min. Recessing Depth (in): 3 15/16
Light Distribution: Downlight
Weight (kg): 0.241
Weight (lbs): 0.53
Fixture Finish: BLK / WHI
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 82mm/ 3 1/4" x 42mm / 1 5/8"
Upon Request: Unique Ceiling Thickness

ELECTRICAL

Lamp Type: LED (7haga Standard)

Lamp Type: LED (Znaga Standard)
Input Wattage (W): 9
Total Output Wattage (W): 8.2
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 1050

LED

Number of LEDs: 2 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 Max. Delivered Lumen (lm): 314 / 342 / 350 / 357 Nominal Lumen (lm): 440 / 480 / 490 / 500 CRI: >90 CRI Lamp Life (hrs): 50000 Upon Request: Special Color Temperature

OPTICAL

Reflector°: 8 / 18 / 34 Upon Request: Special Beam Angles


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE



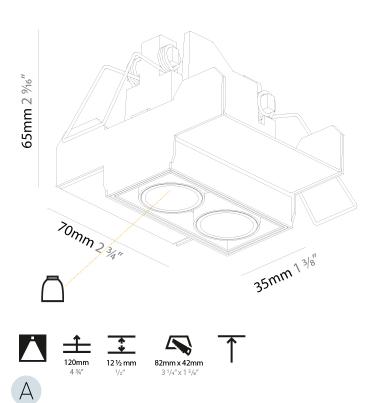


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com



MAGIQ 2 CELL TRIMLESS

A35616-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

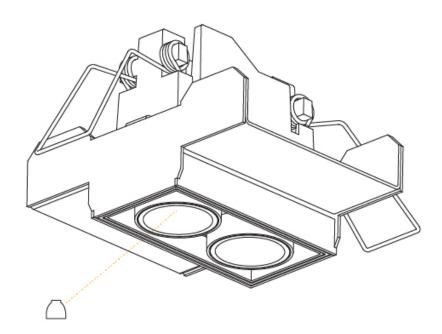





MAGIQ

COLOR FINISH CHART

PROJECT TYPE SPECIFIER QUANTITY DATE

Fixture Finish



Holder Finish







MAGIQ

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE
QUANTITY

LEGEND

T		_	a 85		special LED (upon request) PGR_PGRW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	71-600	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
ZŢ	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
□ •+	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	4⊚	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	دول) ه	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
J	available upon request	O	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust

IK RATING

above the surface)

IK02	above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm