

D114030)-	-	-	
base number	Finish	Finish	Finish	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 1550	
Height (in): 61	
Light Distribution: Omnidirectional	

Fixture Finish: BEI / BLW / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI
Holder Finish: WHI / GSD
Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 100/100 Cord	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D114030-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

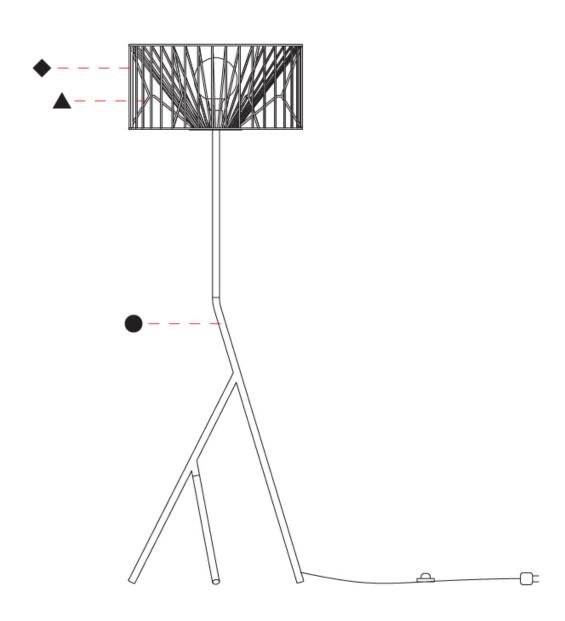





D114031-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL

Shape: Abstract
Diameter (mm): 500
Diameter (in): $19^{11}\!\!/_{16}$ Height (mm): 540
Height (in): $21^{11}\!\!/_{4}$

Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D114031-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	

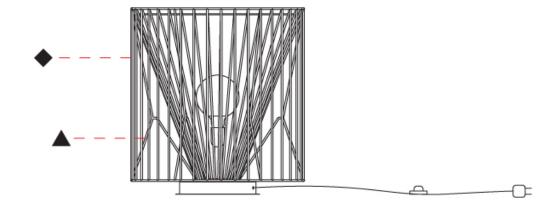





MARIOLA


COLOR FINISH CHART


PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		


Fixture Finish






























Holder Finish

White - WHI	







COLOR FINISH CHART

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Accent Finish		
White - WHI		

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.





COLOR FINISH CHART

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











MARIOLA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

=	loor-mounted				
-	1001-Indulted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
/ w	vall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
↑ ce	eiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow \parallel w$	vall-mounted	T	color of suspension cable	71400	fixture with natural vivid LED (upon request)
Y or	omni-directional light distribution		length of suspension cable	CRI	color rendering index
∆ di	direct light distribution		reflector degree selection	(K)	color temperature
di	direct/indirect light distribution	s s	super spot	(X)	lumen (luminous flux)
in	ndirect light distribution	*	lens	(₹	efficacy (lumens per watt)
as	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
au	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
ℴ ro	ound wall or ceiling cut-out	\odot	integrated shine ring with diffuser	3	walk on
SC SC	quare wall or ceiling cut-out		free individual colors 01-29	②	drive on
ද්දි th	he supplied jig specifies the cutout dimensions	0	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d•≱ m	ninimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u></u> re	ecessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
<u></u> Се	eiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1 ce	eiling thickness selection		luminaire part to be colored (F4)		acoustic material
== (s	dimmable DP (phase), DV (0-10V), DD (dali), DS step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
in cc	ncluded or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8 Se	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
ಿ ″/ se	sensor	0	direct diffuser	։ (Մ) _«	UL Certified to UL and CSA Standards
[re	emote control	0	ball-proof (upon request)	(B)	CSA Certified to UL and CSA Standards
J av	available upon request	9	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm