

E111198	-	-		
L	Finish	-	Finish	

Options Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Type. Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 250
Height (in): 9 13/16
Max. Overall Height (mm): 2250
Max. Overall Height (in): 89 $\frac{9}{16}$
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK

Holder Finish: MWH / MBK

Accent Finish: WHI / GSD

Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable

Cable Details. 2,000iiiii/18 3/4 Transparent Cable	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	

#### LED


# OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP66

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



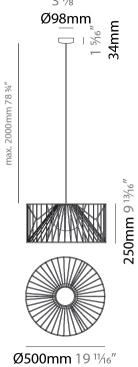






E111198-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

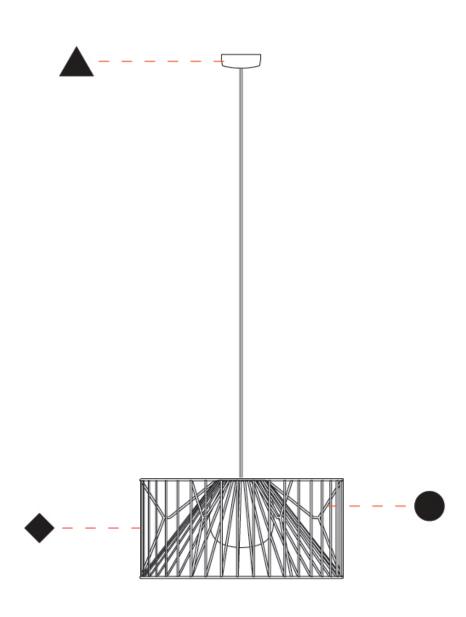





#### E111199-

base number

inish	Finish	Finish
ptions	Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

#### PHYSICAL

Shape: Drum
Diameter (mm): 800
Diameter (in): 31 ½

Height (mm): 160
Height (in): 6 <sup>5</sup>/<sub>16</sub>

Max. Overall Height (mm): 2160

Max. Overall Height (in): 85 1/16

Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Accent Finish: WHI / GSD

Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

#### LED


### OPTICAL

### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP66



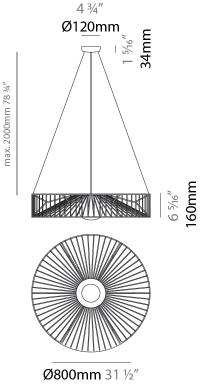






E111199-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

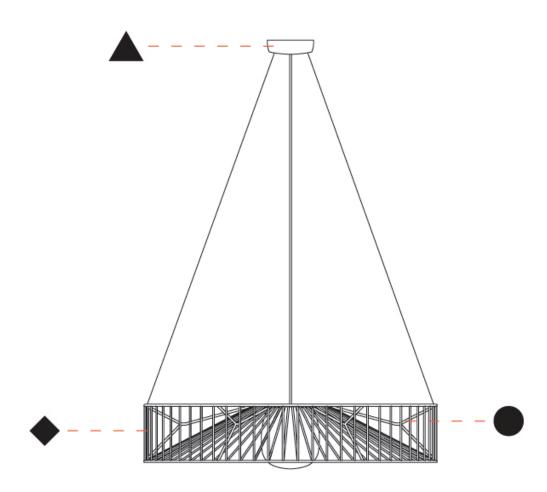





### **MARIOLA**


COLOR FINISH CHART


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE


#### **Fixture Finish**






























### **Holder Finish**

Matte White - MWH				







COLOR FINISH CHART

**Accent Finish** 

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





#### **COLOR FINISH CHART**

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











# **MARIOLA**

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

# **LEGEND**

100				-	1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	<b>℃</b>	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	$\odot$	integrated shine ring with diffuser	30	walk on
$\Box$	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□</b> ←,→	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>(</b> )	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser		ETL Certified to UL and CSA Standards
<b>•</b>	sensor	0	direct diffuser	շ <b>(</b> Մ) սո	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	<b>(II</b> )	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	<b>Z</b>	Certified for North American Standards

### **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### **IK RATING**

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm