

| D114030     |        |        |        |  |
|-------------|--------|--------|--------|--|
| base number | Finish | Finish | Finish |  |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### GENERAL

| Series: Mariola          |  |
|--------------------------|--|
| Brand: Ole               |  |
| Division: Design         |  |
| Mounting Type: Portable  |  |
| Mounting Location: Floor |  |
| Subcategory: Ambient     |  |

| PHYSICAL                            |  |
|-------------------------------------|--|
| Shape: Abstract                     |  |
| Diameter (mm): 500                  |  |
| Diameter (in): 19 11/16             |  |
| Height (mm): 1550                   |  |
| Height (in): 61                     |  |
| Light Distribution: Omnidirectional |  |

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

| OLV / SIL / STIV / TER / WITH         |
|---------------------------------------|
| Holder Finish: WHI / GSD              |
| Accent Finish: WHI                    |
| Fixture Material: Fabric Cord / Metal |
| Cable Details: 100/100 Cord           |

| Cable Details: 100/100 Cord      |
|----------------------------------|
| ELECTRICAL                       |
| Number of Lamps: 1               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: A19                  |
| Bulb Included: Bulb Not Included |
| Max. Wattage Per Lamp (W): 15    |
| Lamp Base: E26                   |
| Input Voltage (V): 120           |
| Upon Request: 277Vac / GU24      |
|                                  |

#### LED


OPTICAL

### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



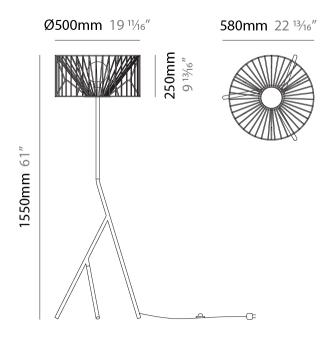






D114030-

| ROJECT   |  |
|----------|--|
| /PE      |  |
| PECIFIER |  |
| UANTITY  |  |
| ATE      |  |

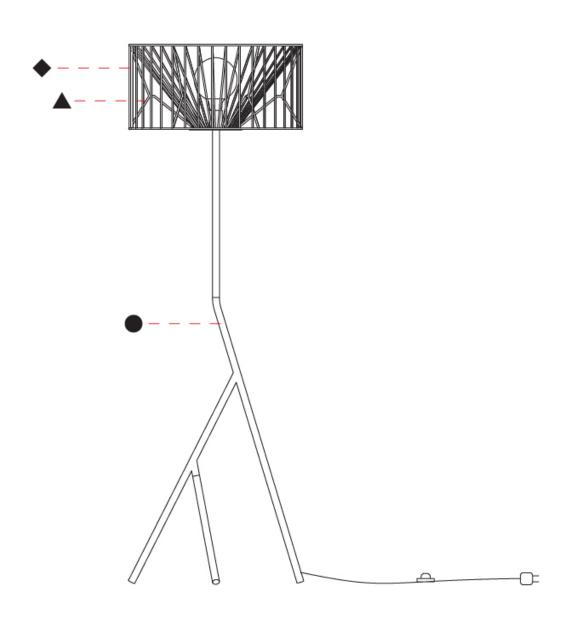





D114031-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

### PHYSICAL

Shape: Abstract

Diameter (mm): 500

Diameter (in):  $19^{11}/_{16}$ Height (mm): 540Height (in):  $21^{1}/_{4}$ Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

### **ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

### LED

## OPTICAL


# RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





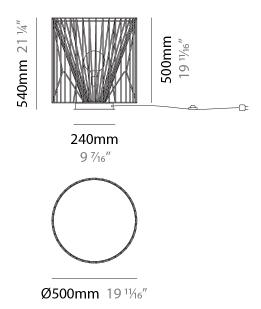






D114031-

| PROJECT   |
|-----------|
| ГҮРЕ      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

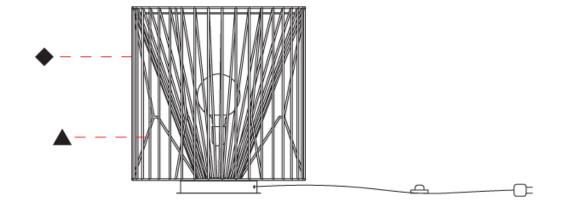





### E114033-

base number

Options

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

| Series: Mariola          |  |
|--------------------------|--|
| Brand: Ole               |  |
| Division: Exterior       |  |
| Mounting Type: Portable  |  |
| Mounting Location: Floor |  |
| Subcategory: Ambient     |  |

#### **PHYSICAL**

| Snape: Drum             |
|-------------------------|
| Diameter (mm): 500      |
| Diameter (in): 19 11/16 |

Height (mm): 1650

Height (in): 64 15/16

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 100/100 Cord

### **ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

### OPTICAL

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP66

| PROJECT   |  |
|-----------|--|
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |





320mm 12 5/8"




Ø500mm 19 11/16"





E114033-

| ROJECT   |  |
|----------|--|
| /PE      |  |
| PECIFIER |  |
| UANTITY  |  |
| ATE      |  |

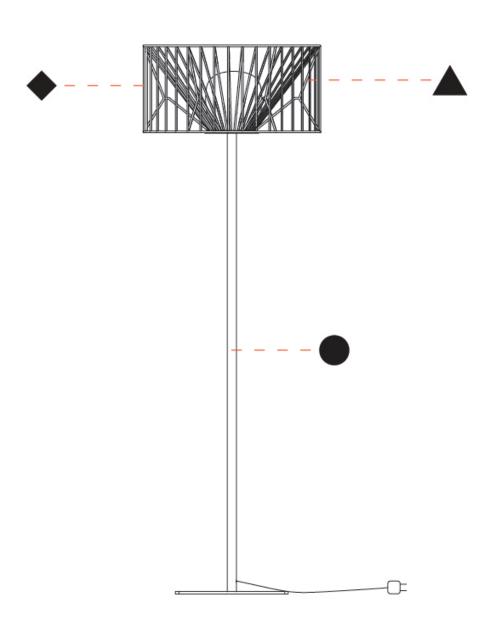





### E114034-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

### PHYSICAL

Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 520

Height (in): 20  $\frac{1}{2}$ 

Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

### ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED

# OPTICAL


# RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$ 

IP rating: IP66





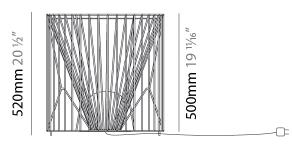








E114034-

| PROJECT   |  |  |
|-----------|--|--|
| TYPE      |  |  |
| SPECIFIER |  |  |
| QUANTITY  |  |  |
| DATE      |  |  |

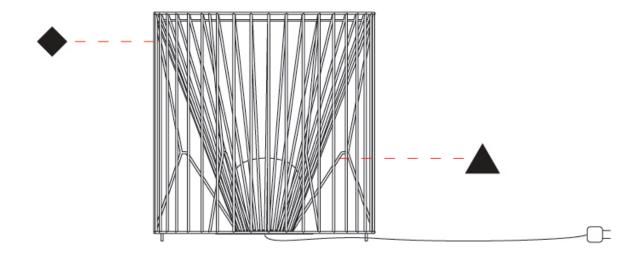





### **MARIOLA**

COLOR FINISH CHART

| PROJECT   |
|-----------|
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

#### **Fixture Finish**






























### **Holder Finish**

| White - WHI |  |  |  |  |  |  |
|-------------|--|--|--|--|--|--|
|             |  |  |  |  |  |  |
|             |  |  |  |  |  |  |
|             |  |  |  |  |  |  |
|             |  |  |  |  |  |  |
|             |  |  |  |  |  |  |
|             |  |  |  |  |  |  |







COLOR FINISH CHART

| PROJECT   |  |  |  |
|-----------|--|--|--|
| TYPE      |  |  |  |
| SPECIFIER |  |  |  |
| QUANTITY  |  |  |  |
| DATE      |  |  |  |

| Accent Finish |  |  |  |
|---------------|--|--|--|
| White - WHI   |  |  |  |
|               |  |  |  |
|               |  |  |  |
|               |  |  |  |
|               |  |  |  |
|               |  |  |  |

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.





### **COLOR FINISH CHART**

PROJECT TYPE NOTES QUANTITY DATE























| OLIVE - OLV<br>Pant. 5625 |  |
|---------------------------|--|
|                           |  |

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



| PROJECT  |  |  |
|----------|--|--|
| TYPE     |  |  |
| NOTES    |  |  |
| QUANTITY |  |  |
| DATE     |  |  |



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



| PROJECT  |  |
|----------|--|
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



| PROJECT  |  |  |
|----------|--|--|
| TYPE     |  |  |
| NOTES    |  |  |
| QUANTITY |  |  |
| DATE     |  |  |



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



| PROJECT  |  |
|----------|--|
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |











# **MARIOLA**

| PROJECT   |  |  |
|-----------|--|--|
| TYPE      |  |  |
| SPECIFIER |  |  |
| QUANTITY  |  |  |
| DATE      |  |  |

# **LEGEND**

| T at I                  |  |          |  |            | anasial LED (unan request) DCD_DCDW tunable  |
|-------------------------|--|----------|--|------------|--|
| <u></u>                 | floor-mounted  | ¥        | pivotable  | ⊛          | special LED (upon request) RGB, RGBW, tunable,<br>gold+, meat+, art+, fashion+                 |
| 7                       | wall and ceiling: recessed and surface mounted               | ى        | rotating   | 0          | warm dim / natural dimming LED   |
| $\uparrow$              | ceiling-mounted and wall-mounted                             | Œ        | illuminate tilted  | 0          | rechargeable battery powered   |
| $\rightarrow$           | wall-mounted   | I        | color of suspension cable                                    | 1H00       | fixture with natural vivid LED (upon request)  |
| Y                       | omni-directional light distribution                          | ↓        | length of suspension cable                                   | CRI        | color rendering index  |
| À                       | direct light distribution                                    | Δ        | reflector degree selection                                   | (K)        | color temperature  |
| X                       | direct/indirect light distribution                           | s s      | super spot   | (X)        | lumen (luminous flux)  |
| Y                       | indirect light distribution                                  | *        | lens   | (₹         | efficacy (lumens per watt)   |
|                         | asymmetric light distribution                                | 8        | lens pack  | UGR        | Unified Glare Rating (UGR) range from 5-40   |
| $\overline{\mathbf{A}}$ | aura light distribution                                      | 0        | shine ring   | €          | marine grade (AISI 316 stainless steel)  |
| R                       | round wall or ceiling cut-out                                | 0        | integrated shine ring with diffuser                          | 3          | walk on  |
| Z)                      | square wall or ceiling cut-out                               |          | free individual colors 01-29                                 | <b>②</b>   | drive on   |
| <b>€</b> €              | the supplied jig specifies the cutout dimensions             | Č        | individual colors: 00 (free of charge), 01-25 (extra charge) | OSC        | Dark Sky Compliance  |
| <b>d</b> •→             | minimum distance (meters) lamp - object                      | <b>♦</b> | luminaire part to be colored (F1)                            | Ġ          | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| $\hat{\pm}$             | recessed depth   |          | luminaire part to be colored (F2)                            |            | lamp protected against explosion   |
| 1                       | ceiling thickness in mm                                      | •        | luminaire part to be colored (F3)                            |            | blown glass using traditional methods by master glass blower                                   |
| 1                       | ceiling thickness selection                                  |          | luminaire part to be colored (F4)                            | <b>4</b> ⊚ | 100  |
|                         | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)    | •        | luminaire part to be colored (F5)                            |            | protection class I, protection insulation  |
|                         | included or excluded LED driver/transformer/<br>control gear | •        | color of 3-circuit adaptor                                   |            | protection class II, protection insulation   |
| 8                       | separately switchable  | $\odot$  | indirect diffuser  |            | ETL Certified to UL and CSA Standards  |
| <b>9</b>                | sensor   | 0        | direct diffuser  | ։ (Մ) us   | UL Certified to UL and CSA Standards   |
|                         | remote control   | 1        | ball-proof (upon request)                                    | <b>(</b>   | CSA Certified to UL and CSA Standards  |
| 9                       | available upon request                                       | O        | accessory  | <b>Z</b>   | Certified for North American Standards   |

### **IP RATING**

| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger)  |
|------|---|
| IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)      |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture                               |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions                        |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions              |
| IP65 | protected against ingress of dust<br>protected against jets of water  |
| IP66 | protected against ingress of dust<br>protected against powerful jets of water or heavy seas   |
| IP67 | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                    |
| IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods  |

### **IK RATING**

above the surface)

| IK02 | above the surface)  |
|------|---|
| IK03 | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
| IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
| IKO6 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
| IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$  |
| IK08 | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
| IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm