

MARIOLA SUSPENSION

E111198-	-	

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL
Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 250
Height (in): 9 ¹³ / ₁₆

Max. Overall Height (mm): 2250 Max. Overall Height (in): 89 1/16

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Accent Finish: WHI / GSD Fixture Material: Fabric Cord / Metal

Cable Details: 2,000mm/78 3/4" Transparent Cable

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120

LED


OPTICAL **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP66

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



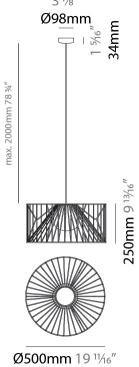






MARIOLA SUSPENSION

E111198-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

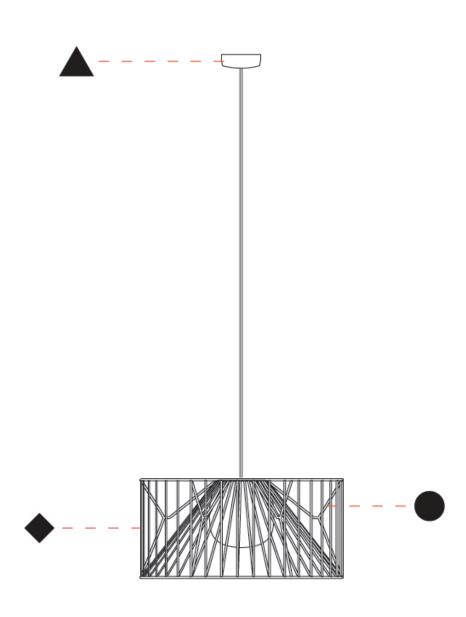





MARIOLA SURFACE

E112052-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL	
Shape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 490	
Height (in): 19 ⁵ / ₁₆	
Light Distribution: Omnidirectional	

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

ELECTRICAL Number of Lamps: 1 Lamp Type: LED Retrofit Bulb Included: Bulb Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26

Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP66





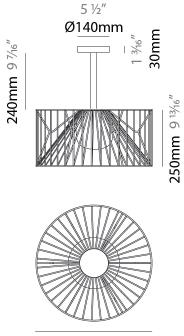

Ø500mm 19 11/16"






MARIOLA SURFACE

E112052-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

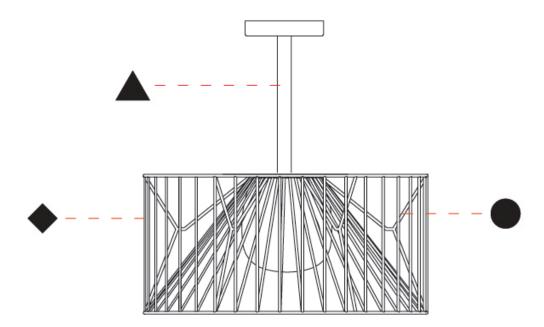





E114033-

base number

Options

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola	
Brand: Ole	
Division: Exterior	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL

Shape: Druin	
Diameter (mm): 500	
Diameter (in): 19 11/16	

Height (mm): 1650

Height (in): 64 15/16

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 100/100 Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP66

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



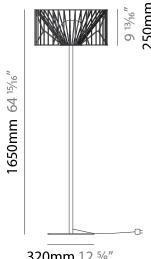

320mm 12 5/8"




Ø500mm 19 11/16"





E114033-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	_

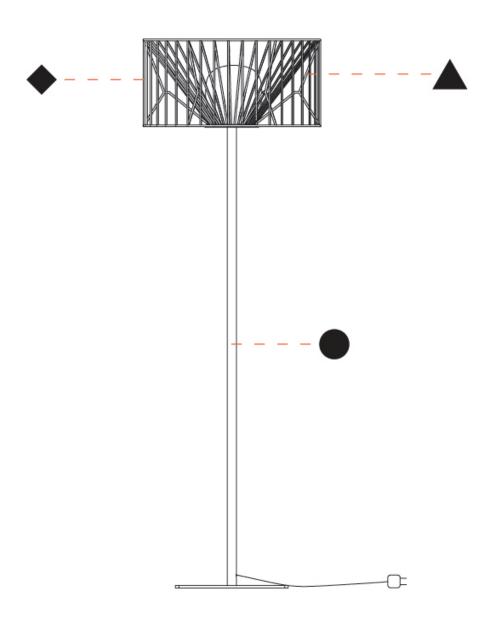





E114034-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mariola
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL

Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 520

Height (in): 20 $\frac{1}{2}$

Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

IP rating: IP66





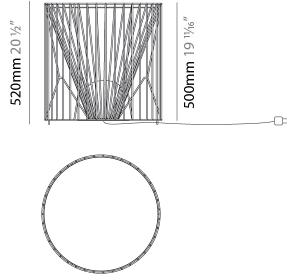


Ø500mm 19 11/16"





E114034-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

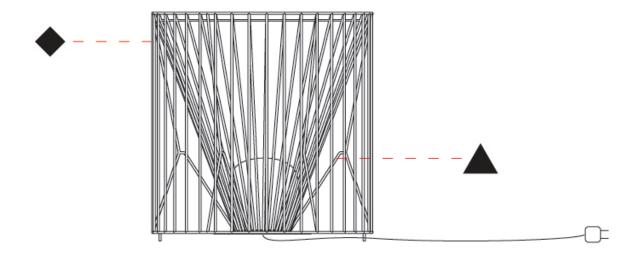






MARIOLA


COLOR FINISH CHART


PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		


Fixture Finish






























Holder Finish











MARIOLA SUSPENSION, SURFACE, PORTABLE

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Ac	ce	nt	Fı	nı	sh

White - WHI		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











MARIOLA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

	ing W		8 N.S		special LED (upon request) PGR_PGRW_tunable
<u></u>	floor-mounted	Á	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	THEO	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	←	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	(°K)	color temperature
	direct/indirect light distribution	s s	super spot	(M)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out	Ġ	free individual colors 01-29	9	drive on
€ €	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
□ **	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	()	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
₹	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (II)	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	ւՄա	UL Certified to UL and CSA Standards
	remote control	\oplus	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
J	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm