

D114030					
base number	Finish	Finish	Finish		
	Ontions	Ontions	0-4:		

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 <sup>11</sup> / <sub>16</sub>	
Height (mm): 1550	
Height (in): 61	
Light Distribution: Omnidirectional	

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 100/100 Cord

	tare material rabine out a metal
Ca	ble Details: 100/100 Cord
EL	ECTRICAL
Nu	ımber of Lamps: 1
La	mp Type: LED Retrofit
La	mp Shape: A19
Bu	ılb Included: Bulb Not Included
Ма	ax. Wattage Per Lamp (W): 15
La	mp Base: E26
Inp	out Voltage (V): 120
Up	oon Request: 277Vac / GU24

#### LED


#### OPTICAL

# RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



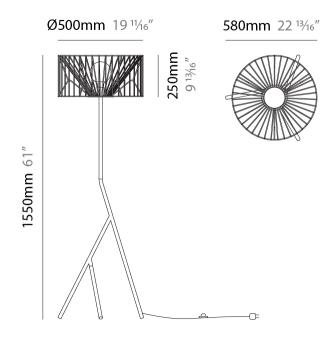






D114030-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

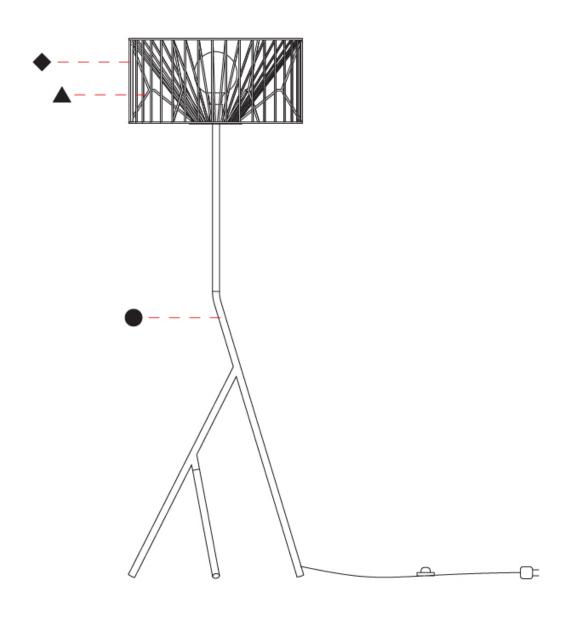





D114031-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola Brand: Ole Division: Design Mounting Type: Portable Mounting Location: Floor Subcategory: Ambient

#### PHYSICAL

Shape: Abstract Diameter (mm): 500 Diameter (in): 19 11/16 Height (mm): 540 Height (in): 21 1/4 Light Distribution: Omnidirectional

Diffuser: PMMA - Opal Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

#### **ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

#### LED


### OPTICAL

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20



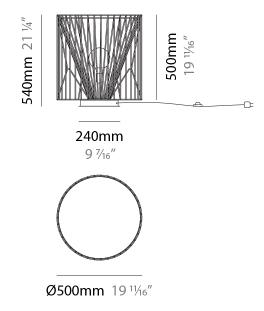






D114031-

PROJECT	
ГҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

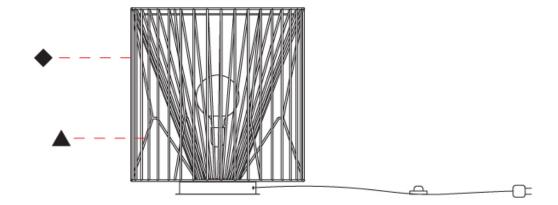





### **MARIOLA**

COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

#### **Fixture Finish**






























### **Holder Finish**

White - WHI			







COLOR FINISH CHART

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Accent Finish				
Wh	ite - \	VHI		

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between pro-





#### **COLOR FINISH CHART**

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











## **MARIOLA**

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

## **LEGEND**

					special LED (upon request) PGB_PGBW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	<b>3</b>	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□</b> ←,→	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>●</b> ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C. CO	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>.</b>	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	0	direct diffuser	շ (Մը) us	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	<b>®</b> :	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	<b>②</b>	Certified for North American Standards

### **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### **IK RATING**

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)