

MASAI SUSPENSION

D41083-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 2000

Length (in): 78 3/4

Width (mm): 900

Width (in): 35 7/16

Height (mm): 500

Height (in): 19 11/16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 45

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 3960 / 4320

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

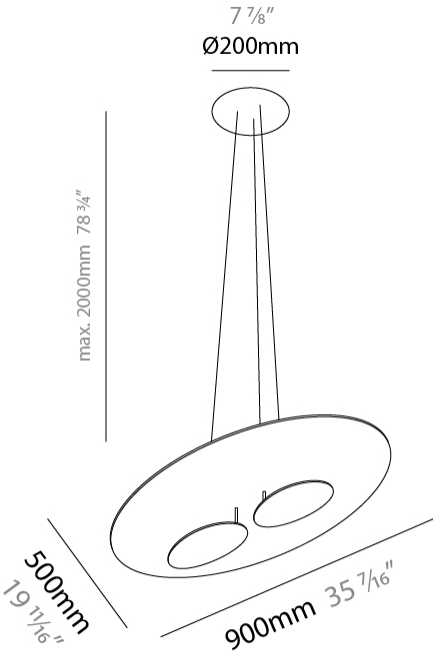

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

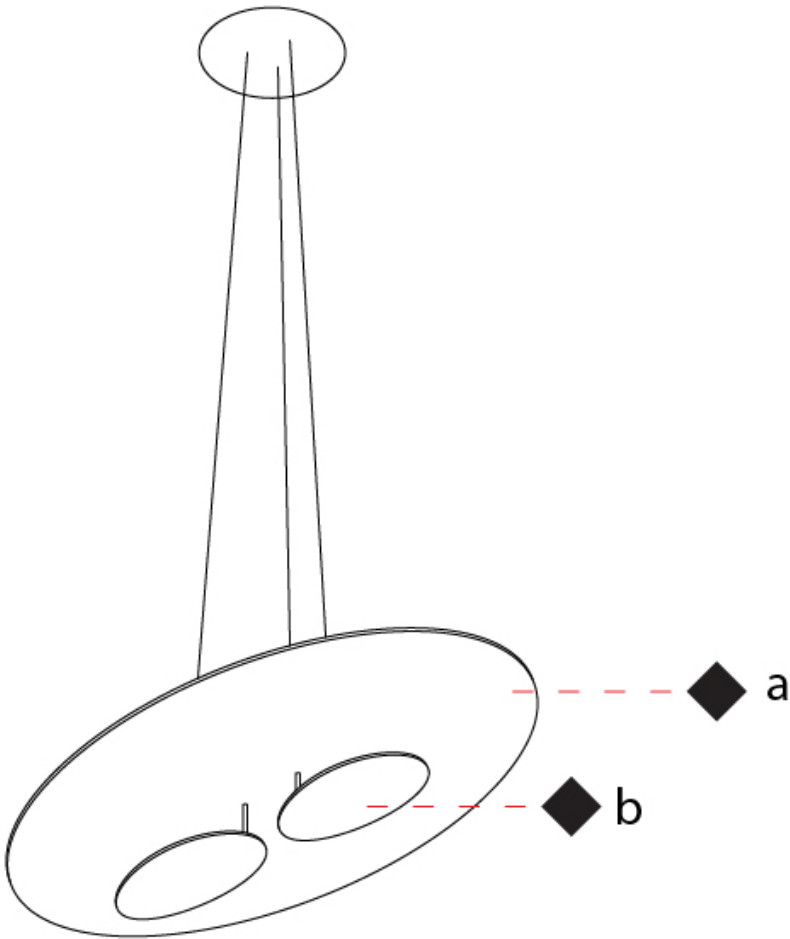

MASAI SUSPENSION

D41084-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 2000

Length (in): 78 3/4

Width (mm): 1300

Width (in): 51 3/16

Height (mm): 640

Height (in): 25 3/16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 60

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 5760

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

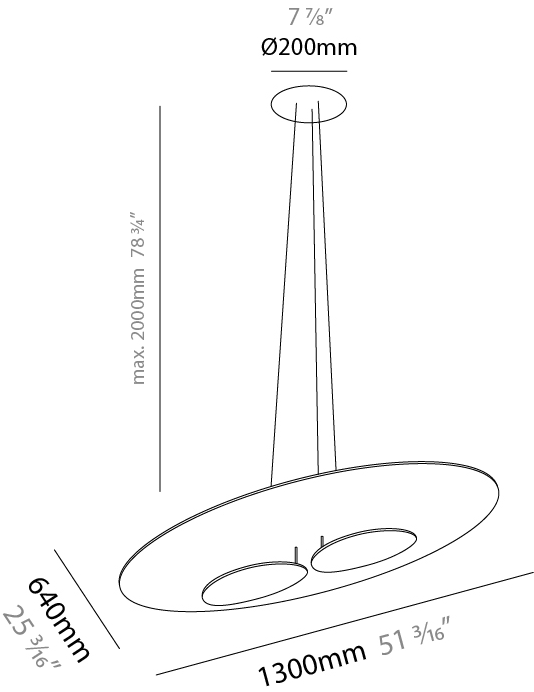

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

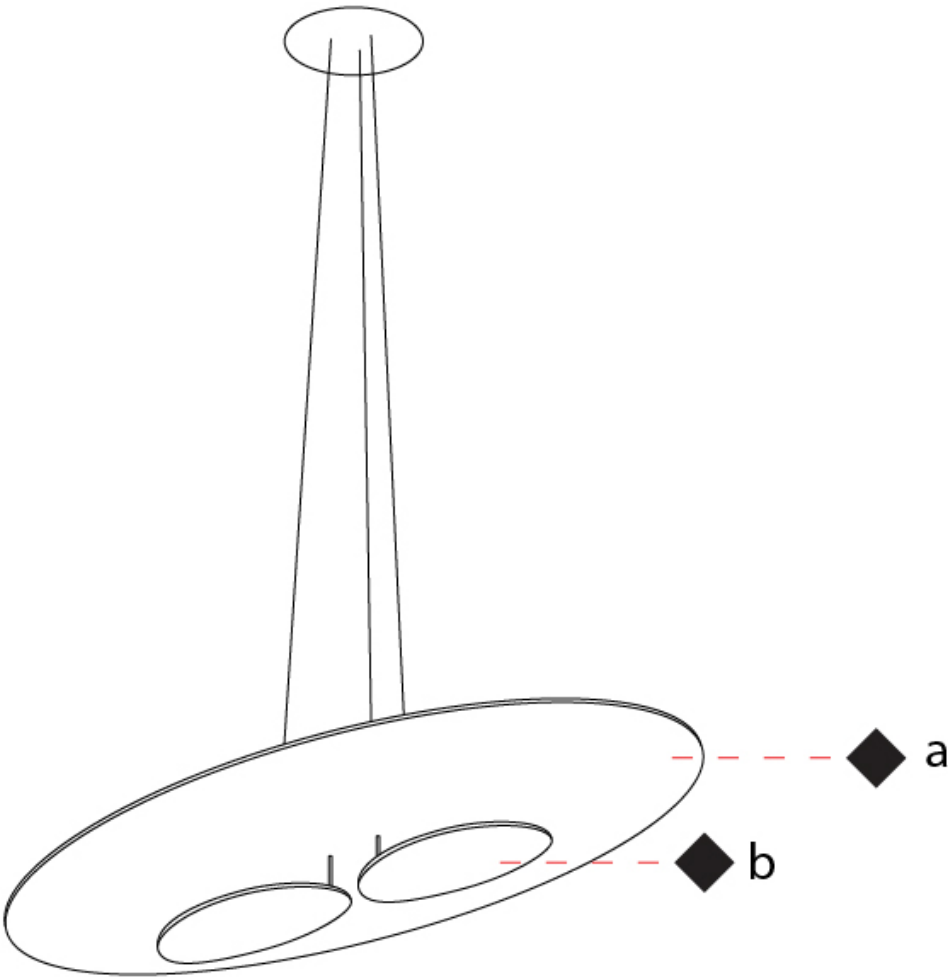

MASAI SURFACE

D42086- -
base number Color Finish
 Temperature Options

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai
Partner: Icone
Division: Design
Installation: Surface
Product Type: Ceiling Surface
Mounting Location: Ceiling
Light Distribution: Indirect

PHYSICAL

Shape: Abstract
Length (mm): 900
Length (in): 35 7/16
Width (mm): 600
Width (in): 23 5/8
Height (mm): 180
Height (in): 7 1/16
Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 40
Dimming: Non-Dimming / Phase Dimming (120vac Only)
Input Voltage (V): 120Vac Direct Line

LED


Color Temperature (°K): 2700 / 3000
Nominal Lumen (lm): 3840 / 3920
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

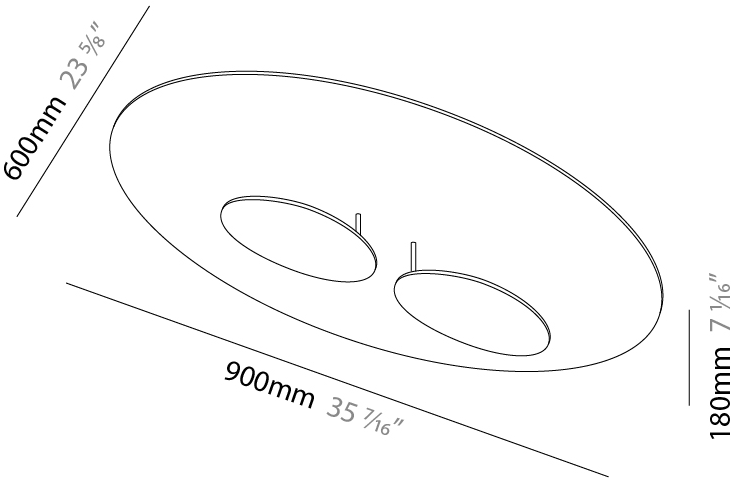

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

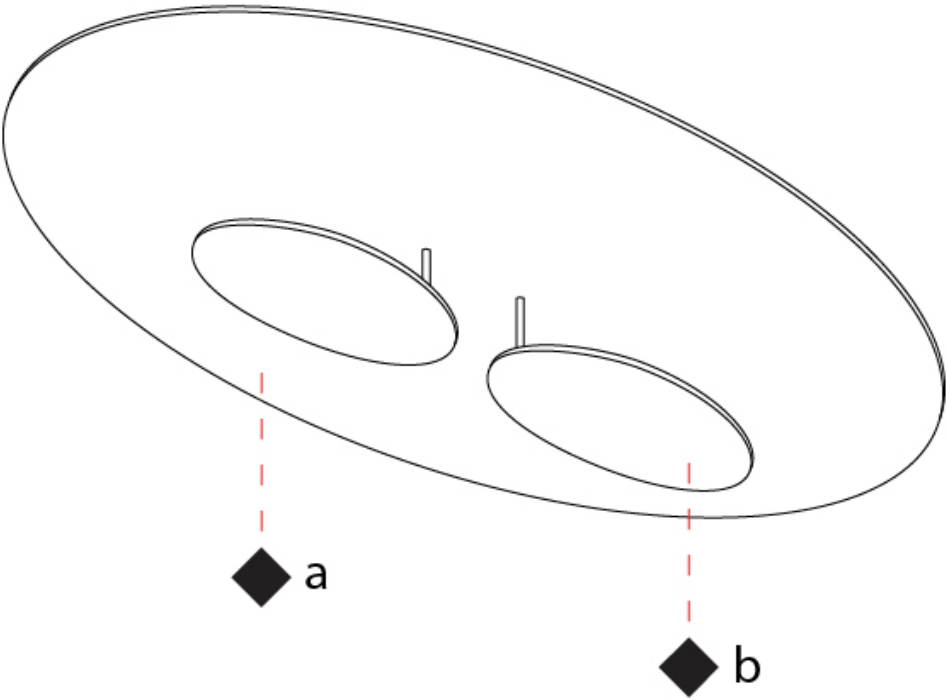

MASAI SURFACE

D42087-

-

base number

Color

Finish

Temperature

Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 500

Length (in): 19 11⁄16

Width (mm): 360

Width (in): 14 3⁄16

Height (mm): 140

Height (in): 5 1⁄2

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1350 / 1440

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

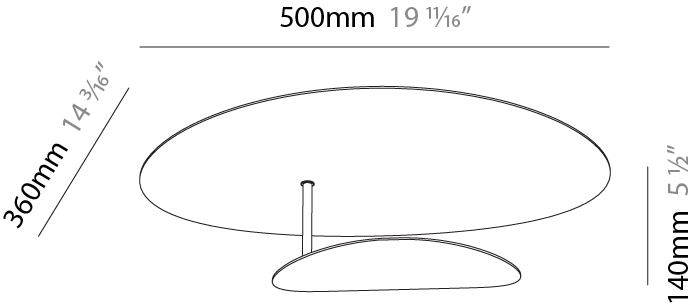

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

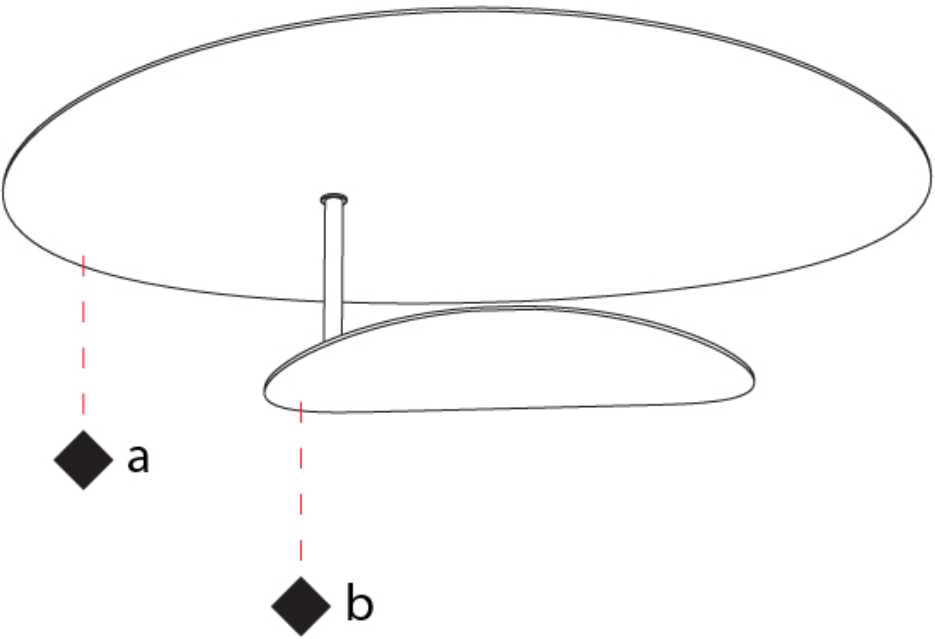

MASAI SURFACE

D42088-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 700

Length (in): 27 5/16

Width (mm): 440

Width (in): 17 5/16

Height (mm): 160

Height (in): 6 5/16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 20

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1920 / 1960

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

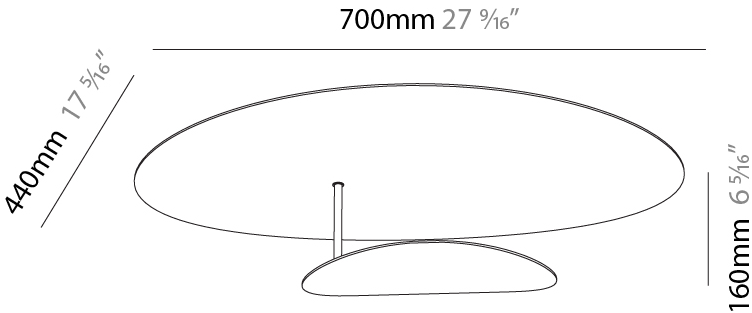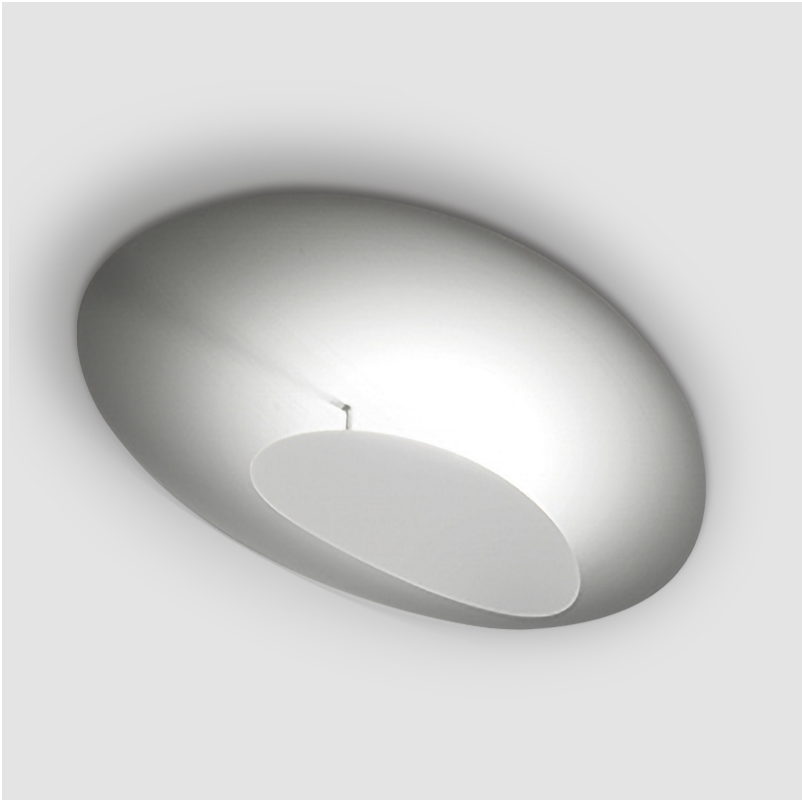

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

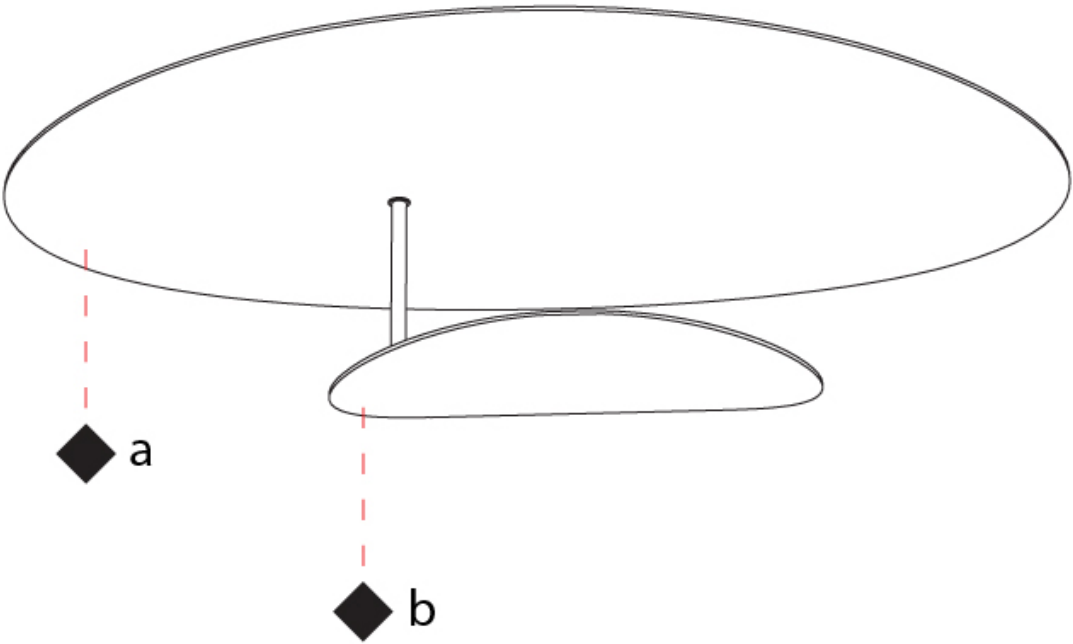

MASAI SURFACE

D43077-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 250

Length (in): 9 13/16

Width (mm): 140

Width (in): 5 1/2

Height (mm): 130

Height (in): 5 1/8

Fixture Finish: WHI / BLK / BBZ / BIN

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1320 / 1440

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE


SPECIFIER

QUANTITY


DATE




4 1/4"
Ø108mm



J-Box cover plate
Included

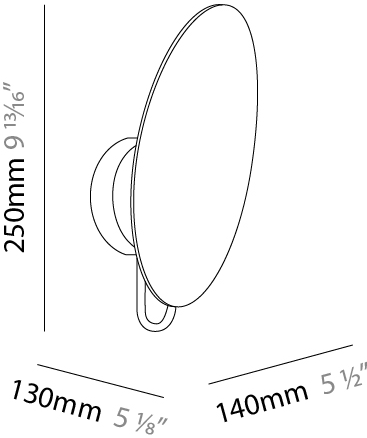

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

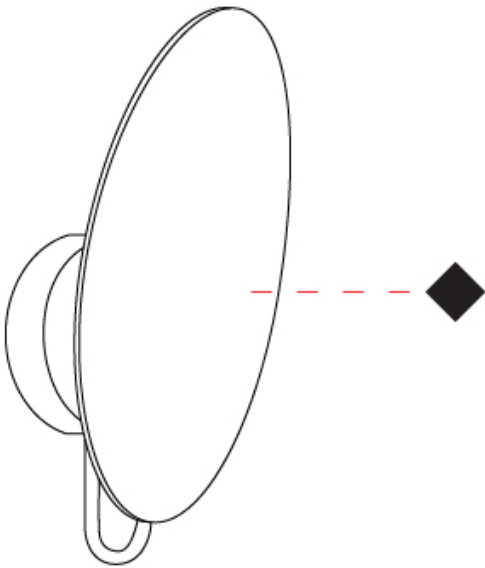

MASAI SURFACE

D43078-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Direct

PHYSICAL

Shape: Oval

Length (mm): 360

Length (in): 14 3⁄16

Width (mm): 180

Width (in): 7 1⁄16

Height (mm): 180

Height (in): 7 1⁄16

Fixture Finish: WHI / BLK / BBZ / BIN

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 20

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1920 / 1960

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE


SPECIFIER

QUANTITY


DATE




4 1⁄4"
Ø108mm



J-Box cover plate
Included

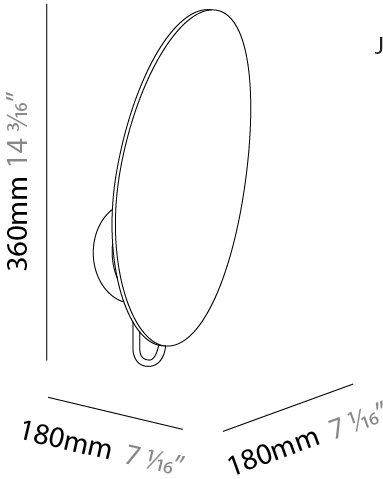

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

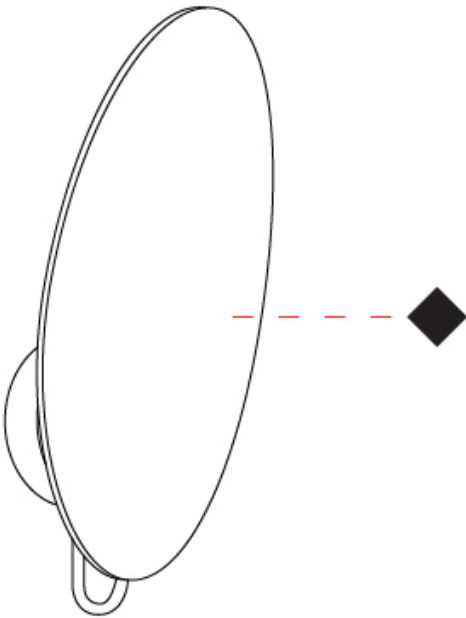

MASAI SURFACE

D43079-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 380

Length (in): 14 15/16

Width (mm): 220

Width (in): 8 11/16

Height (mm): 160

Height (in): 6 5/16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1320 / 1440

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

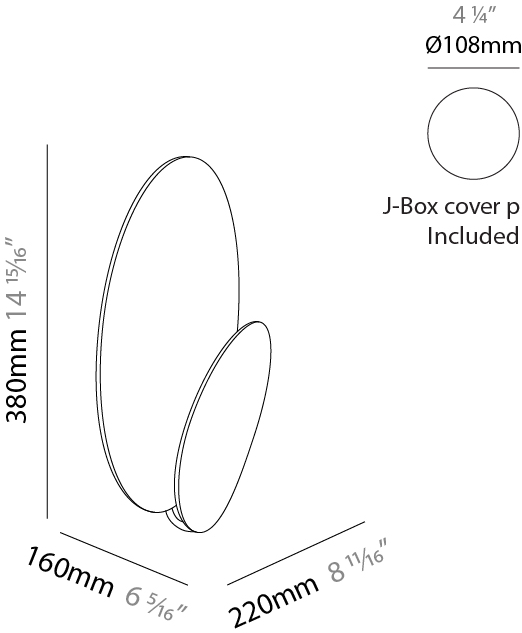

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

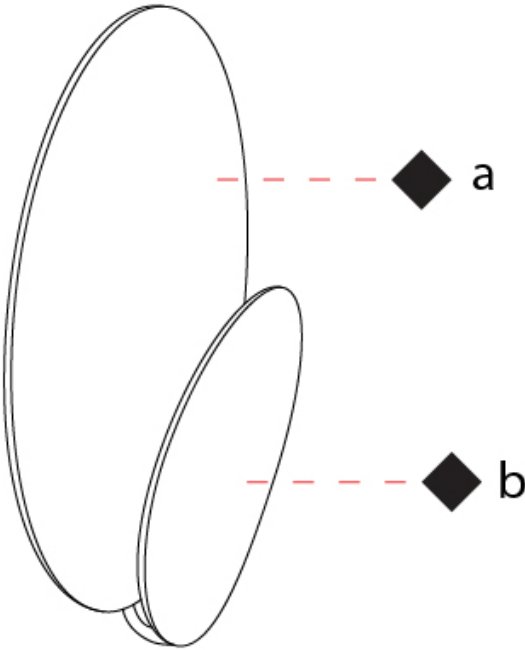

MASAI SURFACE

D43080-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 500

Length (in): 19 11⁄16

Width (mm): 280

Width (in): 11

Height (mm): 180

Height (in): 7 1⁄16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 20

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1920 / 1960

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

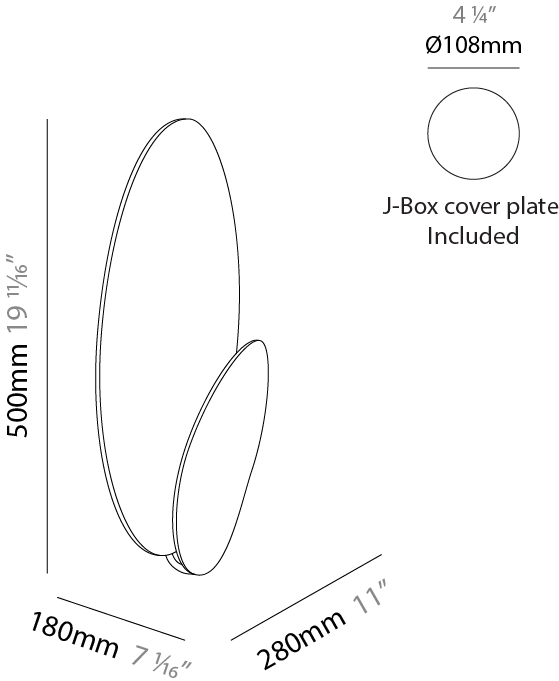

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

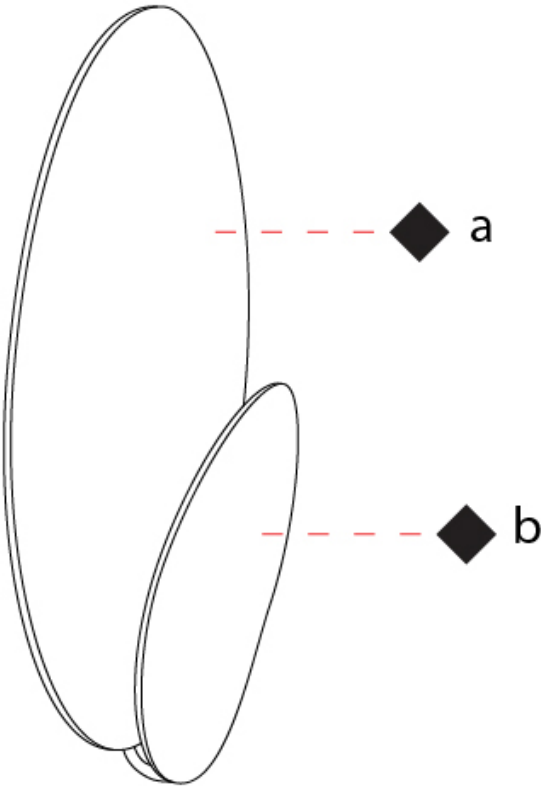

MASAI PORTABLE

D44022-

base number	LED	Color	Finish
	Dimming	Temperature	Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai
 Partner: Icone
 Division: Design
 Installation: Portable
 Product Type: Table
 Mounting Location: Table
 Light Distribution: Indirect

PHYSICAL

Shape: Oval
 Length (mm): 280
 Length (in): 11
 Width (mm): 140
 Width (in): 5 ½
 Height (mm): 490
 Height (in): 19 ⅝
[Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI](#)
 Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
 Input Wattage (W): 15
[Dimming: Non-Dimming / Phase Dimming \(120vac Only\)](#)
 Input Voltage (V): 120Vac Direct Line

LED

[Color Temperature \(°K\): 2700 / 3000](#)
 Nominal Lumen (lm): 1320 / 1440
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

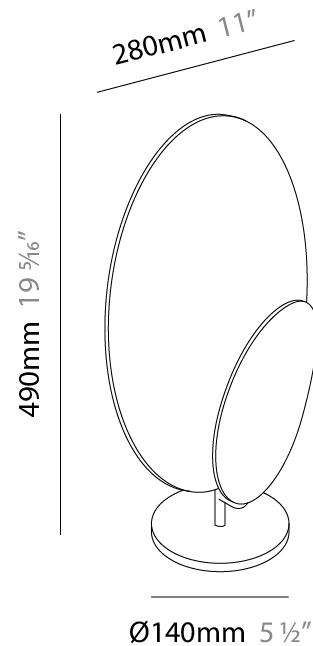

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

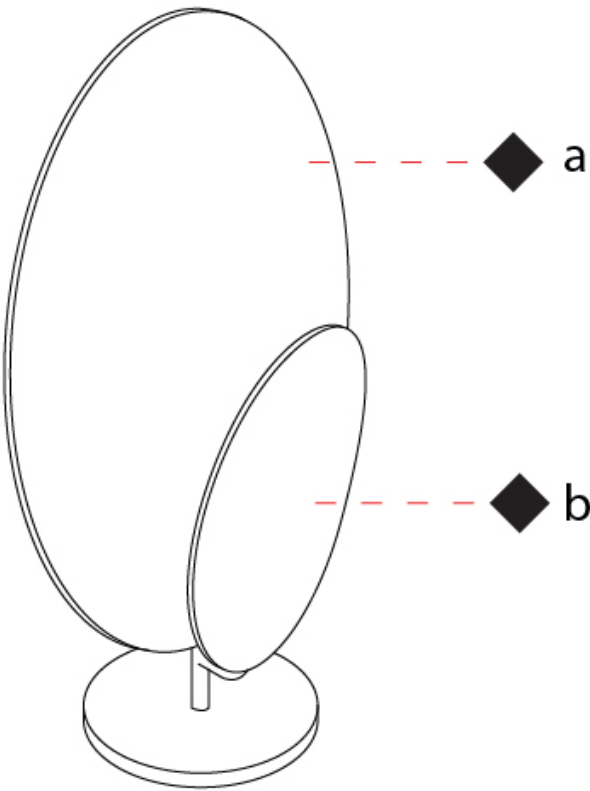

MASAI PORTABLE

D44023-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Portable

Product Type: Table

Mounting Location: Table

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 440

Length (in): 17 5/16

Width (mm): 200

Width (in): 7 7/8

Height (mm): 740

Height (in): 29 1/8

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 20

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1920 / 1960

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

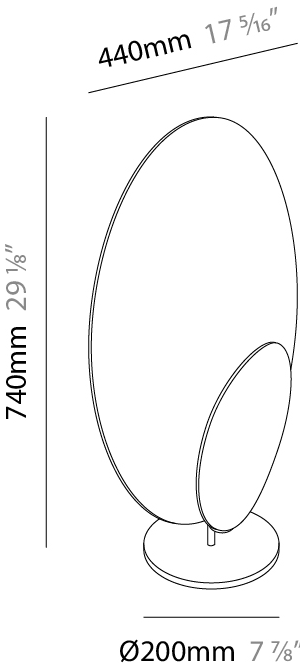

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

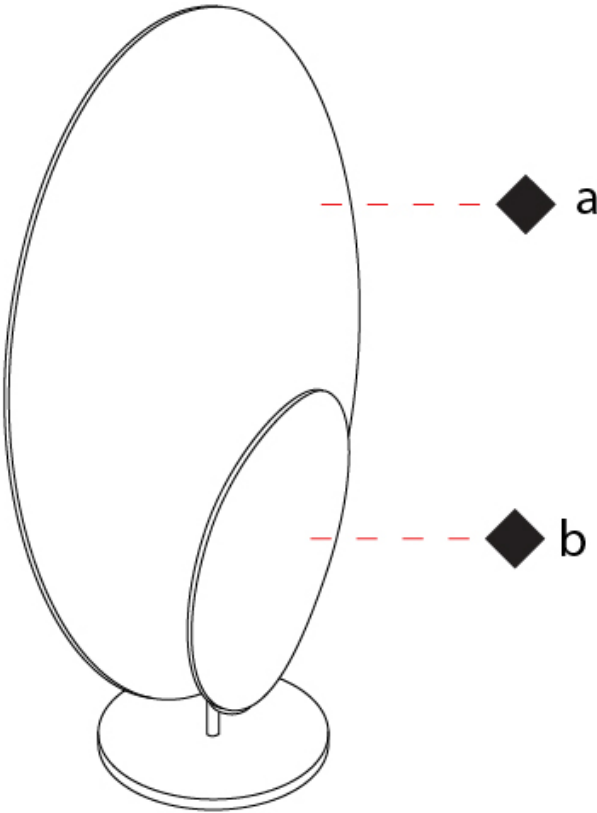

MASAI PORTABLE

D44024-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Portable

Product Type: Floor

Mounting Location: Floor

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 640

Length (in): 25 3⁄16

Width (mm): 300

Width (in): 11 13⁄16

Height (mm): 1380

Height (in): 54 5⁄16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 20

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 1920 / 1960

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

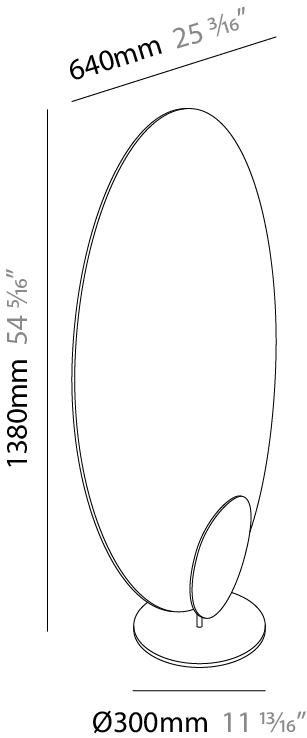

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

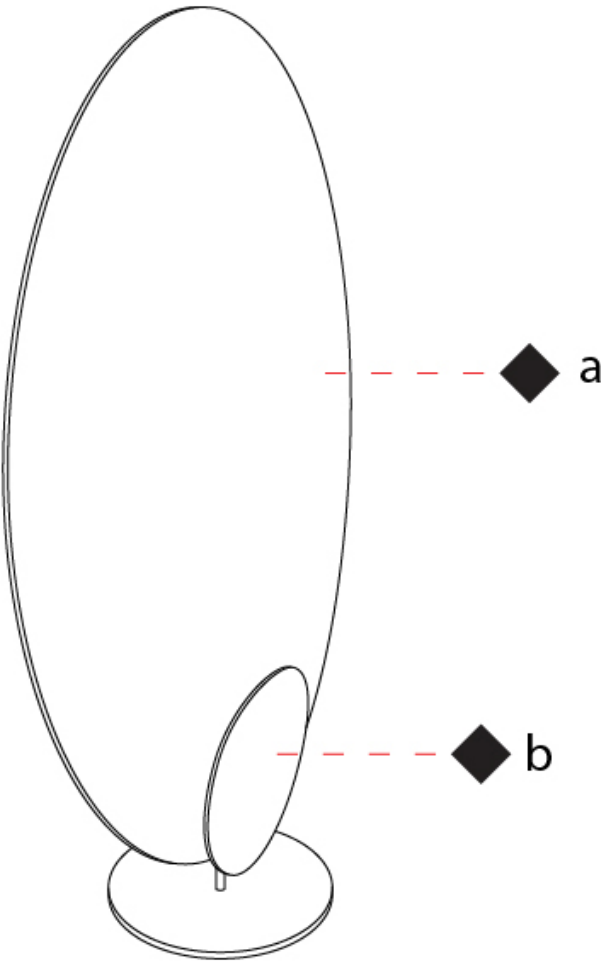

MASAI PORTABLE

D44025-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Portable

Product Type: Floor

Mounting Location: Floor

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 640

Length (in): 25 3⁄16

Width (mm): 300

Width (in): 11 13⁄16

Height (mm): 1380

Height (in): 54 5⁄16

Fixture Finish: WHI / GPB / GPW / GPK / WBB / WBK / SPI / WBI

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 53

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 6920

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

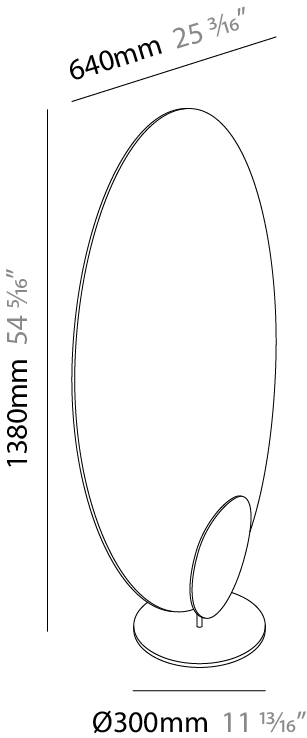

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

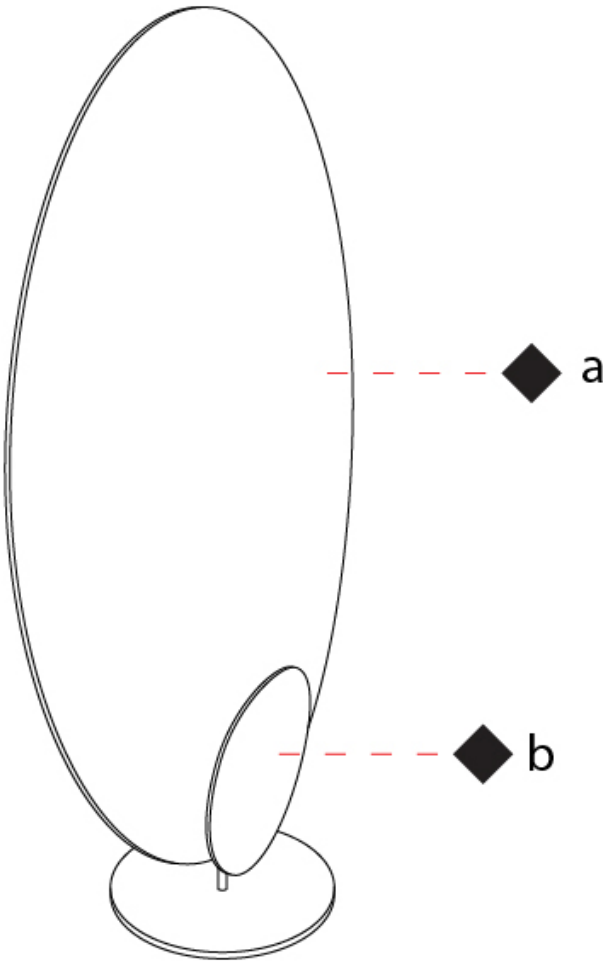

MASAI PORTABLE

D44026-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Masai

Partner: Icone

Division: Design

Installation: Portable

Product Type: Floor

Mounting Location: Floor

Light Distribution: Indirect

PHYSICAL

Shape: Oval

Length (mm): 300

Length (in): 11 13/16

Width (mm): 300

Width (in): 11 13/16

Height (mm): 1830

Height (in): 72 1/16

Fixture Finish: WBB / BBB / BBZ / BIN

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 45

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Input Voltage (V): 120Vac Direct Line

LED

Color Temperature (°K): 2700 / 3000

Nominal Lumen (lm): 4050

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

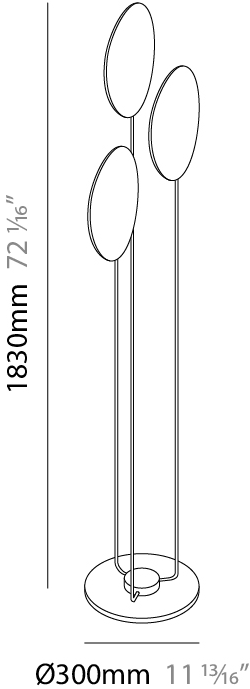

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

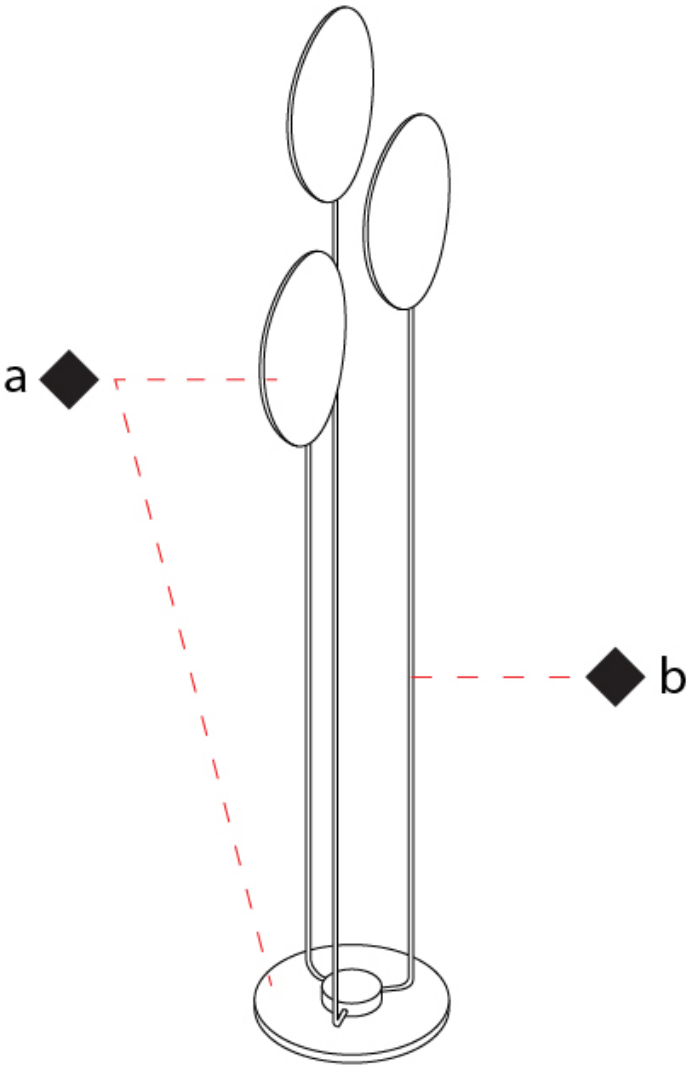

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)