

MINI CORNICHE RECESSED

E9I507-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 620

Length (in): 24 7/16

Width (mm): 43

Width (in): 1 11/16

Depth (mm): 32

Depth (in): 1 1/4

Diffuser: Tempered Glass - 5mm / 3/16" thick

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 21 / 11.5 (Dif) / 12.5 (Asy)

Total Output Wattage (W): 18.5 / 10.5 (Dif) / 11 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 18

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 1400 / 1450 / 825 (Dif) / 350 (Asy)

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ELL / DIF / ASY

Beam Angle: Diffuser - 82

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B0 U5 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

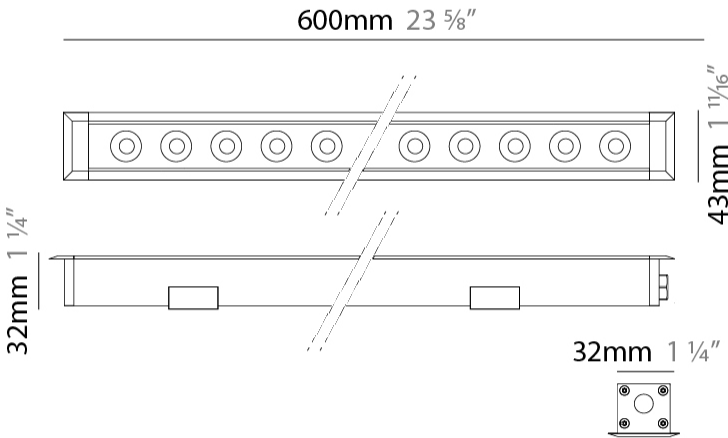

MINI CORNICHE RECESSED

E9I507-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

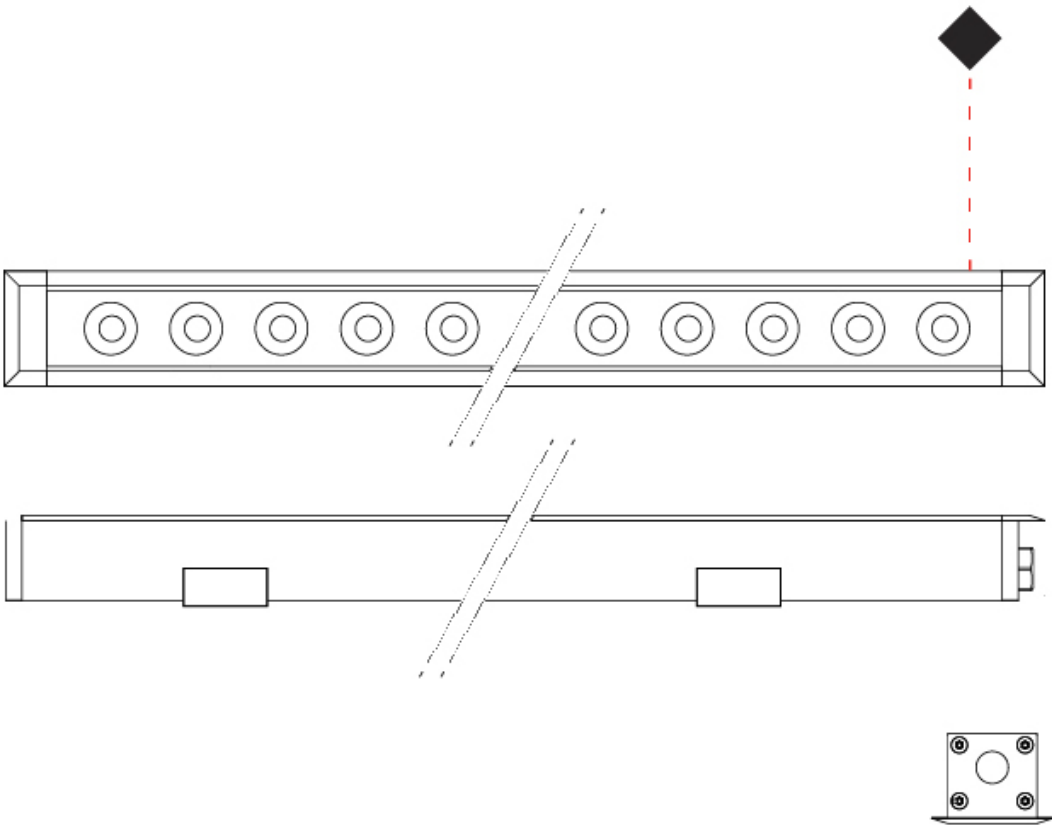

E

MINI CORNICHE RECESSED

E9I521-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 1220

Length (in): 48 1/32

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/2

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 46 / 24 (Dif) / 26 (Asy)

Total Output Wattage (W): 40 / 21 (Dif) / 22 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 36

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 2790 / 2900 / 1650 (Dif) / 675 (Asy)

Nominal Lumen (lm): 5040 / 5220

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL ; RGBW 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B0 U5 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

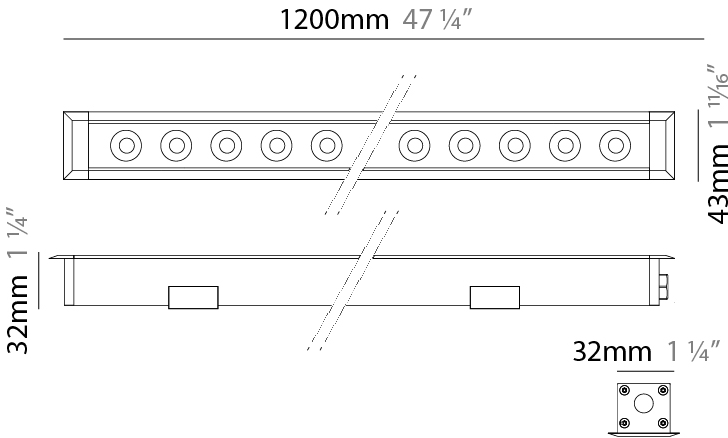

MINI CORNICHE RECESSED

E9I521-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

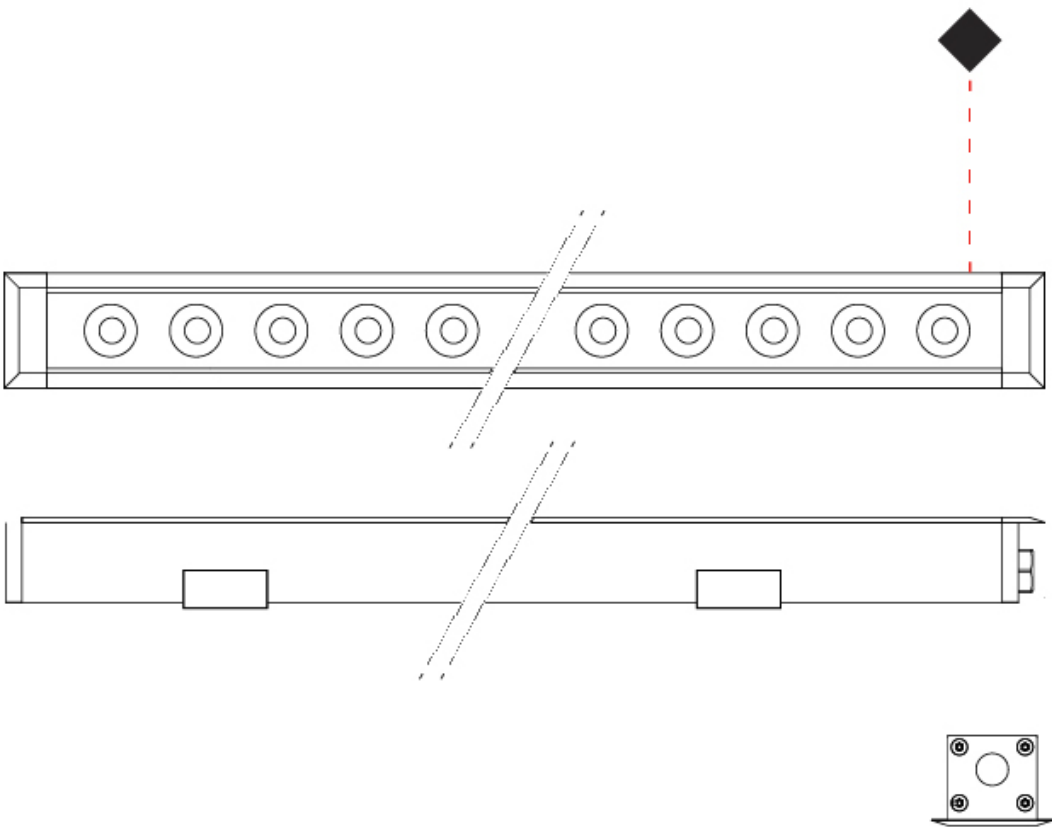

E

MINI CORNICHE RECESSED

E9I620-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 120

Length (in): 4 3/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/4

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 3.5 / 2

Total Output Wattage (W): 3 / 1.5 (Dif/Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 3

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 250 / 260

Nominal Lumen (lm): 420 / 435

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B0 U3 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

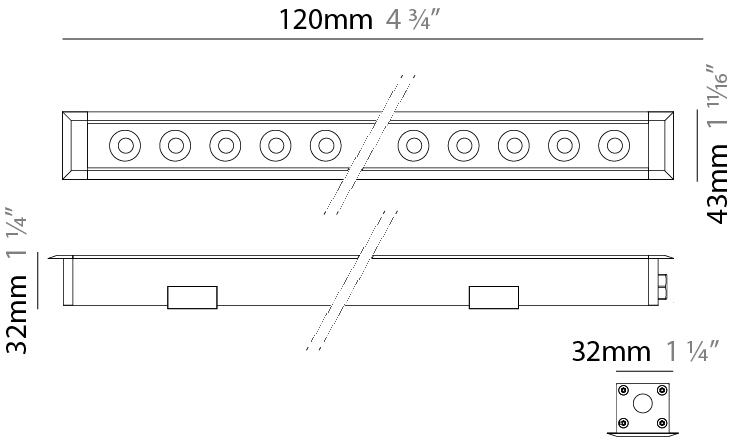

MINI CORNICHE RECESSED

E9I620-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

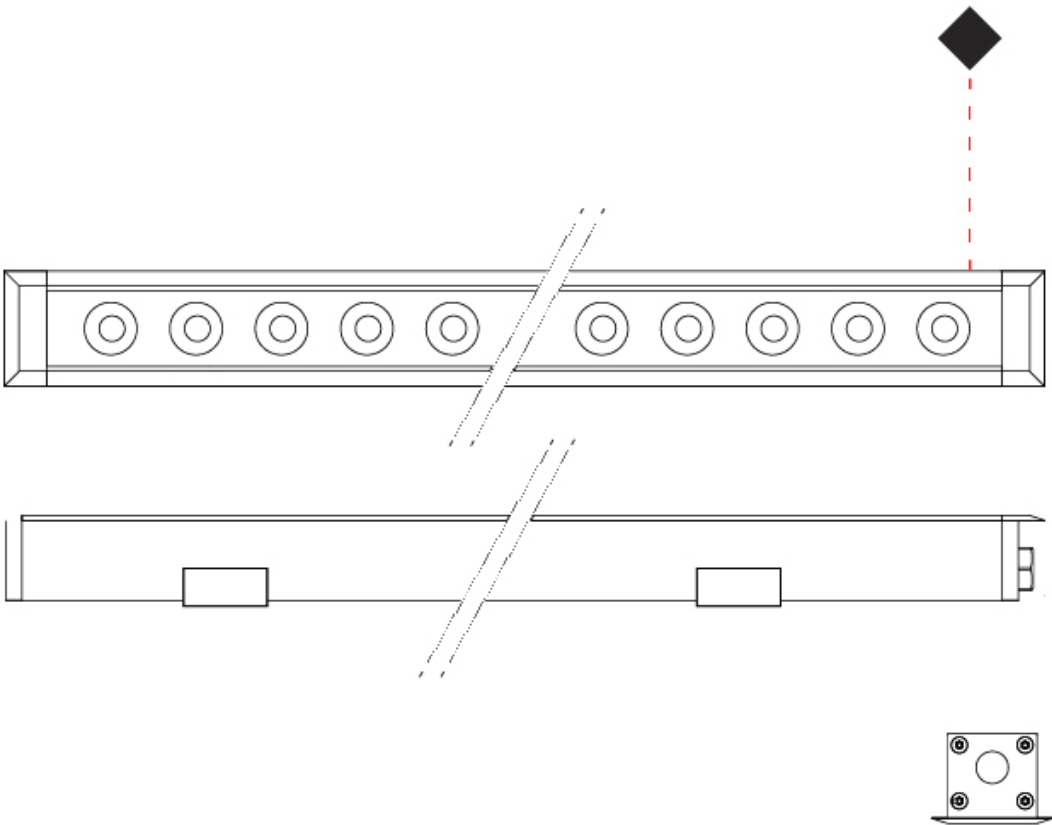

E

MINI CORNICHE RECESSED

E9I622-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 320

Length (in): 12 5⁄8

Width (mm): 43

Width (in): 1 5⁄8

Height (mm): 32

Height (in): 1 1⁄4

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 10.7 / 6 (Dif) / 6.5 (Asy)

Total Output Wattage (W): 9.5 / 5.5 (Dif) / 6 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 700 / 780 / 400 (Dif) / 170 (Asy)

Nominal Lumen (lm): 1260 / 1305

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B0 U4 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

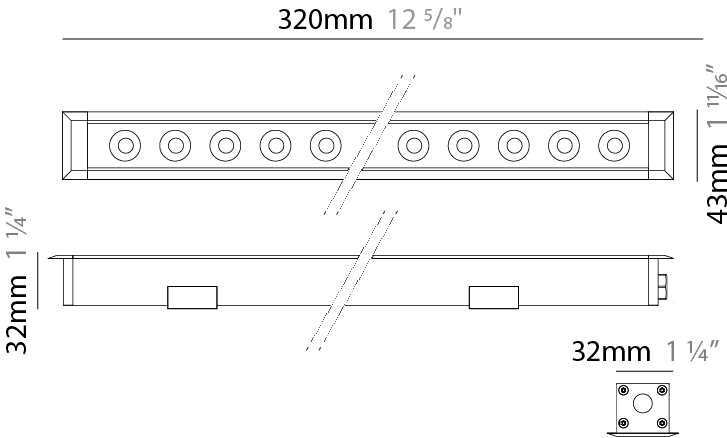

MINI CORNICHE RECESSED

E9I622-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

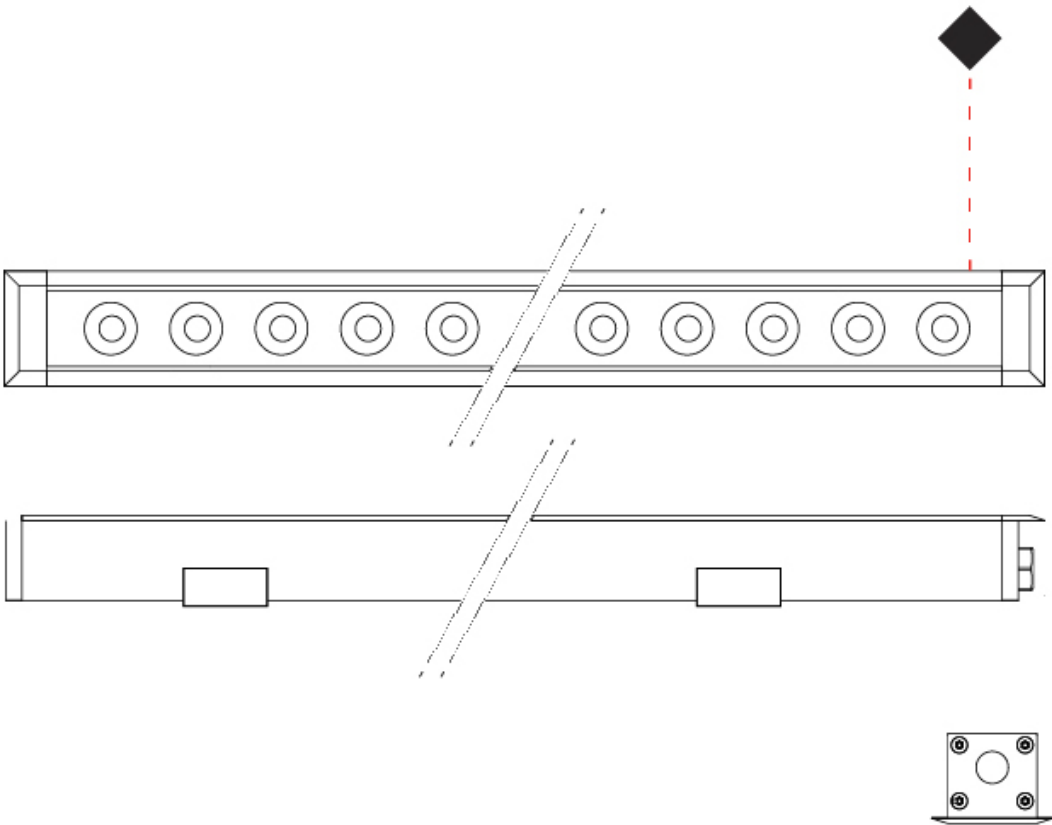

E

MINI CORNICHE RECESSED

E9I623-

base number	Color	Finish	Lens
	Temperature	Options	Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche
Partner: Platek
Division: Exterior
Installation: Recessed
Product Type: Walk Over
Mounting Location: In-Ground
Light Distribution: Uplight

PHYSICAL

Shape: Rectangle
Length (mm): 920
Length (in): 36 1/4
Width (mm): 43
Width (in): 1 5/8
Height (mm): 32
Height (in): 1 1/2
Weight (kg): 1.6
Weight (lbs): 3.5
Screws: A4 stainless steel
Diffuser: Clear tempered glass
Gasket: Gore-Tex valve to prevent condensation inside the fitting.
Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 32 / 17.5 (Dif) / 19.5 (Asy)
Total Output Wattage (W): 29 / 15.5 (Dif) / 17 (Asy)
Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Number of LEDs: 27
Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 2100 / 2180 / 1240 (Dif) / 505 (Asy)
CRI: >80 CRI
Lamp Life (hrs): 60000


OPTICAL

Optic°: 13 / 26 / 40 / ELL (29W) - DIF (15.5W) / ASY (17W)
--

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK07
Bug Rating: B0 U5 G0
Upon Request: Higher Maximum Ambient Temperature


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

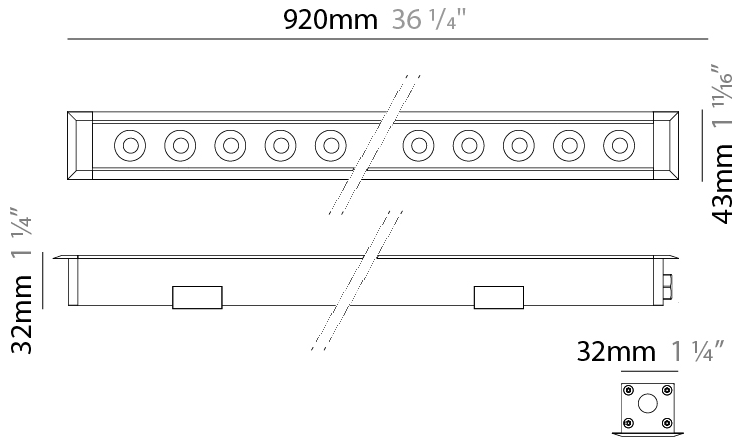

MINI CORNICHE RECESSED

E9I623-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

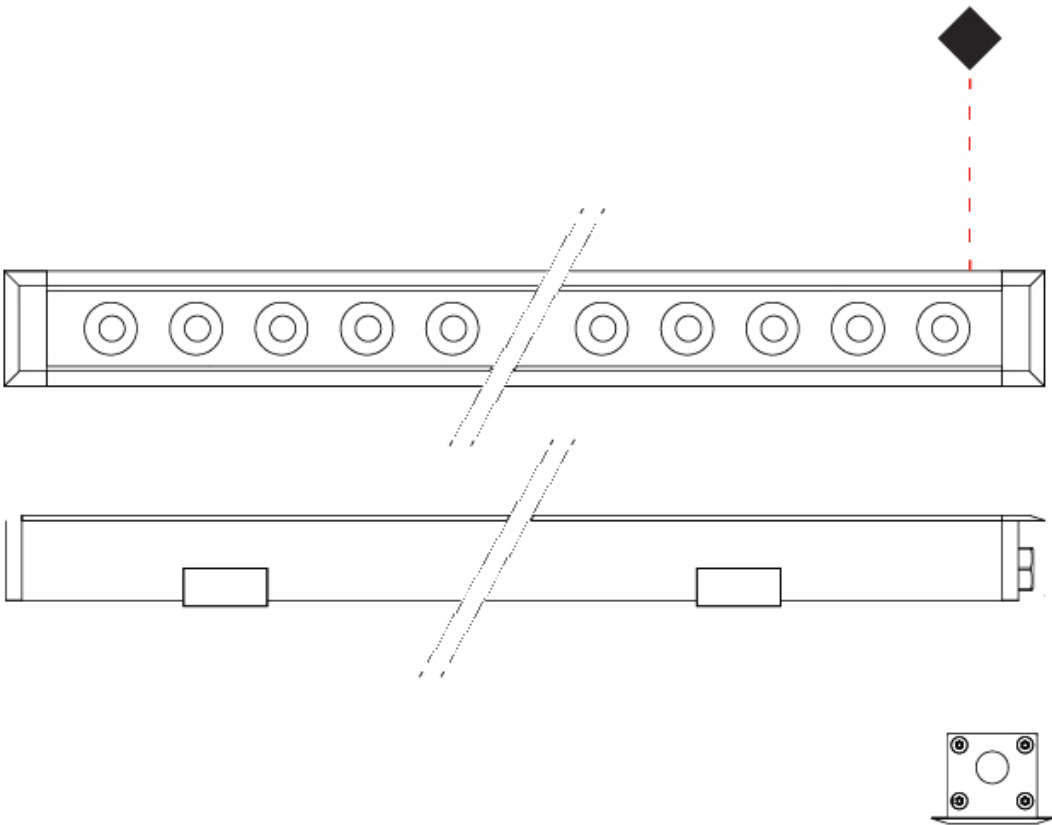

E

MINI CORNICHE RECESSED

E9I636-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 120

Length (in): 4 3/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/4

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 6

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 4

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

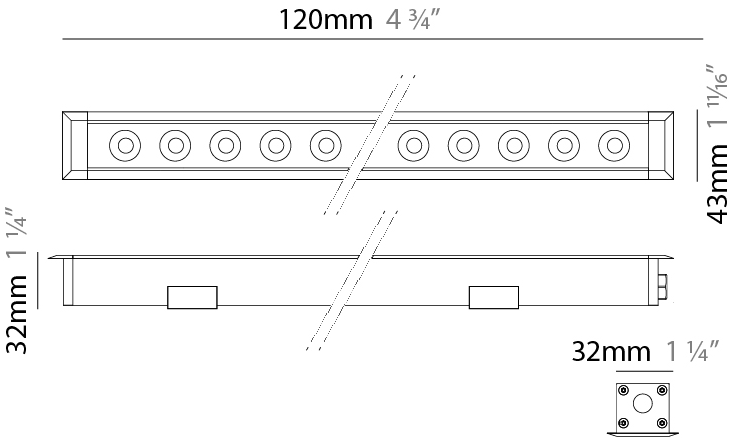

MINI CORNICHE RECESSED

E9I636-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

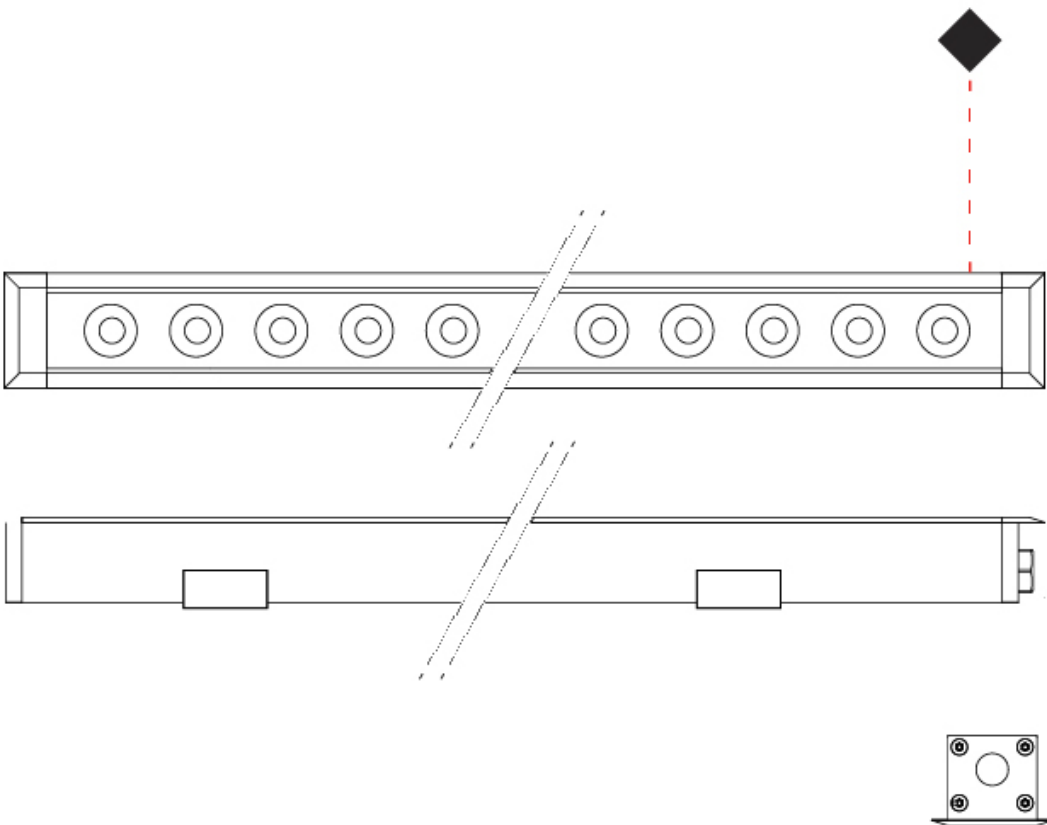

E

MINI CORNICHE RECESSED

E9I637-
base number Finish Lens
Options Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche
Partner: Platek
Division: Exterior
Installation: Recessed
Product Type: Walk Over
Mounting Location: In-Ground
Light Distribution: Uplight

PHYSICAL

Shape: Rectangle
Length (mm): 320
Length (in): 12 7/16
Width (mm): 43
Width (in): 1 5/8
Height (mm): 32
Height (in): 1 1/4
Diffuser: Clear tempered glass
Gasket: Gore-Tex valve to prevent condensation
Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Total Output Wattage (W): 11.5
Dimming: Bluetooth technology or DMX
Control Gear: DMX
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 500

LED

Number of LEDs: 8
Color Temperature (°K): RGBW
CRI: >80 CRI
Lamp Life (hrs): 60000
Special LEDs offerings: RGBW


OPTICAL

Optic°: 28 / 47 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP67
IK Rating: IK07
Upon Request: Higher Maximum Ambient Temperature


PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

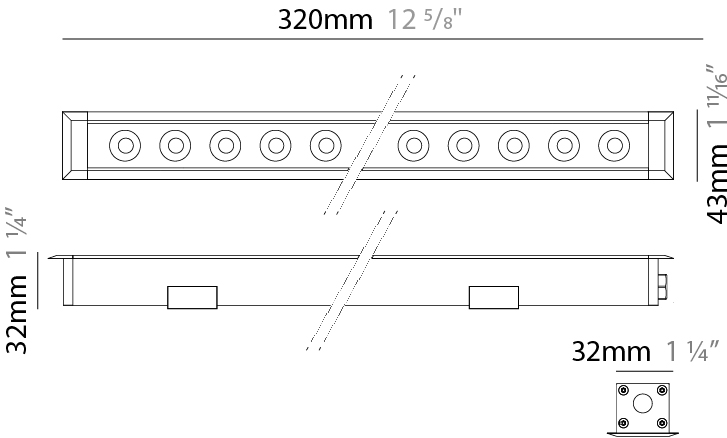

MINI CORNICHE RECESSED

E9I637-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

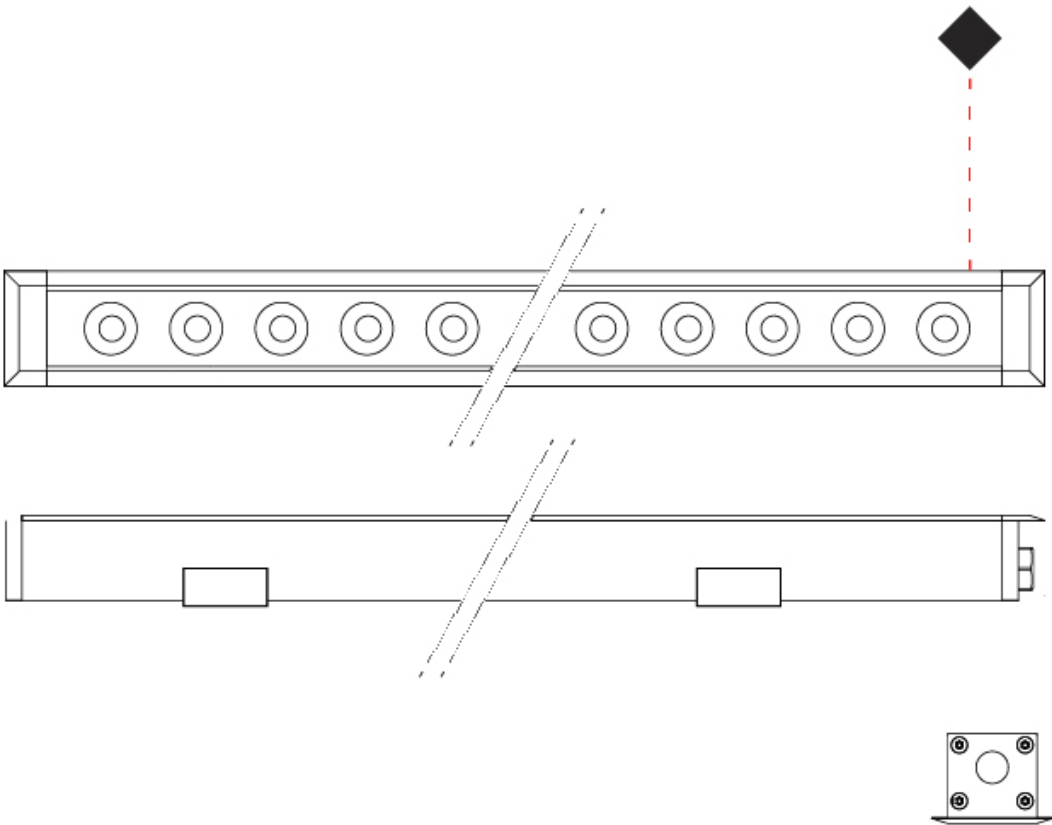

E

MINI CORNICHE RECESSED

E9I638-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 620

Length (in): 24 7⁄16

Width (mm): 43

Width (in): 1 11⁄16

Depth (mm): 32

Depth (in): 1 ¼

Diffuser: Tempered Glass - 5mm / 3/16" thick

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 23

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 16

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 28 / 47 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

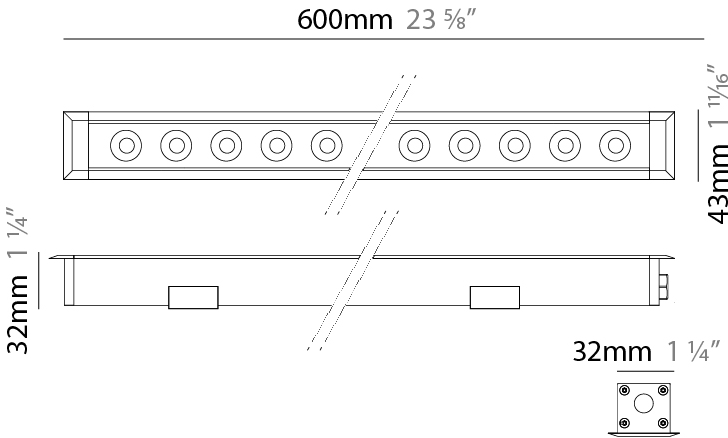

MINI CORNICHE RECESSED

E9I638-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

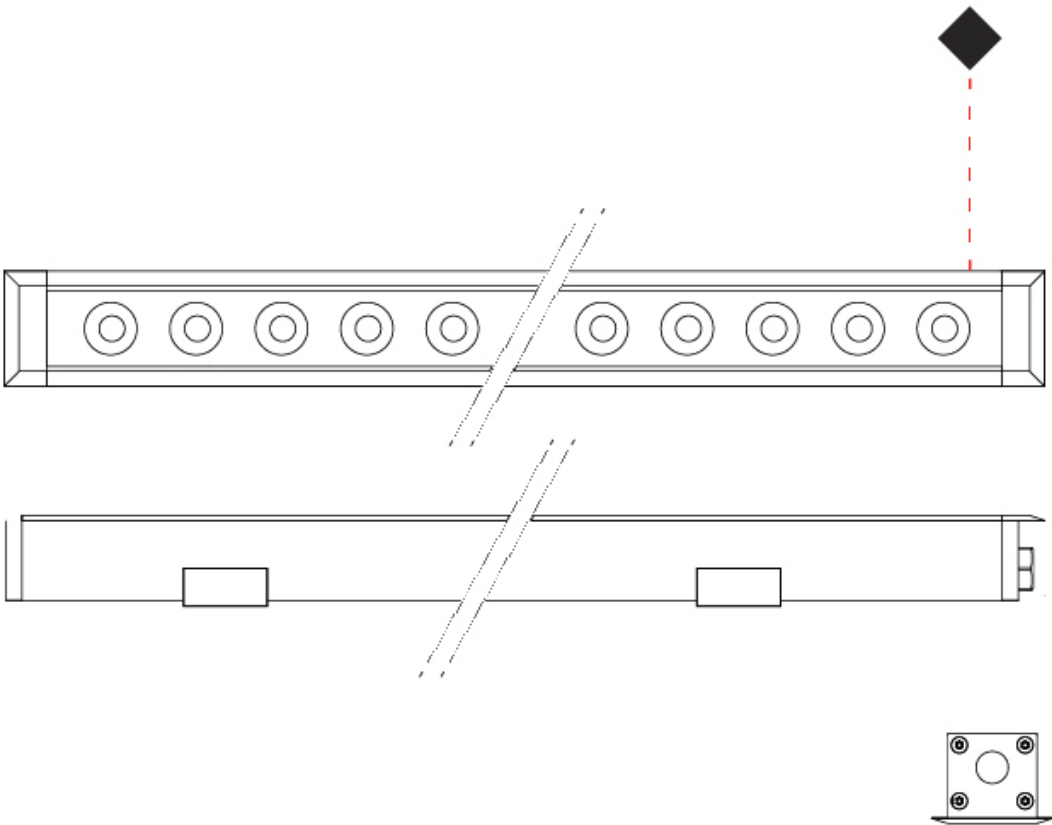

E

MINI CORNICHE RECESSED

E9I639- -

base number Finish Options Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

Light Distribution: Uplight

PHYSICAL

Shape: Rectangle

Length (mm): 1220

Length (in): 48 1/32

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/2

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 46

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 32

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 47 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards


IP rating: IP67

IK Rating: IK07

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

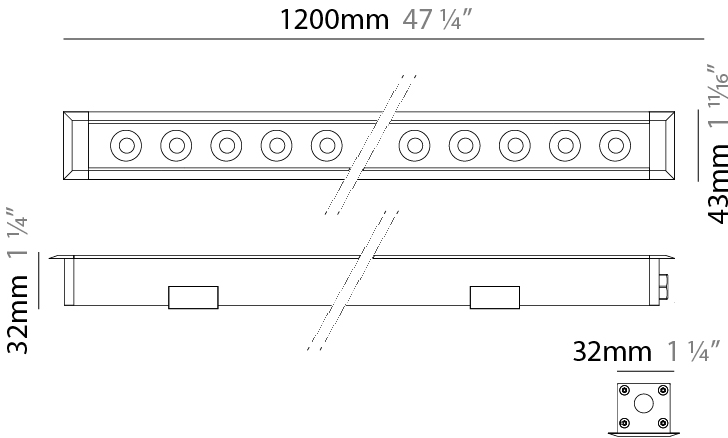

MINI CORNICHE RECESSED

E9I639-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

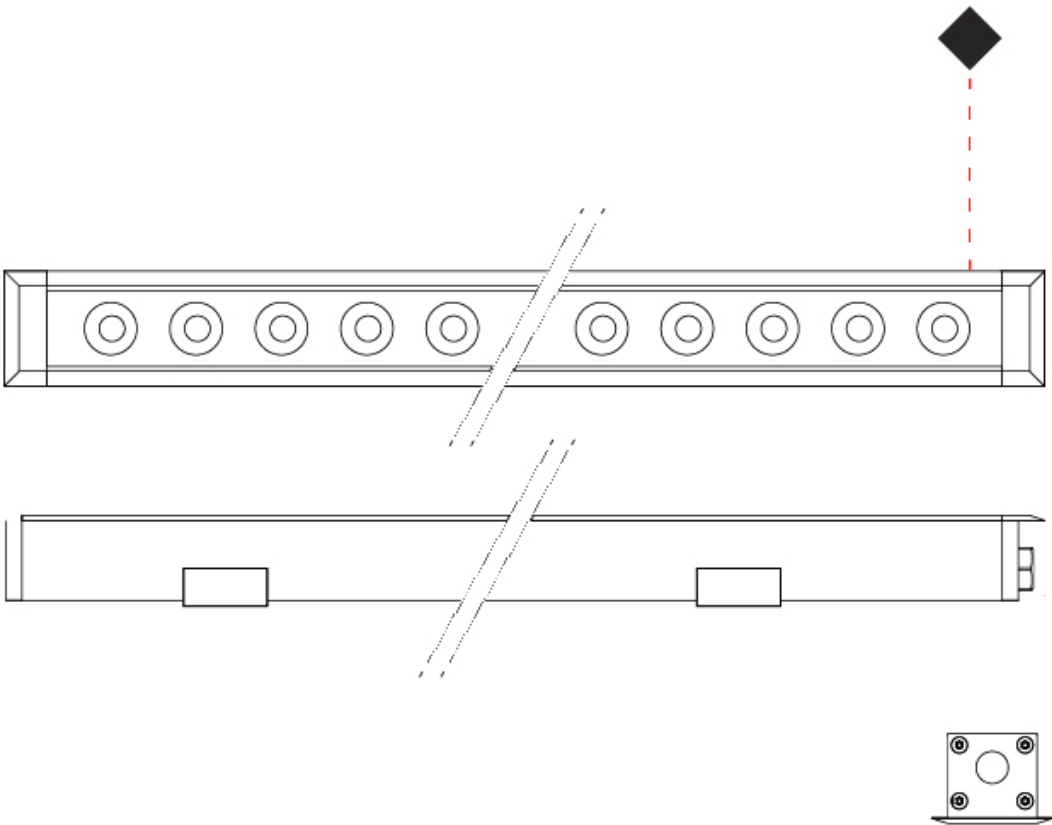

E

MINI CORNICHE RECESSED

E9I640-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Walk Over

Mounting Location: In-Ground

PHYSICAL

Shape: Rectangle

Length (mm): 920

Length (in): 36 1/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Diffuser: Tempered Glass - 5mm / 3/16" thick

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 35

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 24

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 28 / 47 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK07

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

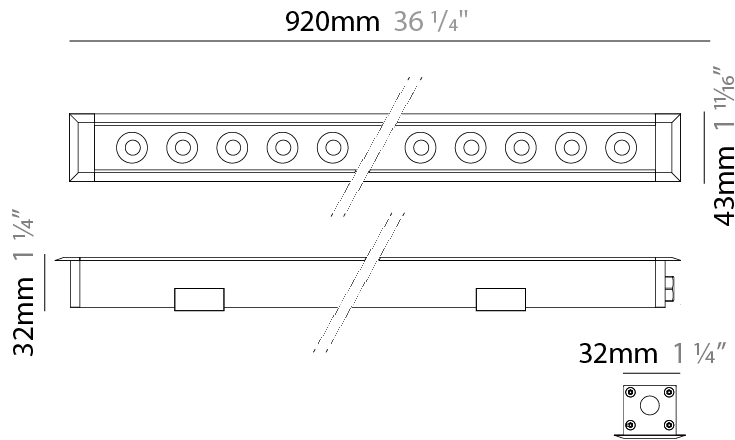

MINI CORNICHE RECESSED

E9I640-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

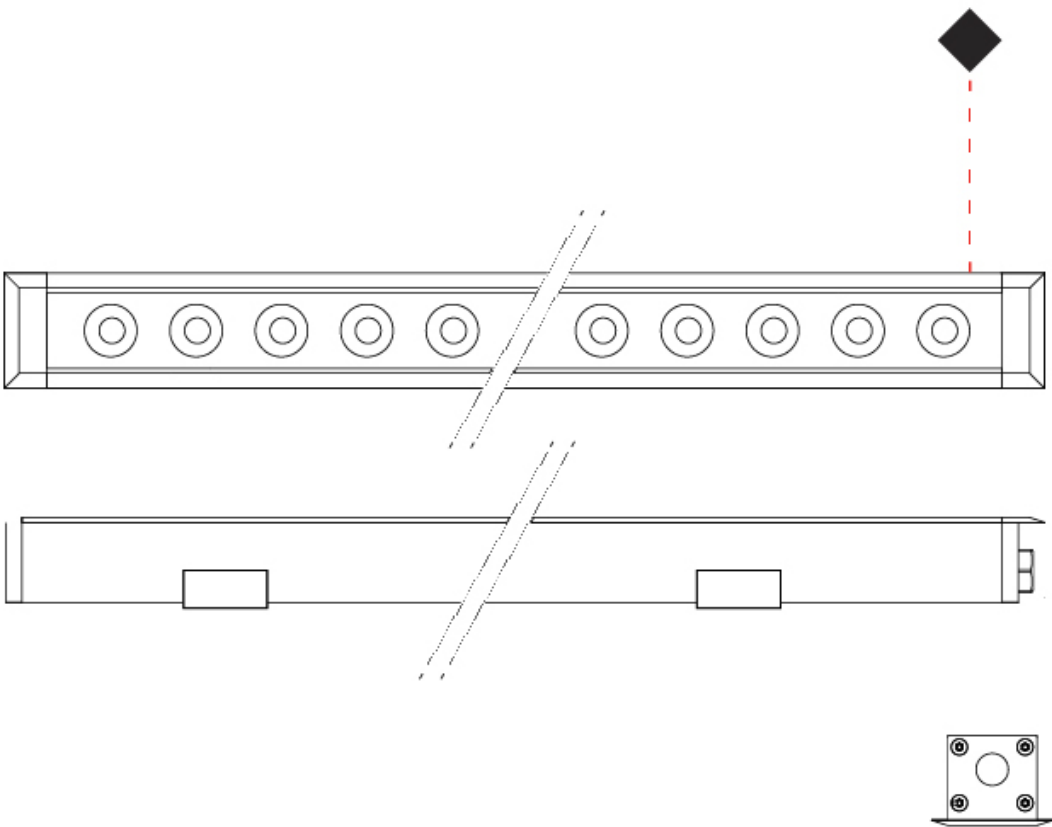

E

MINI CORNICHE RECESSED

E9Q080-

base number

Color
Temperature

Finish
Options

Lens
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 1220

Length (in): 48 1/32

Width (mm): 43

Width (in): 1 3/4

Height (mm): 32

Height (in): 1 1/4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 2.7

Weight (lbs): 5.9

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 1210mm / 47 5/8"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 40 / 20 (Dif) / 21 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 36

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 3000 / 3120

Nominal Lumen (lm): 5040 / 5220

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B3 U1 G1

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

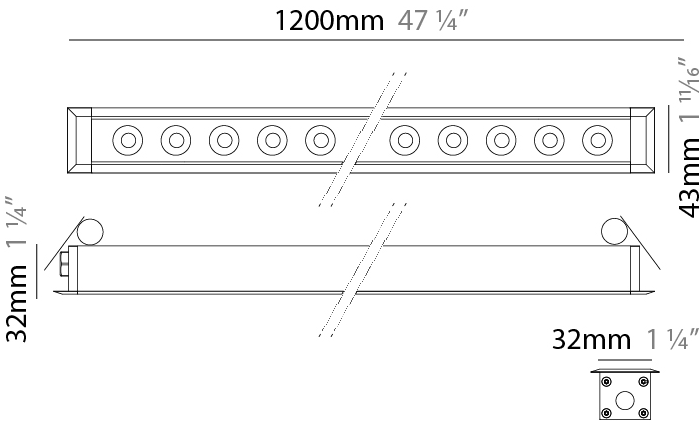

MINI CORNICHE RECESSED

E9Q080-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

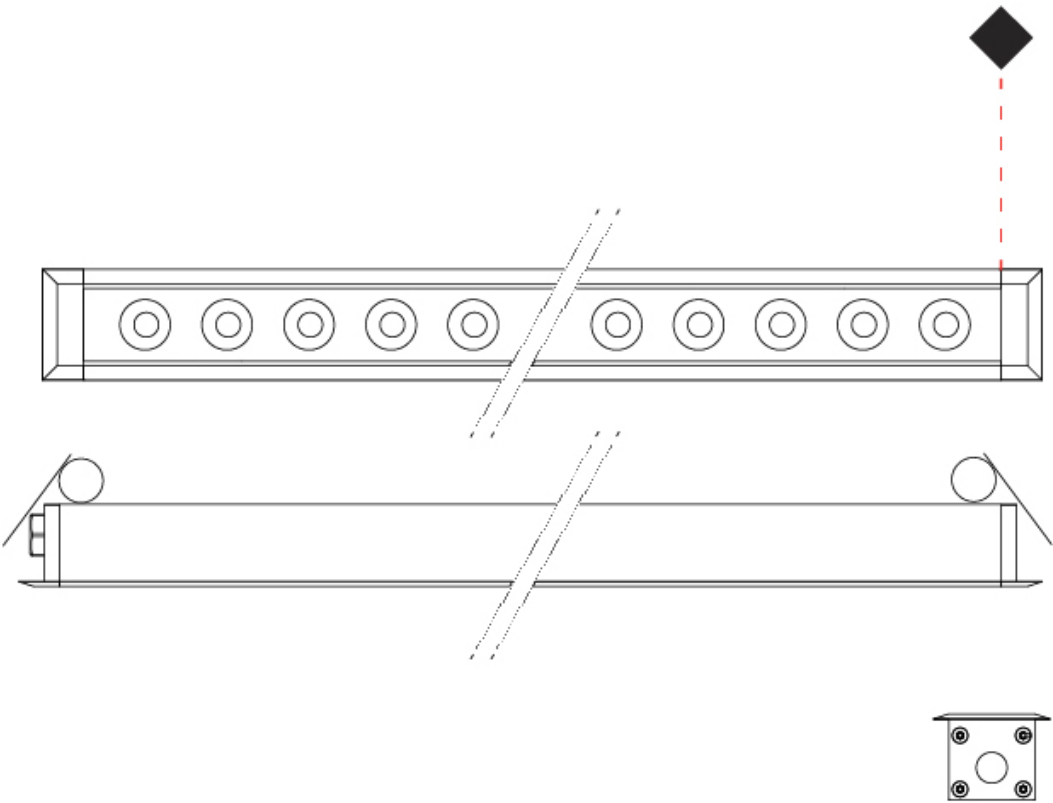

E

MINI CORNICHE RECESSED

E9Q100-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 620

Length (in): 24 7⁄8

Width (mm): 43

Width (in): 1 5⁄8

Height (mm): 32

Height (in): 1 1⁄4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 1.3

Weight (lbs): 2.8

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 610mm / 24"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 18.5 / 10.5 (Dif) / 11 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 18

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 1500 / 1560

Nominal Lumen (lm): 2520 / 2610

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B2 U1 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

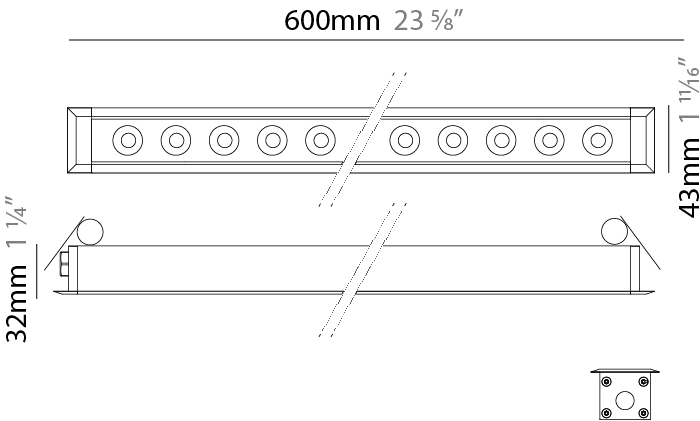

MINI CORNICHE RECESSED

E9Q100-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

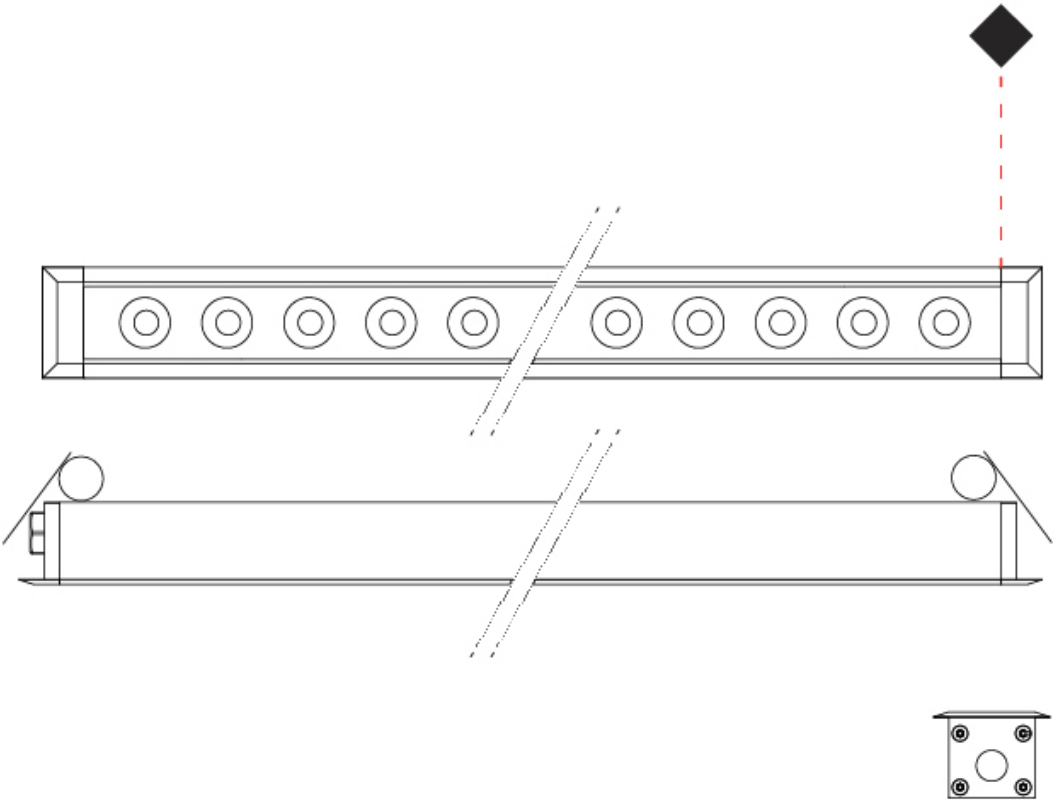

E

MINI CORNICHE RECESSED

E9Q103- -

base number Finish Lens
Options Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 620

Length (in): 24 7⁄8

Width (mm): 43

Width (in): 1 5⁄8

Height (mm): 32

Height (in): 1 1⁄4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 1.3

Weight (lbs): 2.8

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 610mm / 24"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 23

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards


IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

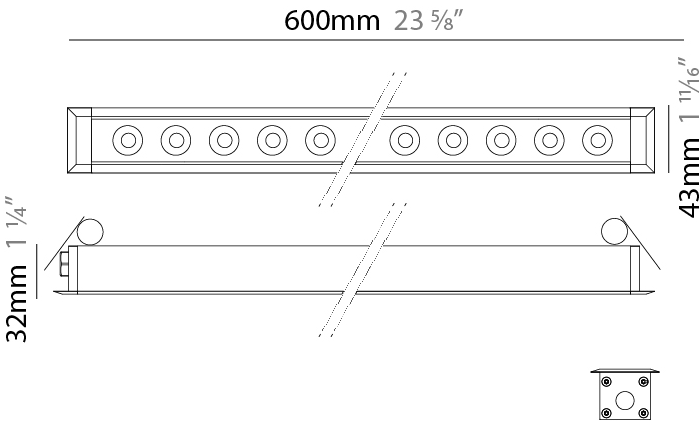

MINI CORNICHE RECESSED

E9Q103-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

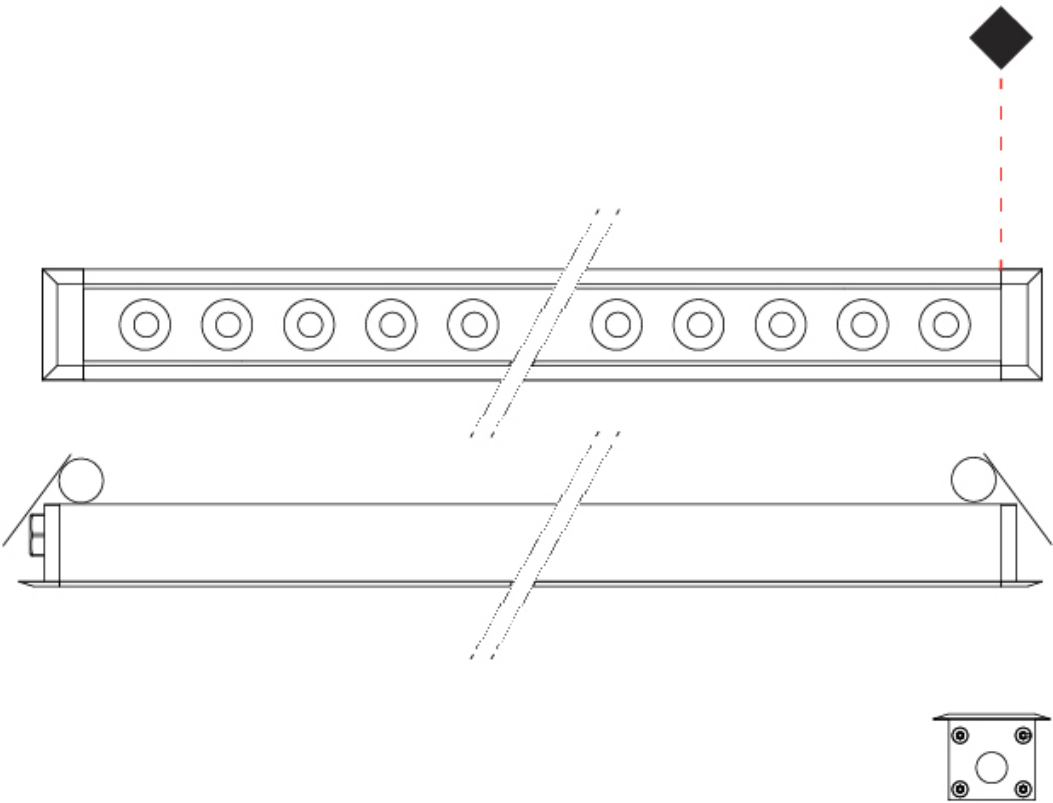

E

MINI CORNICHE RECESSED

E9Q104-

base number

Color
Temperature

Finish
Options

Lens
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 120

Length (in): 4 ¾

Width (mm): 43

Width (in): 1 ⅞

Height (mm): 32

Height (in): 1 ¼

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 110mm / 4 5/16"

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 3.5 / 1.5 (Dif)

Total Output Wattage (W): 3 / 1 (Dif)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 3

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 250 / 260

Nominal Lumen (lm): 420 / 435

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B1 U1 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

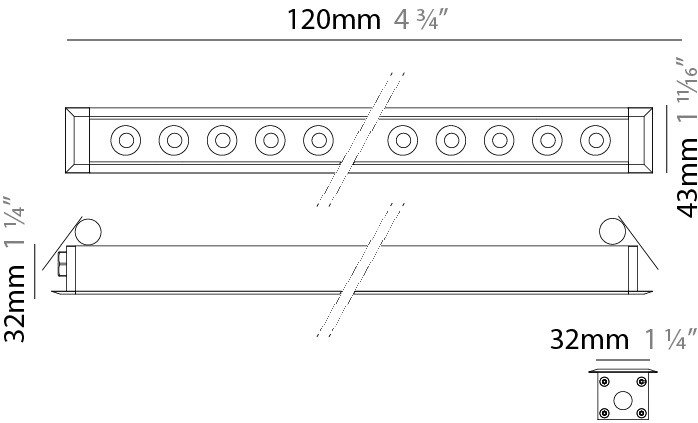

MINI CORNICHE RECESSED

E9Q104-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

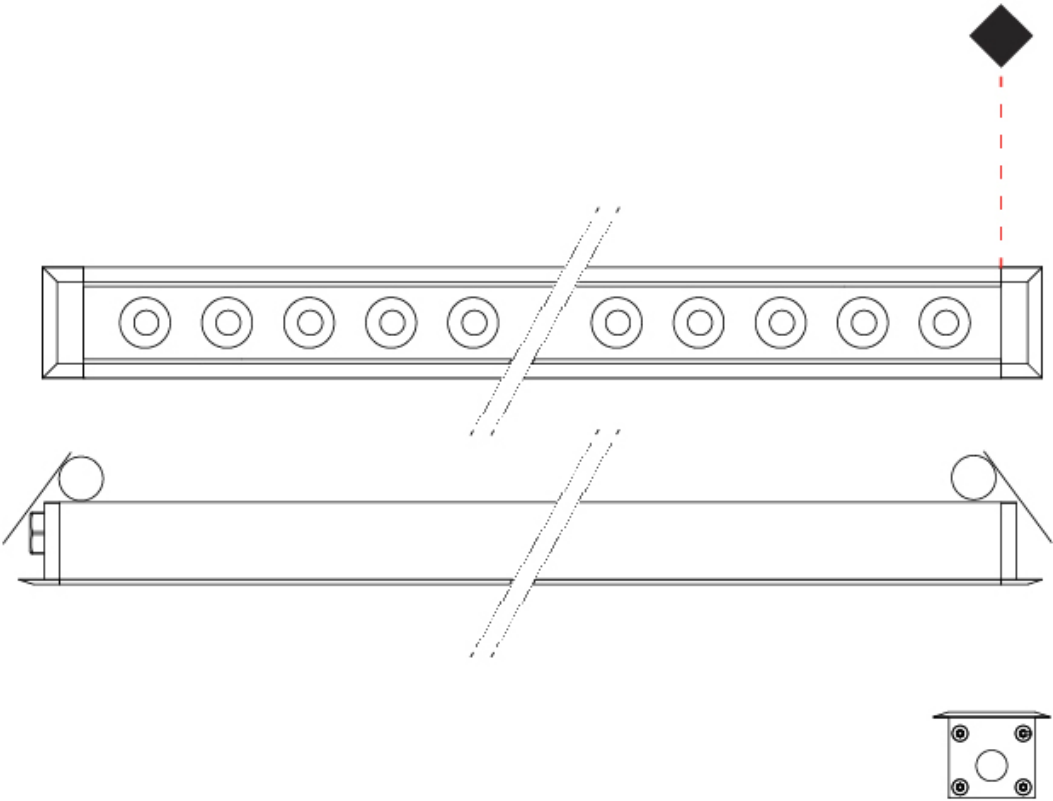

E

MINI CORNICHE RECESSED

E9Q106-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 320

Length (in): 12 5⁄8

Width (mm): 43

Width (in): 1 11⁄16

Height (mm): 32

Height (in): 1 1⁄4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 0.8

Weight (lbs): 1.76

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 310mm / 12 3/16"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 9.5 / 5.5 / 6

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 9

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 750 / 780

Nominal Lumen (lm): 1260 / 1305

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B1 U1 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

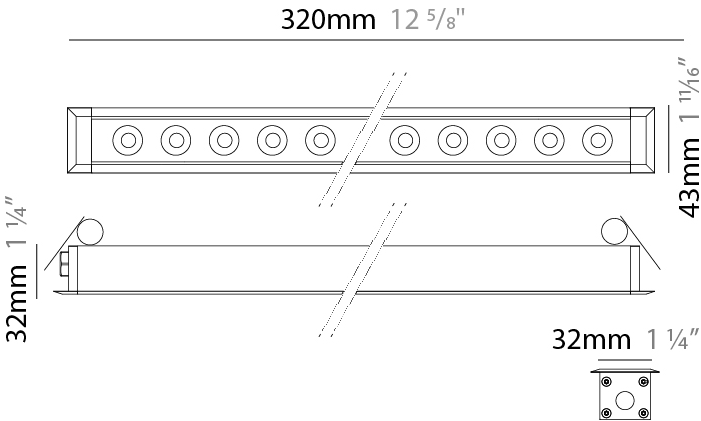

MINI CORNICHE RECESSED

E9Q106-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

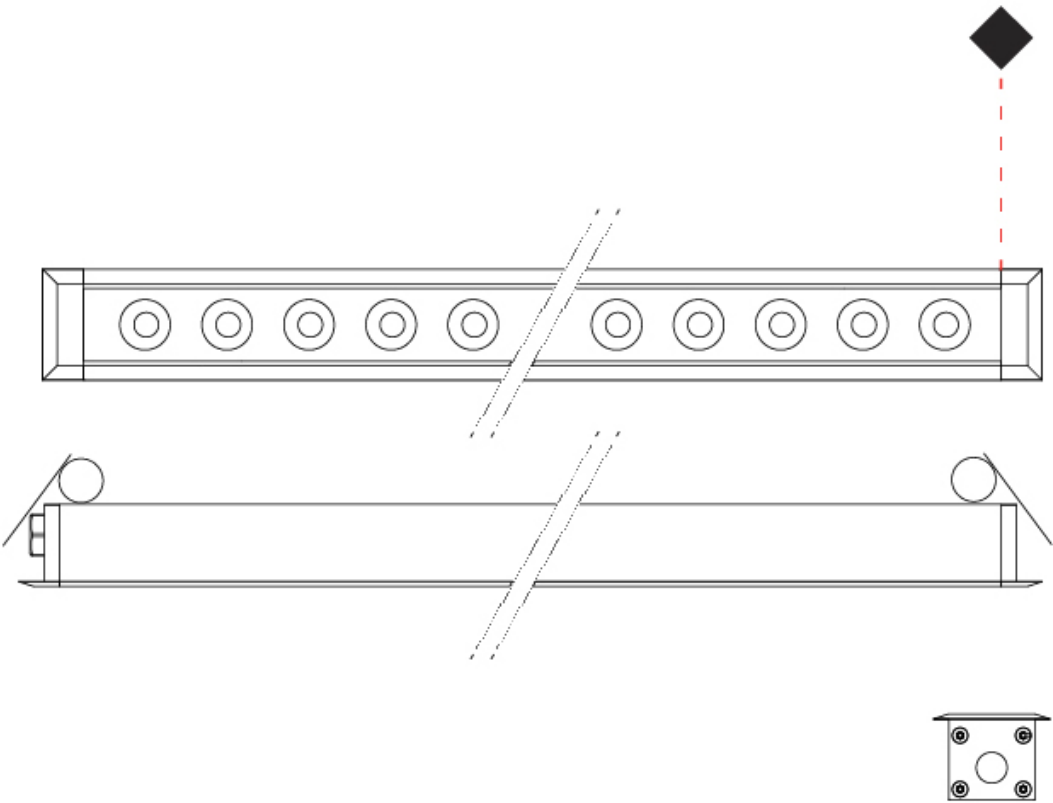

E

MINI CORNICHE RECESSED

E9Q107-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 920

Length (in): 36 1/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 2

Weight (lbs): 4.4

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 910mm / 35 13/16"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 29 / 15.5 (Dif) / 17 (Asy)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 18

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 2260 / 2350

Nominal Lumen (lm): 3780 / 3915

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / ASY / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B3 U1 G1

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

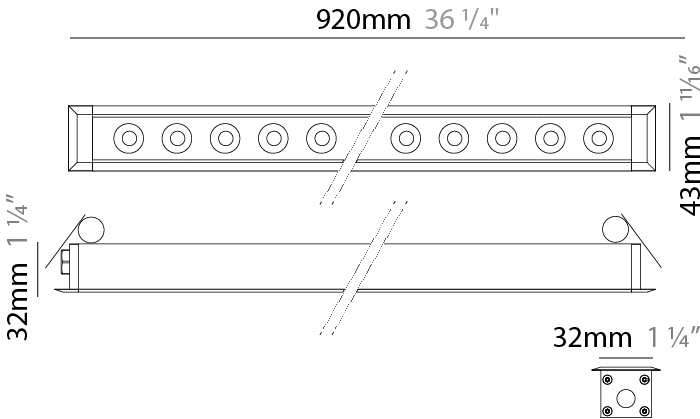

MINI CORNICHE RECESSED

E9Q107-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

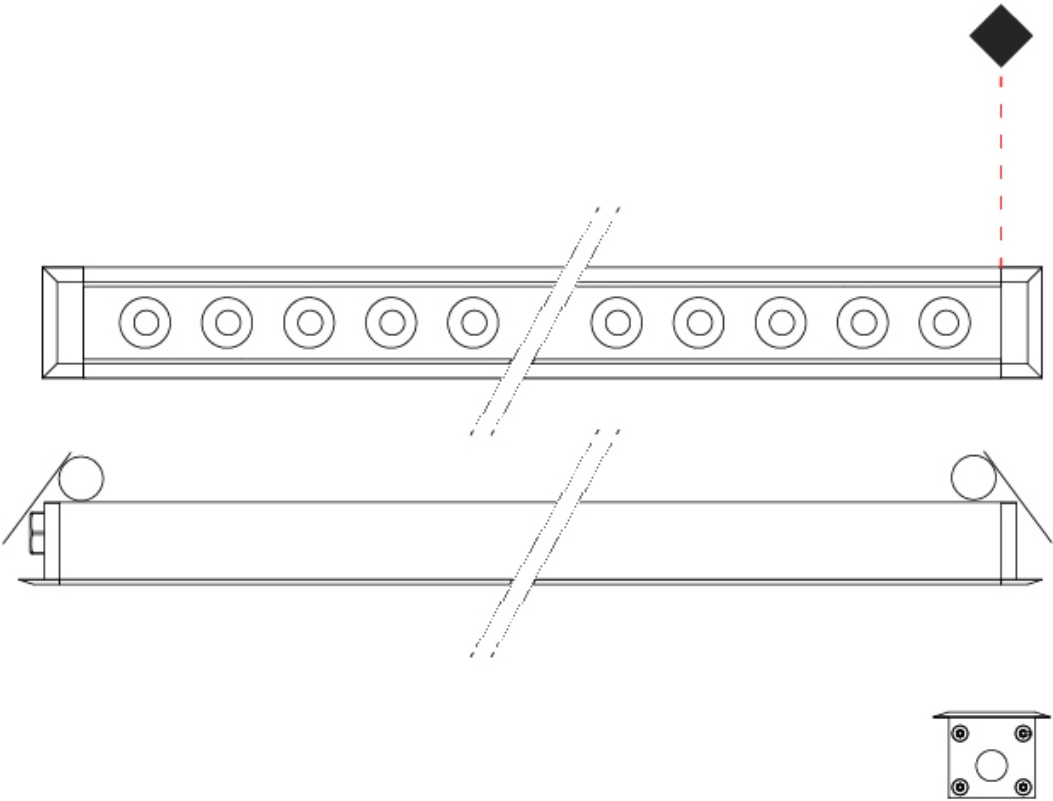

E

MINI CORNICHE RECESSED

E9Q110-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 920

Length (in): 36 1/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 2

Weight (lbs): 4.4

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 910mm / 35 13/16"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 35

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 24

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

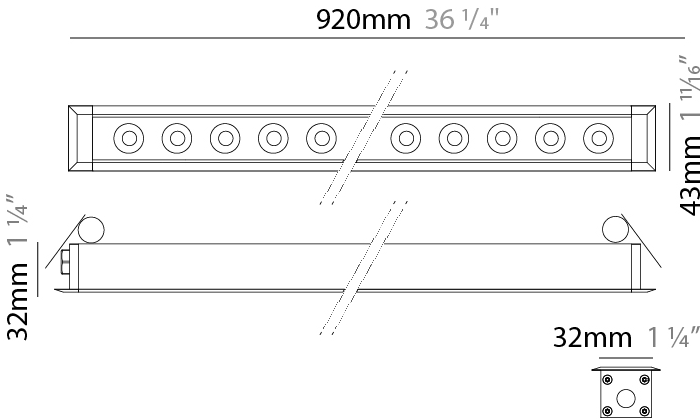

MINI CORNICHE RECESSED

E9Q110-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

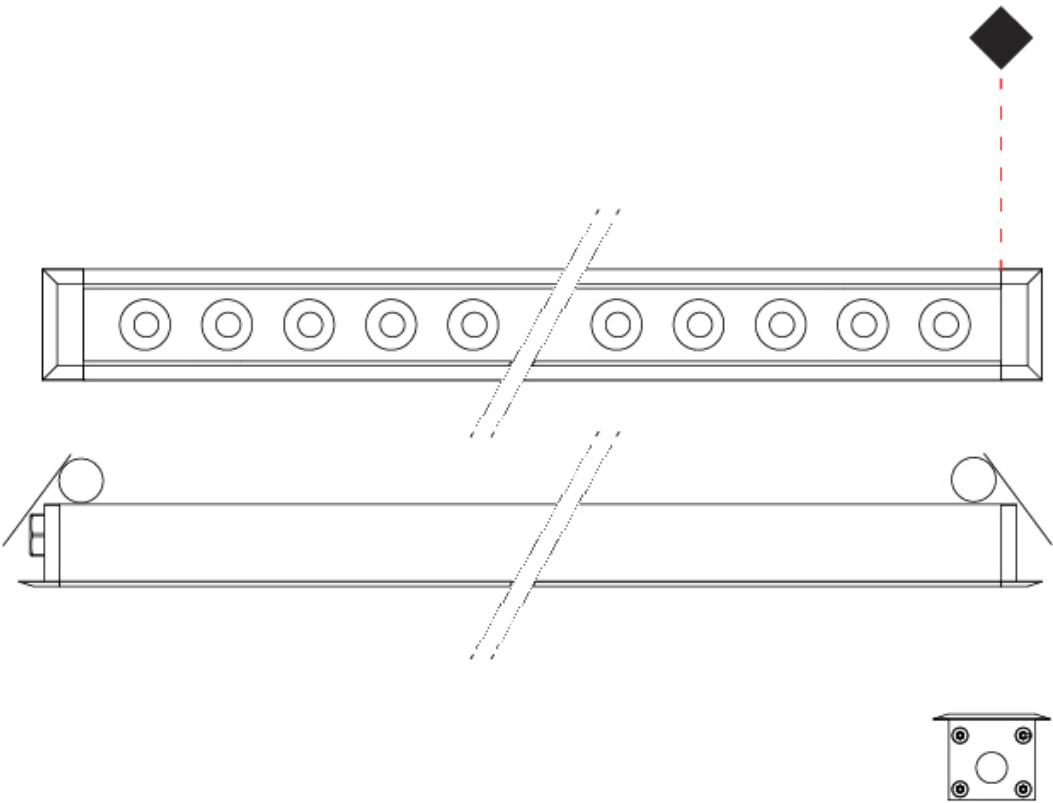

E

MINI CORNICHE RECESSED

E9Q111-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 120

Length (in): 4 3/4

Width (mm): 43

Width (in): 1 5/8

Height (mm): 32

Height (in): 1 1/4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Installation Requirement: 36mm / 1 7/16" x 110mm / 4 5/16"

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 6

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 4

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

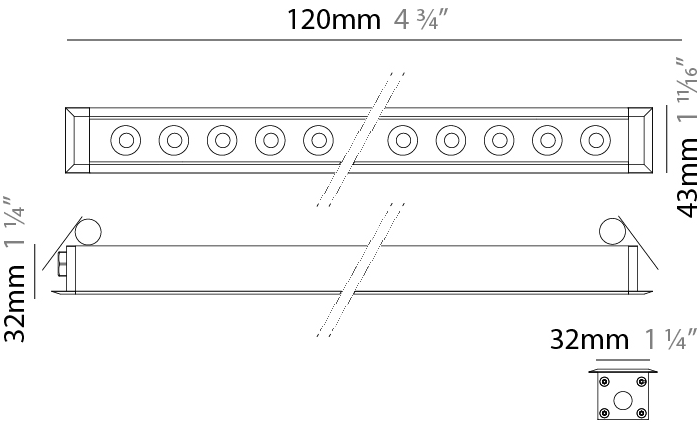

MINI CORNICHE RECESSED

E9Q111-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

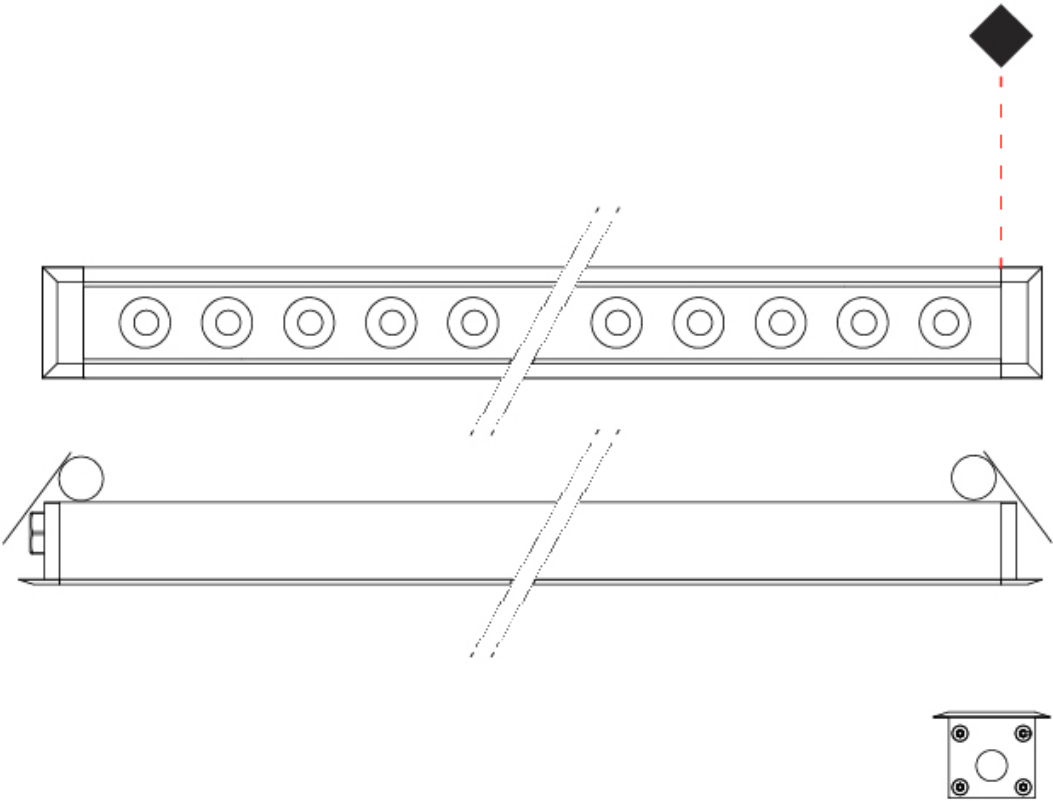

E

MINI CORNICHE RECESSED

E9Q112-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 320

Length (in): 12 5⁄8

Width (mm): 43

Width (in): 1 11⁄16

Height (mm): 32

Height (in): 1 1⁄4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 0.8

Weight (lbs): 1.76

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 310mm / 12 3/16"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 11.5

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 8

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

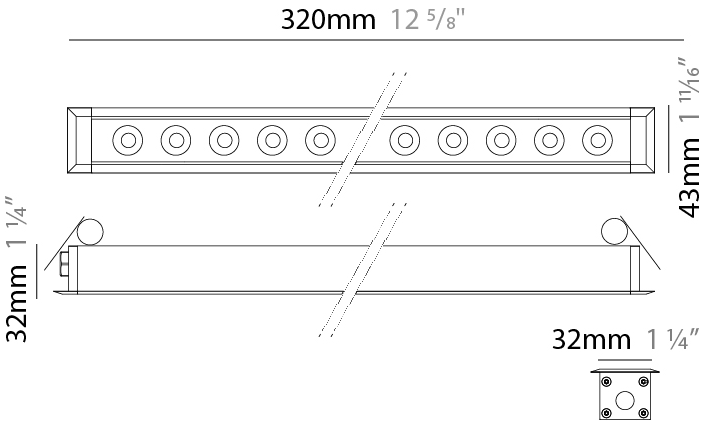

MINI CORNICHE RECESSED

E9Q112-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

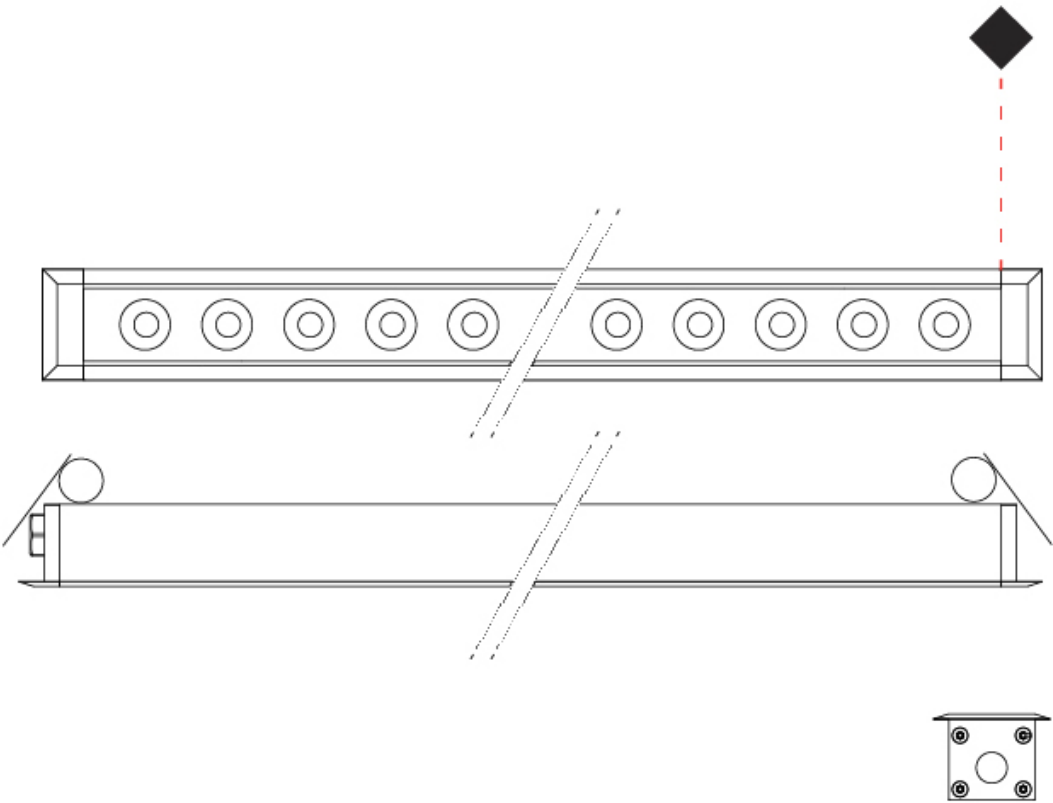

E

MINI CORNICHE RECESSED

E9Q114-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Rectangle

Length (mm): 1220

Length (in): 48 1/32

Width (mm): 43

Width (in): 1 3/4

Height (mm): 32

Height (in): 1 1/4

Ceiling Thickness (mm): 2 - 13

Ceiling Thickness (in): 1/16 - 1/2

Weight (kg): 2.7

Weight (lbs): 5.9

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

Cut-out Measurements: 36mm / 1 7/16" x 1210mm / 47 5/8"

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 46

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 32

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

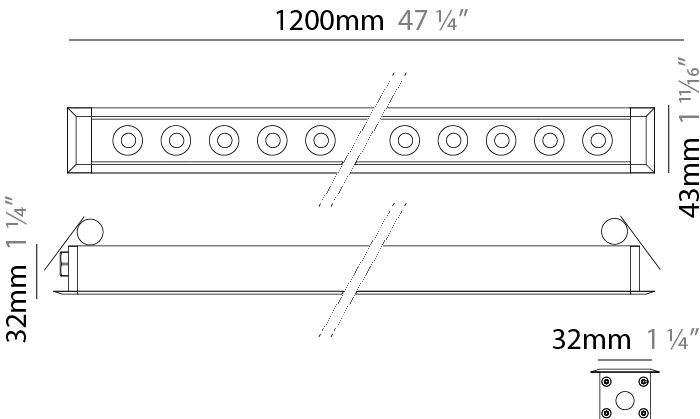

MINI CORNICHE RECESSED

E9Q114-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

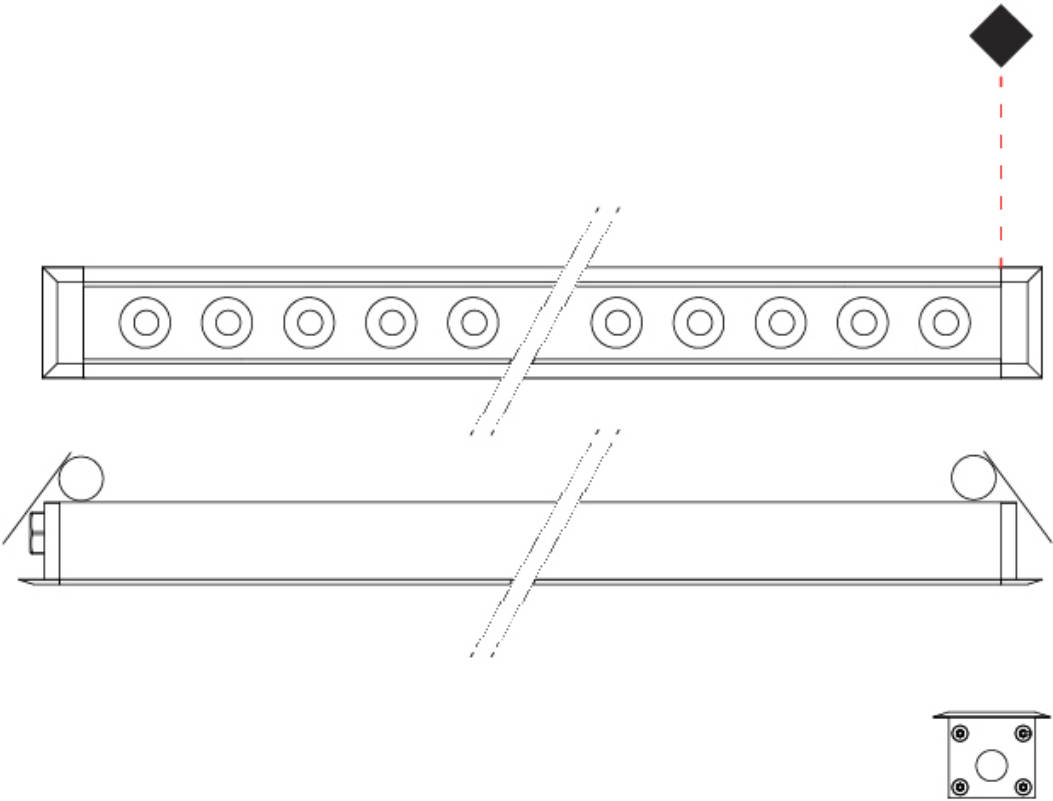

E

MINI CORNICHE SURFACE

E9W518-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 300

Length (in): 11 13/16

Width (mm): 32

Width (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 1.2

Weight (lbs): 2.6

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 9.5 / 5.5 (Dif.)

Total Output Wattage (W): 9 / 5 (Dif.)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 9

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 750 / 780

Nominal Lumen (lm): 1260 / 1305

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U1 G0


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

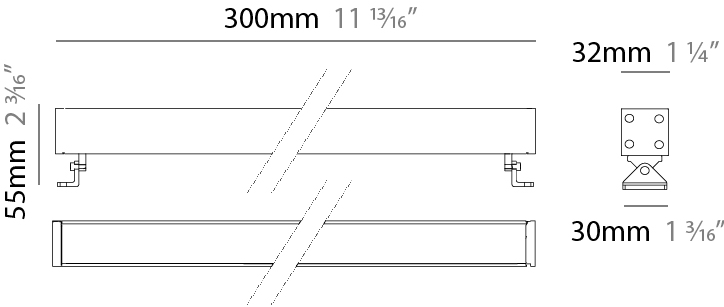

MINI CORNICHE SURFACE

E9W518-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

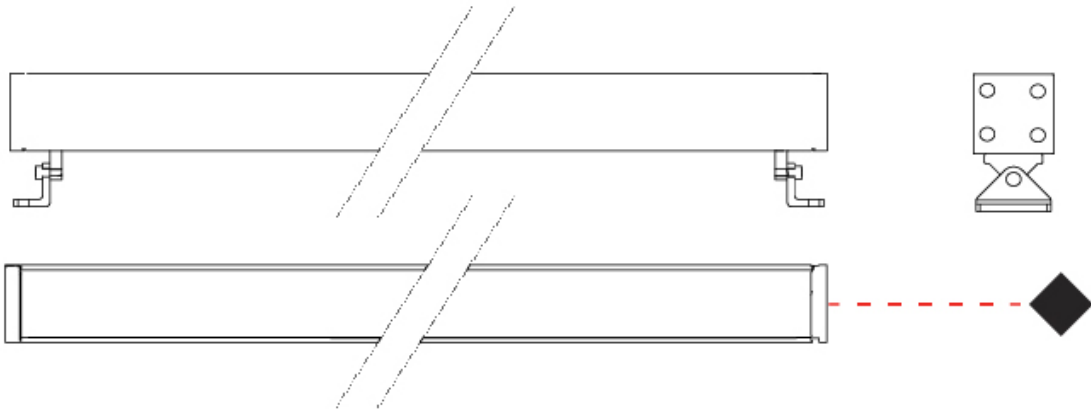

E

MINI CORNICHE SURFACE

E9W536-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wallwash

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 600

Length (in): 23 ⁵/₈

Width (mm): 32

Width (in): 1 ¹/₄

Height (mm): 32

Height (in): 1 ¹/₄

Extension (mm): 55

Extension (in): 2 ³/₁₆

Weight (kg): 1.8

Weight (lbs): 4.0

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 18.5 / 10.5 (Dif.)

Total Output Wattage (W): 18 / 10 (Dif.)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 18

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 1500 / 1560

Nominal Lumen (lm): 2520 / 2610

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B2 U1 G0



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

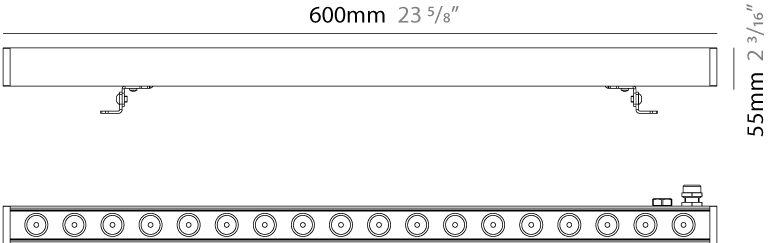

MINI CORNICHE SURFACE

E9W536-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

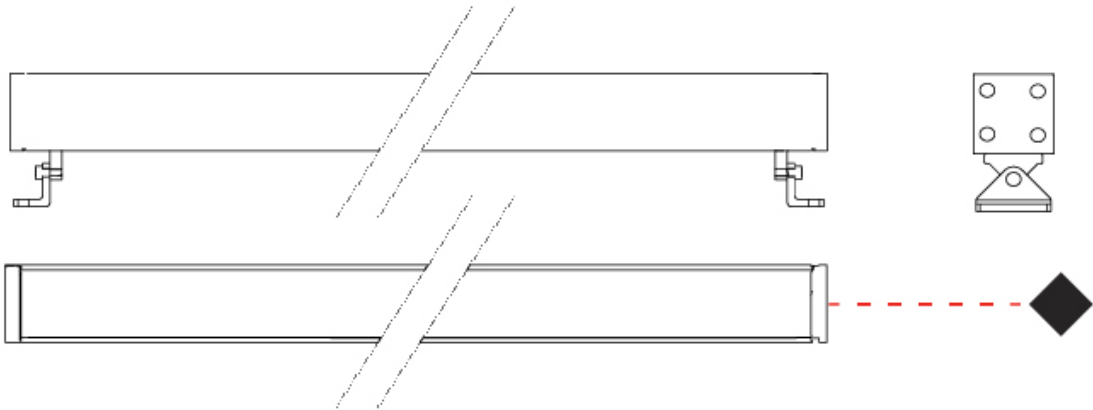

E

MINI CORNICHE SURFACE

E9W536- : E9W536-30K-GRY-40

base number

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche
Partner: Platek
Division: Exterior
Installation: Surface
Product Type: Wallwash
Mounting Location: Wall
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 600
Length (in): 23 5/8
Width (mm): 32
Width (in): 1 1/4
Height (mm): 32
Height (in): 1 1/4
Extension (mm): 55
Extension (in): 2 3/16
Weight (kg): 1.8
Weight (lbs): 4.0
Screws: A4 stainless steel
Diffuser: Clear tempered glass
Gasket: Gore-Tex valve to prevent condensation inside the fitting.
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 18.5 / 10.5 (Dif)
Total Output Wattage (W): 18 / 10 (Dif)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 18
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 1500
Nominal Lumen (lm): 2520
CRI: >80 CRI
Lamp Life (hrs): 60000


OPTICAL

Optic°: 40°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK06
Bug Rating: B2 U1 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE



32mm 1 1/4 "



30mm 1 3/16 "



MINI CORNICHE SURFACE

E9W545-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 1200

Length (in): 47 1/4

Width (mm): 32

Width (in): 1 1/4

Height (mm): 32

Height (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 2.5

Weight (lbs): 5.5

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 40 / 21 (Dif)

Total Output Wattage (W): 36 / 20 (Dif)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 36

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 3000 / 3120

Nominal Lumen (lm): 5040 / 5220

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B3 U1 G1

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

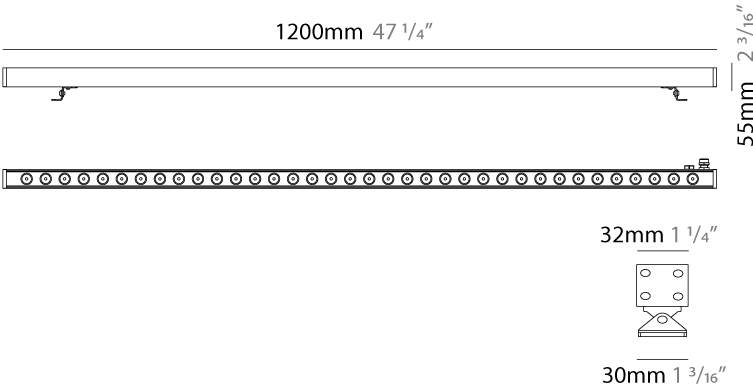

MINI CORNICHE SURFACE

E9W545-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

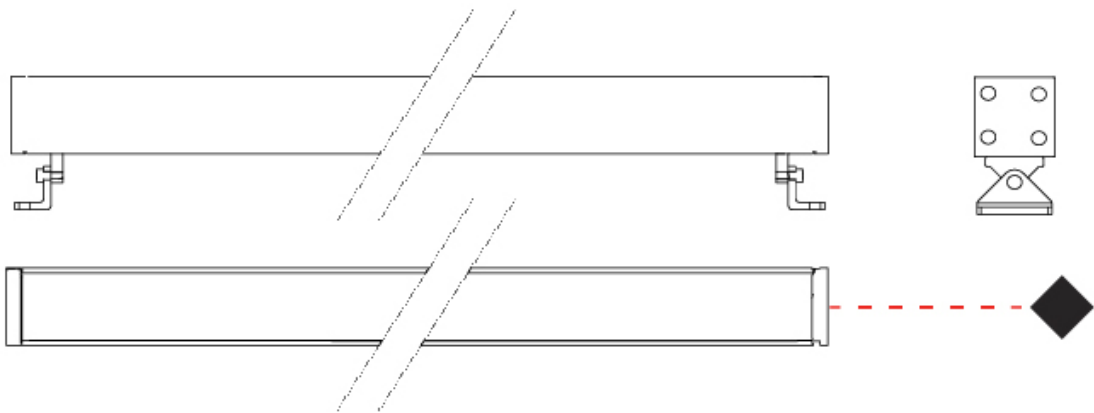

MINI CORNICHE SURFACE

E9W554-

base number

Color

Finish

Lens

Temperature

Options

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 900

Length (in): 35 7/16

Width (mm): 32

Width (in): 1 1/4

Height (mm): 32

Height (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 2.2

Weight (lbs): 4.8

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 29 / 15.5 (Dif.)

Total Output Wattage (W): 27 / 15 (Dif.)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 27

Color Temperature (°K): 3000 / 4000

Max. Delivered Lumen (lm): 2260 / 2350

Nominal Lumen (lm): 3780 / 3915

CRI: >80 CRI

Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B3 U1 G1

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

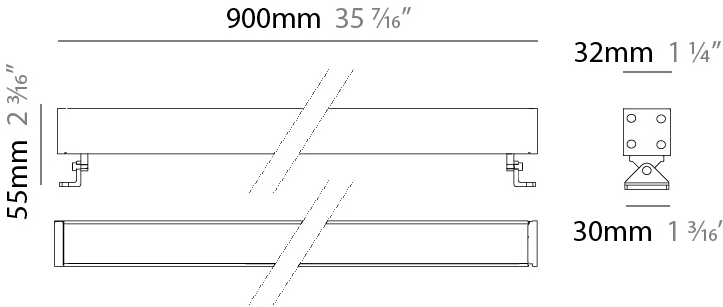

MINI CORNICHE SURFACE

E9W554-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

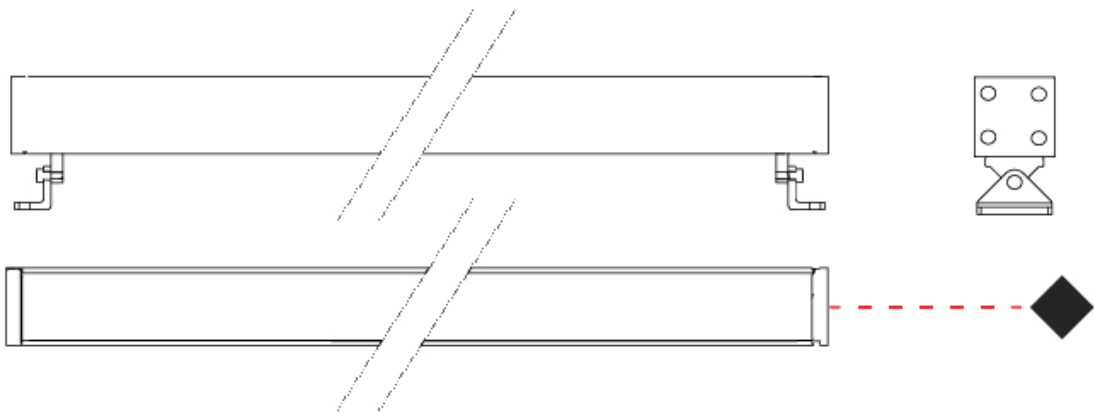

E

MINI CORNICHE SURFACE

E9W554- : E9W554-30K-BRZ-13

base number

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche
Partner: Platek
Division: Exterior
Installation: Surface
Product Type: Wall Grazer
Mounting Location: Wall
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 900
Length (in): 35 7/16
Width (mm): 32
Width (in): 1 1/4
Height (mm): 32
Height (in): 1 1/4
Extension (mm): 55
Extension (in): 2 3/16
Weight (kg): 2.2
Weight (lbs): 4.8
Diffuser: Extra Clear Flat Tempered Glass - 5mm / 3/16" thick
Gasket: Gore-Tex valve to prevent condensation inside the fitting.
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 29 / 15.5 (Dif)
Total Output Wattage (W): 27 / 15 (Dif)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120 / 277Vac
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 27
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 2260
Nominal Lumen (lm): 3780
CRI: >80 CRI
Lamp Life (hrs): 60000


OPTICAL

Optic°: 13

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK06
Bug Rating: B3 U1 G1
Upon Request: Higher Maximum Ambient Temperature

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

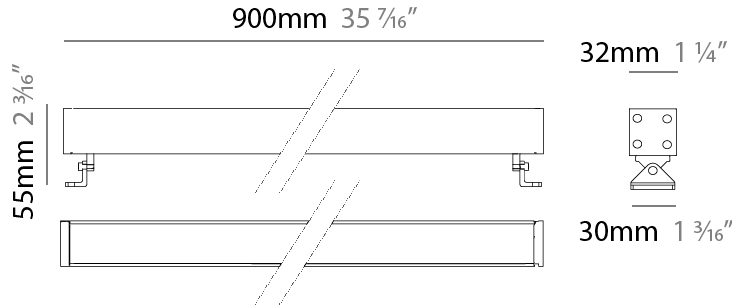

MINI CORNICHE SURFACE

E9W574-

base number Color Finish Lens
Temperature Options Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche
Partner: Platek
Division: Exterior
Installation: Surface
Product Type: Wall Grazer
Mounting Location: Wall
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 100
Length (in): 3 15/16
Width (mm): 32
Width (in): 1 1/4
Height (mm): 32
Height (in): 1 1/4
Extension (mm): 55
Extension (in): 2 3/16
Weight (kg): 1.2
Weight (lbs): 2.6
Screws: A4 stainless steel
Diffuser: Clear tempered glass
Gasket: Gore-Tex valve to prevent condensation inside the fitting.
Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ
Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 3.5 / 1.5 (Dif)
Total Output Wattage (W): 3 / 1 (Dif)
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24
Upon Request: (Not included - see components [IP65 or higher enclosure to be supplied by others]) 0-10Vdc dimming / Phase dimming / Non-dimming 120/277Vac

LED

Number of LEDs: 3
Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 250 / 260
Nominal Lumen (lm): 420 / 435
CRI: >80 CRI
Lamp Life (hrs): 60000

OPTICAL

Optic°: 13 / 26 / 40 / DIF / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP65
IK Rating: IK06
Bug Rating: B1 U1 G0
Upon Request: Higher Maximum Ambient Temperature


PROJECT _____

TYPE _____

SPECIFIER _____

QUANTITY _____


DATE _____

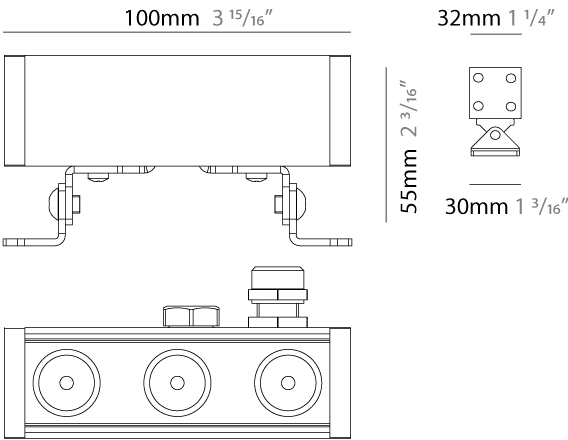

MINI CORNICHE SURFACE

E9W574-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

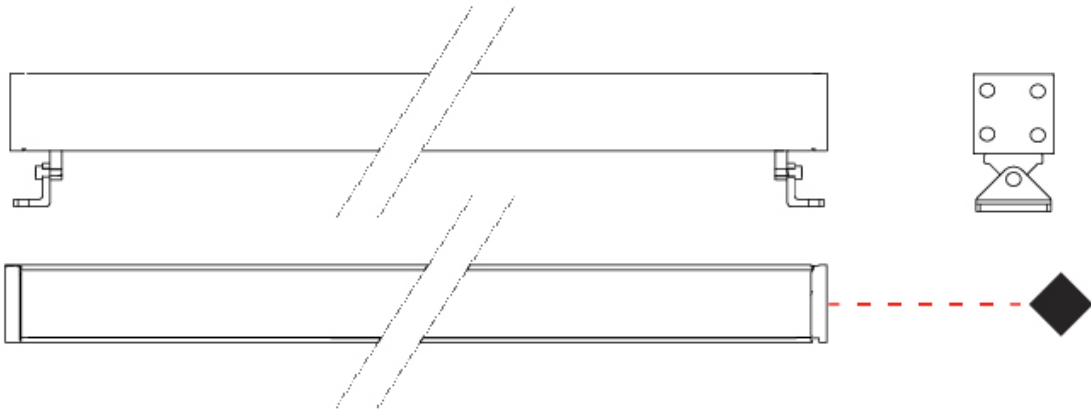

MINI CORNICHE SURFACE

E9W591-

-

base number

Finish
Options

Lens
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 100

Length (in): 3 15/16

Width (mm): 32

Width (in): 1 1/4

Height (mm): 32

Height (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 1.2

Weight (lbs): 2.6

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 6

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 4

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

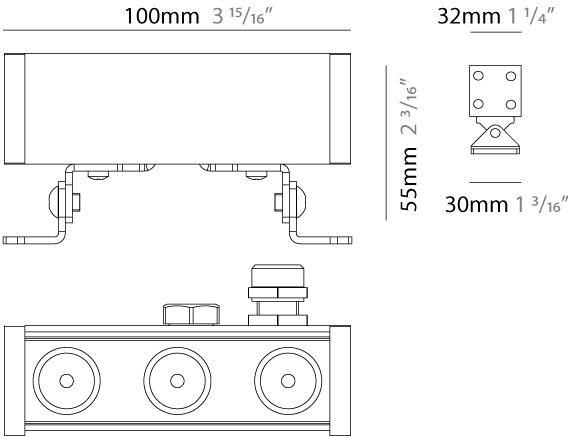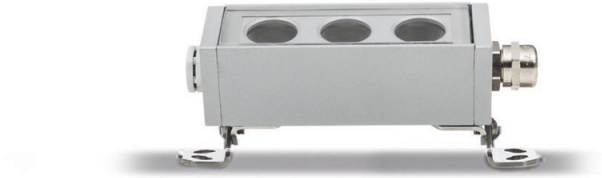

MINI CORNICHE SURFACE

E9W591-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

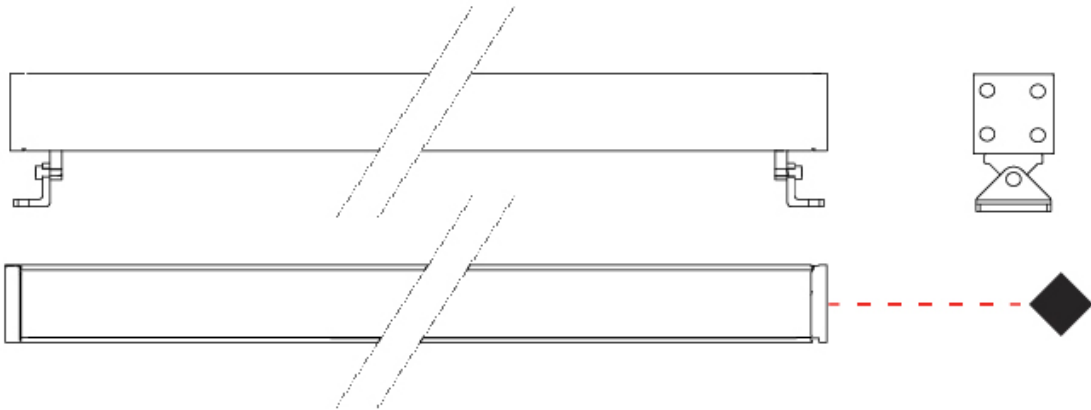

E

MINI CORNICHE SURFACE

E9W592-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 300

Length (in): 11 13/16

Width (mm): 32

Width (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 1.2

Weight (lbs): 2.6

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 11.5

Dimming: Bluetooth technology or DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 8

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

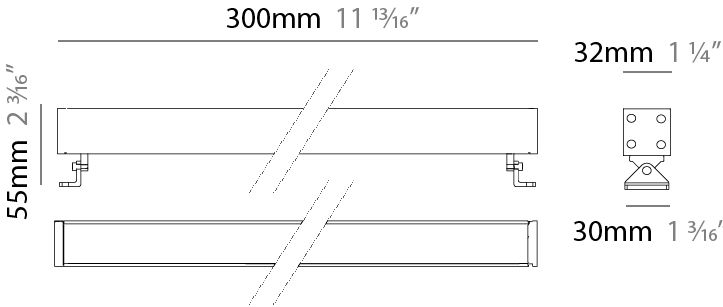

MINI CORNICHE SURFACE

E9W592-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

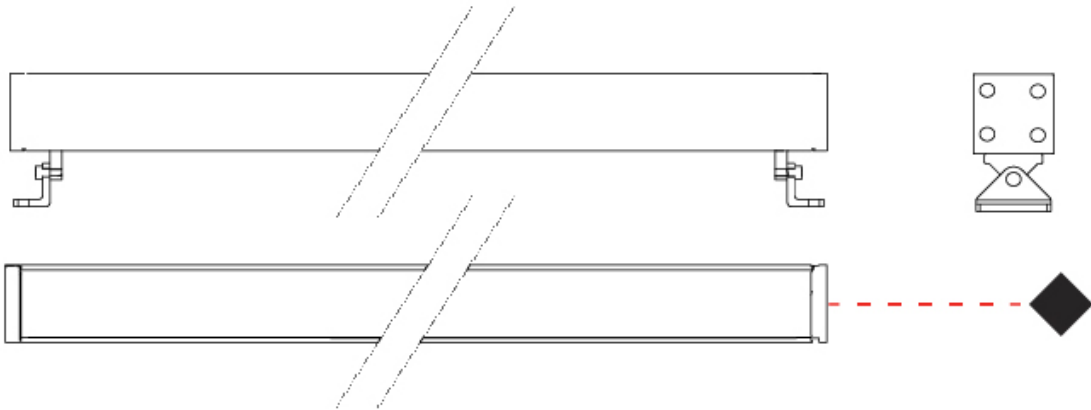

E

MINI CORNICHE SURFACE

E9W593-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 600

Length (in): 23 5⁄8

Width (mm): 32

Width (in): 1 1⁄4

Height (mm): 32

Height (in): 1 1⁄4

Extension (mm): 55

Extension (in): 2 3⁄16

Weight (kg): 1.8

Weight (lbs): 4.0

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 23

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 16

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

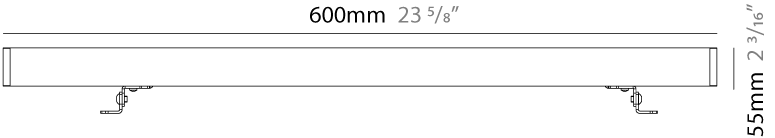

32mm 1 1⁄4 "




30mm 1 3⁄16 "



MINI CORNICHE SURFACE

E9W593-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

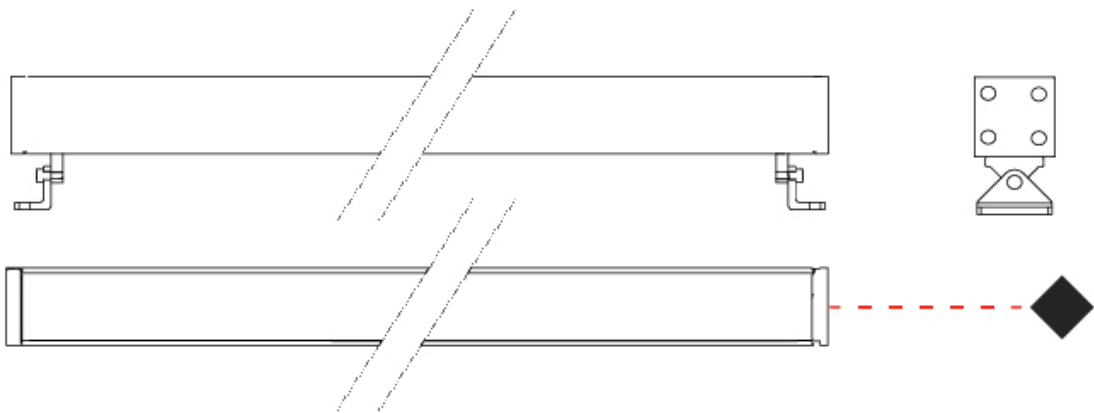

E

MINI CORNICHE SURFACE

E9W612-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 900

Length (in): 35 7⁄16

Width (mm): 32

Width (in): 1 1⁄4

Height (mm): 32

Height (in): 1 1⁄4

Extension (mm): 55

Extension (in): 2 3⁄16

Weight (kg): 2.2

Weight (lbs): 4.8

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 49

Total Output Wattage (W): 35

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 24

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK06

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

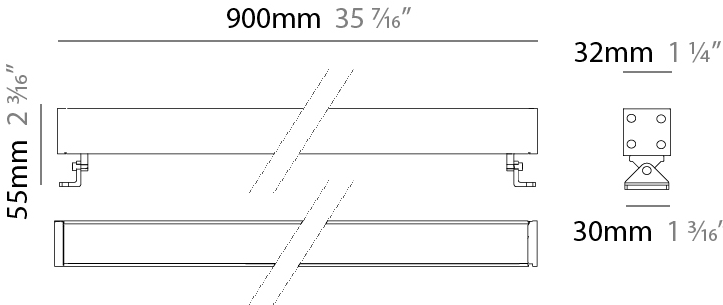

MINI CORNICHE SURFACE

E9W612-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

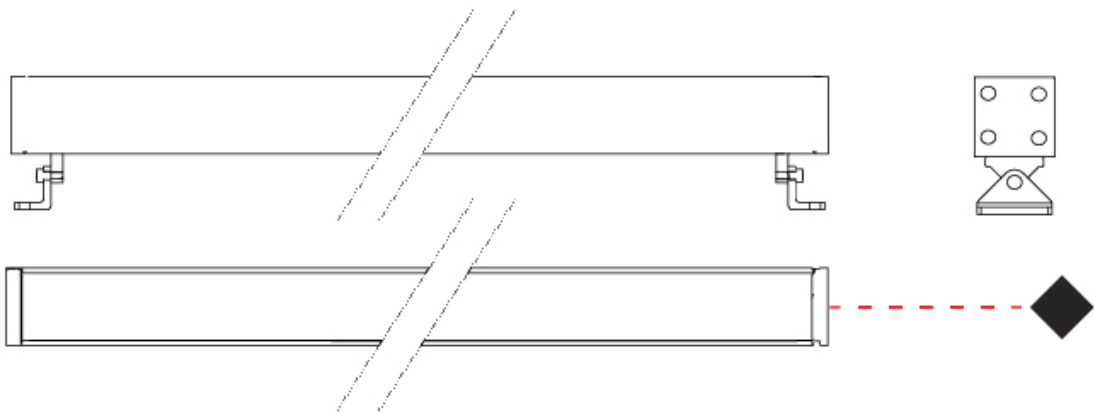

MINI CORNICHE SURFACE

E9W613-

-

base number

Finish Options

Lens Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Mini Corniche

Partner: Platek

Division: Exterior

Installation: Surface

Product Type: Wall Grazer

Mounting Location: Wall

Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle

Length (mm): 1200

Length (in): 47 1/4

Width (mm): 32

Width (in): 1 1/4

Height (mm): 32

Height (in): 1 1/4

Extension (mm): 55

Extension (in): 2 3/16

Weight (kg): 2.5

Weight (lbs): 5.5

Screws: A4 stainless steel

Diffuser: Clear tempered glass

Gasket: Gore-Tex valve to prevent condensation inside the fitting.

Fixture Finish: BLK / WHI / GRY / COR / ANT / BRZ

Fixture Material: Extruded Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 46

Dimming: Bluetooth technology or DMX

Control Gear: DMX

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 32

Color Temperature (°K): RGBW

CRI: >80 CRI

Lamp Life (hrs): 60000

Special LEDs offerings: RGBW

OPTICAL

Optic°: 26 / 40 / ELL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP65

IK Rating: IK07

Bug Rating: B1 U0 G0

Upon Request: Higher Maximum Ambient Temperature


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

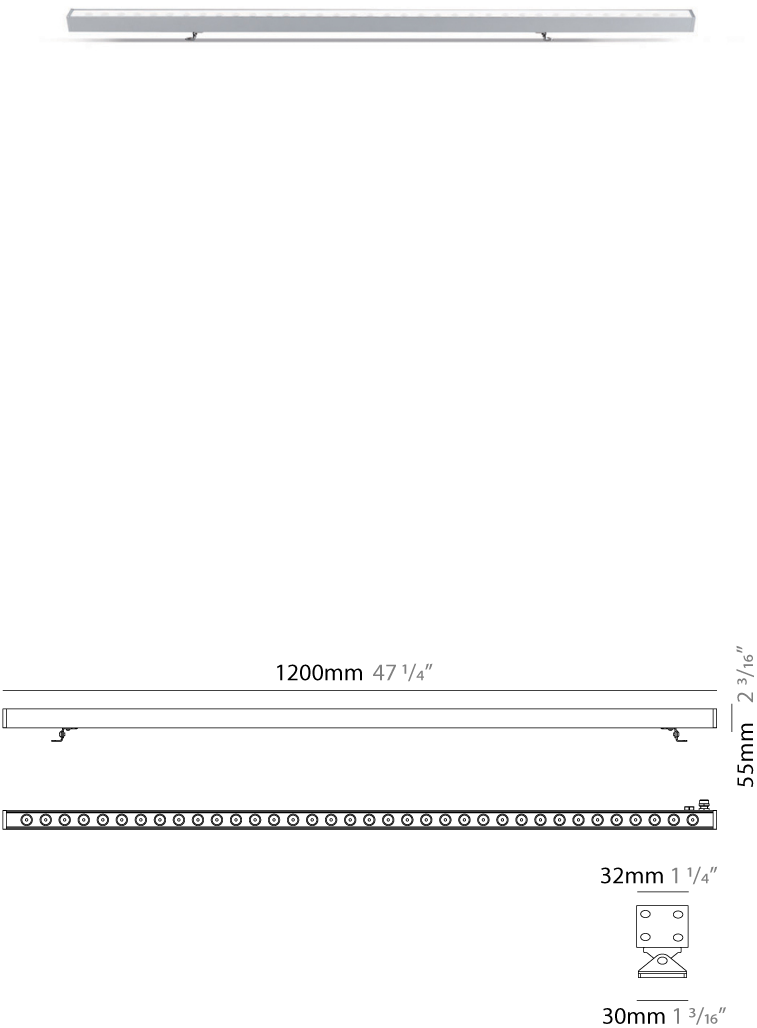

MINI CORNICHE SURFACE

E9W613-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

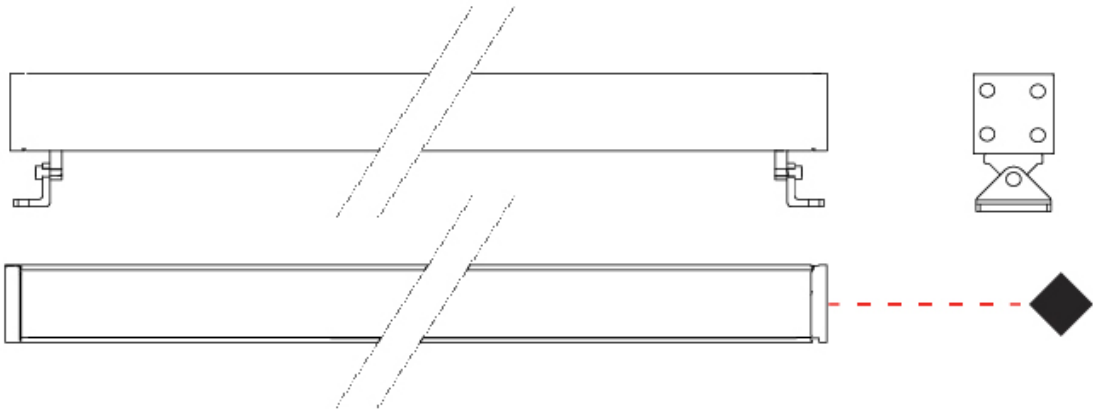


E


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish


Black - BLK



White - WHI



Grey - GRY



Corten - COR



Anthracite - ANT



Bronze - BRZ



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)