

NONAME SUSPENSION

D41096-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3⁄4

Width (mm): 300

Width (in): 11 13⁄16

Height (mm): 30

Height (in): 1 3⁄16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7⁄16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

Cable Details: 1500mm / 59 1⁄16"

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

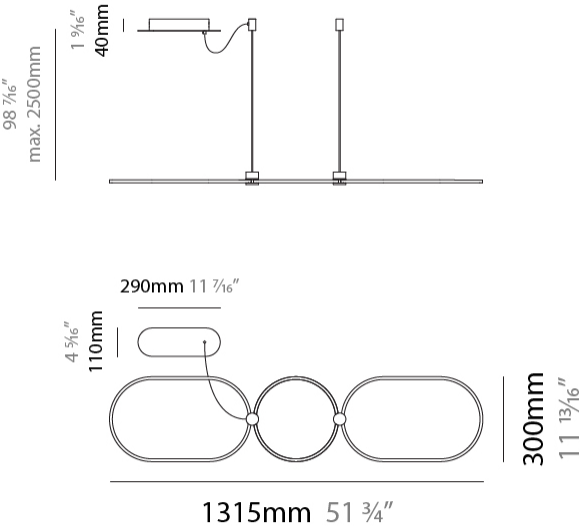

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

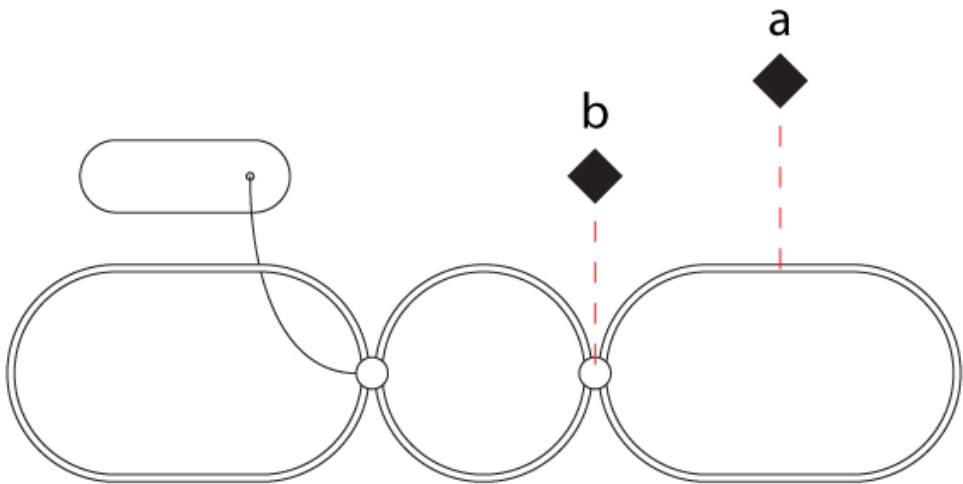

NONAME SUSPENSION

D41097-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3/4

Width (mm): 300

Width (in): 11 13/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

Cable Details: 1500mm / 59 1/16"

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

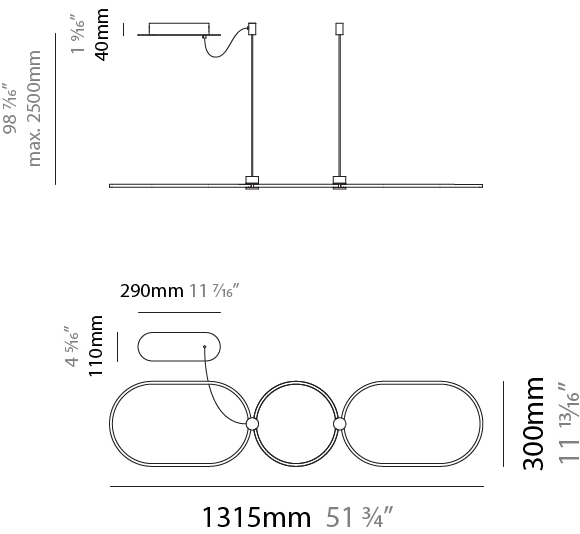

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

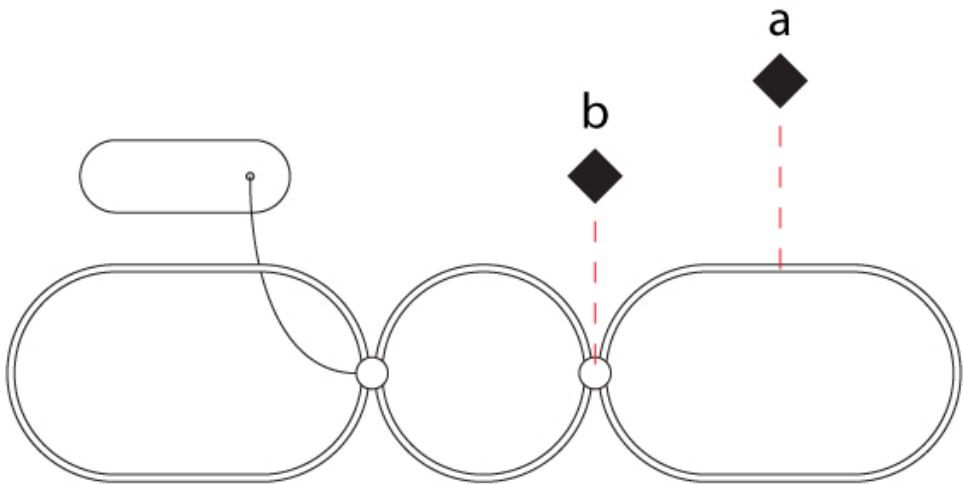

NONAME SUSPENSION

D41098-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3/4

Width (mm): 300

Width (in): 11 13/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

Cable Details: 1500mm / 59 1/16"

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

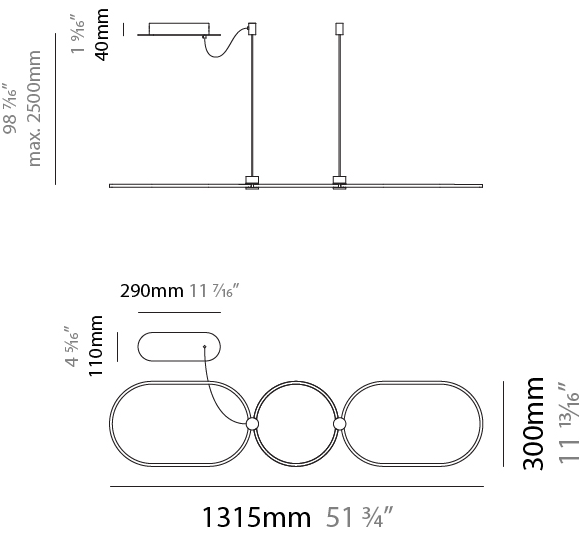

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

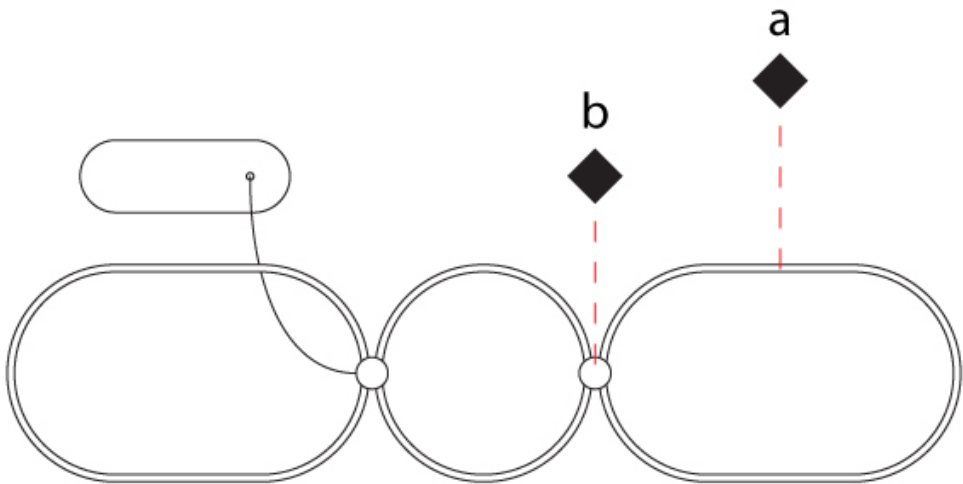

NONAME SUSPENSION

D41099-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 305

Width (in): 12

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

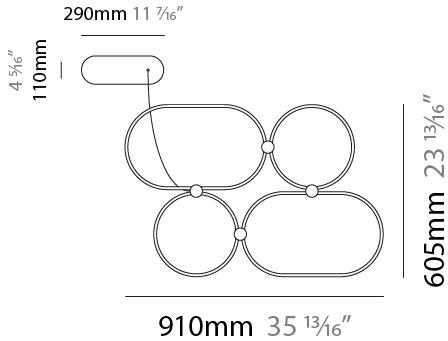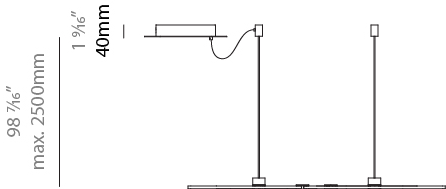

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

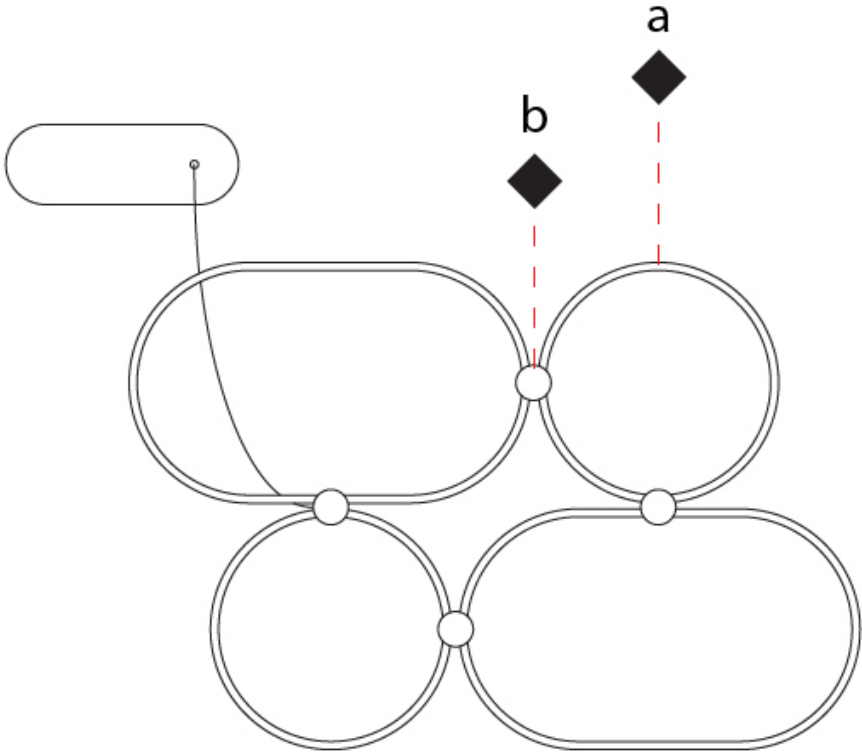

NONAME SUSPENSION

D41100-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 305

Width (in): 12

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER


QUANTITY

DATE

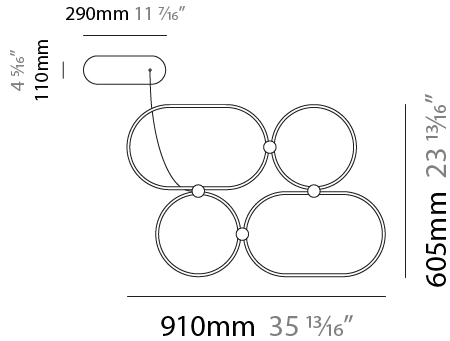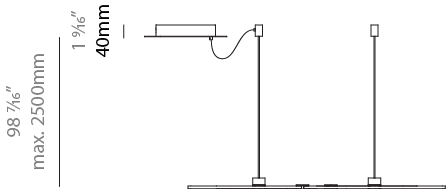

D41100-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

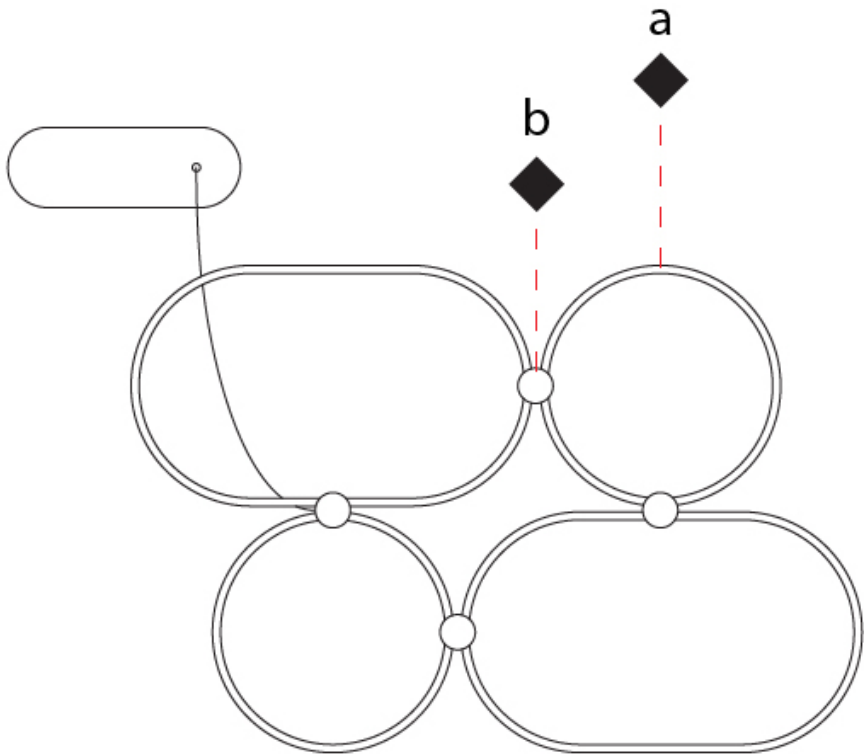

NONAME SUSPENSION

D41101-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 305

Width (in): 12

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

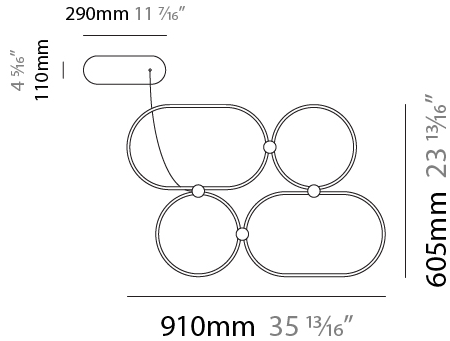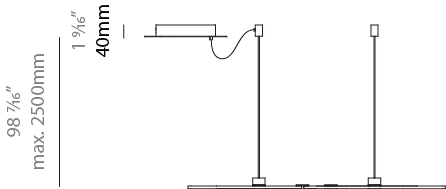

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

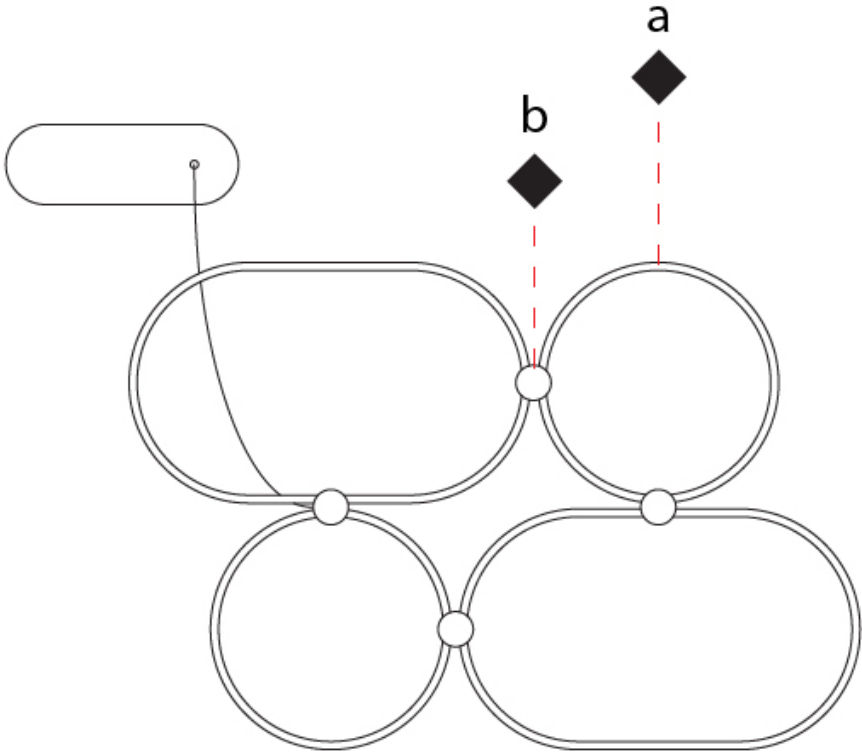

NONAME SUSPENSION

D41102-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3/4

Width (mm): 920

Width (in): 36 1/4

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

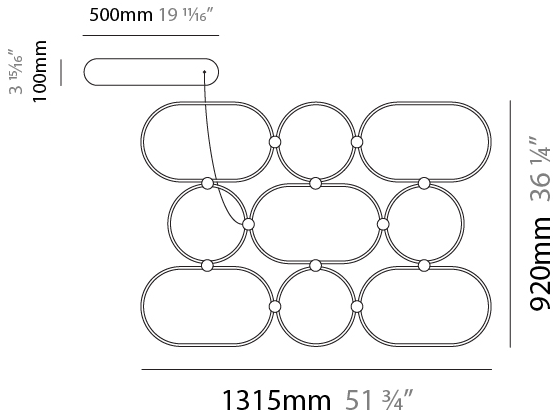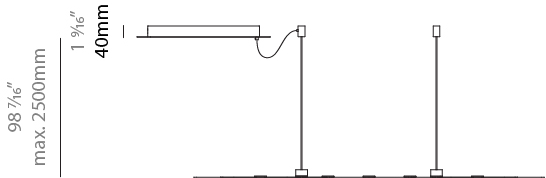

D41102-

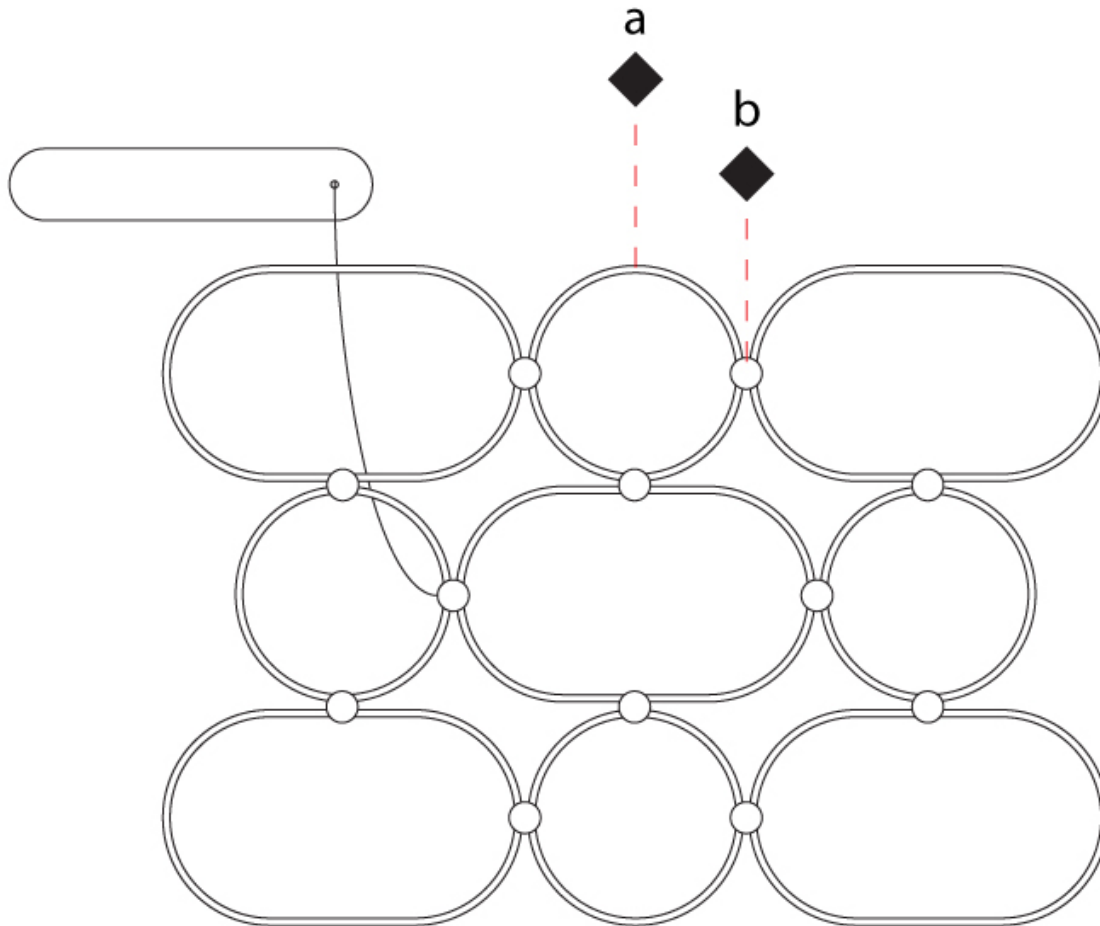

D

NONAME SUSPENSION

D41103-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3/4

Width (mm): 920

Width (in): 36 1/4

Height (mm): 30

Height (in): 1 3/16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

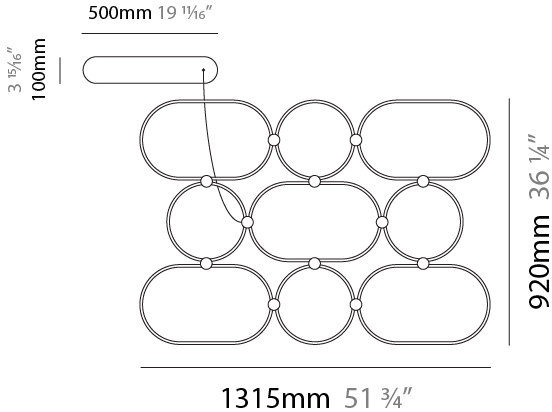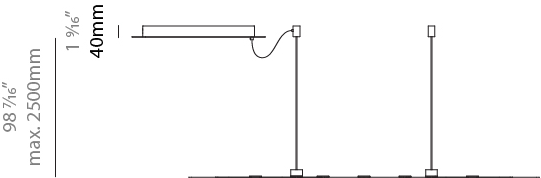

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

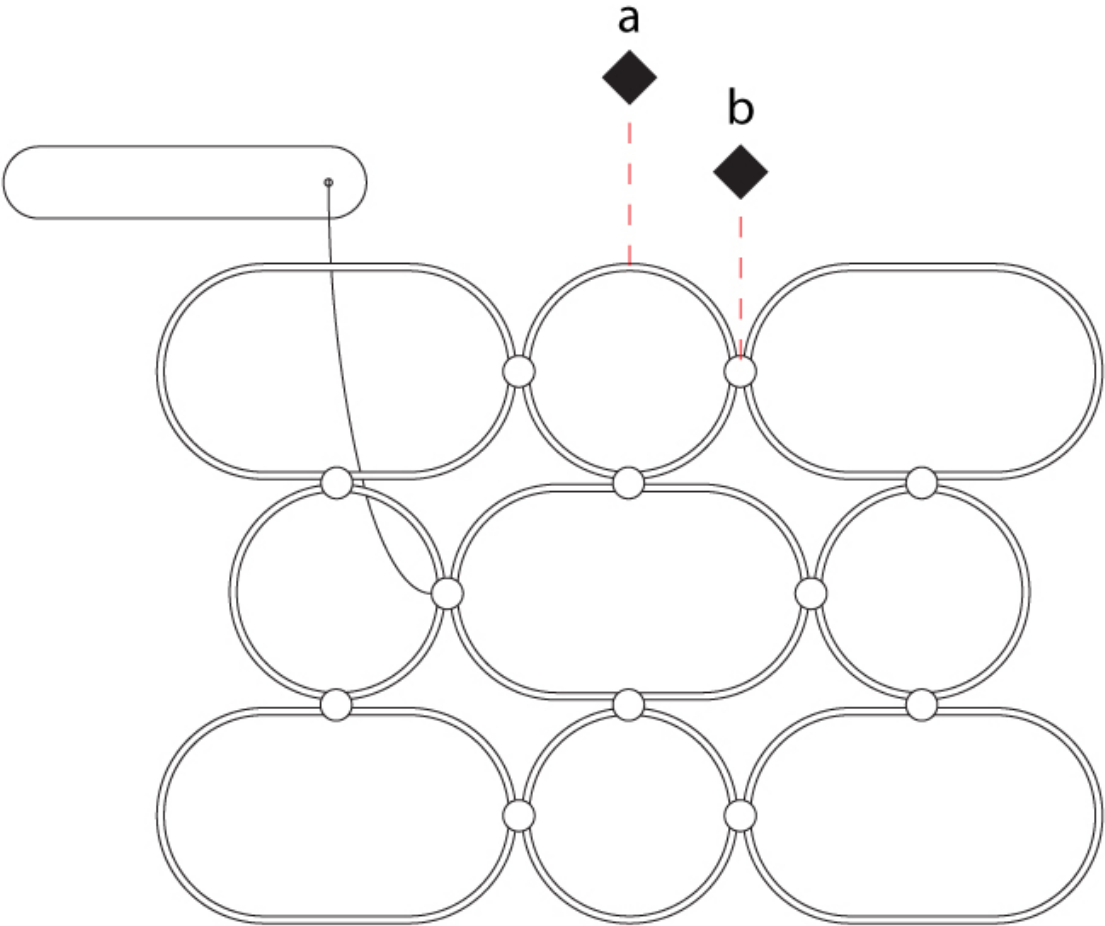

NONAME SUSPENSION

D41104-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3⁄4

Width (mm): 920

Width (in): 36 1⁄4

Height (mm): 30

Height (in): 1 3⁄16

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7⁄16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

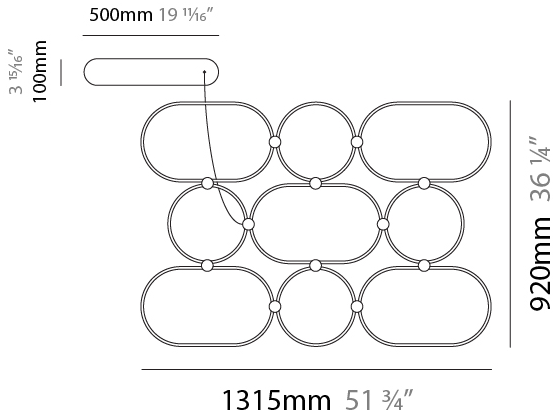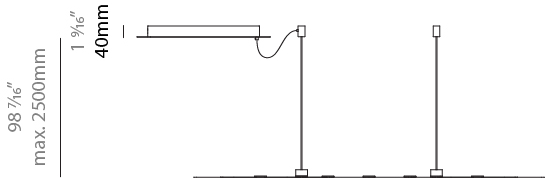

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

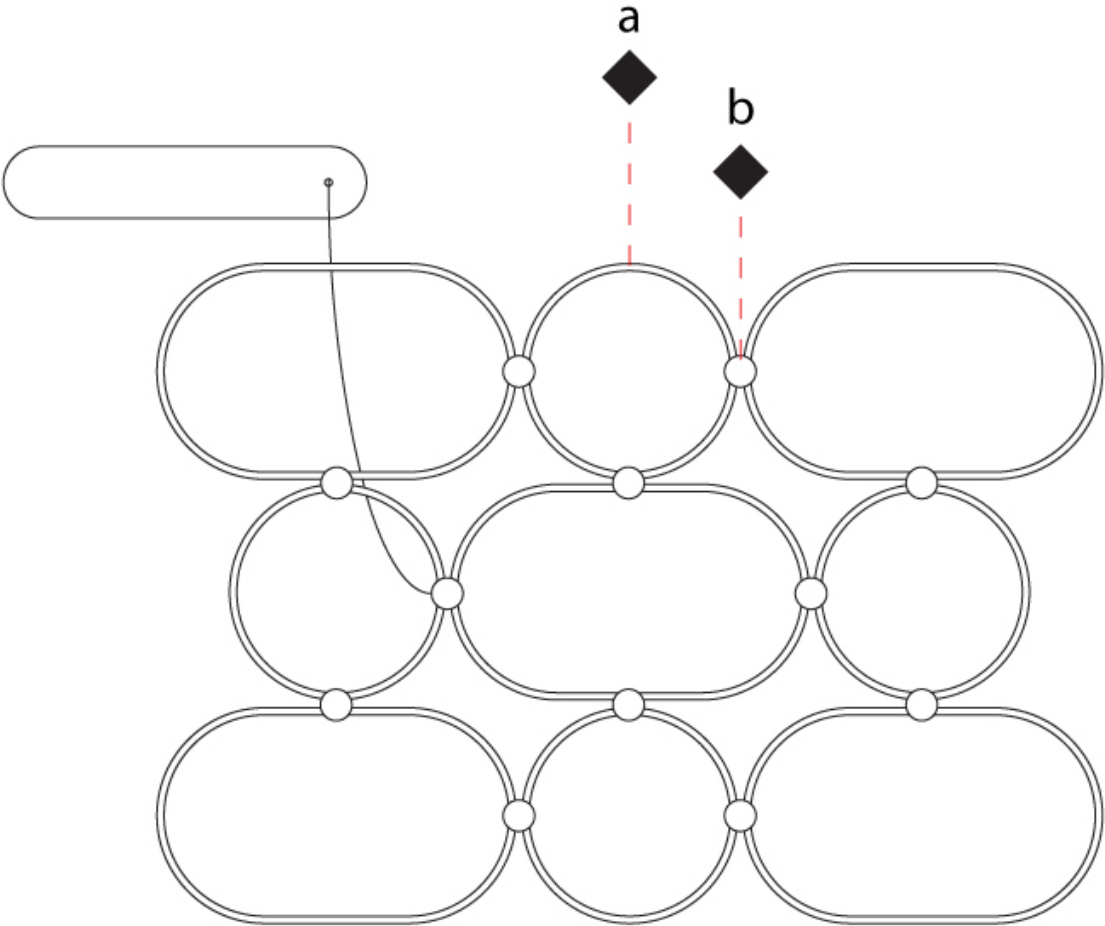

D

NONAME SURFACE

D42093-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3⁄4

Width (mm): 300

Width (in): 11 13⁄16

Height (mm): 30

Height (in): 1 3⁄16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5800

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

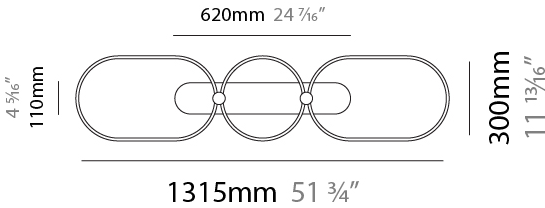

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

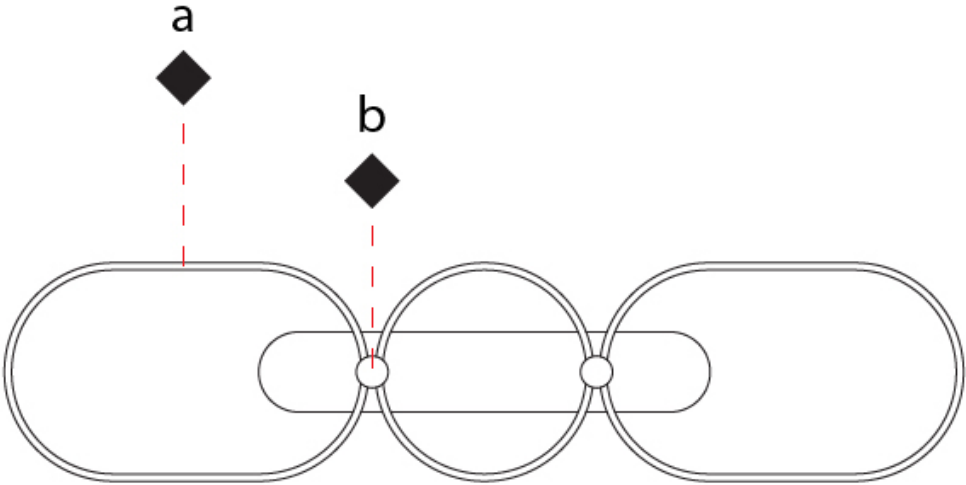

NONAME SURFACE

D42094-

base number	LED Dimming	Color Temperature	Finish Options
-------------	----------------	----------------------	-------------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 605

Width (in): 23 13/16

Height (mm): 30

Height (in): 1 3/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

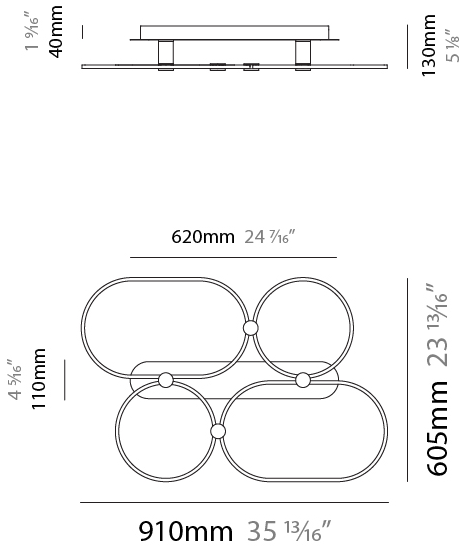

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

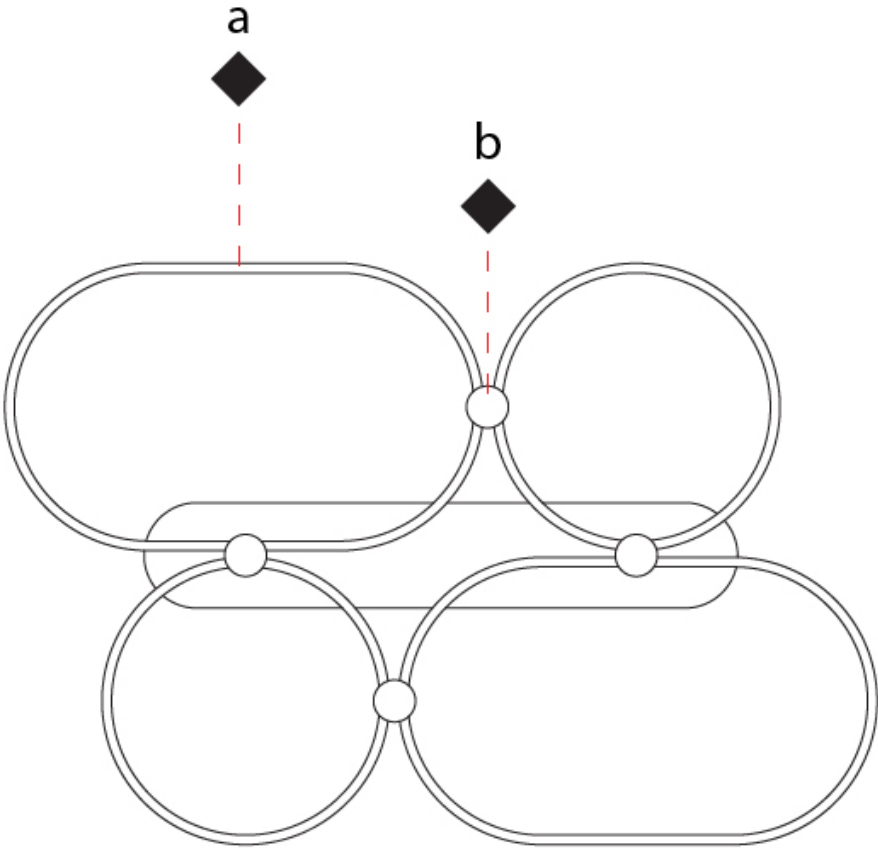

NONAME SURFACE

D42095-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3/4

Width (mm): 920

Width (in): 36 1/4

Height (mm): 30

Height (in): 1 3/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

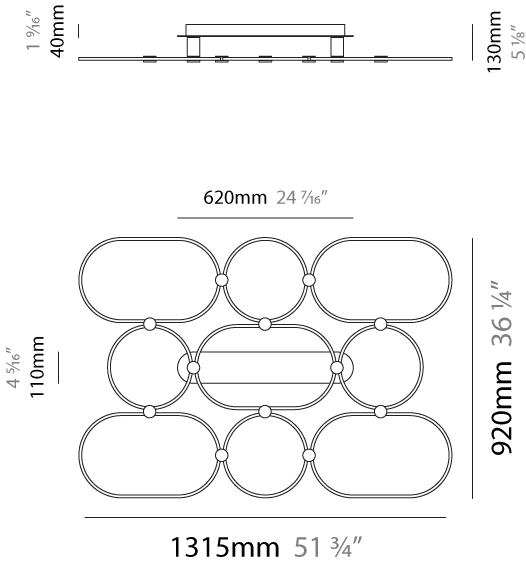

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

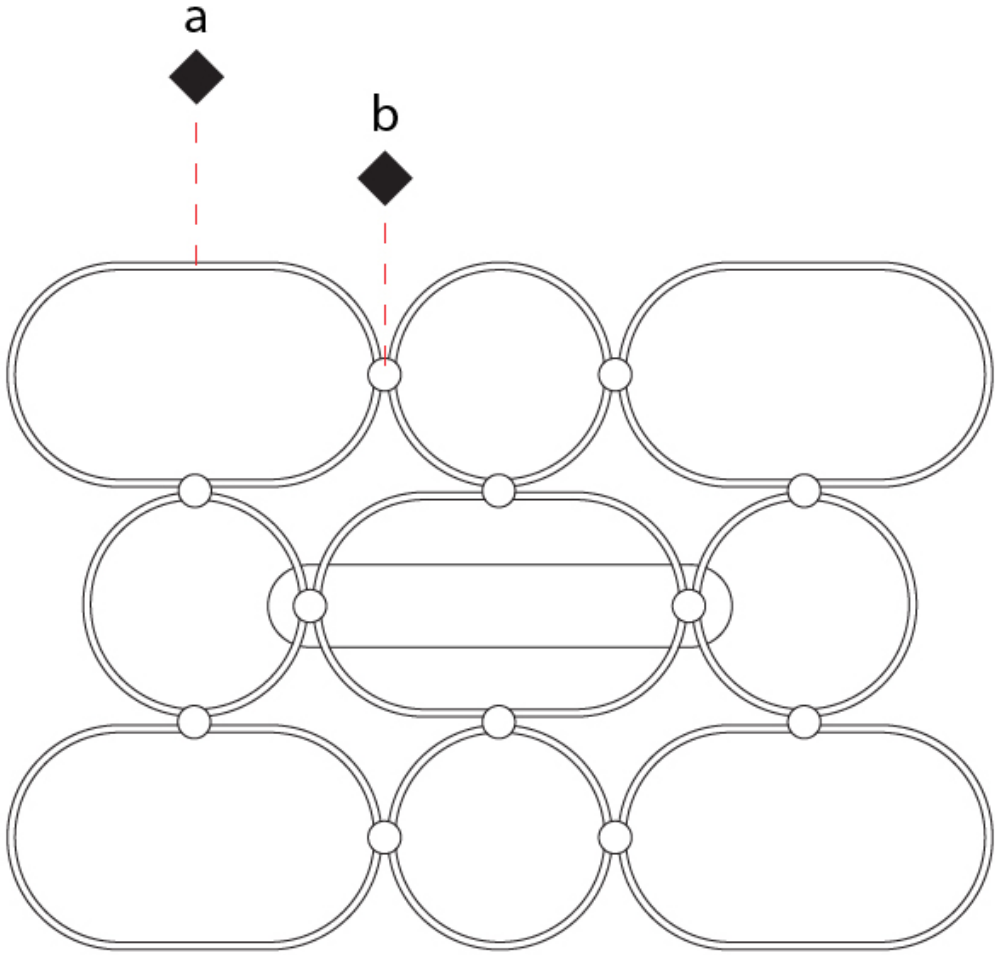

NONAME SURFACE

D42096-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3⁄4

Width (mm): 300

Width (in): 11 13⁄16

Height (mm): 30

Height (in): 1 3⁄16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5800

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

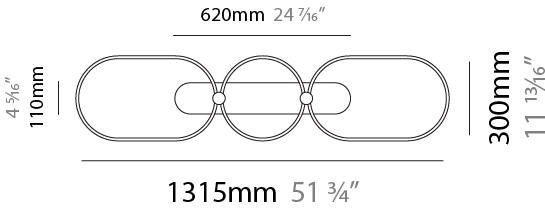

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

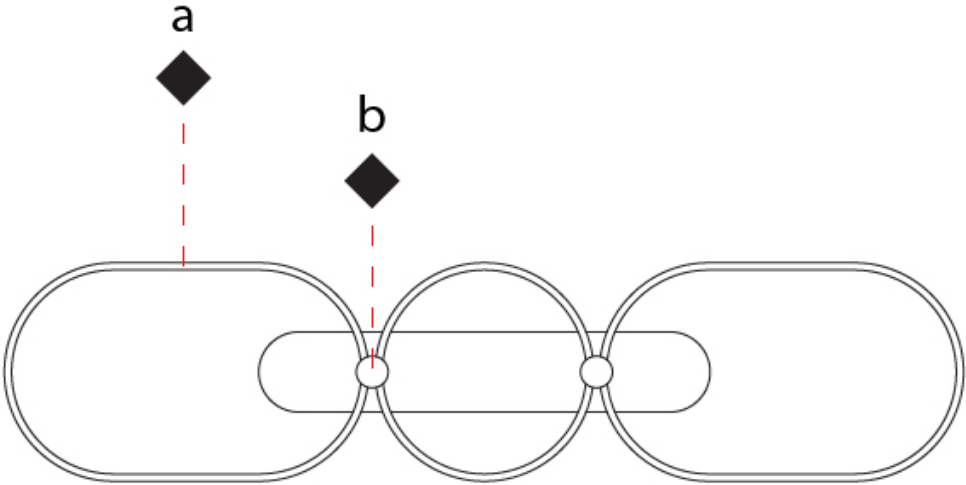

NONAME SURFACE

D42097-

base number

LED
Dimming

Color
Temperature

Finish
Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 605

Width (in): 23 13/16

Height (mm): 30

Height (in): 1 3/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

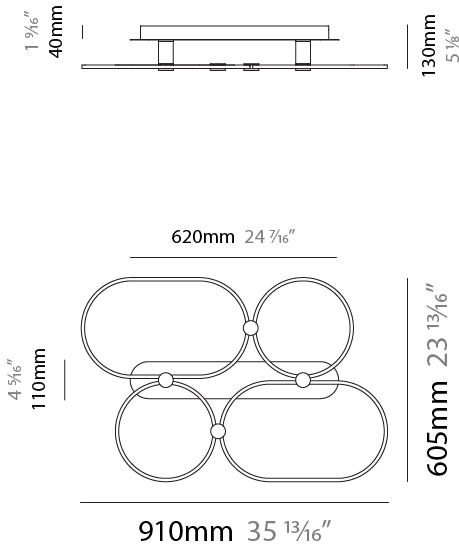

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

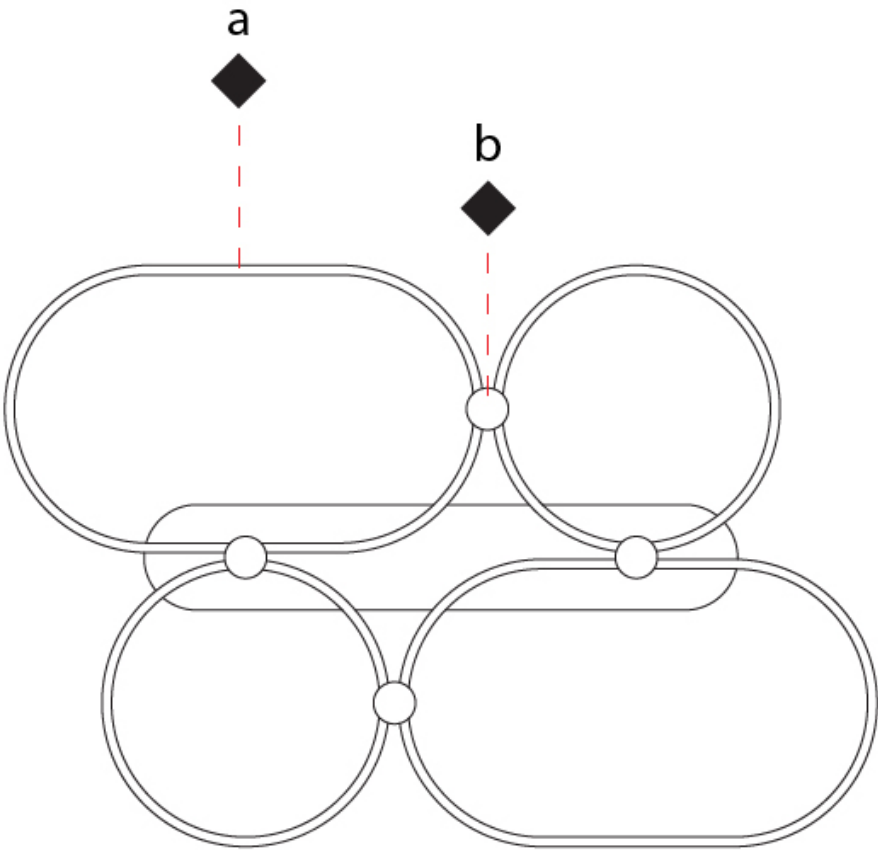

NONAME SURFACE

D42097- : D42097-DV-30K-BLK

base number	LED Dimming	Color Temperature	Finish Options
-------------	----------------	----------------------	-------------------

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 910

Length (in): 35 13/16

Width (mm): 605

Width (in): 23 13/16

Height (mm): 30

Height (in): 1 3/16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 7050 / 7270

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

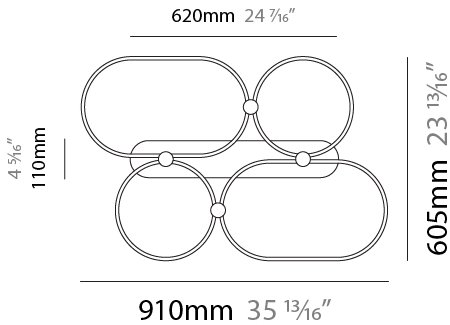

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

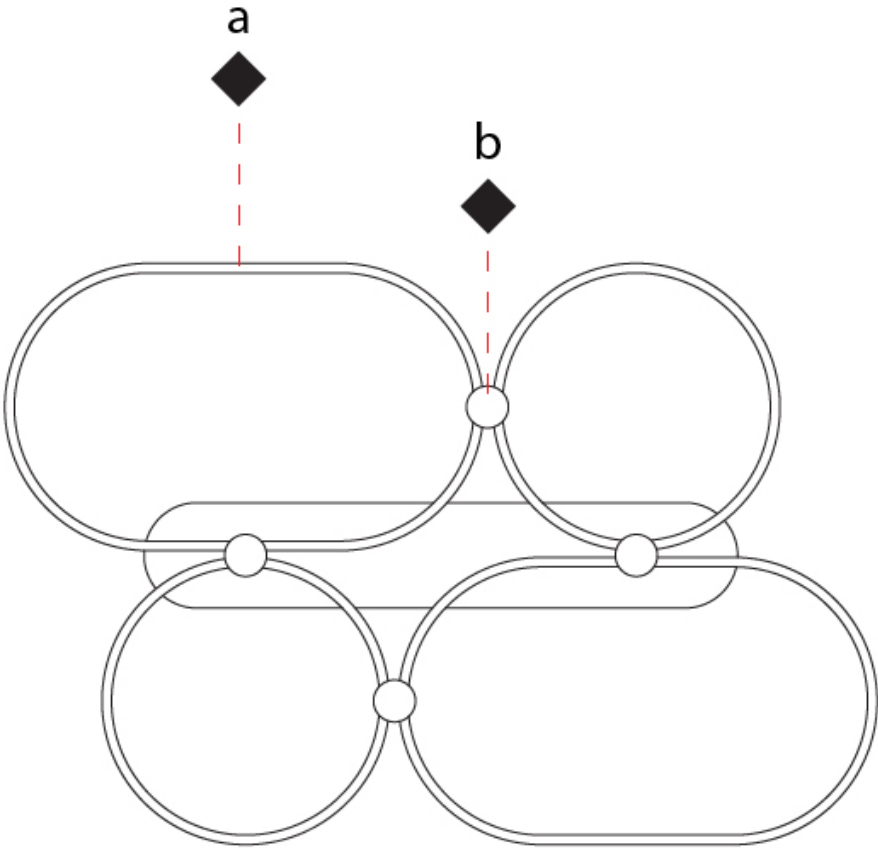

NONAME SURFACE

D42098-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 1315

Length (in): 51 3⁄4

Width (mm): 920

Width (in): 36 1⁄4

Height (mm): 30

Height (in): 1 3⁄16

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

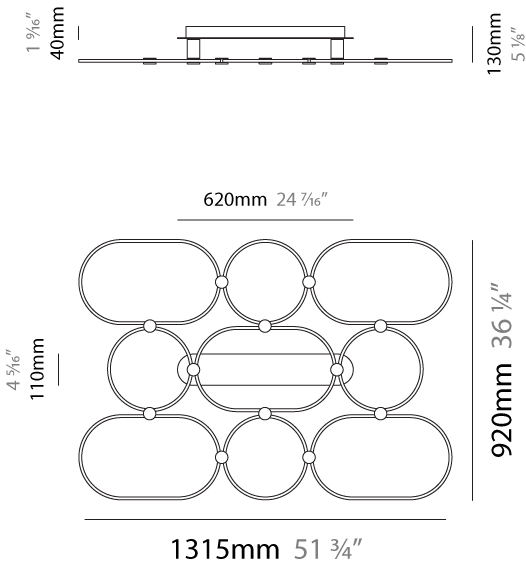

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

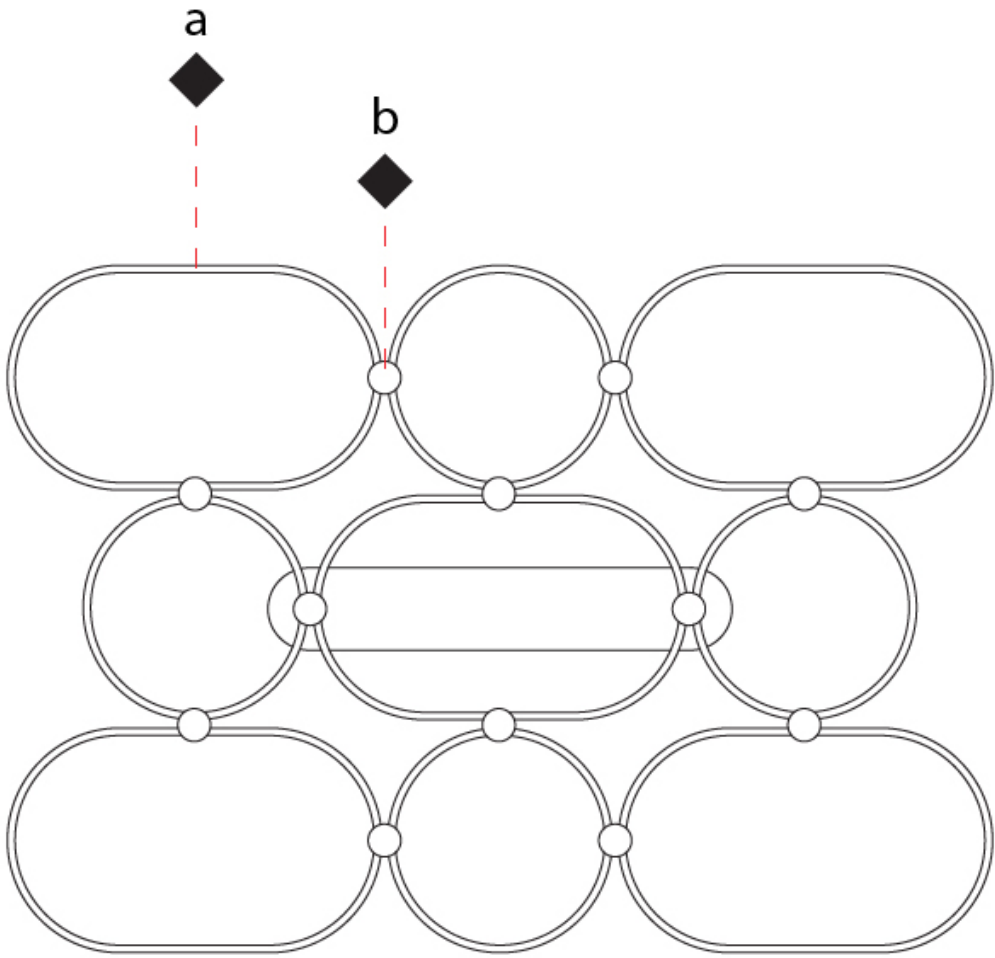

NONAME SURFACE

D43086-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 540

Depth (mm): 130

Height (in): 21 1/4

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 2140 / 2200

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

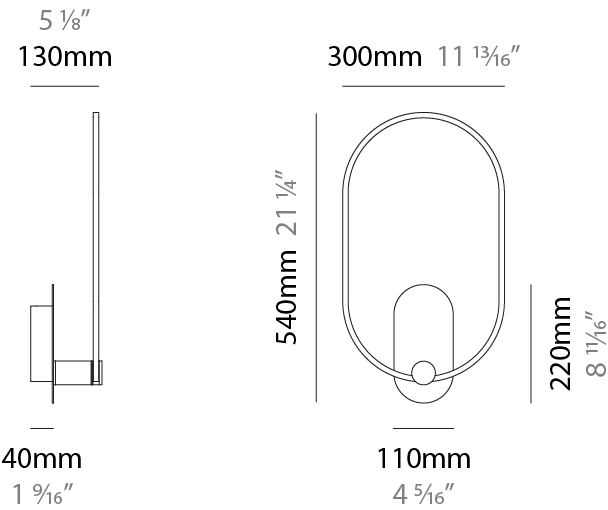

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

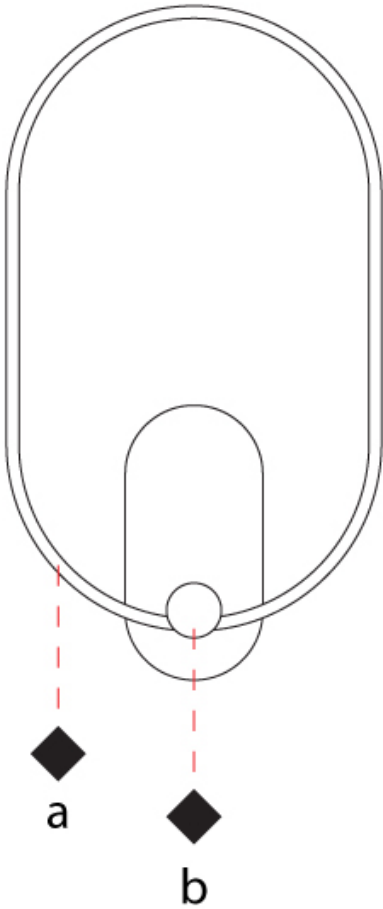

NONAME SURFACE

D43087-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 810

Depth (mm): 130

Height (in): 31 7/8

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 26

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 3620 / 3730

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

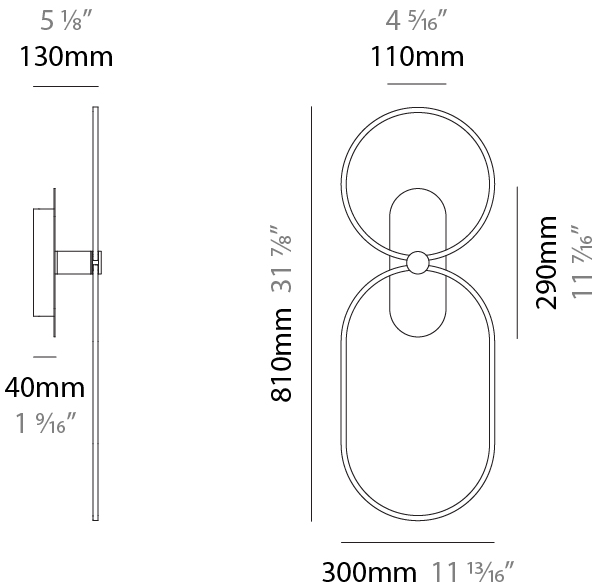

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

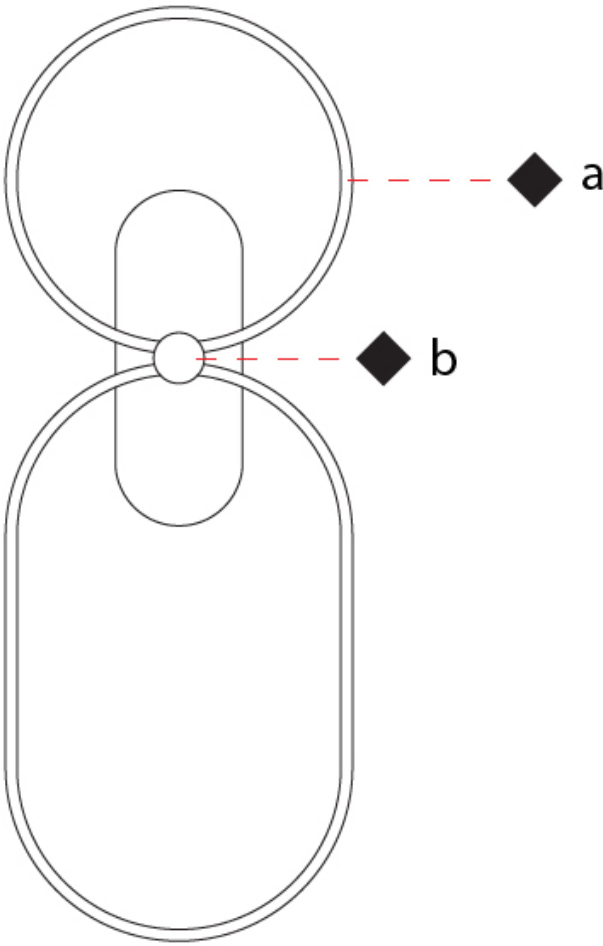

NONAME SURFACE

D43088-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 1315

Depth (mm): 130

Height (in): 51 3/4

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

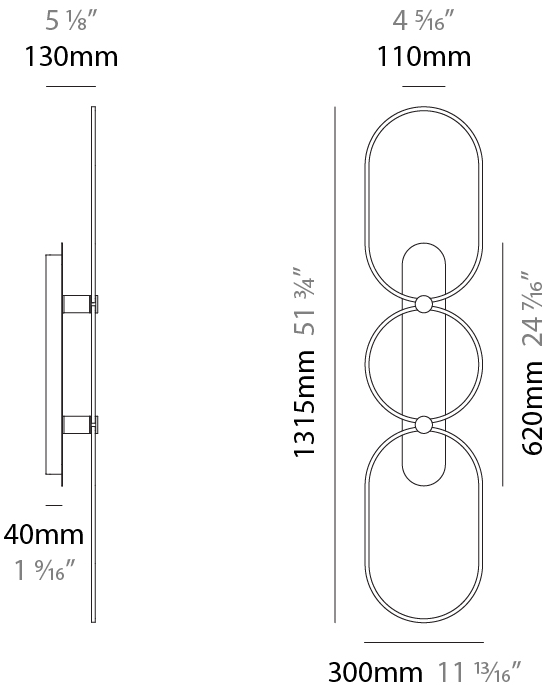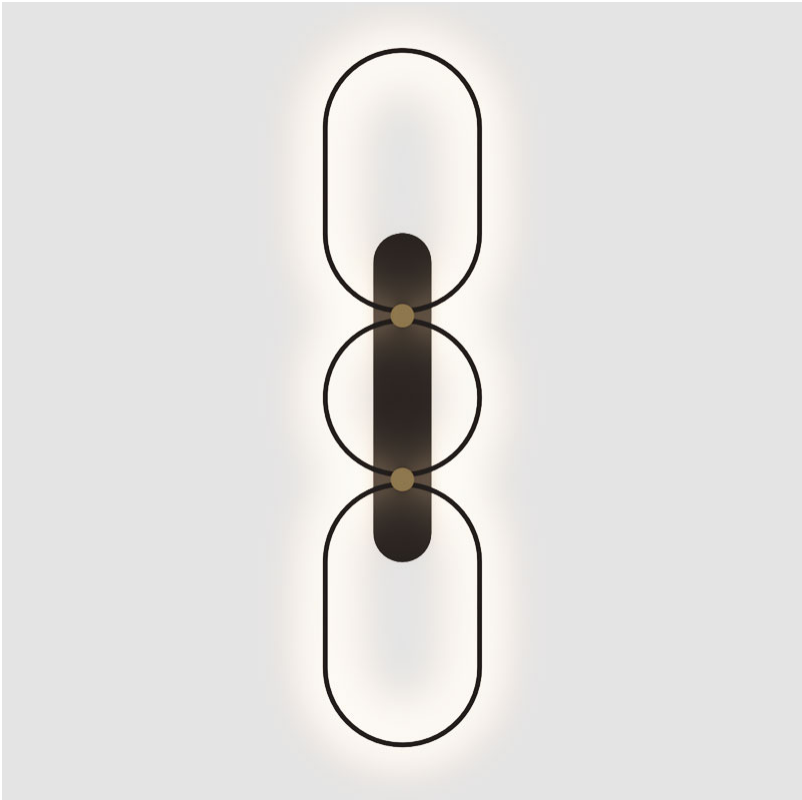

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

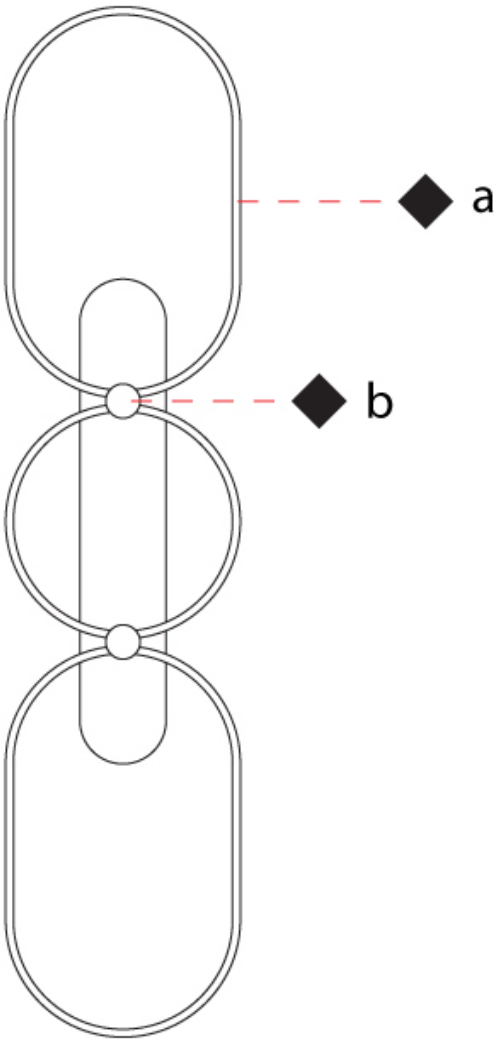

NONAME SURFACE

D43089-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 605

Length (in): 23 13/16

Height (mm): 910

Depth (mm): 130

Height (in): 35 13/16

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

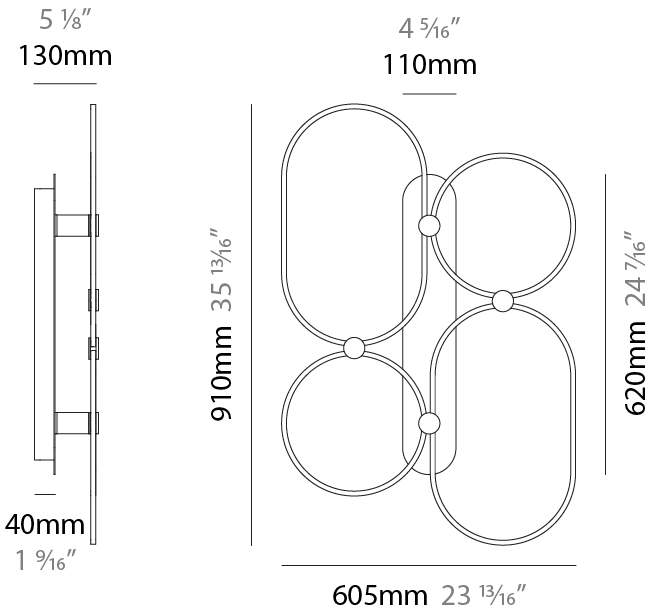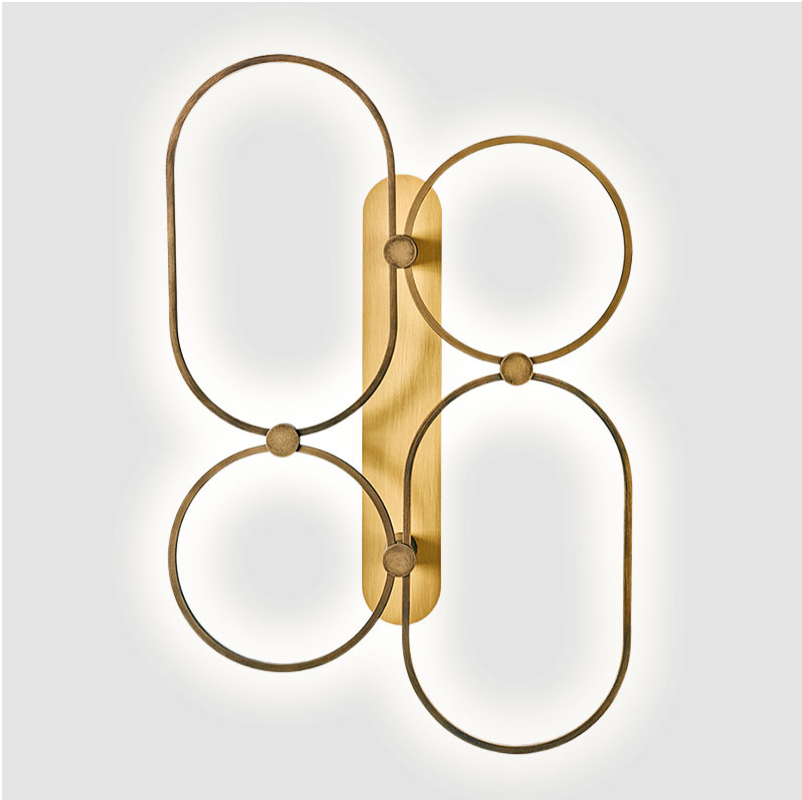

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

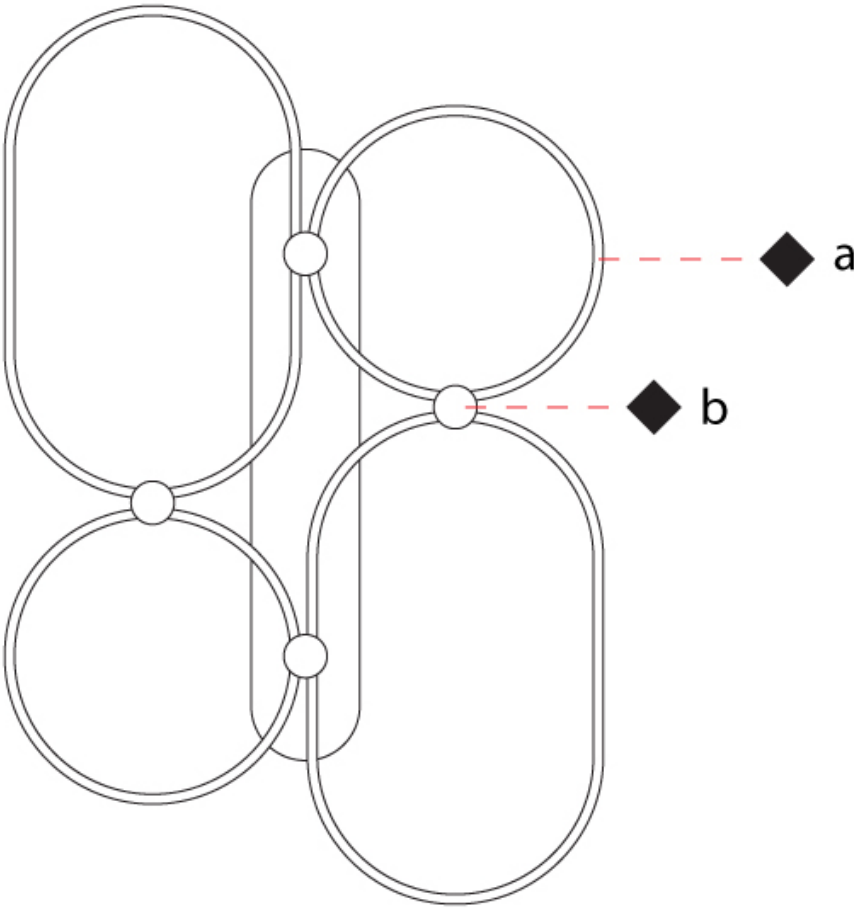

NONAME SURFACE

D43090-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName
 Partner: Icone
 Division: Design
 Installation: Surface
 Product Type: Wall Surface
 Mounting Location: Wall
 Light Distribution: Indirect

PHYSICAL

Shape: Abstract
 Length (mm): 920
 Length (in): 36 ¹/₄
 Height (mm): 1315
 Depth (mm): 130
 Height (in): 51 ³/₄
 Depth (in): 5 ¹/₈
[Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS](#)
 Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
 Input Wattage (W): 116
[Dimming: Phase Dimming / 0-10V Dimming](#)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 24

LED

[Color Temperature \(°K\): 2700 / 3000](#)
 Max. Delivered Lumen (lm): 15900 / 16500
 CRI: >80 CRI
 Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

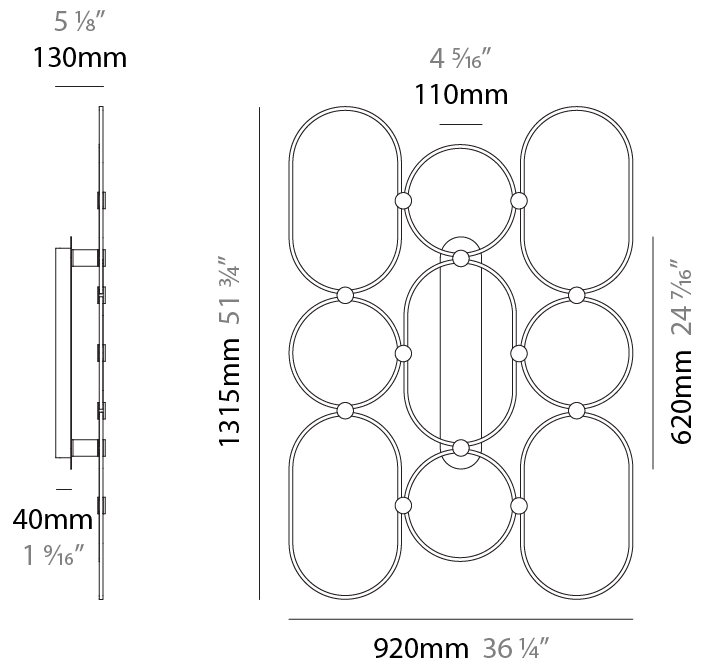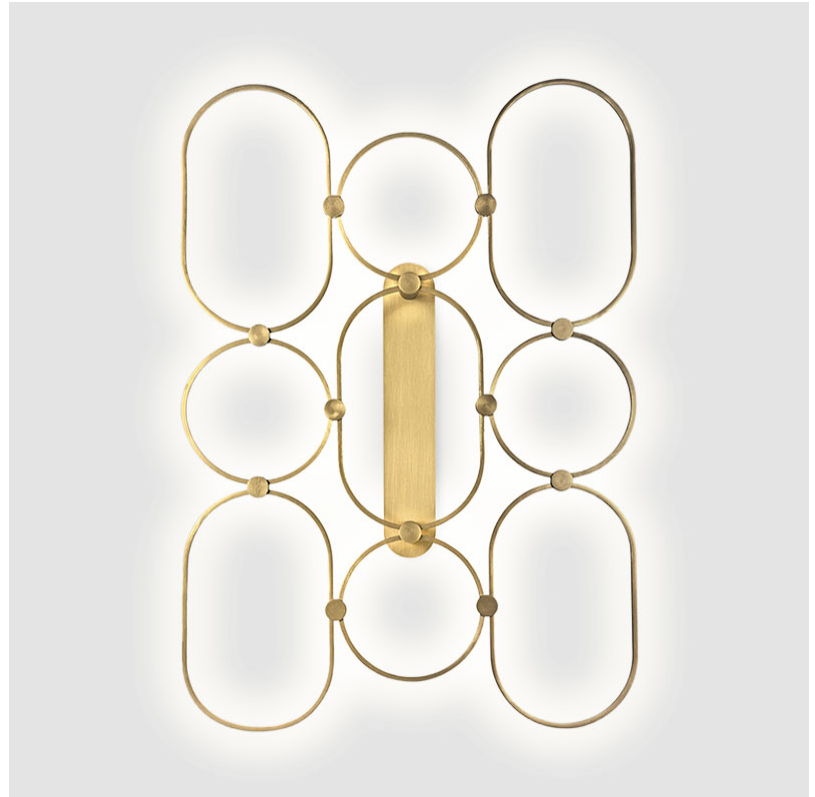

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

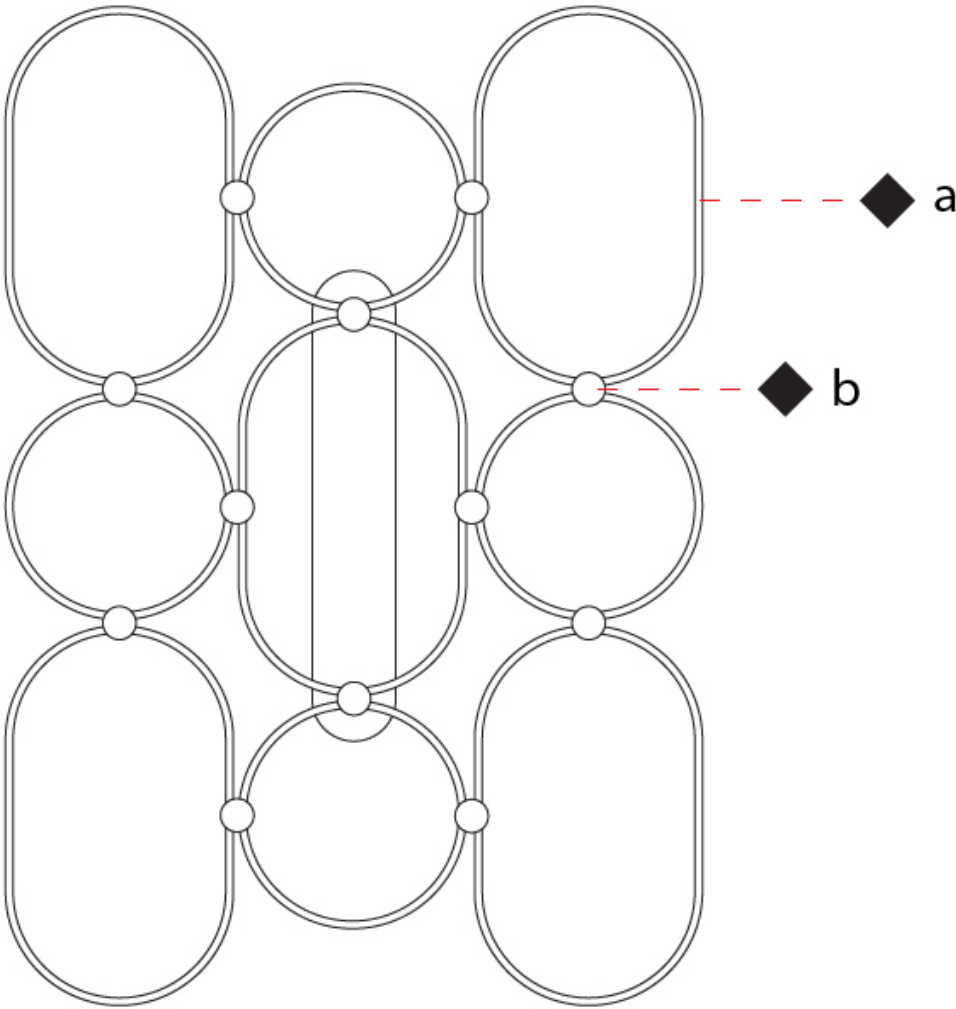

NONAME SURFACE

D43091-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 505

Depth (mm): 130

Height (in): 19 7/8

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 2140 / 2200

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

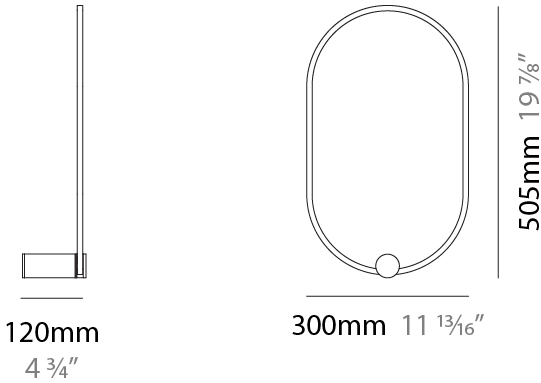

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

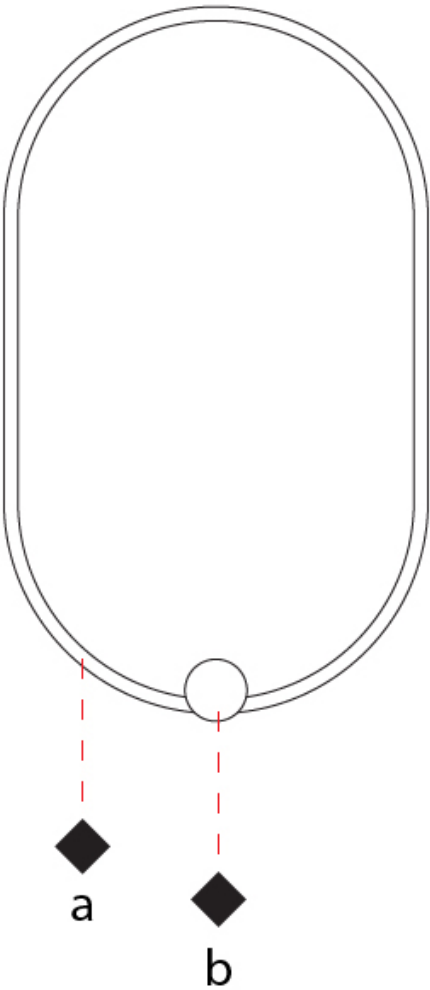

NONAME SURFACE

D43092-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 810

Depth (mm): 130

Height (in): 31 7/8

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 26

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 3620 / 3730

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

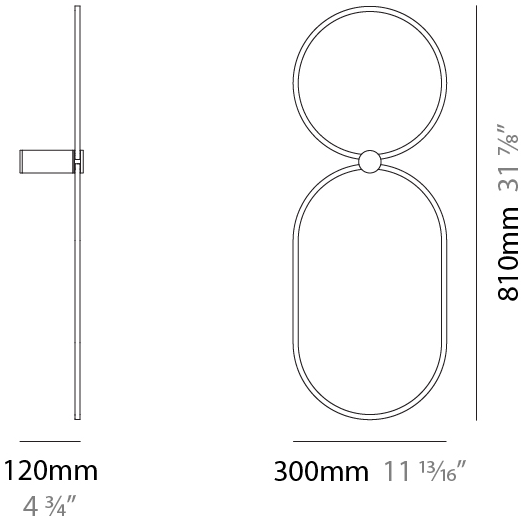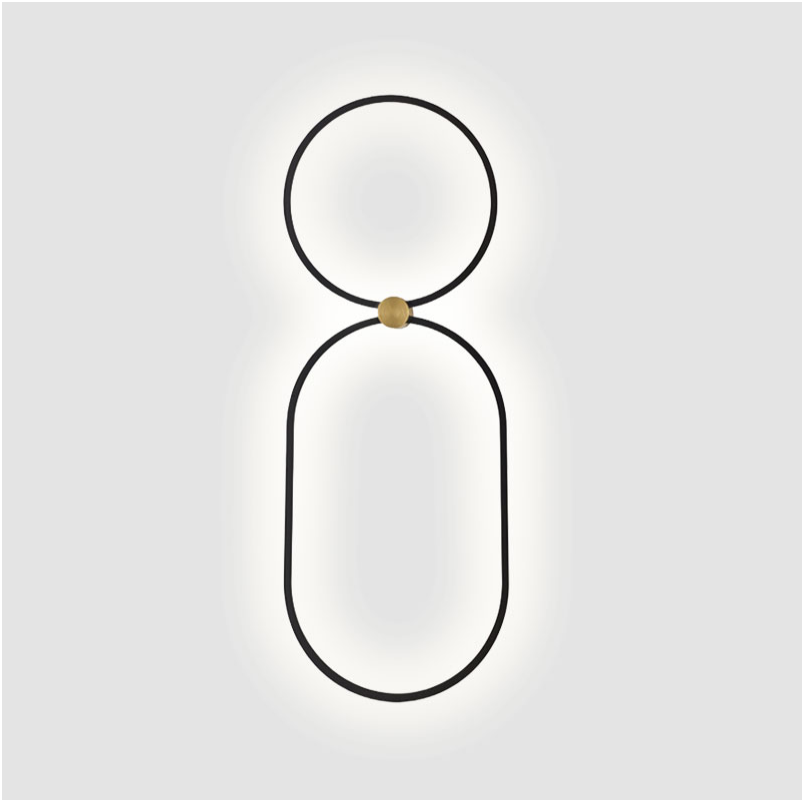

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

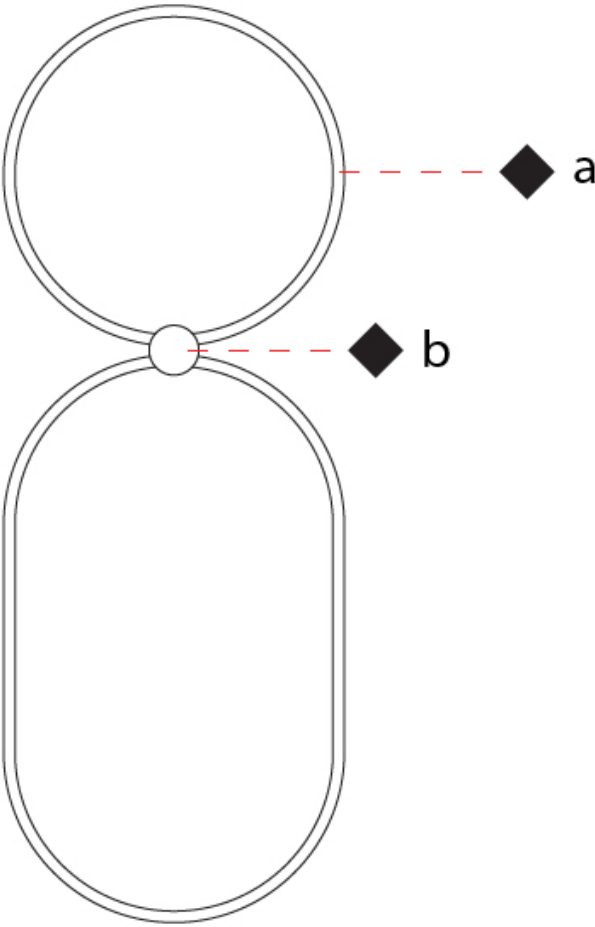

NONAME SURFACE

D43093-

base number

LED
Dimming

Color
Temperature

Finish
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 300

Length (in): 11 13/16

Height (mm): 1315

Depth (mm): 130

Height (in): 51 3/4

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 41.6

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

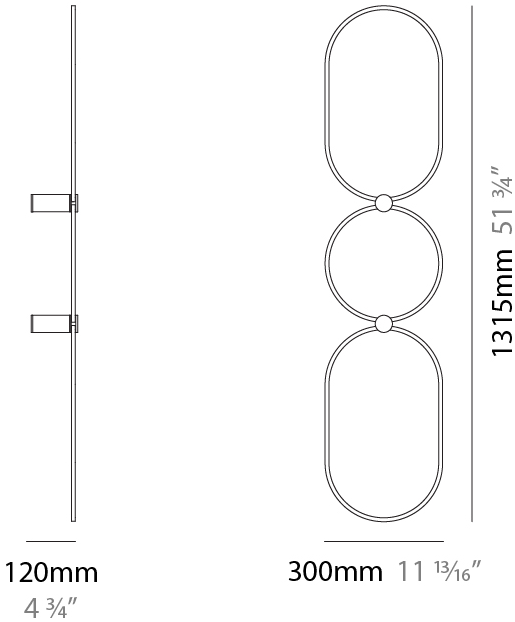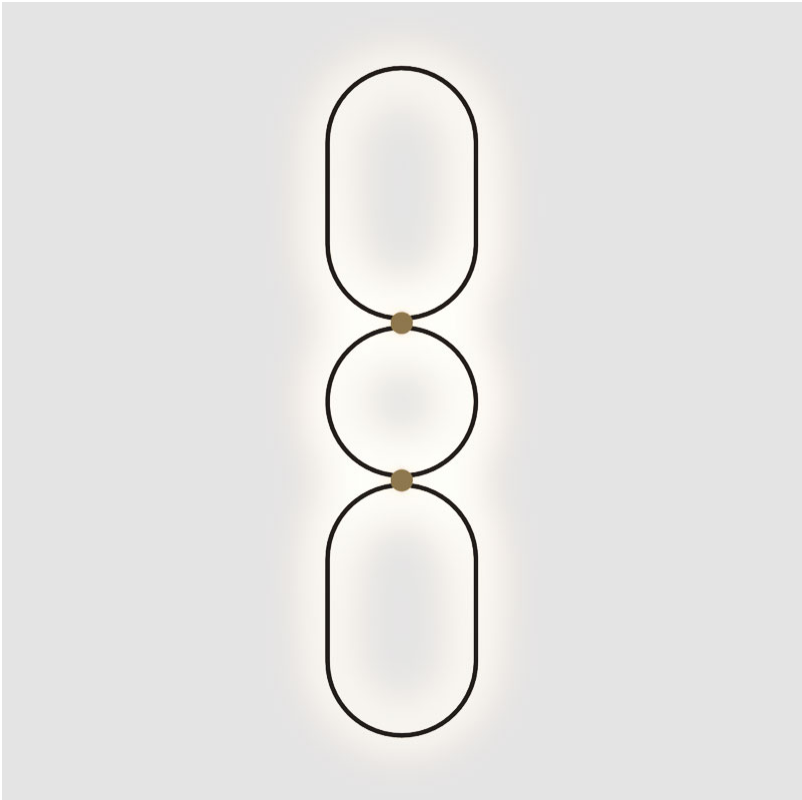

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

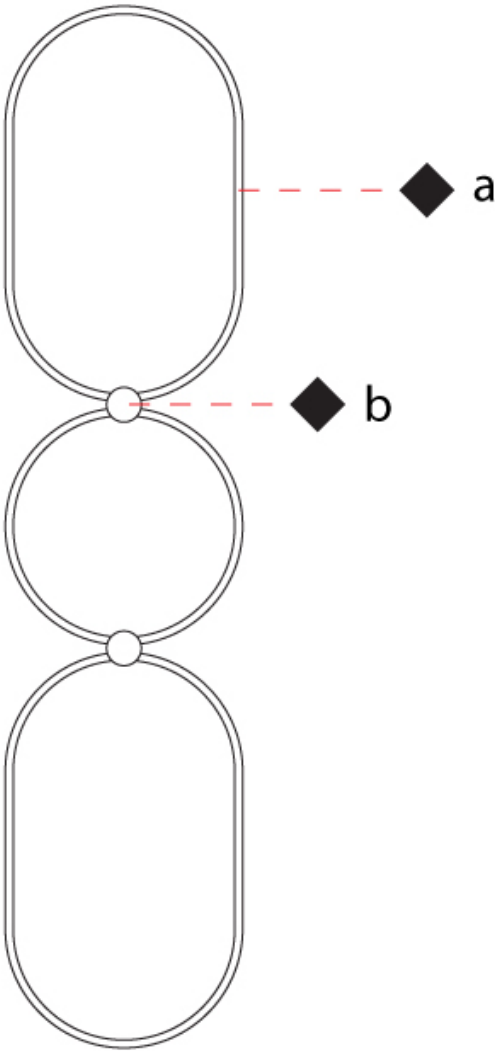

NONAME SURFACE

D43094-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 605

Length (in): 23 13/16

Height (mm): 910

Depth (mm): 130

Height (in): 35 13/16

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 51

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 5700 / 5880

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

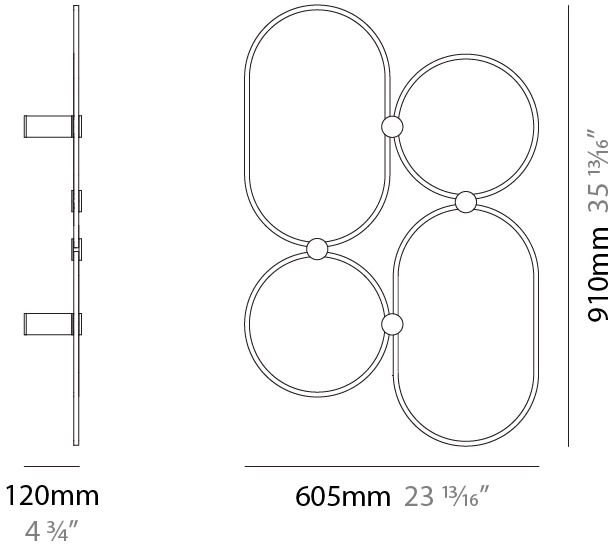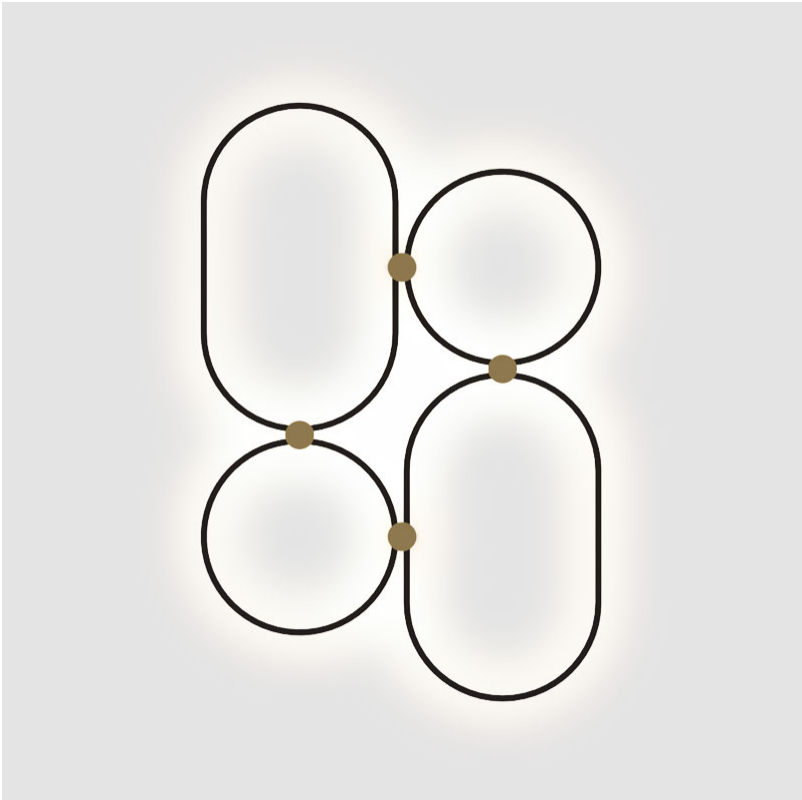

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

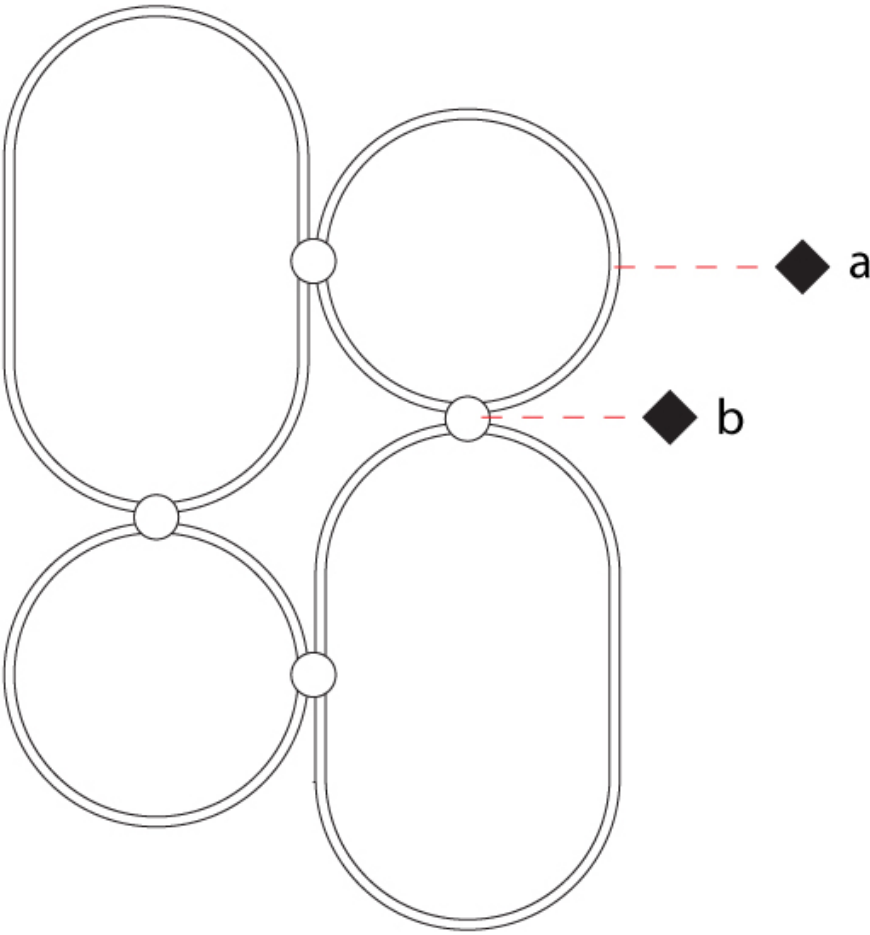

NONAME SURFACE

D43095-

base number

LED
Dimming

Color
Temperature

Finish
Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: NoName

Partner: Icone

Division: Design

Installation: Surface

Product Type: Wall Surface

Mounting Location: Wall

Light Distribution: Indirect

PHYSICAL

Shape: Abstract

Length (mm): 920

Length (in): 36 1/4

Height (mm): 1315

Depth (mm): 130

Height (in): 51 3/4

Depth (in): 5 1/8

Fixture Finish: BLK / WHB / WHW / BKB / BRA / SBS

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 116

Dimming: Phase Dimming / 0-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Color Temperature (°K): 2700 / 3000

Max. Delivered Lumen (lm): 15900 / 16500

CRI: >80 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

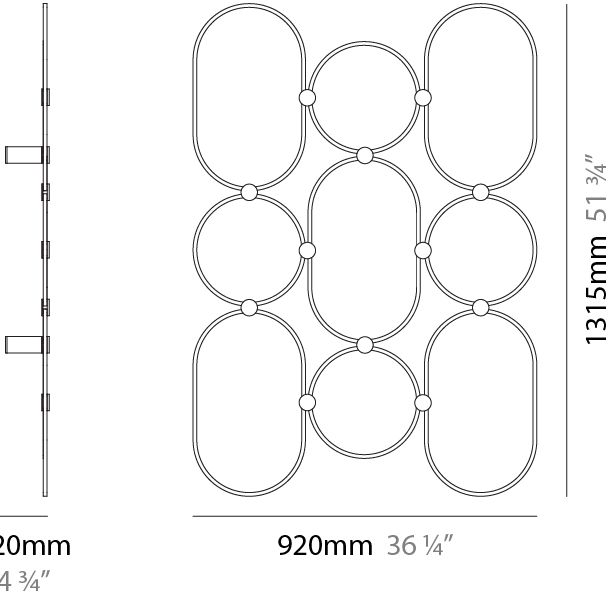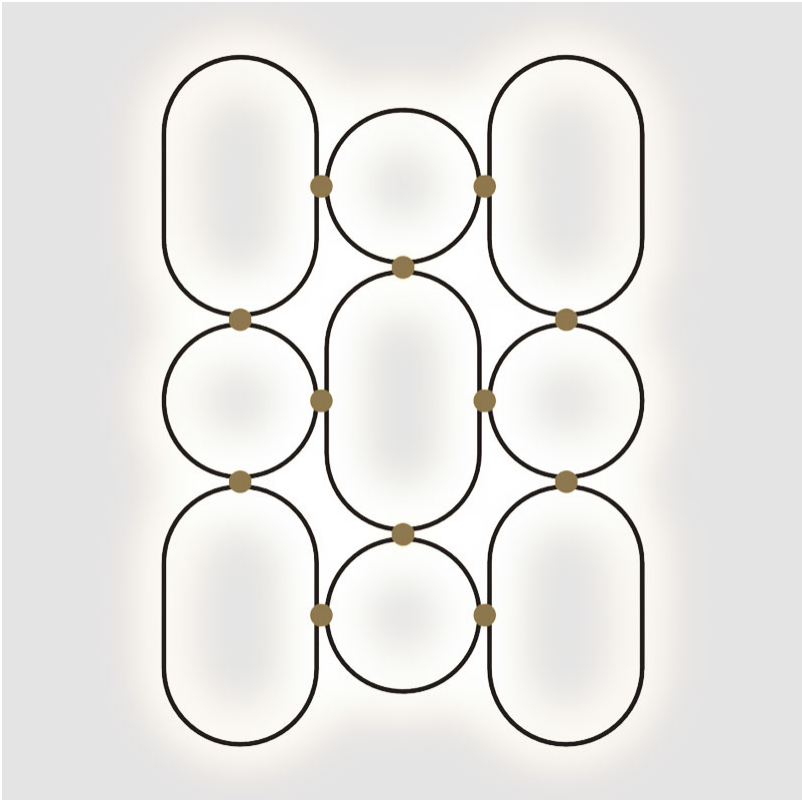


PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

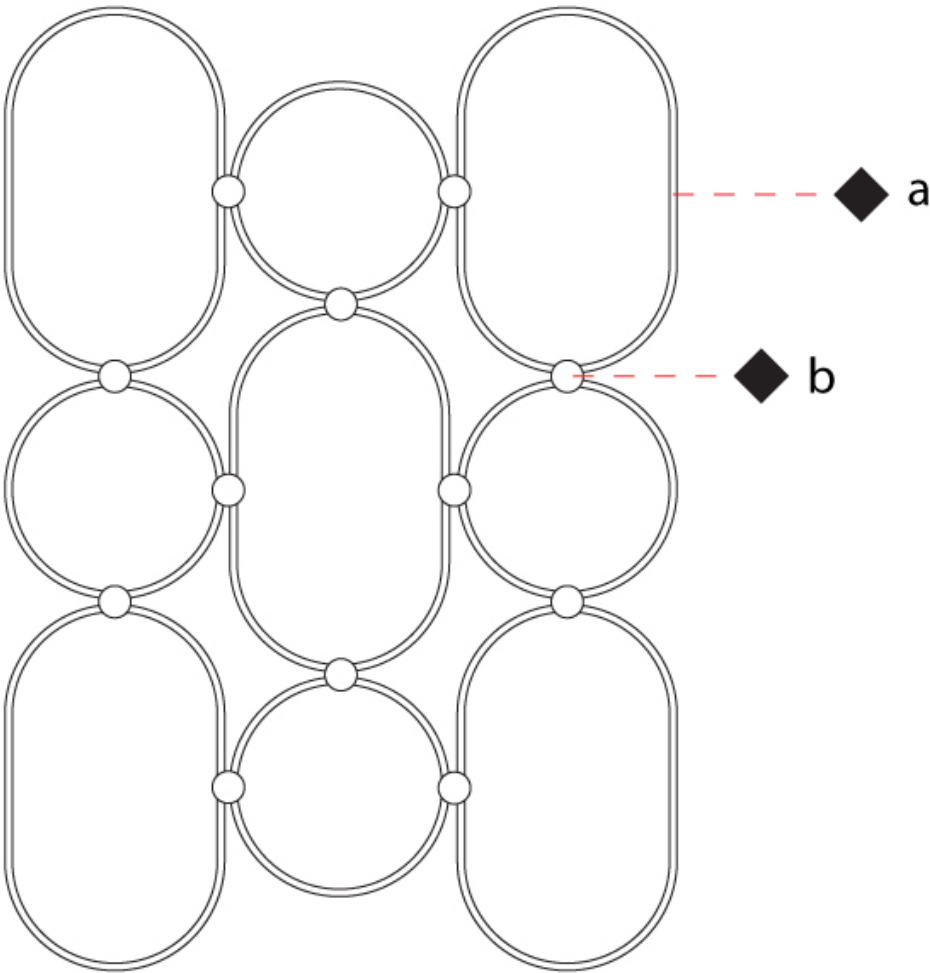

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish

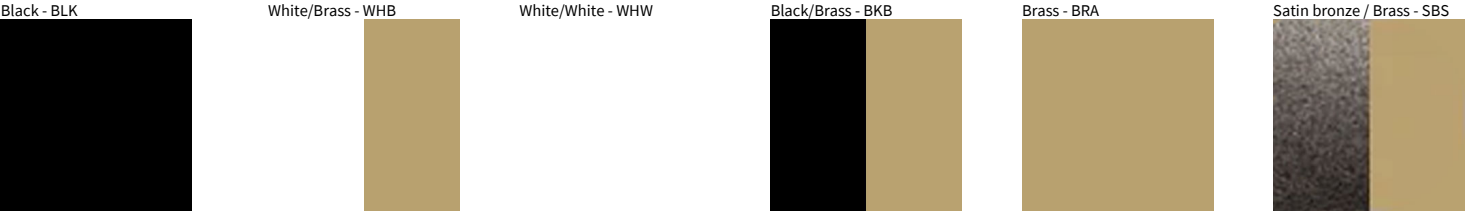

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)