

OIKO PRO WALLWASH RECESSED

A35863-

-

base number

Color

Finishes

Temperature

(Diamond)

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Wallwash

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Wallwash

Mounting Location: Ceiling

Light Distribution: Wallwash

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15.1

Total Output Wattage (W): 13.6

Dimming: Non-Dimming / 0-10V Dimming / Phase Dimming / DALI Dimming / MATTER Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See Components

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1302 / 1383 / 1449 / 1462

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

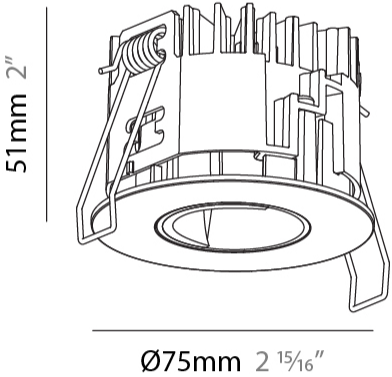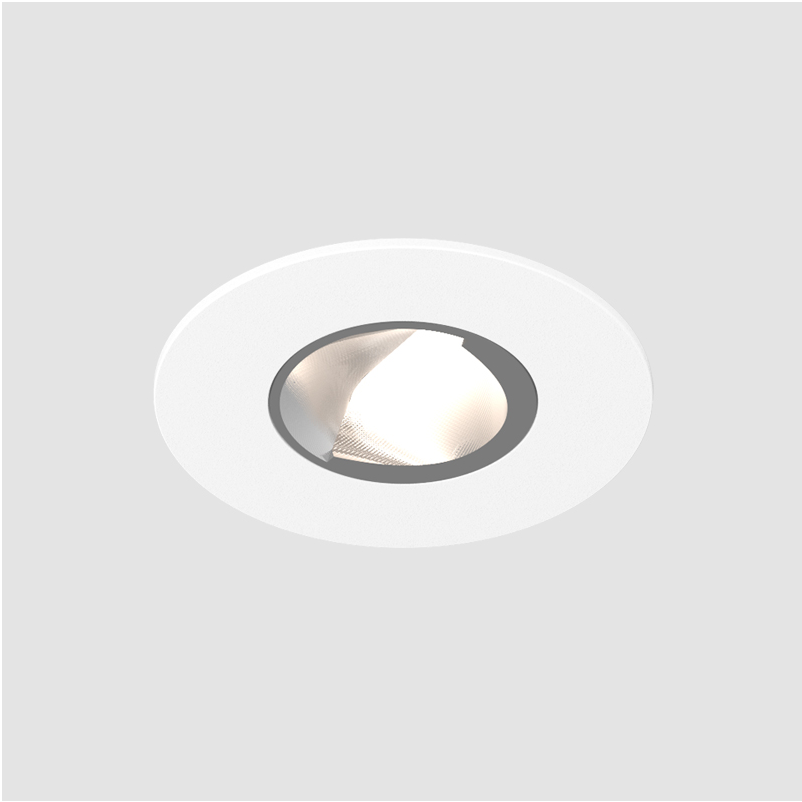

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

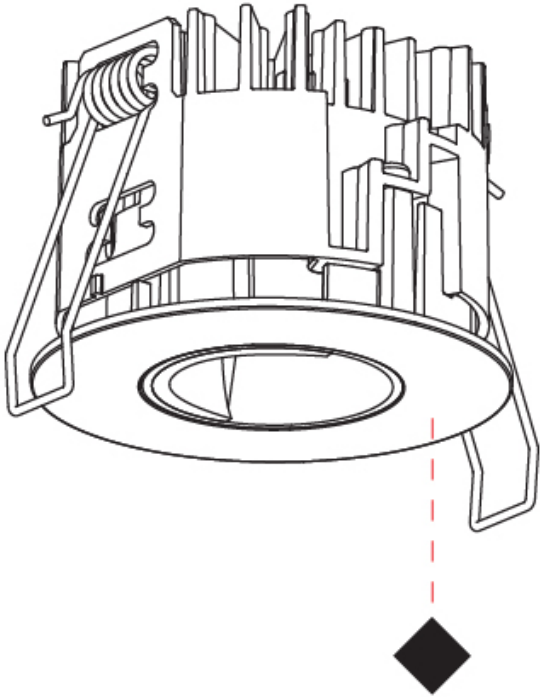

OIKO PRO WALLWASH RECESSED

A35864-

-

base number

Color

Finishes

Temperature

(Diamond)

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Wallwash

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Wallwash

Mounting Location: Ceiling

Light Distribution: Wallwash

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15⁄16

Height (mm): 54

Height (in): 2 1⁄8

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 60

Min. Recessing Depth (in): 2 3⁄8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15.1

Total Output Wattage (W): 13.6

Dimming: Non-Dimming / 0-10V Dimming / Phase Dimming / DALI Dimming / MATTER Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1247 / 1325 / 1388 / 1400

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP54



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

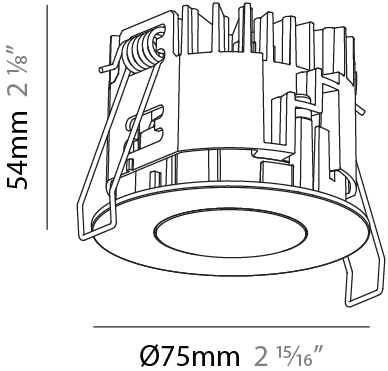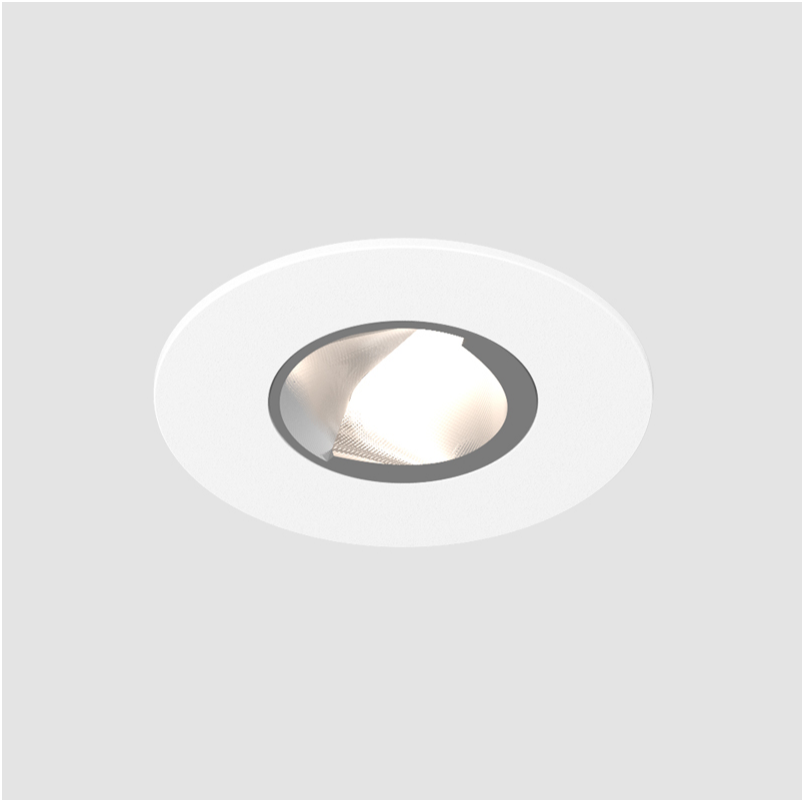

OIKO PRO WALLWASH RECESSED

A35864-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

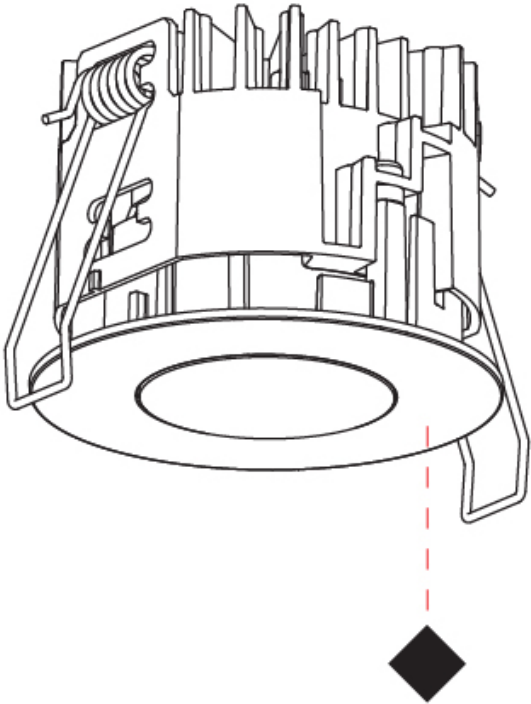

OIKO PRO WALLWASH RECESSED

A35865- -

|             |                       |                 |
|-------------|-----------------------|-----------------|
| base number | Finishes<br>(Diamond) | Lens<br>Options |
|-------------|-----------------------|-----------------|

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Wallwash

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Wallwash

Mounting Location: Ceiling

Light Distribution: Wallwash

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming / Matter

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1216

Nominal Lumen (lm): 1460

CRI: >90 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL



Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

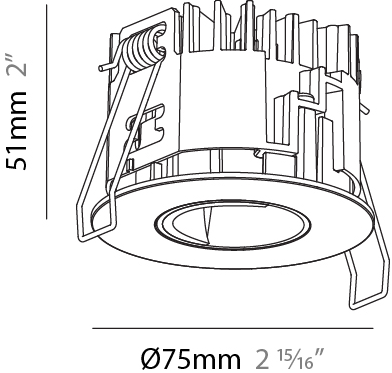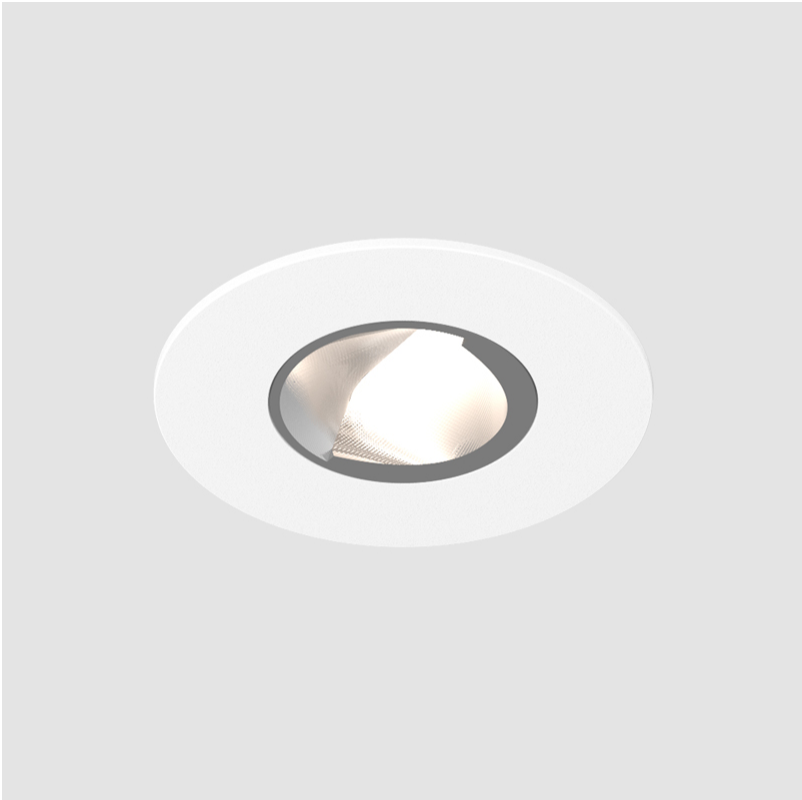

OIKO PRO WALLWASH RECESSED

A35865-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

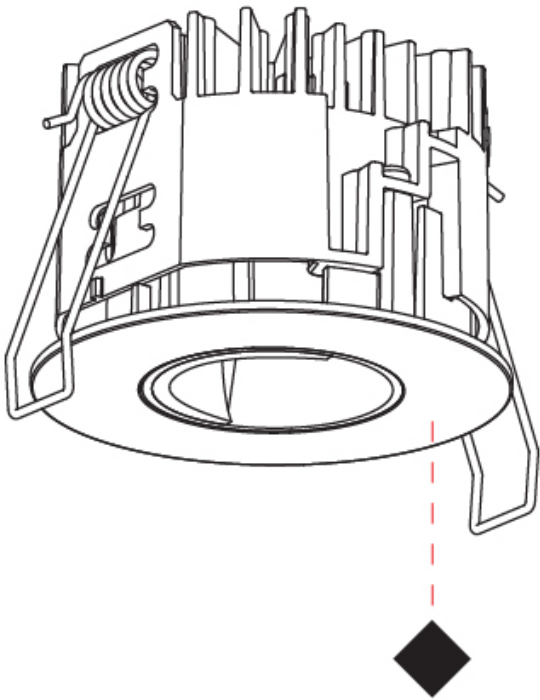

OIKO PRO ROUND FIXED RECESSED

A35866-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 65

Height (in): 2 9/16

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3/4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 16

Total Output Wattage (W): 14.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See Components

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1067 / 1150 / 1217 / 1220

Nominal Lumen (lm): 1393 / 1501 / 1589 / 1592

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 14

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP44



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

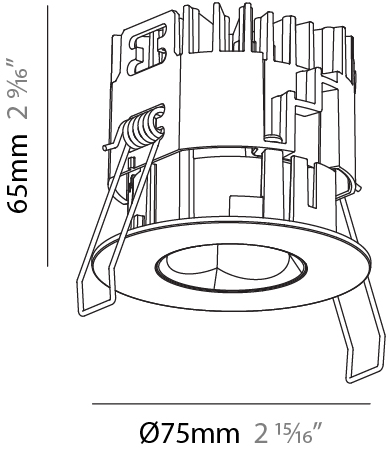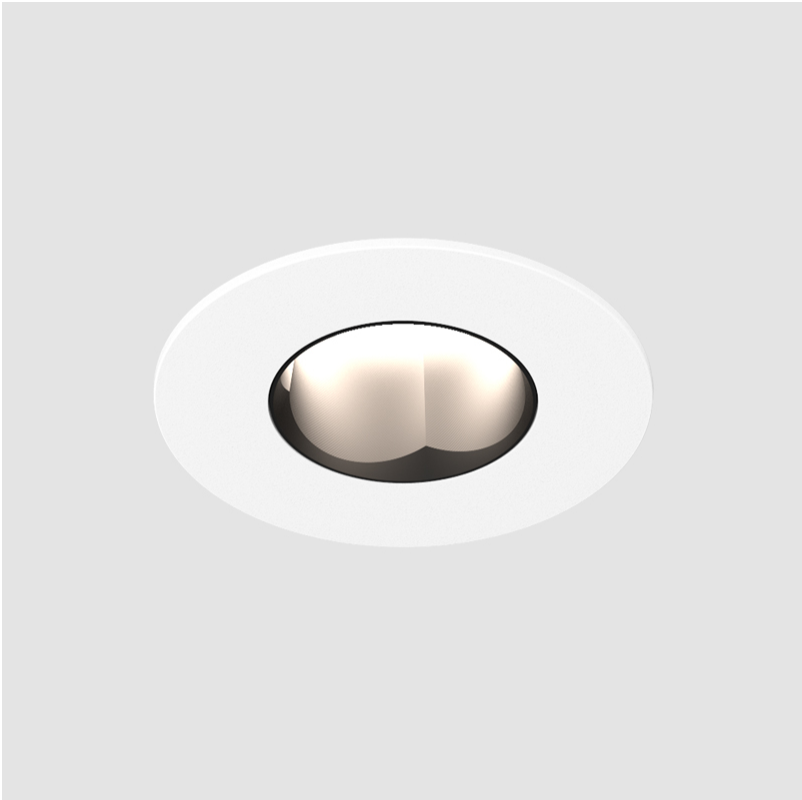

OIKO PRO ROUND FIXED RECESSED

A35866-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

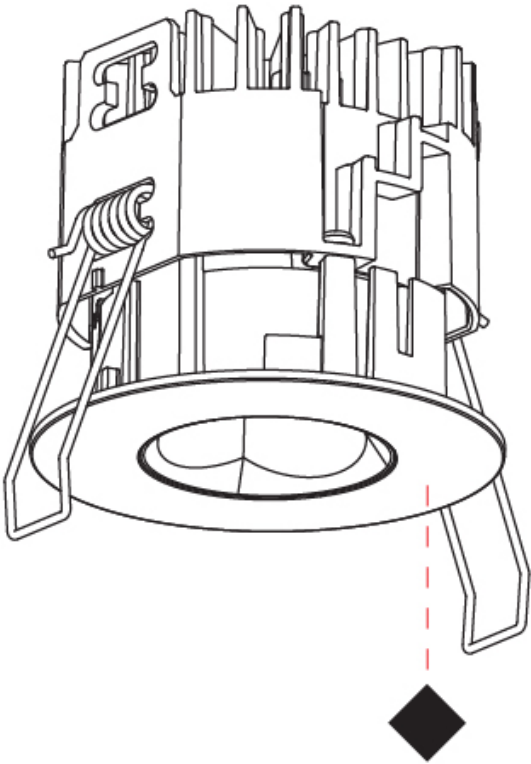

OIKO PRO ROUND FIXED RECESSED

A35867-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15⁄16

Height (mm): 65

Height (in): 2 9⁄16

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3⁄4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See Components

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1295 / 1377 / 1442 / 1455

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 34

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

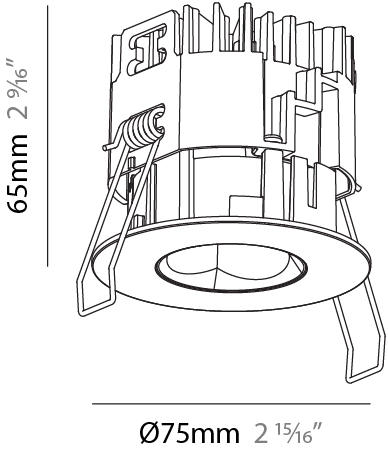

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

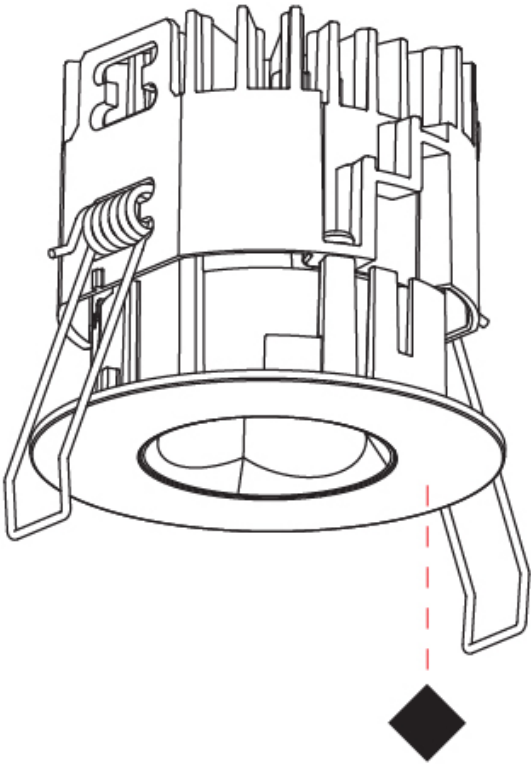

OIKO PRO ROUND FIXED RECESSED

A35868-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1375 / 1462 / 1531 / 1545

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 50

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

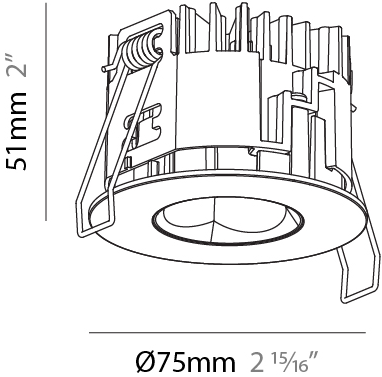

OIKO PRO ROUND FIXED RECESSED

A35868-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

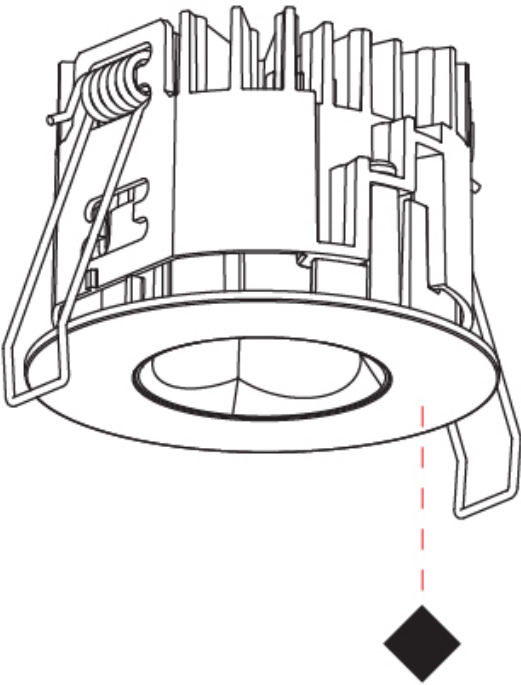

OIKO PRO ROUND FIXED RECESSED

A35869-

base number

Color  
Temperature

Finishes  
(Diamond)

Lens  
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 43

Height (in): 1 11/16

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 50

Min. Recessing Depth (in): 1 15/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1464 / 1556 / 1630 / 1645

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 60

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

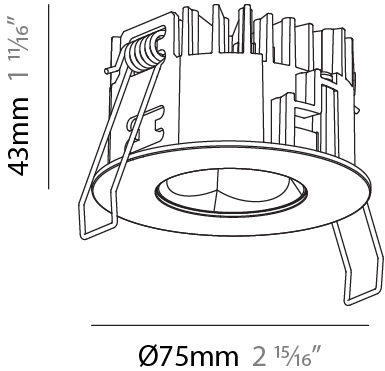

OIKO PRO ROUND FIXED RECESSED

A35869-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

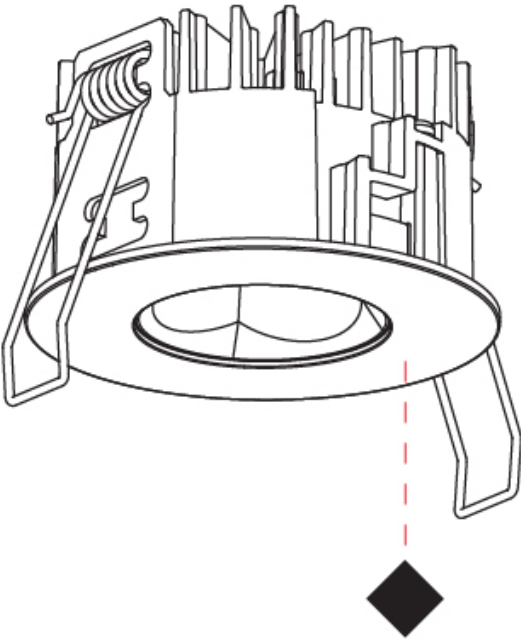

OIKO PRO ROUND FIXED RECESSED

A35870-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 67

Height (in): 2 5/8

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 75

Min. Recessing Depth (in): 2 15/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 16

Total Output Wattage (W): 14.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1017 / 1096 / 1160 / 1162

Nominal Lumen (lm): 1393 / 1501 / 1589 / 1592

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 16

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP54



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

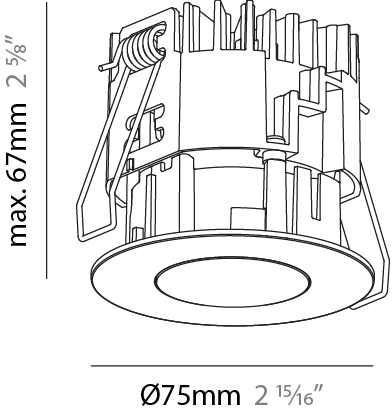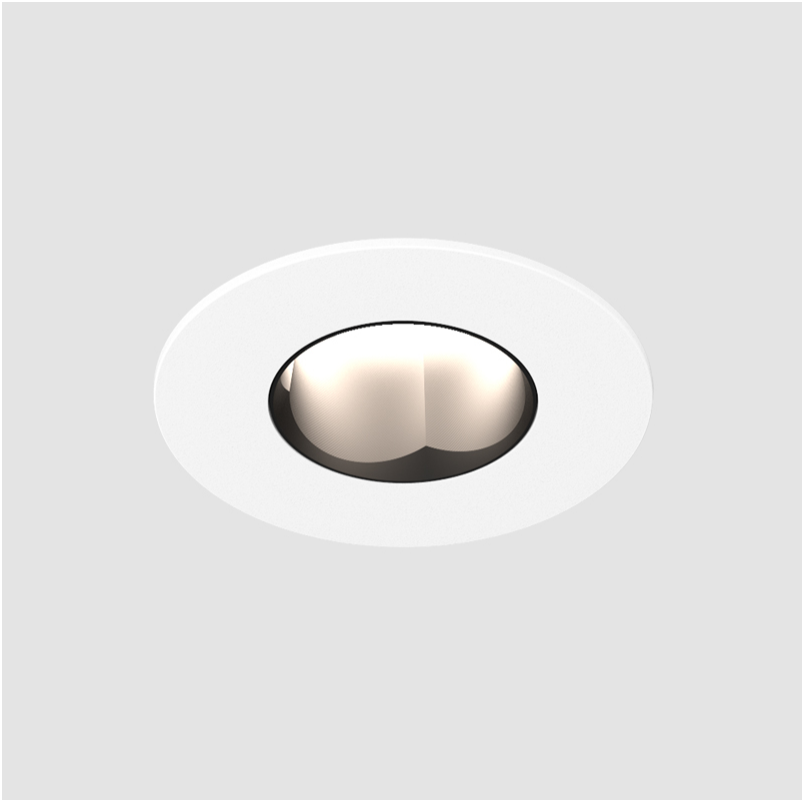

OIKO PRO ROUND FIXED RECESSED

A35870-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

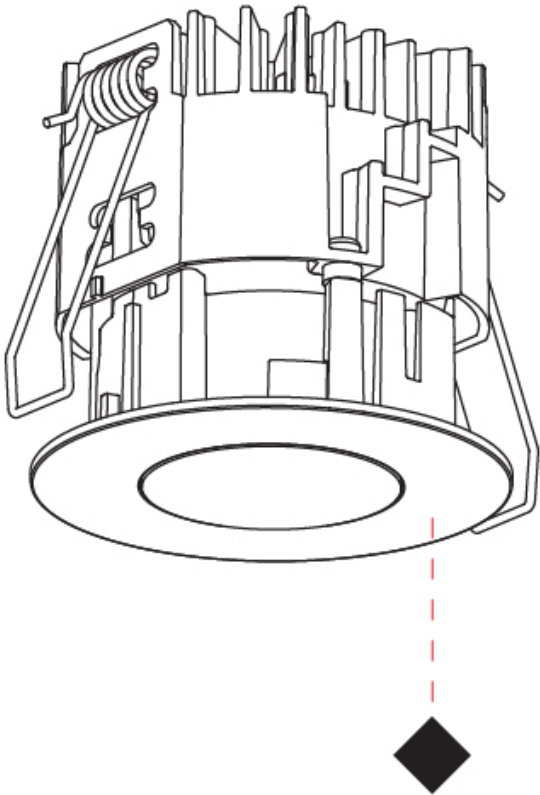

OIKO PRO ROUND FIXED RECESSED

A35871- -

|             |                       |                 |
|-------------|-----------------------|-----------------|
| base number | Finishes<br>(Diamond) | Lens<br>Options |
|-------------|-----------------------|-----------------|

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 65

Height (in): 2 9/16

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3/4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1129

Nominal Lumen (lm): 1460

CRI: >93 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 36


Adjustability: Fixed

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

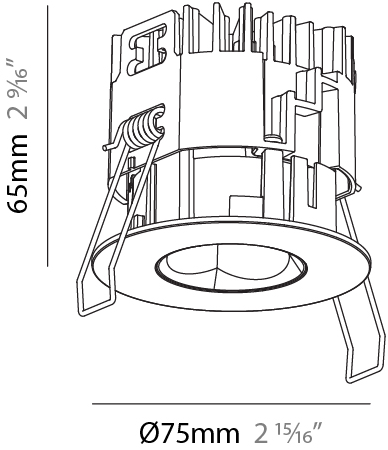

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

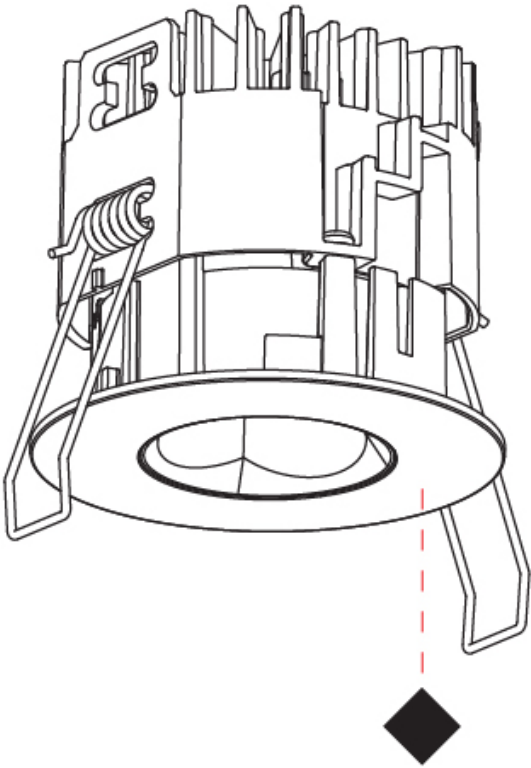

OIKO PRO ROUND FIXED RECESSED

A35872- -

|             |                       |                 |
|-------------|-----------------------|-----------------|
| base number | Finishes<br>(Diamond) | Lens<br>Options |
|-------------|-----------------------|-----------------|

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1240

Nominal Lumen (lm): 1460

CRI: >93 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 52


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

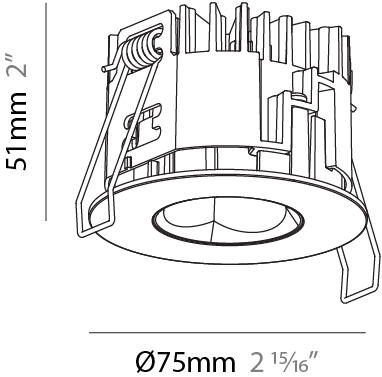

OIKO PRO ROUND FIXED RECESSED

A35872-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

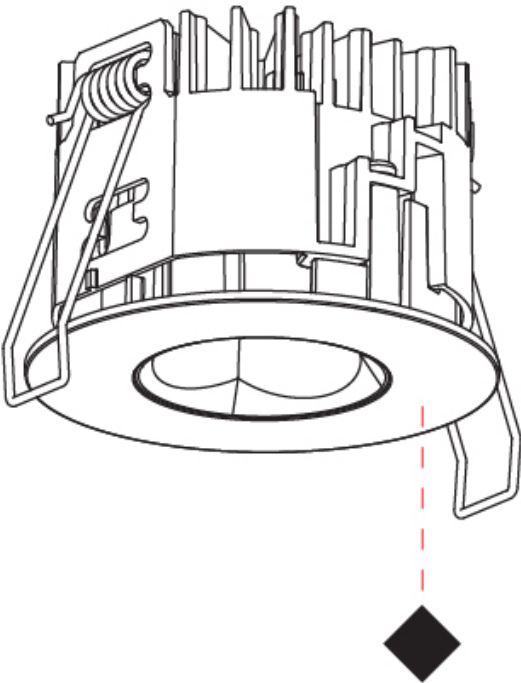

OIKO PRO ROUND FIXED RECESSED

A35873- -

|             |                       |                 |
|-------------|-----------------------|-----------------|
| base number | Finishes<br>(Diamond) | Lens<br>Options |
|-------------|-----------------------|-----------------|

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Recessed

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 43

Height (in): 1 11/16

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 50

Min. Recessing Depth (in): 1 15/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1381

Nominal Lumen (lm): 1460

CRI: >93 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 62


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

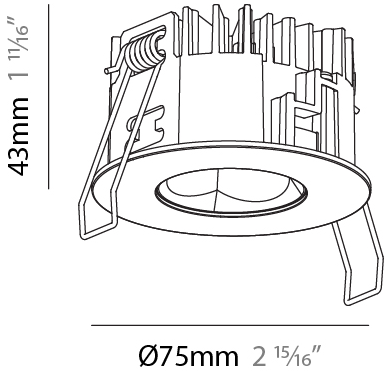

OIKO PRO ROUND FIXED RECESSED

A35873-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

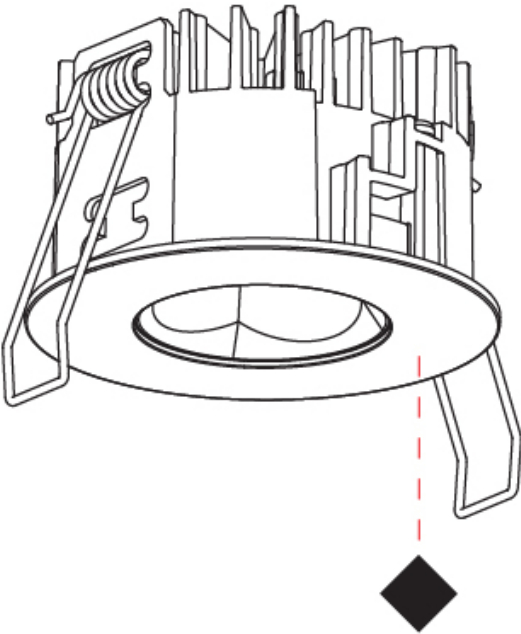

OIKO PRO ROUND WALLWASH TRIMLESS

A35875- -

|             |             |           |
|-------------|-------------|-----------|
| base number | Color       | Finishes  |
|             | Temperature | (Diamond) |

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Wallwash

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Wallwash

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 1 - 25

Ceiling Thickness (in): 1/16 - 1 3/16

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 86mm / 3 3/8" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1302 / 1383 / 1449 / 1462

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >93 CRI

Lamp Life (hrs): 50000

OPTICAL


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

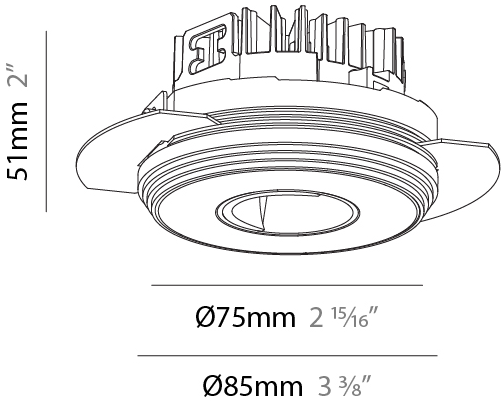

OIKO PRO ROUND WALLWASH TRIMLESS

A35875-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

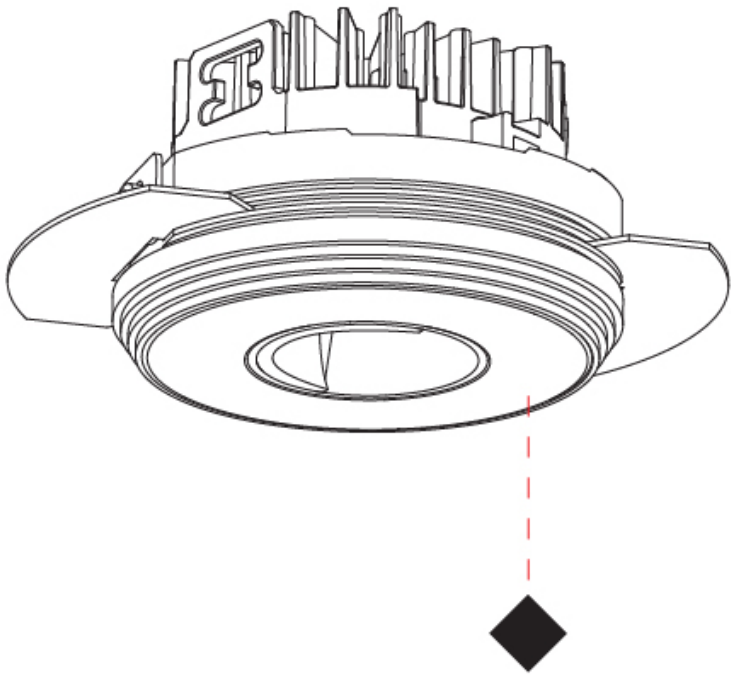

OIKO PRO ROUND WALLWASH TRIMLESS

A35876-

base number Finishes  
(Diamond)

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round  
Subseries: Oiko Pro Round Wallwash  
Partner: Prolicht  
Division: Architectural  
Installation: Trimless  
Product Type: Wallwash  
Mounting Location: Ceiling  
Light Distribution: Direct

PHYSICAL

Shape: Round  
Diameter (mm): 75  
Diameter (in): 2 15/16  
Height (mm): 51  
Height (in): 2  
Ceiling Thickness (mm): 1 - 25  
Ceiling Thickness (in): 1/16 - 1 3/16  
Min. Recessing Depth (mm): 55  
Min. Recessing Depth (in): 2 3/16  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS  
Fixture Material: Aluminum Die Cast  
Cut-out Measurements: 86mm / 3 3/8" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 14  
Total Output Wattage (W): 12.7  
Dimming: Dali Dimming  
Driver Included: No  
Driver Location: Recessed Housing  
Driver Type: Constant Current - Universal (120Vac only for DALI driver)  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White  
Max. Delivered Lumen (lm): 1040 - 1216  
Nominal Lumen (lm): 1242 - 1460  
CRI: >93 CRI  
Lamp Life (hrs): 50000  
Special LEDs offerings: Tunable White


OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

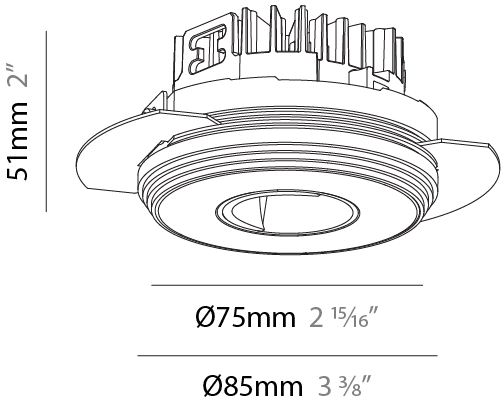

OIKO PRO ROUND WALLWASH TRIMLESS

A35876-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

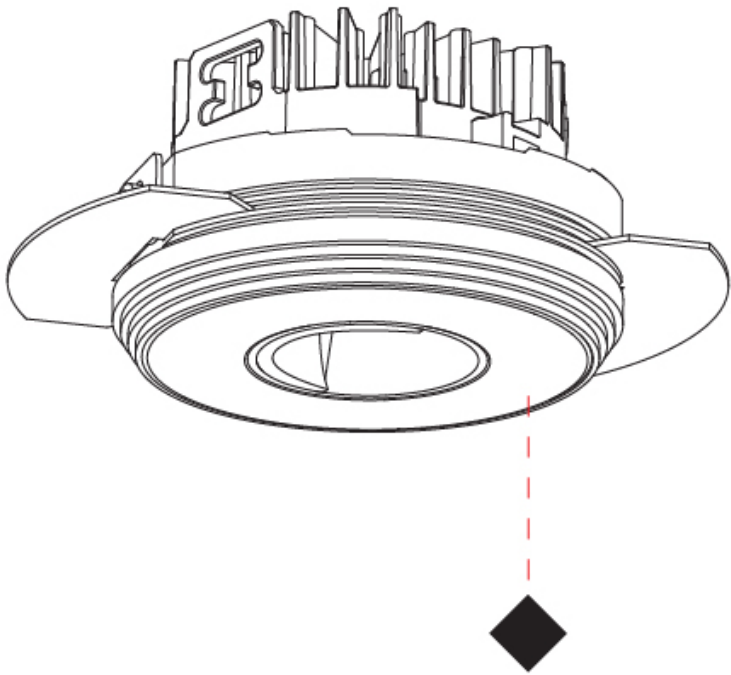

OIKO PRO ROUND FIXED TRIMLESS

A35877-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 65

Height (in): 2 9/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3/4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 16

Total Output Wattage (W): 14.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1067 / 1150 / 1217 / 1220

Nominal Lumen (lm): 1393 / 1501 / 1589 / 1592

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector: 14

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

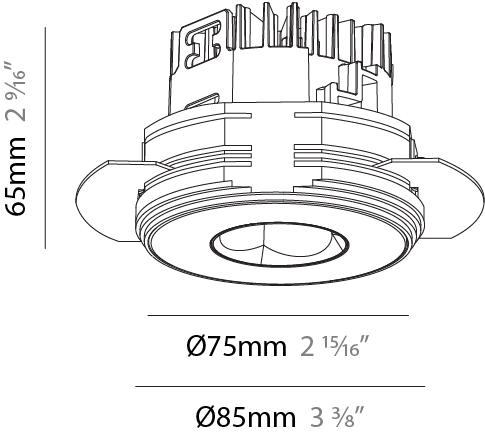

OIKO PRO ROUND FIXED TRIMLESS

A35877-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

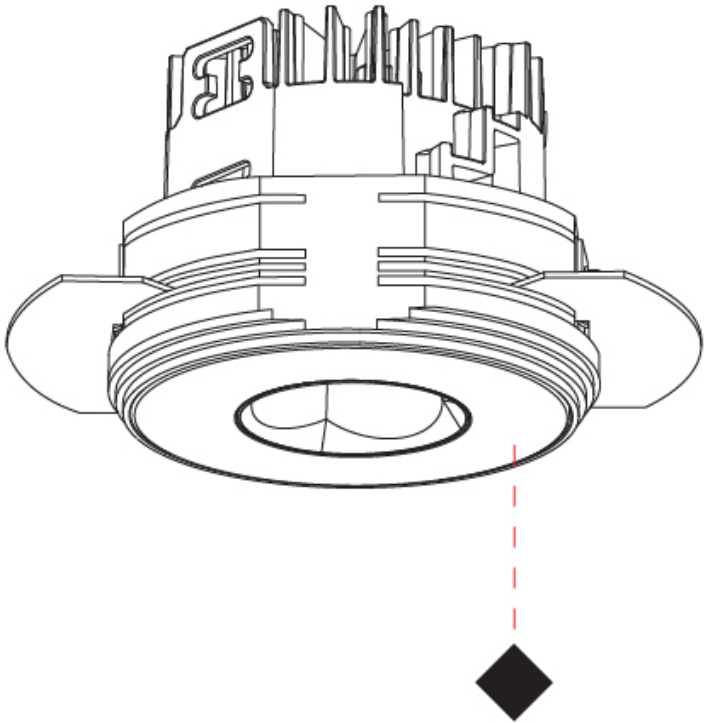

OIKO PRO ROUND FIXED TRIMLESS

A35878-

-

-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 65

Height (in): 2 9/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3/4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1295 / 1377 / 1442 / 1455

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector: 34

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

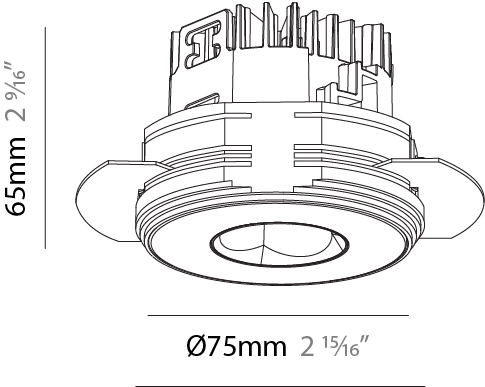

OIKO PRO ROUND FIXED TRIMLESS

A35878-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

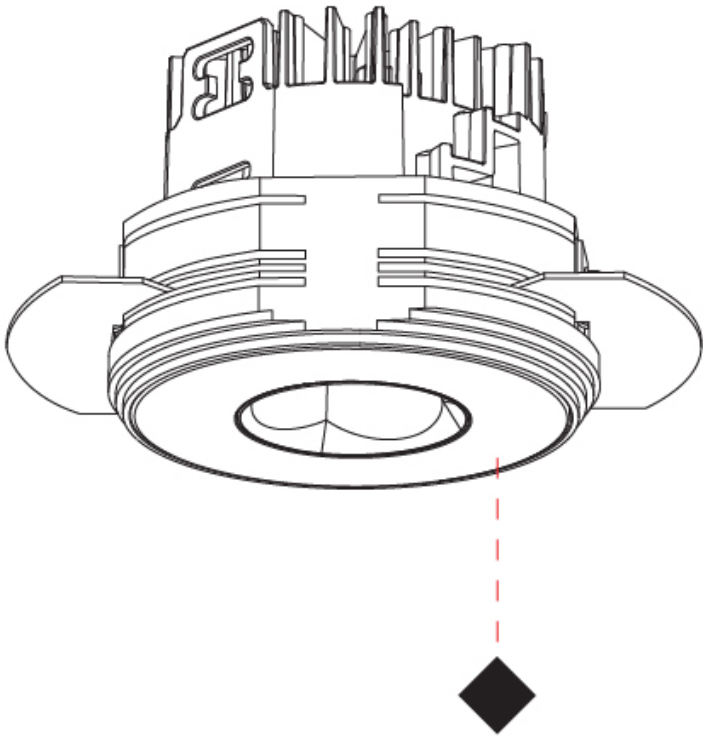

OIKO PRO ROUND FIXED TRIMLESS

A35879-

-

-

base number

Color

Finishes

Lens

Temperature

(Diamond)

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 60

Min. Recessing Depth (in): 2 3/8

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 15

Total Output Wattage (W): 13.6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1375 / 1462 / 1531 / 1545

Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 50

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

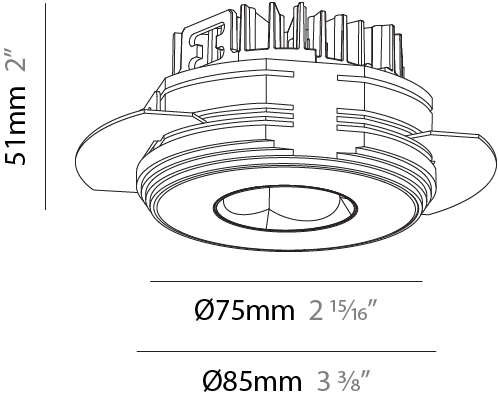

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

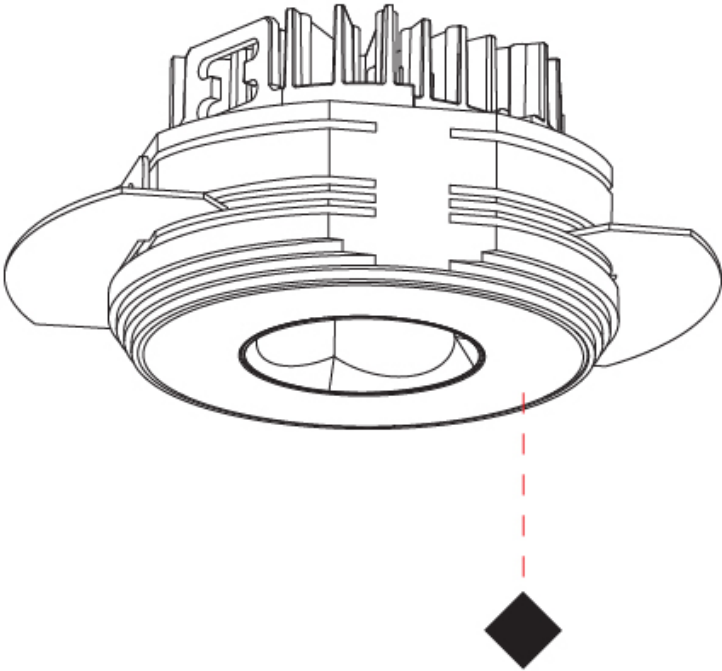

OIKO PRO ROUND FIXED TRIMLESS

A35880- -

|             |                       |                 |
|-------------|-----------------------|-----------------|
| base number | Finishes<br>(Diamond) | Lens<br>Options |
|-------------|-----------------------|-----------------|

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round  
Subseries: Oiko Pro Round Fixed  
Partner: Prolicht  
Division: Architectural  
Installation: Trimless  
Product Type: Downlight  
Mounting Location: Ceiling  
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"  
Shape: Round  
Diameter (mm): 75  
Diameter (in): 2 15/16  
Height (mm): 43  
Height (in): 1 11/16  
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25  
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1  
Min. Recessing Depth (mm): 50  
Min. Recessing Depth (in): 1 15/16  
Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS  
Fixture Material: Aluminum Die Cast  
Cut-out Measurements: 86mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 15  
Total Output Wattage (W): 13.6  
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
Driver Included: No  
Driver Location: Recessed Housing  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (mA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 1464 / 1556 / 1630 / 1645  
Nominal Lumen (lm): 1566 / 1665 / 1743 / 1759  
CRI: >90 CRI  
Lamp Life (hrs): 50000


OPTICAL

Reflector: 60  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

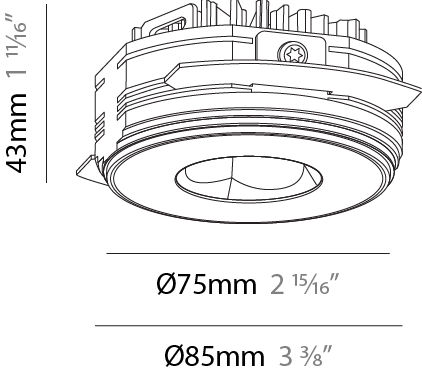

OIKO PRO ROUND FIXED TRIMLESS

A35880-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

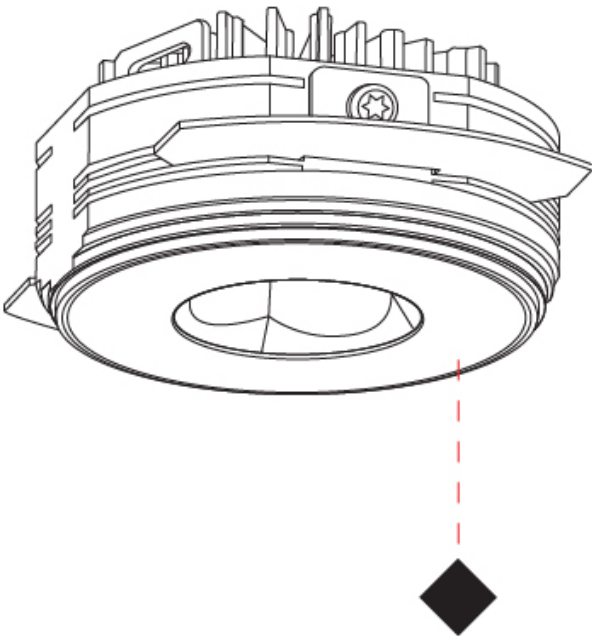

OIKO PRO ROUND FIXED TRIMLESS

A35881-

-

-

base number

Finishes  
(Diamond)

Ceiling  
Thickness

Lens  
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 65

Height (in): 2 9/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 70

Min. Recessing Depth (in): 2 3/4

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 86mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1129

Nominal Lumen (lm): 1460

CRI: >90 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 36

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

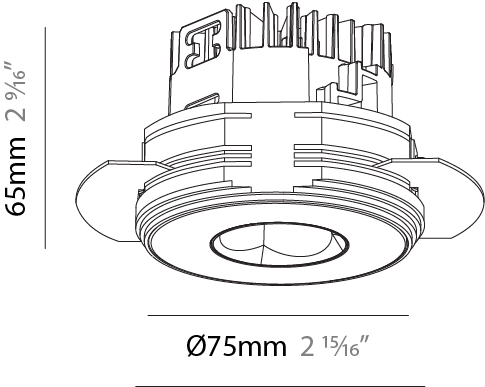

OIKO PRO ROUND FIXED TRIMLESS

A35881-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

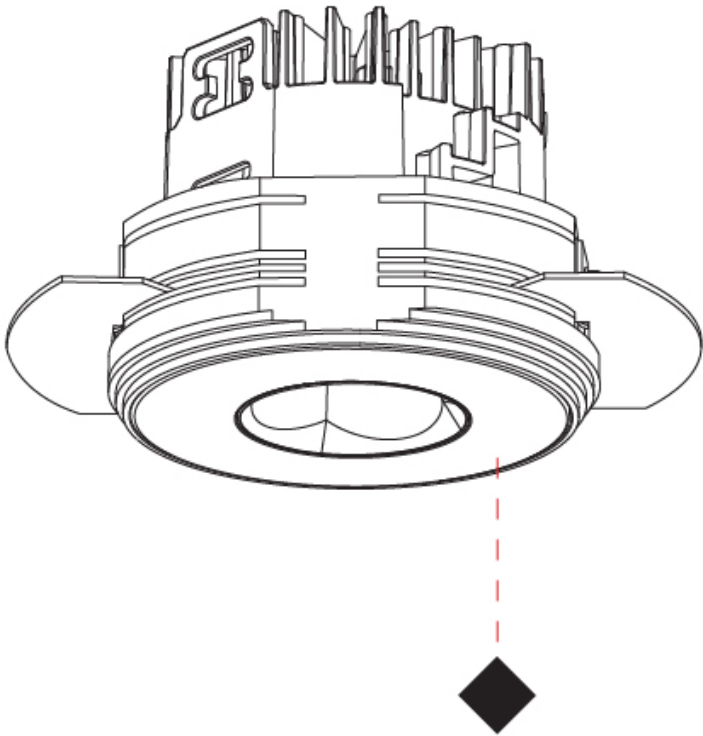

OIKO PRO ROUND FIXED TRIMLESS

A35882-

base number

Finishes  
(Diamond)

Ceiling  
Thickness

Lens  
Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 51

Height (in): 2

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 55

Min. Recessing Depth (in): 2 3/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 86mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1240

Nominal Lumen (lm): 1460

CRI: >90 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 52

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

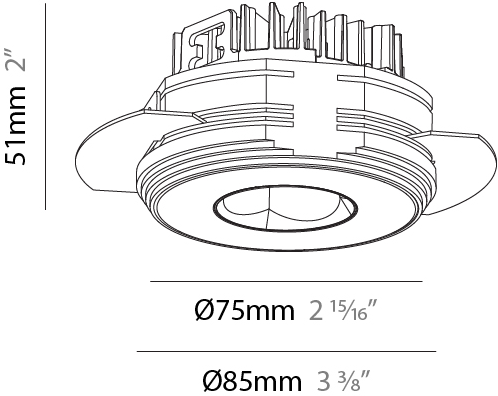

OIKO PRO ROUND FIXED TRIMLESS

A35882-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

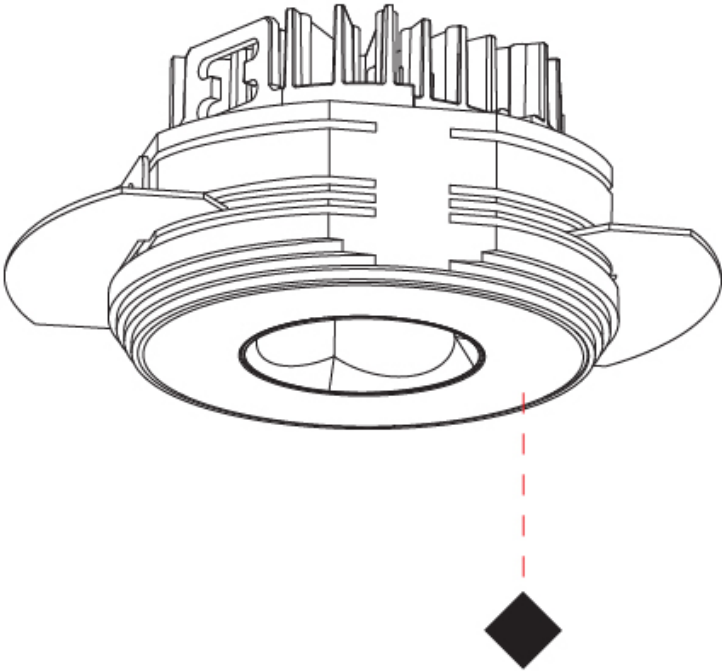

OIKO PRO ROUND FIXED TRIMLESS

A35883-

base number

Finishes  
(Diamond)

Ceiling  
Thickness

Lens  
Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round

Subseries: Oiko Pro Round Fixed

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Round

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 43

Height (in): 1 11/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 50

Min. Recessing Depth (in): 1 15/16

Diffuser: Lens Pack - Spread Lens / Linear Spread Lens / Honeycomb Louver

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Fixture Material: Aluminum Die Cast

Cut-out Measurements: 86mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 14

Total Output Wattage (W): 12.7

Dimming: Dali Dimming

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal (120Vac only for DALI driver)

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White

Max. Delivered Lumen (lm): 1381

Nominal Lumen (lm): 1460

CRI: >90 CRI

Lamp Life (hrs): 50000

Special LEDs offerings: Tunable White

OPTICAL

Reflector°: 62

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

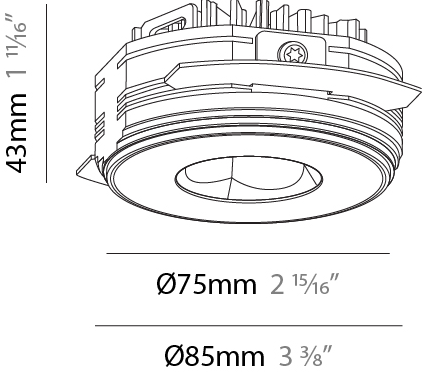

OIKO PRO ROUND FIXED TRIMLESS

A35883-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

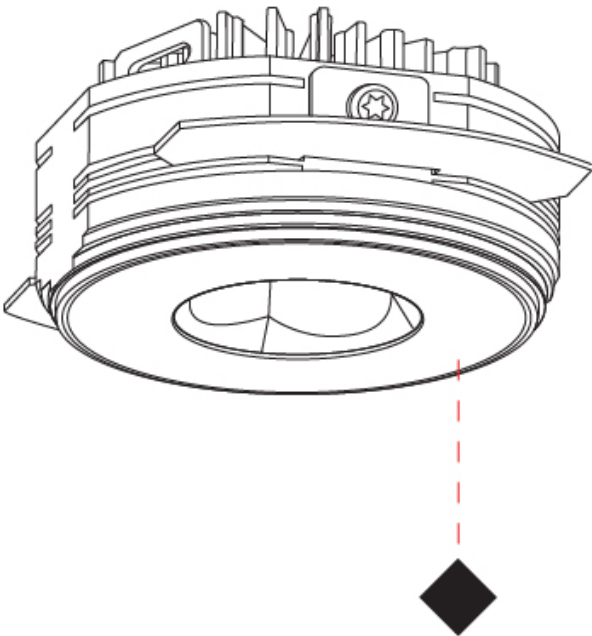

OIKO PRO WALLWASH RECESSED

A35889-

base number Finishes  
(Diamond)

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oiko Pro Round  
Subseries: Oiko Pro Wallwash  
Partner: Prolicht  
Division: Architectural  
Installation: Recessed  
Product Type: Wallwash  
Mounting Location: Ceiling  
Light Distribution: Wallwash

PHYSICAL

Aperture Sizes - Downlights: 1"  
Shape: Round  
Diameter (mm): 75  
Diameter (in): 2 15/16  
Height (mm): 54  
Height (in): 2 1/8  
Ceiling Thickness (mm): 1 - 25  
Ceiling Thickness (in): 1/16 - 1 3/16  
Min. Recessing Depth (mm): 60  
Min. Recessing Depth (in): 2 3/8  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS  
Fixture Material: Aluminum Die Cast  
Cut-out Measurements: 68mm / 2 11/16" Diameter

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 14  
Total Output Wattage (W): 12.7  
Dimming: Dali Dimming / Matter  
Driver Included: No  
Driver Location: Recessed Housing  
Driver Type: Constant Current - Universal (120Vac only for DALI driver)  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Constant Current (MA): 700

LED

Color Temperature (°K): 2700-6500 Tunable White  
Max. Delivered Lumen (lm): 1159  
Nominal Lumen (lm): 1460  
CRI: >90 CRI  
Lamp Life (hrs): 50000  
Special LEDs offerings: Tunable White



OPTICAL

Adjustability: Fixed


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP54

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

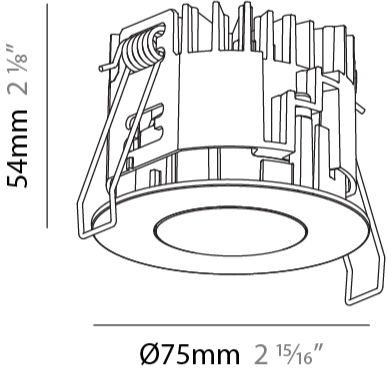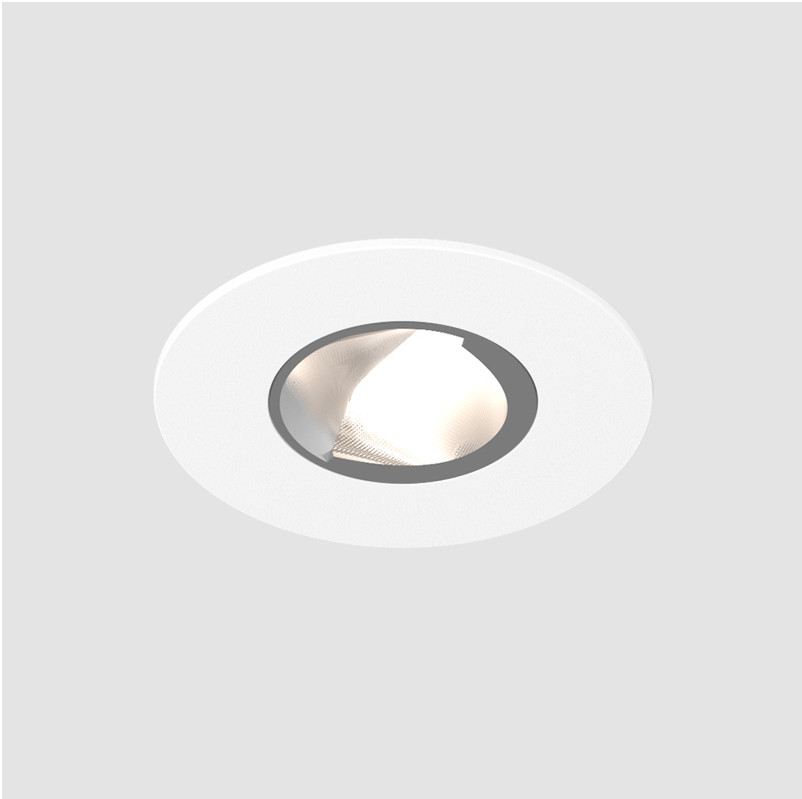










|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

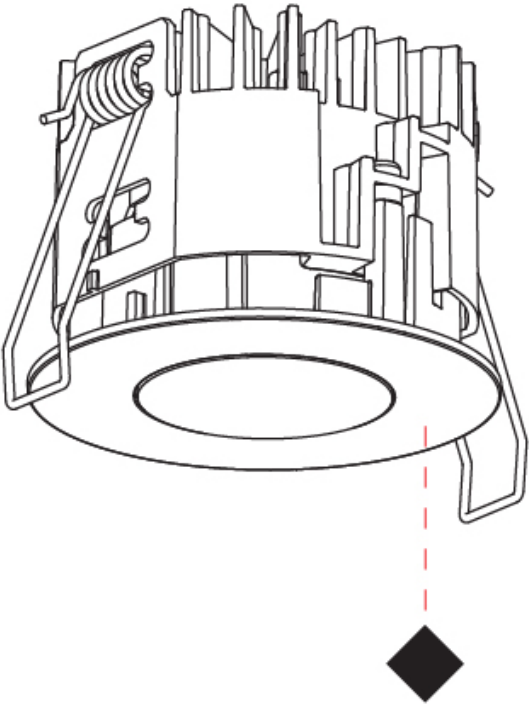

OIKO PRO ROUND  
COLOR FINISH CHART

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

Fixture Finish

|                                                                                                                 |                                                                                                                    |                                                                                                                    |                                                                                                                       |                                                                                                                    |                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Sparkling Silver - 01 (SSR)<br> | Black Velvet - 02 (BKV)<br>       | Crystal White - 03 (CWI)<br>      | Creamy - 04 (CRY)<br>               | Hampton Bay - 05 (HAB)<br>      | Urban Forest - 07 (UFT)<br>  |
| In the Army - 08 (ITA)<br>      | Rusty Angel - 09 (RUA)<br>        | Fade to Gray - 12 (FTG)<br>       | Mysterious Gray - 13 (MYG)<br>      | Lost Dream - 15 (LOD)<br>       | Purple Sky - 16 (PUS)<br>    |
| Fresh Oh - 17 (FRO)<br>        | Funky P. - 18 (FUP)<br>          | Kissing Aphrodite - 19 (KIA)<br> | Poseidon's Paradise - 20 (POP)<br> | Blue Sky - 21 (BLS)<br>        | Spring Green - 22 (SPG)<br> |
| Mellow Yellow - 23 (MEY)<br>  | Golden Heart - 24 (GOH)<br>     | Champagne Cream - 26 (CHC)<br>  | Copper Mine - 27 (COM)<br>        | Ancient Bronze - 28 (ABZ)<br> | Jazz Gold - 29 (JAG)<br>   |
| Olive Breeze - 30 (OBR)<br>   | Moonlight Silver - 31 (MOS)<br> | Rosewood Red - 32 (ROR)<br>     | Gun Metal Solid - 35 (GMS)<br>    |                                                                                                                    |                                                                                                                 |

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.



### LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

### IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

### IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |