# **ZANEEN**<sub>®</sub>

### **ONNA SUSPENSION**

#### E111201-

base number	Finish	Finish	Finish
	Options	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Onna
Brand: Ole
Division: Exterior
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Abstract
Diameter (mm): 520
Diameter (in): 20 <sup>1</sup> / <sub>2</sub>
Height (mm): 360
Height (in): 14 $\frac{3}{16}$
Max. Overall Height (mm): 2360
Max. Overall Height (in): 95 <sup>15</sup> / <sub>16</sub>
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /
OLV / SIL / STN / TER / WHI
Holder Finish: WHI / BLK
Accent Finish: MWH / MBK
Fixture Material: Fabric Cord / Metal
Cable Details: 2,000mm/78 3/4" Transparent Cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
LED

OPTICAL

#### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP66

TYPE		
SPECIFIER		
QUANTITY		





#### Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



**ONNA SUSPENSION** 

E111201-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

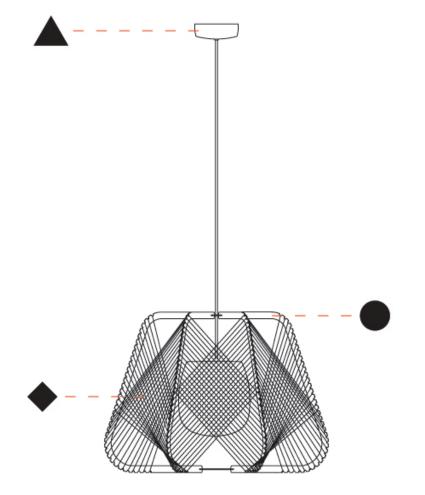

Ε

# **ZANEEN**<sub>®</sub>

### **ONNA PORTABLE**

#### E114035-

E114035	-	-	-	
base number	Finish Options	Finish Options	Finish Options	

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Onna
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient
PHYSICAL
Shape: Abstract
Diameter (mm): 520
Diameter (in): 20 $\frac{1}{2}$
Height (mm): 1386
Height (in): 54 $\frac{4}{7}$
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /
OLV / SIL / STN / TER / WHI
Holder Finish: WHI / BLK
Accent Finish: GBL / GWT
Fixture Material: Fabric Cord / Metal
Cable Details: 100/100 Cord
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
LED
OPTICAL
RATINGS AND CERTIFICATIONS


#### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards IP rating: IP66

PROJECT				
ТҮРЕ	 	 		
SPECIFIER	 	 	-	
QUANTITY	 	 		
DATE	 	 		



20 ½″ Ø520mm



F

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com




**ONNA PORTABLE** 

E114035-

PROJECT

TYPE SPECIFIER
SPECIFIER
QUANTITY
DATE

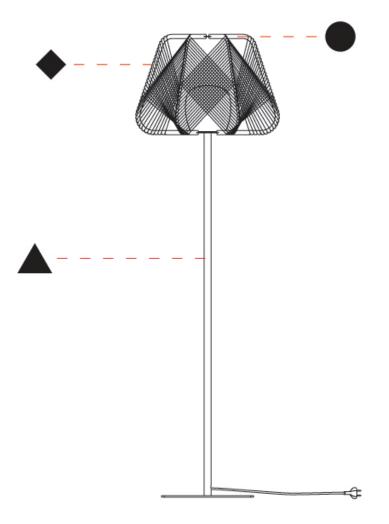

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

Е

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 4/12




# **ONNA**

PROJECT			
TYPE	 	 	 
SPECIFIER	 	 	 
QUANTITY	 	 	 
DATE	 	 	 

#### **Fixture Finish**

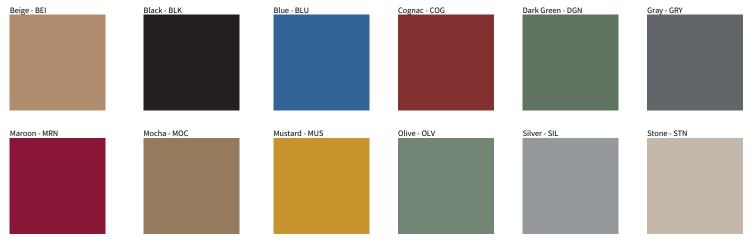




# White - WHI

#### Holder Finish







Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

### **ONNA SUSPENSION, PORTABLE** COLOR FINISH CHART

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

#### Accent Finish







Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com



### COLOR FINISH CHART

PROJECT NOTES



MOCHA - MOC Pant. 7504C 175



TERRACOTTA - TER Pant. 153C



COGNAC - COG Pant. BLACK C 255

TYPE

QUANTITY DATE



MUSTARD - MUS Pant. 1245C 168



WHITE- WHI Pant. WHITE



DARK GREEN - DGN Pant. 5616C 301



OLIVE - OLV Pant. 5625C 323



BEIGE - BEI Pant. 727C 196





120

129

SILVER - SIL Pant. 7C





211

BLACK- BLK

Pant. BLACK C

STONE - STN Pant. 7528C 1196





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding (INT at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



# **ZANEEN**<sub>®</sub>

PROJECT		
TYPE		
NOTES		

QUANTITY DATE

# **COMPLETE COLOR FINISH CHART**

71

2621

S - WHITE- WHI Pant. WHITE



LITIO\* Pant. 5425C



S - BLACK- BLK Pant. BLACK C 211



PACIFIC Pant. 2767C 68

AZUL ROYAL Pant. 288C



BLAVINA Pant. 2915C



CRYSTAL Pant. GLASS



75

DELHIN Pant. 430C 126

BOREAL Pant. 7547C 1786



S - BLUE (INDIGO) Pant. 653C



OCEANO Pant. 294C



**ESCARCHA** Pant. 2707C



ALPACA Pant. 429C



S - GRAY- GRY Pant. 10C 120



NOCTURNO Pant. 7547C

66



ALITALIA Pant. 646C



AZUL ELECTRICO Pant. 2945



LAGO Pant. 324C



S - SILVER - SIL







MARINO Pant. 289C



63

MEDAS Pant. 295C 24





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



67

PROJECT NOTES QUANTITY

DATE

TYPE

**COMPLETE COLOR FINISH CHART** 

320



MUSGO Pant. 5535C



LAVANDA Pant. 374C 2214



ASTRACAN Pant. 7529C

101

187



MARRON Pant. 476C



AVELLANA Pant. 729C



VERDE BILLAR 353 Pant. 340C



S - DARK GREEN Pant. 5616C 301



CRUDO Pant. 7401C 170



CAMELLO Pant. 731C

161



MARRON SUPER Pant. BLACK 4C 189



S - BEIGE - BEI Pant. 7270 196











OPALE Pant. 402 1442



CASTANO Pant. 4625C 1674



MADERA Pant. 7519C



2183

ARENA Pant. 465C







S - STONE - STN Pant. 7528C 1196



TABACO Pant. 1545C 203

S - MOCHA Pant. 7504C



175

**BEIGE / CAMEL** Pant. 1265C



Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

PROJECT QUANTITY

DATE

TYPE NOTES

### **COMPLETE COLOR FINISH CHART**

15



MIMOSA Pant. 108C



NARANJA Pant. 164C 87

ROJO Pant. 186C 241

CLARETE Pant. 209C



PURPURA





AMARILLO Pant. 109U



S - TERRACOTTA Pant. 153C 205



FUEGO Pant. 185C

245



BURDEOS Pant. 188C 163

CICLAMOR Pant. 2050

264









CALABAZA Pant. 158C



SATAN Pant. 207C 19





FUCSIA Pant. 212C









S- MAROON Pant. 1955C 224





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com





285



PROJECT	
ТҮРЕ	
NOTES	
QUANTITY	
DATE	

# **COMPLETE COLOR FINISH CHART**



AMORATADO Pant. 265C 135



ALEJANDRIA Pant. 196C 261



LAPIZLAZULI Pant. 2745C

62



CANET Pant. 2717C



VIOLETA Pant. 7676C





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

### **ONNA**

PROJECT

TYPE

SPECIFIER QUANTITY

DATE

# LEGEND

↓_	floor-mounted	¥	pivotable	$\circledast$	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
$\overline{}$	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	Ø	rechargeable battery powered
$\rightarrow$	wall-mounted	T	color of suspension cable	1111 1100	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution		length of suspension cable	CRI	color rendering index
	direct light distribution	Δ	reflector degree selection	<b>°K</b>	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	$\overline{\mathbf{A}}$	lens		efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ä	aura light distribution	0	shine ring	318	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	$\odot$	integrated shine ring with diffuser	٢	walk on
5	square wall or ceiling cut-out	D.	free individual colors 01-29		drive on
d d	the supplied jig specifies the cutout dimensions	i Co	individual colors: 00 (free of charge), 01-25 (extra charge)	<b>O</b> SC	Dark Sky Compliance
(++)	minimum distance (meters) lamp - object	۲	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
£	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
[↓	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)	(ه)	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
<b>6</b>	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
У	separately switchable	$\odot$	indirect diffuser		ETL Certified to UL and CSA Standards
シリ	sensor	D	direct diffuser	c (U) us	UL Certified to UL and CSA Standards
	remote control	$\boldsymbol{\Theta}$	ball-proof (upon request)	<b>S</b> .	CSA Certified to UL and CSA Standards
2	available upon request	U	accessory	2	Certified for North American Standards

### **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
1966	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### **IK RATING**

КОТ	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
КО4	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
KOS	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
КОТ	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
КО9	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)