

D141135-

base number

Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 140
Diameter (in): 5 ½
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 1660
Max. Overall Height (in): 65 $\frac{3}{8}$
Light Distribution: Omnidirectional
Weight (kg): 0.51
Weight (lbs): 1.12
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: CHR

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Fixture Material: Glass / Metal Cable Details: 1500mm cable

Certified By: Certified for North American Standards

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	










D141135-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

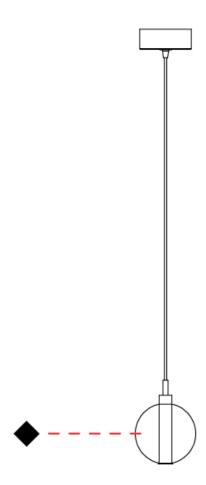





OSCURA - 3 LIGHT CLUSTER SUSPENSION

D141137-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 3 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Culturate many David and	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 270
Diameter (in): $10\frac{5}{8}$
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 1660
Max. Overall Height (in): 65 $\frac{3}{8}$
Light Distribution: Omnidirectional
Weight (kg): 2.25
Weight (lbs): 4.96
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

Cable Details: 1500mm cable

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20





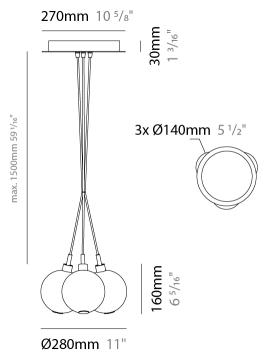






OSCURA - 3 LIGHT CLUSTER SUSPENSION

D141137-

PROJECT			
TYPE			_
SPECIFIER			_
QUANTITY			_
DATE			_

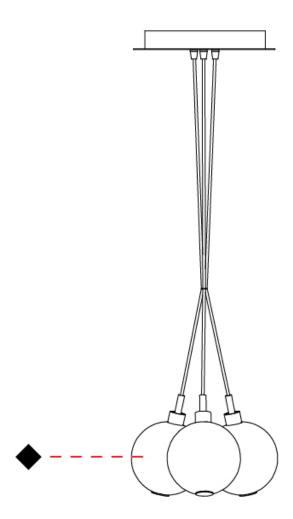





OSCURA - 7 LIGHT CLUSTER SUSPENSION

D141138-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 7 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 430
Diameter (in): 16 ¹⁵ / ₁₆
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 1660
Max. Overall Height (in): 65 3/8
Light Distribution: Omnidirectional
Weight (kg): 4
Weight (lbs): 8.82
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

ELECTRICAL
Number of Lamps: 7
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 28
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Cable Details: 1500mm cable

Certified By: Certified for North American Standards





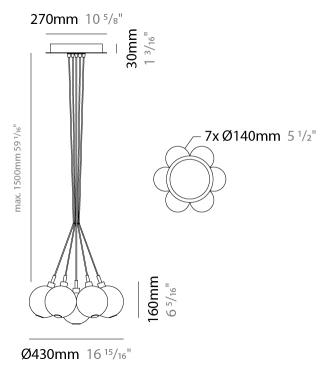






OSCURA - 7 LIGHT CLUSTER SUSPENSION

D141138-

TYPE SPECIFIER QUANTITY DATE	PROJECT		
QUANTITY	TYPE		
	SPECIFIER		
DATE	QUANTITY		
	DATE		

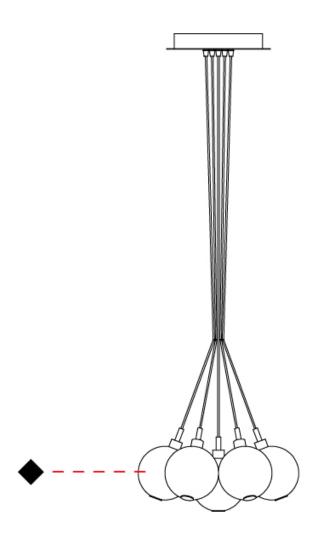





OSCURA - 19 LIGHT CLUSTER SUSPENSION

D141139-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 19 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 720
Diameter (in): 28 3/8
Height (mm): 160
Height (in): 5 $\frac{7}{8}$
Max. Overall Height (mm): 2660
Max. Overall Height (in): 64 15/16
Light Distribution: Omnidirectional
Weight (kg): 9.5
Weight (lbs): 20.94
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

Cable Details: 2500mm cable


ELECTRICAL
Number of Lamps: 19
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 76
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

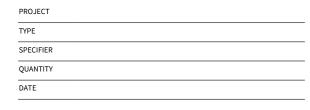



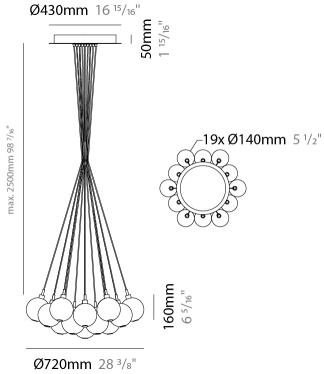



ZANEEN_®

OSCURA - 19 LIGHT CLUSTER SUSPENSION

D141139-

ROJECT
YPE
PECIFIER
UANTITY
ATE







OSCURA - 37 LIGHT CLUSTER SUSPENSION

D141140-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 37 Light Cluster
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling

Mounting Location. Centing
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 1000
Diameter (in): 39 ³ / ₈
Height (mm): 160
Height (in): 5 1/8
Max. Overall Height (mm): 2660
Max. Overall Height (in): 64 15/16
Light Distribution: Omnidirectional
Weight (kg): 18.20
Weight (lbs): 40.12
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: PSS

Fixture Material: Glass / Metal Cable Details: 2500mm cable

ELECTRICAL	
Number of Lamps: 37	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 148	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





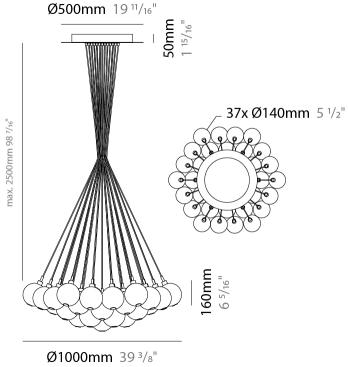






OSCURA - 37 LIGHT CLUSTER SUSPENSION

D141140-

PROJECT			
TYPE			_
SPECIFIER			_
QUANTITY			_
DATE			_

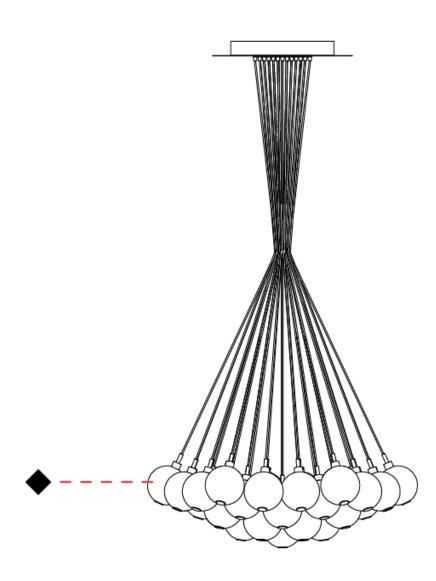





OSCURA - 3 LIGHT MULTIPLE SUSPENSION

D141141-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 3 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 270
Diameter (in): 10 %
Height (mm): 160
Height (in): 5 1/8
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 $^{15}\!\!/_{16}$
Light Distribution: Omnidirectional
Weight (kg): 2.2
Weight (lbs): 4.85
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm cable


ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 12	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

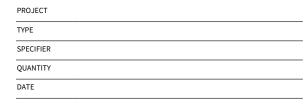



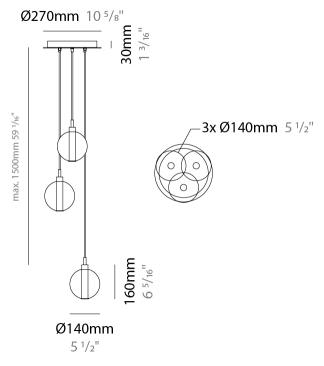






OSCURA - 3 LIGHT MULTIPLE SUSPENSION

D141141-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	_
DATE	_

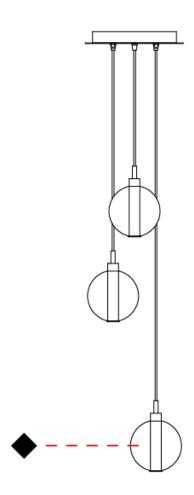





OSCURA - 5 LIGHT MULTIPLE SUSPENSION

D141142-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 5 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cub automore Douglant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 270
Diameter (in): 10 \(\frac{5}{8} \)
Height (mm): 160
Height (in): $5\frac{7}{8}$
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 15/16
Light Distribution: Omnidirectional
Weight (kg): 2.7
Weight (lbs): 5.95
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

ELECTRICAL	
Number of Lamps: 5	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 20	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Cable Details: 1500mm cable

Certified By: Certified for North American Standards





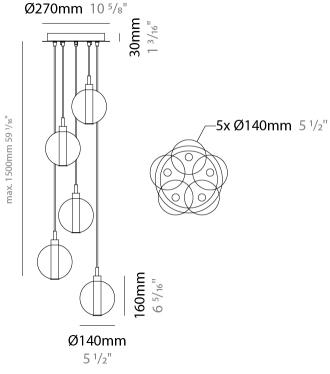






OSCURA - 5 LIGHT MULTIPLE SUSPENSION

D141142-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

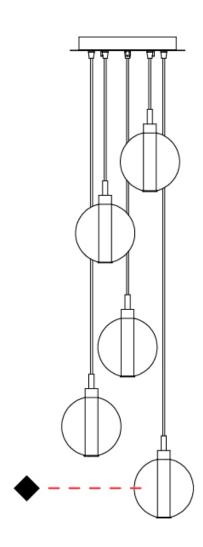





OSCURA - 7 LIGHT MULTIPLE SUSPENSION

D141143-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 7 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subsatagony Bandant	

mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 460
Diameter (in): 18 ½
Height (mm): 160
Height (in): 5 $\frac{7}{8}$
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 15/16
Light Distribution: Omnidirectional
Weight (kg): 4.9
Weight (lbs): 10.8
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

ELECTRICAL	
Number of Lamps: 7	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 28	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
nput Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

IP rating: IP20

Cable Details: 1500mm cable

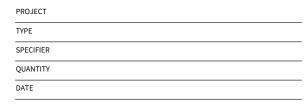



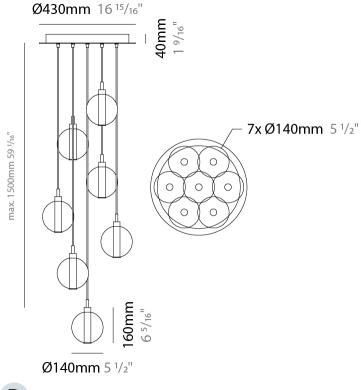






OSCURA - 7 LIGHT MULTIPLE SUSPENSION

D141143-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

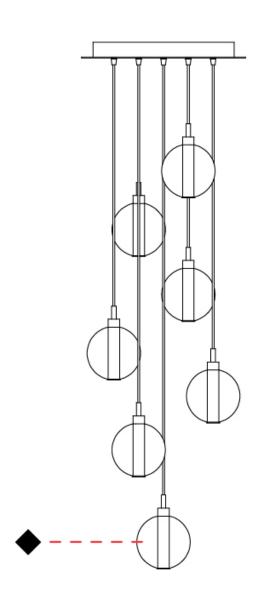





OSCURA - 9 LIGHT MULTIPLE SUSPENSION

D141144-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 9 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	


ELECTRICAL
Number of Lamps: 9
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 36
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

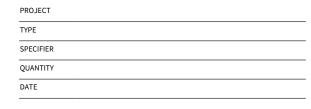



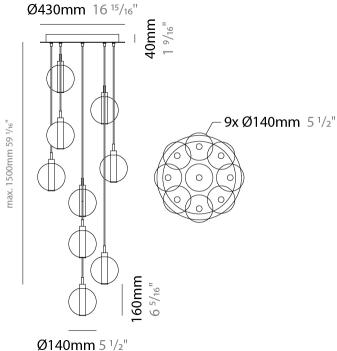






OSCURA - 9 LIGHT MULTIPLE SUSPENSION

D141144-

ROJECT	
YPE	
PECIFIER	_
UANTITY	_
ATE	

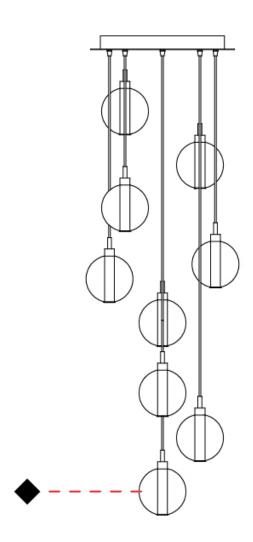





OSCURA - 11 LIGHT MULTIPLE SUSPENSION

D141145-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 11 Light Multiple
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 460
Diameter (in): 18 ½
Height (mm): 160
Height (in): 5 1/8
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 15/16
Light Distribution: Omnidirectional
Weight (kg): 6.3
Weight (lbs): 13.9
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal

Cable Details: 1500mm cable


ELECTRICAL
Number of Lamps: 11
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 44
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

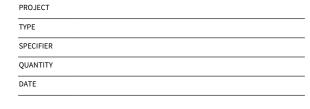



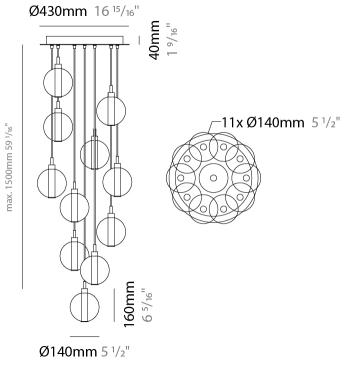






OSCURA - 11 LIGHT MULTIPLE SUSPENSION

D141145-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

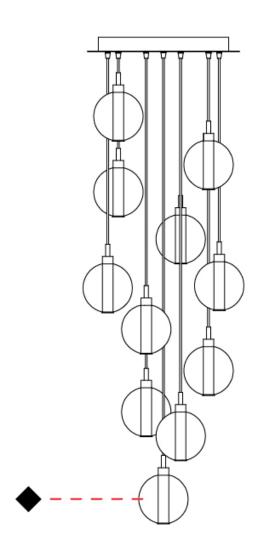





D141215-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 240
Height (in): $9\frac{7}{16}$
Max. Overall Height (mm): 1740
Max. Overall Height (in): 68 ½
Light Distribution: Omnidirectional
Weight (kg): 0.855
Weight (lbs): 1.88
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: CHR

Fixture Material: Glass / Metal Cable Details: 1500mm cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 4
Max. Wattage Per Lamp (W): 1
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D141215-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

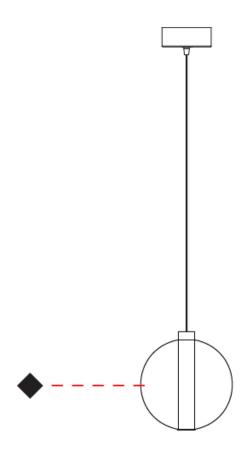





D141216-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Cable Details: 1500mm cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 4
Max. Wattage Per Lamp (W): 1
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D141216-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	

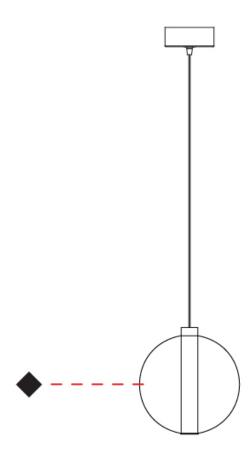





D141217-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 260
Diameter (in): 10 1/4
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 1.000
Weight (lbs): 2.2
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: CHR

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Fixture Material: Glass / Metal Cable Details: 1500mm cable

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



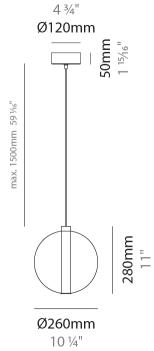






D141217-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

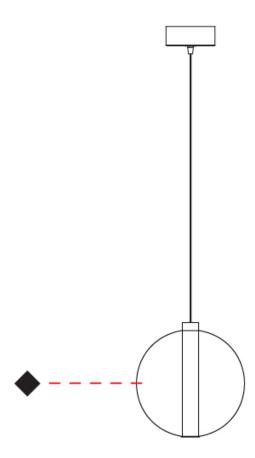



ZANEEN®

OSCURA SURFACE

D143022-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Round
Diameter (mm): 140
Diameter (in): 5 ½
Height (mm): 140
Depth (mm): 190
Height (in): $5\frac{1}{2}$
Depth (in): 7 ½
Light Distribution: Omnidirectional
Weight (kg): 0.51
Weight (lbs): 1.12
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
Holder Finish: CHR
Fixture Material: Glass / Metal

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 4 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












OSCURA SURFACE

D143022-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

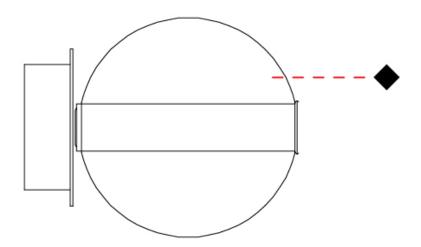



ZANEEN®

OSCURA PORTABLE

D144027-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Ambient	

PHYSICAL
Shape: Round
Diameter (mm): 150
Diameter (in): 5 1/8
Height (mm): 200
Height (in): 7 1/8
Light Distribution: Omnidirectional
Weight (kg): 0.835
Weight (lbs): 1.84
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA

Holder Finish: CHR
Fixture Material: Glass / Metal

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT


TYPE

SPECIFIER

QUANTITY

DATE










OSCURA PORTABLE

D144027-

ROJECT	
YPE	
PECIFIER	_
UANTITY	_
ATE	

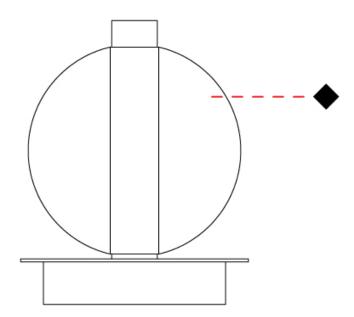





OSCURA SUSPENSION

D14OSCURA-MOD-SYS

base number

1.To build a product code in our	configurator select	the specify button or
the base model # product page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Modular	

PHYSICAL

ELECTRICAL


Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards









OSCURA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish





























Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.





OSCURA

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

T	Mary D		a 878		special LED (upon request) PGP_PGPW_tupable
	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	ĹM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩ <u></u>	efficacy (lumens per watt)
	asymmetric light distribution	\otimes	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ā	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
d C	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ • _* +	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\perp}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	√ ⑨	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
₩	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	։ (Մ) ու	UL Certified to UL and CSA Standards
	remote control	(1)	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

100000	288 (400 C) - 26 5 (100 C) - 26 5 (
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm