OSCURA - MONOPOINT SUSPENSION

D141135-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 140	
Diameter (in): $5\frac{1}{2}$	
Height (mm): 160	
Height (in): 6 ⁵ ∕ ₁₆	
Max. Overall Height (mm): 1660	
Max. Overall Height (in): 65 $\frac{3}{8}$	
Light Distribution: Omnidirectional	
Weight (kg): 0.51	
Weight (lbs): 1.12	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKE SMK / STE / TOB / TRA	3/
Holder Finish: CHR	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	
ELECTRICAL	
Number of Lamps: 1	
Lamn Tyne: LED Retrofit	

Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


May 27, 2024, 10:17 am

OSCURA - MONOPOINT SUSPENSION

D141135-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

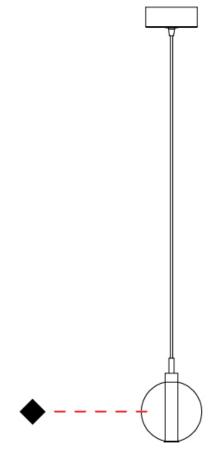

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - 3 LIGHT CLUSTER SUSPENSION

D141137-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 3 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 270	
Diameter (in): $10\frac{5}{8}$	
Height (mm): 160	
Height (in): 6 ⁵ / ₁₆	
Max. Overall Height (mm): 1660	
Max. Overall Height (in): 65 🐇	
Light Distribution: Omnidirectional	
Weight (kg): 2.25	
Weight (lbs): 4.96	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGE SMK / STE / TOB / TRA) / RUB / SKB /
Holder Finish: PSS	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	

. ۰.

Number of Lamps: 3
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



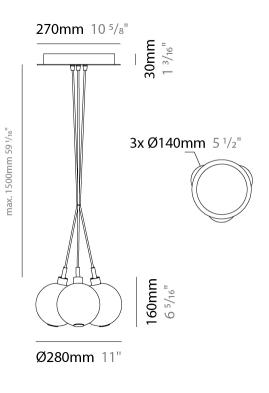

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - 3 LIGHT CLUSTER SUSPENSION

D141137-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

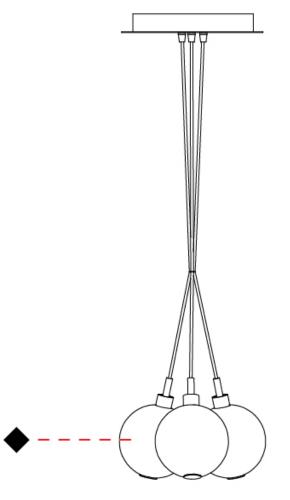



OSCURA - 7 LIGHT CLUSTER SUSPENSION

D141138-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 7 Light Cluster
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 430
Diameter (in): 16 ¹⁵ / ₁₆
Height (mm): 160
Height (in): 6 ⁵ / ₁₆
Max. Overall Height (mm): 1660
Max. Overall Height (in): 65 ⅔
Light Distribution: Omnidirectional
Weight (kg): 4
Weight (lbs): 8.82
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm cable

ELECTRICAL

-

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		



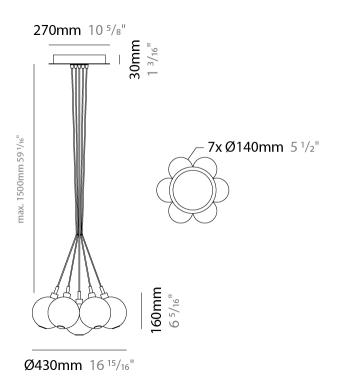

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 5/28

OSCURA - 7 LIGHT CLUSTER SUSPENSION

D141138-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

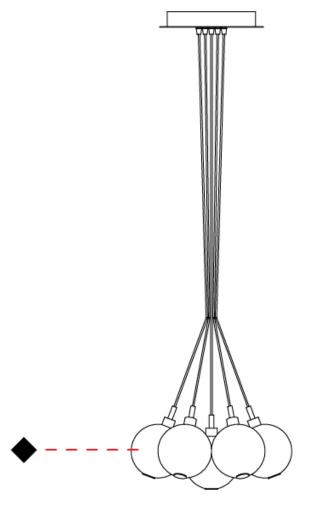

OSCURA - 19 LIGHT CLUSTER SUSPENSION

D141139-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 19 Light Cluster
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 720
Diameter (in): 28 $\frac{3}{8}$
Height (mm): 160
Height (in): 5 $\frac{7}{8}$
Max. Overall Height (mm): 2660
Max. Overall Height (in): 64 ¹⁵ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 9.5
Weight (lbs): 20.94
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 2500mm cable

ELECTRICAL

Number of Lamps: 19	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 76	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



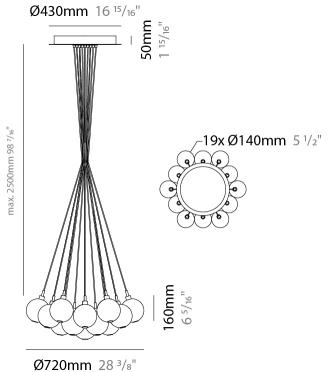

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - 19 LIGHT CLUSTER SUSPENSION

D141139-

PROJECT

FROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 8/28



OSCURA - 37 LIGHT CLUSTER SUSPENSION

D141140-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 37 Light Cluster
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 1000
Diameter (in): 39 ³ / ₈
Height (mm): 160
Height (in): 5 $\frac{7}{8}$
Max. Overall Height (mm): 2660
Max. Overall Height (in): 64 ¹⁵ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 18.20
Weight (lbs): 40.12
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 2500mm cable

ELECTRICAL

Number of Lamps: 37	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 148	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



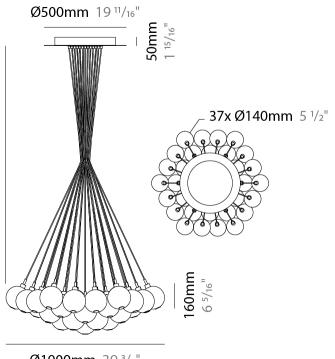

Ø1000mm 39 3/8"

2500mm 98 7/16"

max.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - 37 LIGHT CLUSTER SUSPENSION

D141140-

PROJECT

FROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

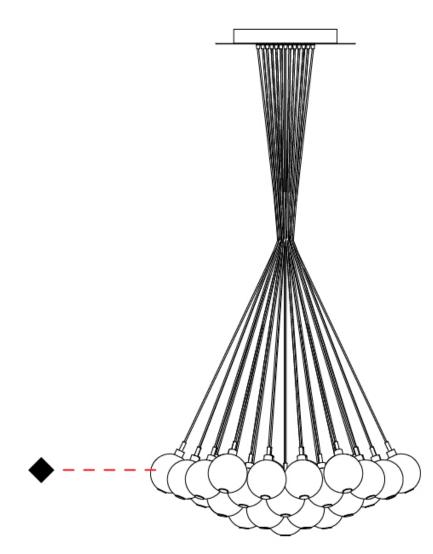

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - 3 LIGHT MULTIPLE SUSPENSION

D141141-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 3 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	_
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 270	
Diameter (in): 10 ⁵ ⁄ ₈	
Height (mm): 160	_
Height (in): $5\frac{7}{8}$	
Max. Overall Height (mm): 1660	_
Max. Overall Height (in): 64 ¹⁵ / ₁₆	_
Light Distribution: Omnidirectional	_
Weight (kg): 2.2	_
Weight (lbs): 4.85	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /	
SMK / STE / TOB / TRA	_
Holder Finish: PSS	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	
ELECTRICAL	

ELECTRICAL

Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 12	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



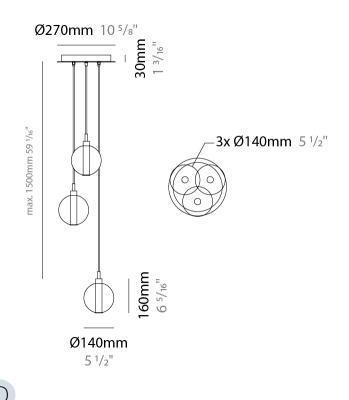

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 11/28

OSCURA - 3 LIGHT MULTIPLE SUSPENSION

D141141-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

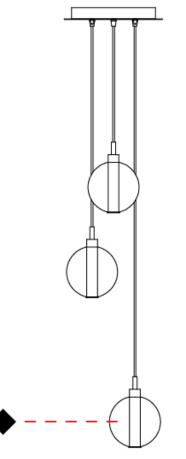



OSCURA - 5 LIGHT MULTIPLE SUSPENSION

D141142-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 5 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 270	
Diameter (in): 10 ⅓	
Height (mm): 160	
Height (in): $5\frac{1}{8}$	
Max. Overall Height (mm): 1660	
Max. Overall Height (in): 64 ¹⁵ / ₁₆	
Light Distribution: Omnidirectional	
Weight (kg): 2.7	
Weight (lbs): 5.95	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB	/
SMK / STE / TOB / TRA	
Holder Finish: PSS	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	

ELECTRICAL

Number of Lamps: 5
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 20
Max. Wattage Per Lamp (W): 4
Lamp Base: G9
Input Voltage (V): 120
•

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		



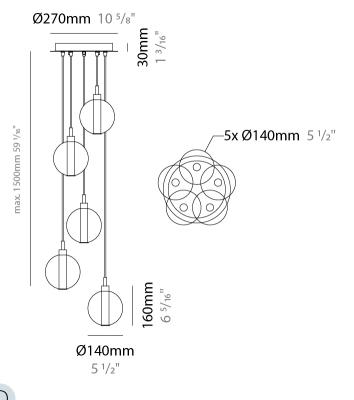


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - 5 LIGHT MULTIPLE SUSPENSION

D141142-

PROJECT

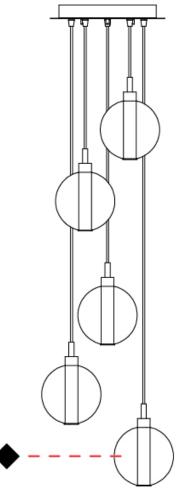

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - 7 LIGHT MULTIPLE SUSPENSION

D141143-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 7 Light Multiple
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 460
Diameter (in): 18 $\frac{1}{3}$
Height (mm): 160
Height (in): 5 ⁷ / ₈
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 ¹⁵ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 4.9
Weight (lbs): 10.8
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm cable

ELECTRICAL

Number of Lamps: 7	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 28	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



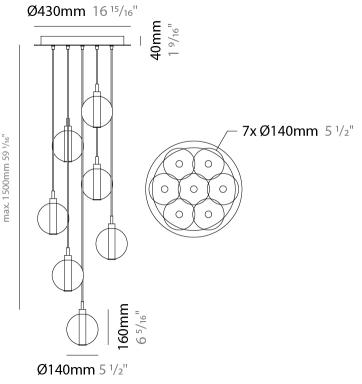

Zaneen Group Inc. © 2024. T 1800-388-3382. F 416-247-9319. www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 15/28

OSCURA - 7 LIGHT MULTIPLE SUSPENSION

D141143-

PROJECT

ROJECT
TYPE
SPECIFIER
QUANTITY
DATE

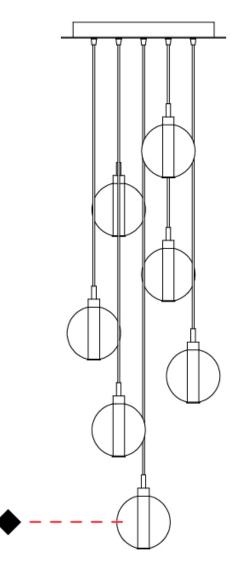

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - 9 LIGHT MULTIPLE SUSPENSION

D141144-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - 9 Light Multiple	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	_
PHYSICAL	
Shape: Round	
Diameter (mm): 460	
Diameter (in): 18 $\frac{1}{8}$	
Height (mm): 160	
Height (in): 6 ⁵ / ₁₆	
Max. Overall Height (mm): 1660	_
Max. Overall Height (in): 64 ¹⁵ / ₁₆	_
Light Distribution: Omnidirectional	
Weight (kg): 5.6	_
Weight (lbs): 12.35	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /	
SMK / STE / TOB / TRA	_
Holder Finish: PSS	_
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	_

ELECTRICAL

Number of Lamps: 9	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 36	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PRO.	JEC

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

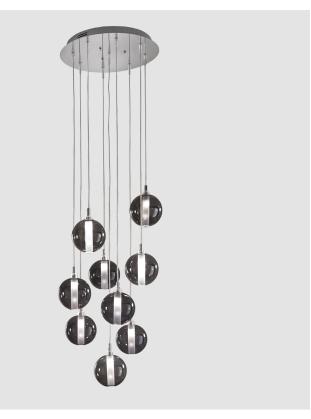

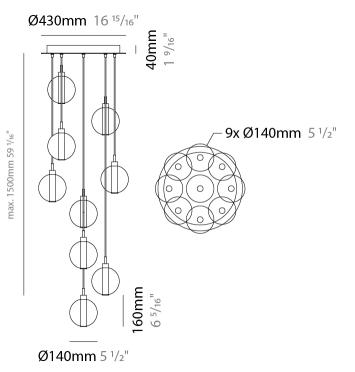

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - 9 LIGHT MULTIPLE SUSPENSION

D141144-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

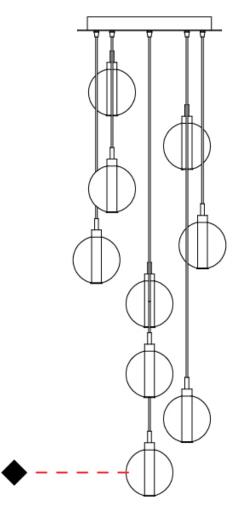

OSCURA - 11 LIGHT MULTIPLE SUSPENSION

D141145-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - 11 Light Multiple
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 460
Diameter (in): 18 $\frac{1}{8}$
Height (mm): 160
Height (in): 5 $\frac{7}{8}$
Max. Overall Height (mm): 1660
Max. Overall Height (in): 64 ¹⁵ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 6.3
Weight (lbs): 13.9
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm cable

ELECTRICAL

Number of Lamps: 11	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 44	
Max. Wattage Per Lamp (W): 4	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			



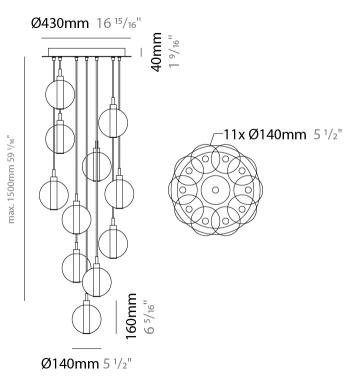

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 19/28

OSCURA - 11 LIGHT MULTIPLE SUSPENSION

D141145-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			
-			

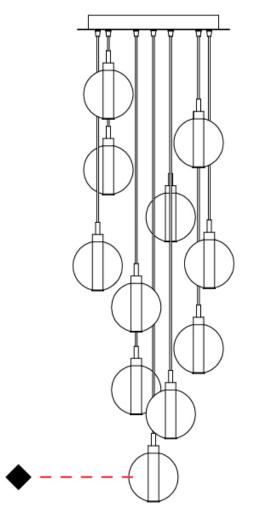

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - MONOPOINT SUSPENSION

D141215-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura
Subseries: Oscura - Monopoint
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 220
Diameter (in): $8^{11}/_{16}$
Height (mm): 240
Height (in): 9 $\frac{7}{16}$
Max. Overall Height (mm): 1740
Max. Overall Height (in): 68 ½
Light Distribution: Omnidirectional
Weight (kg): 0.855
Weight (lbs): 1.88
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB /
SMK / STE / TOB / TRA
Holder Finish: CHR
Fixture Material: Glass / Metal
Cable Details: 1500mm cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit

Bulb Included: Bulb Not Included
Total Output Wattage (W): 4
Max. Wattage Per Lamp (W): 1
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

OSCURA - MONOPOINT SUSPENSION

D141215-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

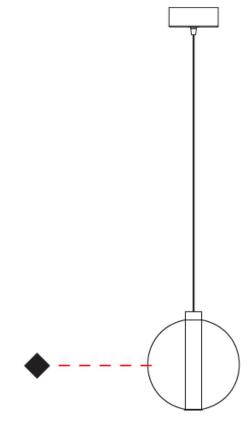

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - MONOPOINT SUSPENSION

D141216-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 240	
Diameter (in): 9 $\frac{7}{16}$	
Height (mm): 260	
Height (in): 10 ¹ / ₄	
Max. Overall Height (mm): 1760	
Max. Overall Height (in): 69 $\frac{5}{16}$	
Light Distribution: Omnidirectional	
Weight (kg): 0.925	
Weight (lbs): 2.04	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SI SMK / STE / TOB / TRA	KB /
Holder Finish: CHR	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	

Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 4
Max. Wattage Per Lamp (W): 1
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	






Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - MONOPOINT SUSPENSION

D141216-

PROJECT

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

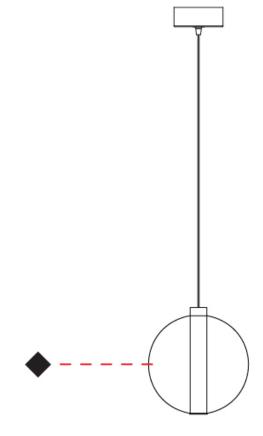



Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 24/28

OSCURA - MONOPOINT SUSPENSION

D141217-

Finish Options base number

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Oscura	
Subseries: Oscura - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 260	
Diameter (in): 10 ¹ / ₄	
Height (mm): 280	
Height (in): 11	
Max. Overall Height (mm): 1780	
Max. Overall Height (in): 70 $\frac{1}{16}$	
Light Distribution: Omnidirectional	
Weight (kg): 1.000	
Weight (lbs): 2.2	
Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUI SMK / STE / TOB / TRA	B / SKB /
Holder Finish: CHR	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	

Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 4
Max. Wattage Per Lamp (W): 1
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		








Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

OSCURA - MONOPOINT SUSPENSION

D141217-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

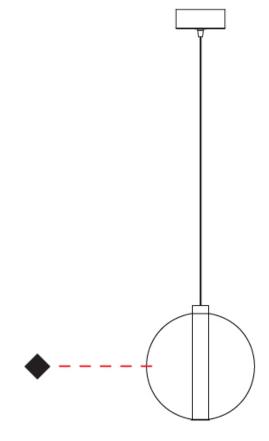



Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

May 27, 2024, 10:17 am

Page 26/28



OSCURA

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish

Rose Gold - RGD











Sky Blue - SKB





Smoke - SMK





Steel - STE

Pink - PNK

Tobacco - TOB



Transparent - TRA



Holder Finish



Polished Stainless Steel - PSS

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com



OSCURA

PROJECT

TYPE

SPECIFIER

QUANTITY DATE

LEGEND

<u> </u>	floor-mounted	¥	pivotable	\circledast	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	Ø	rechargeable battery powered
\rightarrow	wall-mounted	T	color of suspension cable	1111 1100	fixture with natural vivid LED (upon request)
¥	omni-directional light distribution	÷	length of suspension cable	CRI	color rendering index
	direct light distribution	Δ	reflector degree selection	€К	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
$\mathbf{\mathbf{Y}}$	indirect light distribution	*	lens	₩.	efficacy (lumens per watt)
	asymmetric light distribution	Ð	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ä	aura light distribution	0	shine ring	318	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	٢	walk on
5	square wall or ceiling cut-out	Ċ	free individual colors 01-29		drive on
c ک	the supplied jig specifies the cutout dimensions	Ú.	individual colors: 00 (free of charge), 01-25 (extra charge)	B sc	
(++) M	minimum distance (meters) lamp - object	۲	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
£	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
\$	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)	(ه)	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
প	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
シリ	sensor	D	direct diffuser	c (H) us	UL Certified to UL and CSA Standards
Ĩ	remote control	$\boldsymbol{\Theta}$	ball-proof (upon request)	SP.	CSA Certified to UL and CSA Standards
2	available upon request	U	accessory	(\mathbb{Z})	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
1954	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
1965	protected against ingress of dust protected against jets of water
1966	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
КОб	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)