

PAGODA SUSPENSION

D111228-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Pagoda

Partner: Ole

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

PHYSICAL

Shape: Hexagon

Length (mm): 600

Length (in): 23 5/8

Width (mm): 520

Width (in): 20 1/2

Height (mm): 410

Height (in): 16 1/8

Max. Overall Height (mm): 2410

Max. Overall Height (in): 94 7/8

Weight (kg): 5.48

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: BLK

Fixture Material: Metal / PMMA / Recycled Cord

Primary Material: Fabric - Recycled

Cable Details: 2000mm / 78 3/4" Transparent Cable

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Max. Wattage Per Lamp (W): 15

Lamp Base: E27

Dimming: Non-Dimmable

Driver Included: No

Input Voltage (V): 120

Upon Request: Casambi

LED


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

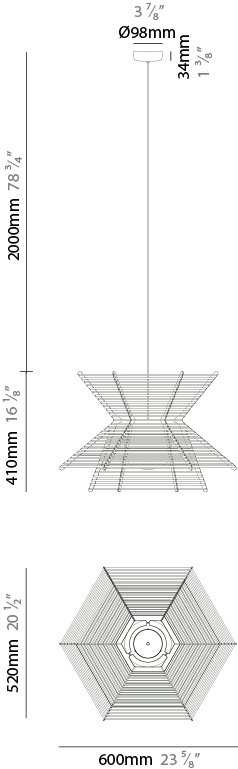

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

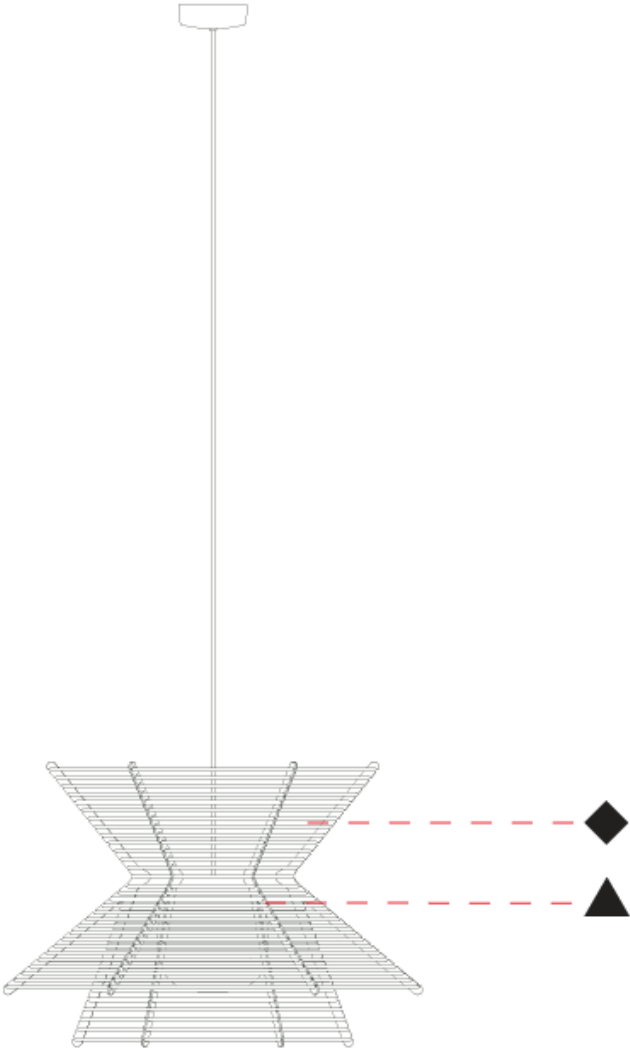

PAGODA SURFACE

D113077-

base number Finish Options

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Pagoda  
Partner: Ole  
Division: Design  
Installation: Surface  
Product Type: Wall Surface  
Mounting Location: Wall  
Light Distribution: Direct / Indirect

PHYSICAL

Shape: Abstract  
Width (mm): 310  
Width (in): 12 3/16  
Height (mm): 240  
Depth (mm): 150  
Height (in): 9 7/16  
Depth (in): 5 7/8  
Weight (kg): 1.62  
Diffuser: PMMA - Opal  
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI  
Holder Finish: BLK  
Fixture Material: Metal / PMMA / Recycled Cord

ELECTRICAL

Number of Lamps: 1  
Lamp Type: LED Retrofit  
Max. Wattage Per Lamp (W): 7  
Lamp Base: G9  
Dimming: Non-Dimmable  
Driver Included: No  
Input Voltage (V): 120  
Upon Request: Casambi



LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

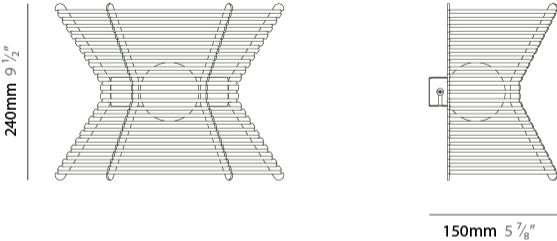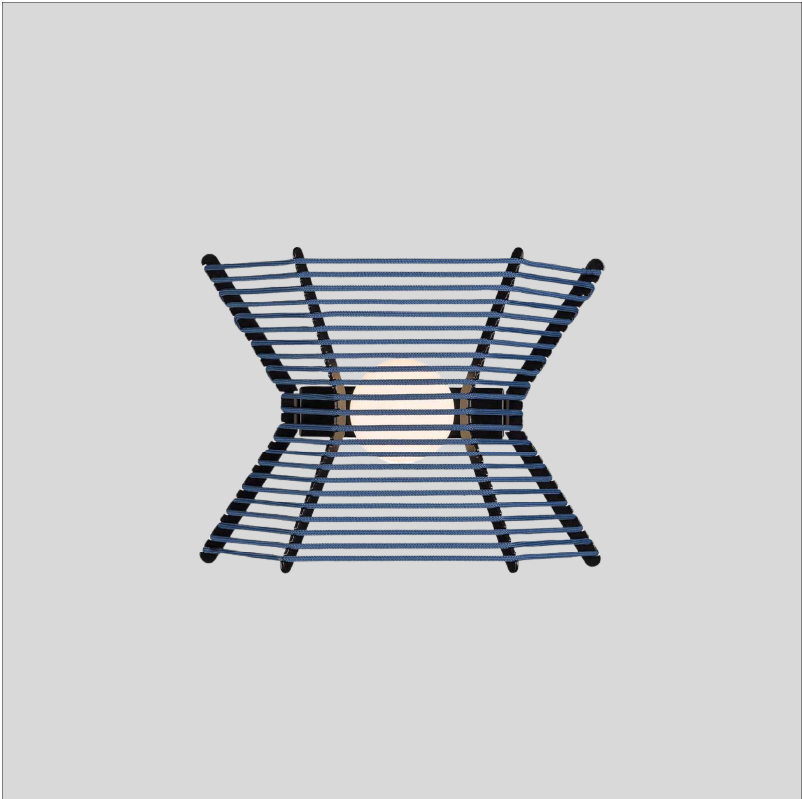

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

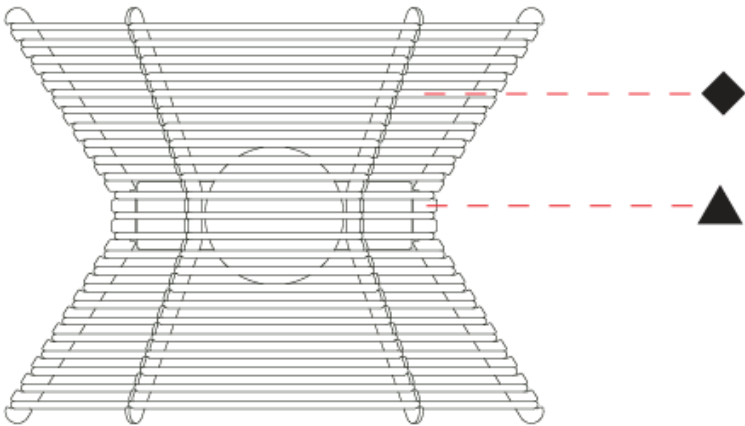

PAGODA PORTABLE

D114045-

base number Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Pagoda

Partner: Ole

Division: Design

Installation: Portable

Product Type: Floor

Mounting Location: Floor

PHYSICAL

Shape: Hexagon

Length (mm): 600

Length (in): 23 5/8

Width (mm): 520

Width (in): 20 1/2

Height (mm): 1600

Height (in): 63

Weight (kg): 8.74

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: BLK

Fixture Material: Metal / PMMA / Recycled Cord

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Max. Wattage Per Lamp (W): 15

Lamp Base: E27

Dimming: Non-Dimmable

Driver Included: No

Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

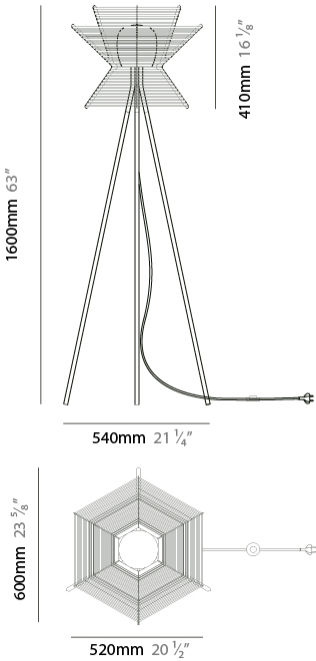

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

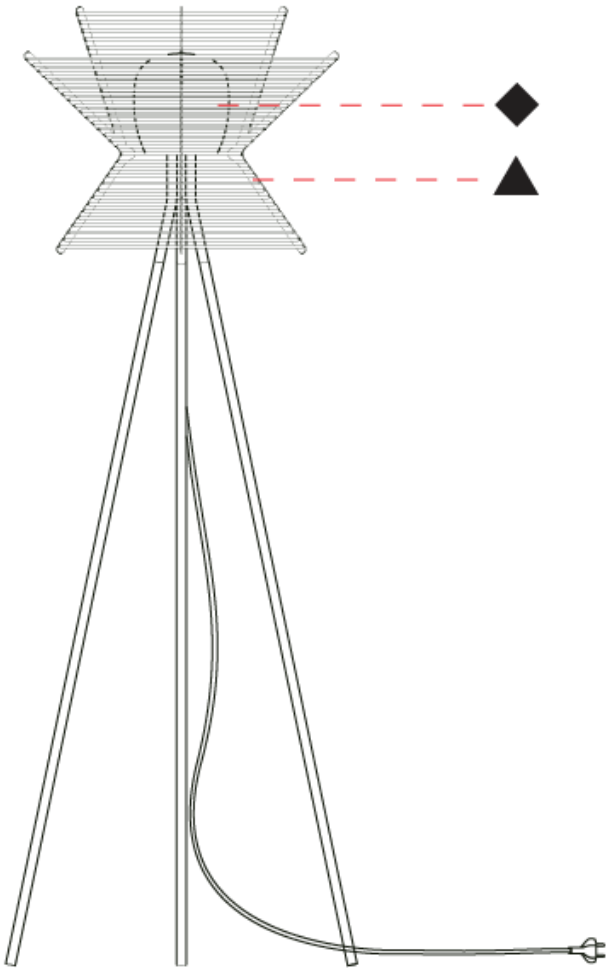

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Fixture Finish

Beige - BEI

Black - BLK

Blue - BLU

Cognac - COG

Dark Green - DGN

Gray - GRY

Maroon - MRN

Mocha - MOC

Mustard - MUS

Olive - OLV

Silver - SIL

Stone - STN

Terracotta - TER

White - WHI

Holder Finish


Black - BLK

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



COMPLETE COLOR FINISH CHART

Standard Colors of Recycles Cords

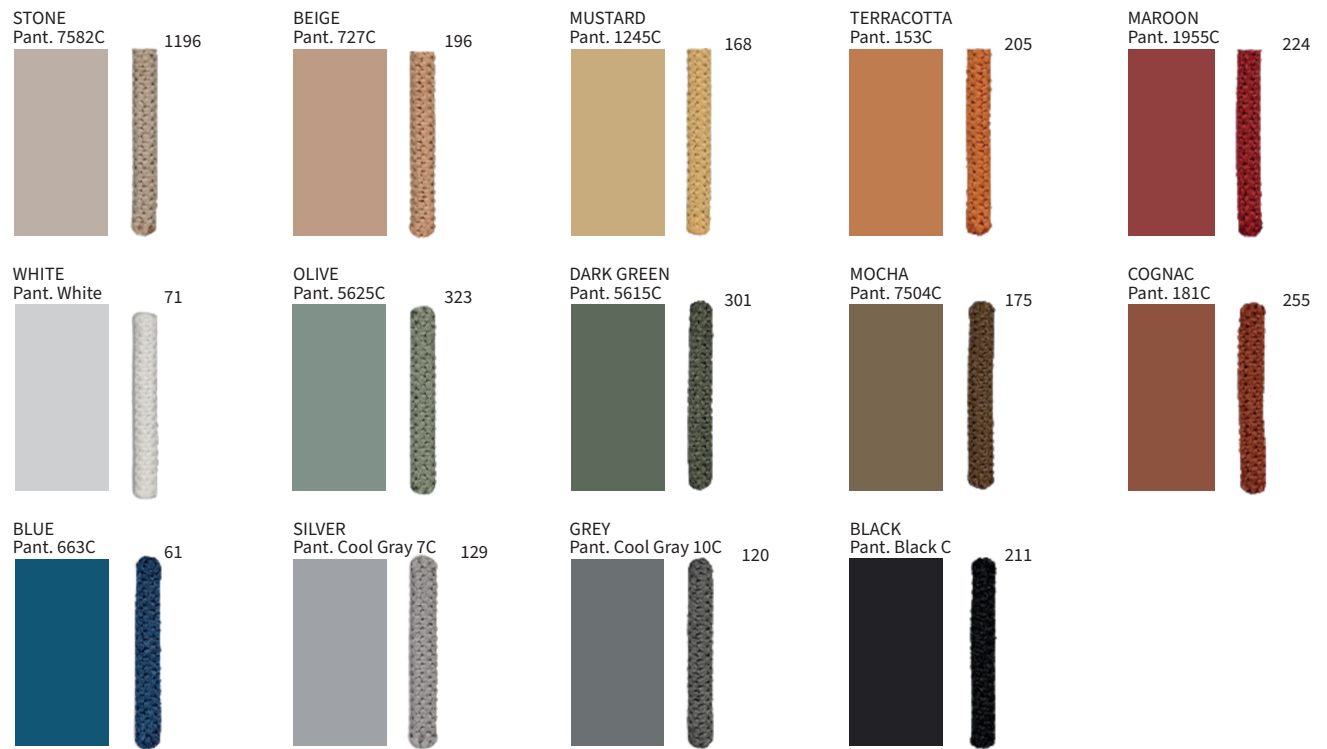




Sustainable Thin Cord



Standard Colors with [S-]  
Other fabric cord colors available upon request. Price increase and minimum quantities may apply  
**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.  
Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, [www.zaneen.com](http://www.zaneen.com)  
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact [zteam@zaneen.com](mailto:zteam@zaneen.com).  
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at [zaneen.com](http://zaneen.com)

COMPLETE COLOR FINISH CHART

Special Colors (for indoor use only)

|                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>CRISTAL</div> <div>Pant. Glass</div> <div>75</div> <div></div> <div></div>           | <div>Crudo</div> <div>Pant. 7401C</div> <div>170</div> <div></div> <div></div>          | <div>ORO</div> <div>Pant. 872C</div> <div>16</div> <div></div> <div></div>                  | <div>GOLDEN</div> <div>Pant. 7403C</div> <div>7</div> <div></div> <div></div>       | <div>AVELLANA</div> <div>Pant. 1955C</div> <div>152</div> <div></div> <div></div>    |
| <div>ALPACA</div> <div>Pant. 429C</div> <div>1401</div> <div></div> <div></div>           | <div>ARENA</div> <div>Pant. 465C</div> <div>151</div> <div></div> <div></div>           | <div>CASTOR</div> <div>Pant. P7530C</div> <div>167</div> <div></div> <div></div>            | <div>TABACO</div> <div>Pant. 1545C</div> <div>203</div> <div></div> <div></div>     | <div>MARRON</div> <div>Pant. 476C</div> <div>187</div> <div></div> <div></div>       |
| <div>TUNEL</div> <div>Pant. Black 7C</div> <div>169</div> <div></div> <div></div>       | <div>BURDEOS</div> <div>Pant. 188C</div> <div>163</div> <div></div> <div></div>       | <div>FRESILLA</div> <div>Pant. 695C</div> <div>273</div> <div></div> <div></div>          | <div>ARCILLA</div> <div>Pant. 1675C</div> <div>205</div> <div></div> <div></div>  | <div>SATAN</div> <div>Pant. 207C</div> <div>19</div> <div></div> <div></div>       |
| <div>MUSGO</div> <div>Pant. 5535C</div> <div>320</div> <div></div> <div></div>        | <div>NOCTURNO</div> <div>Pant. 7547</div> <div>66</div> <div></div> <div></div>     | <div>MEDAS</div> <div>Pant. 295C</div> <div>168</div> <div></div> <div></div>           | <div>LAVA</div> <div>Pant. 151C</div> <div>1334</div> <div></div> <div></div>   | <div>FUEGO</div> <div>Pant. 185C</div> <div>245</div> <div></div> <div></div>    |
| <div>VERDE OSCURO</div> <div>Pant. 3298C</div> <div>358</div> <div></div> <div></div> | <div>MARINO</div> <div>Pant. 289C</div> <div>63</div> <div></div> <div></div>       | <div>AZUL ELECTRICO</div> <div>Pant. 2945C</div> <div>168</div> <div></div> <div></div> | <div>CALABAZA</div> <div>Pant. 158C</div> <div>84</div> <div></div> <div></div> | <div>ROJO</div> <div>Pant. 186C</div> <div>241</div> <div></div> <div></div>     |
| <div>JUNGLA</div> <div>Pant. 356C</div> <div>310</div> <div></div> <div></div>        | <div>AZUL ROYAL</div> <div>Pant. 288C</div> <div>1075</div> <div></div> <div></div> | <div>VIOLETA</div> <div>Pant. 7676U</div> <div>147</div> <div></div> <div></div>        | <div>AMARILLO</div> <div>Pant. 109U</div> <div>1</div> <div></div> <div></div>  | <div>CICLAMOR</div> <div>Pant. 205C</div> <div>264</div> <div></div> <div></div> |

Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, [www.zaneen.com](http://www.zaneen.com)

Available for International specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact [zteam@zaneen.com](mailto:zteam@zaneen.com).

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at [zaneen.com](http://zaneen.com)

### LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

### IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

### IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |