

D111073-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL	
Series: Poma	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL
Shape: Cylinder
Diameter (mm): 450
Diameter (in): 17 11/16
Height (mm): 650
Height (in): 25 1/16
Max. Overall Height (mm): 2650
Max. Overall Height (in): 104 $\frac{5}{16}$
Light Distribution: Direct
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Fixture Material: Fabric Cord / Metal Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	










D111073-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

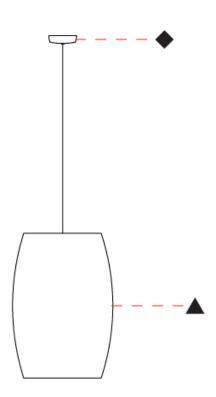





D111074-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma Brand: Ole Division: Design Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Ambient

PHYSICAL Shape: Cylinder Diameter (mm): 600 Diameter (in): 23 1/8 Height (mm): 500 Height (in): 19 11/16 Max. Overall Height (mm): 2500 Max. Overall Height (in): 98 1/16 Light Distribution: Direct Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D111074-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		







D111075-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GLIVERAL	
Series: Poma	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Culpantamamu Amabiamt	

Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 750
Diameter (in): 29 ½
Height (mm): 400
Height (in): 15 ³ / ₄
Max. Overall Height (mm): 2400
Max. Overall Height (in): 4 ½
Light Distribution: Direct
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

FI FCTDICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



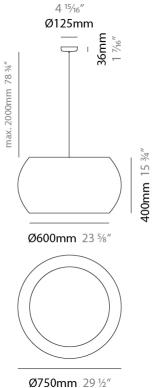






D111075-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	







D113031-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

PHYSICAL
Shape: Cylinder
Length (mm): 310
Length (in): 12 ³ / ₁₆
Height (mm): 450
Depth (mm): 120
Height (in): 17 11/16
Depth (in): 4 ³ / ₄
Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK

Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

LLECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Reguest: 277Vac / GU24


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			











D113031-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

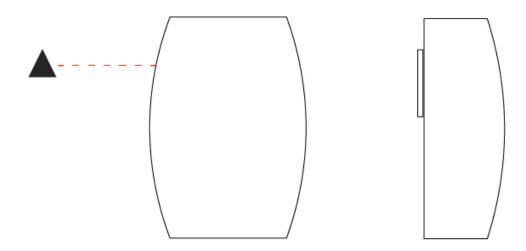







D114013-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	

PHYSICAL

Subcategory: Ambient

Shape: Cylinder		
Diameter (mm): 2	40	
Diameter (in): 9 1/16	i	
Height (mm): 330		
Height (in): 13		
Light Distribution	Direct	

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

OLV / SIL / STN / TER / WHI	-,,	- , -	,	, -	- /	,
Holder Finish: White						

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Fixture Material: Fabric Cord / Metal

Certified By: Certified for North American Standards
IP rating: IP20

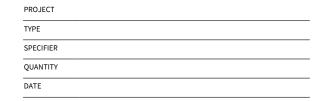








170mm 6 11/16"






D114013-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

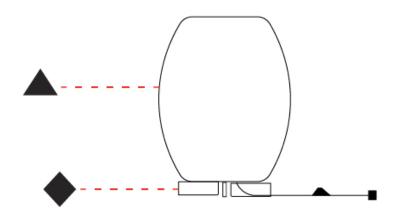







D114014-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor

PHYSICAL

Shape: Cylinder
Diameter (mm): 450
Diameter (in): 17 11 / $_{16}$ Height (mm): 1470
Height (in): 57 7 / $_{8}$

Light Distribution: Direct

Subcategory: Ambient

Fixture Finish: BEI / BLW / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: Natural Wood

Fixture Material: Metal / Wood / Fabric Cord

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Upon Request: 277Vac / GU24

Certified By: Certified for North American Standards













D114014-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

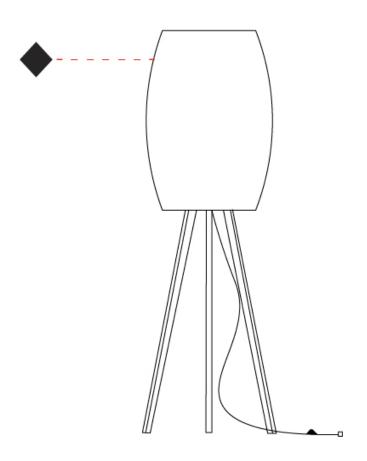







E111202-

base number

Finish Finish Finish
Options Options Option

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma	
Brand: Ole	
Division: Exterior	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 450
Diameter (in): 17 11/16
Height (mm): 650
Height (in): 25 ⁹ / ₁₆
Max. Overall Height (mm): 2650
Max. Overall Height (in): 104 $\frac{5}{16}$
Light Distribution: Direct
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /
OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK
Accent Finish: WHI / BLK

Cable Details: 2000mm Cable	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Fixture Material: Fabric Cord / Metal

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		







Ø450mm 17 11/16"






E111202-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

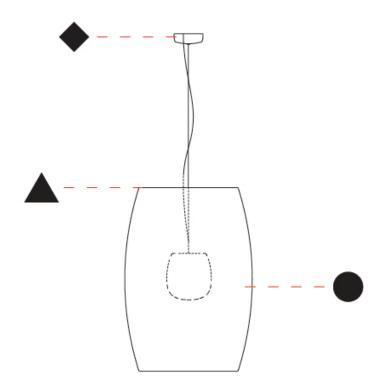





E111203-

base number

•			
	Finish	Finish	Finish
	Options	Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma
Brand: Ole
Division: Exterior
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient

OLV/SIL/SIN/TER/WHI
Holder Finish: MWH / MBK
Accent Finish: WHI / BLK
Fixture Material: Fabric Cord / Metal
Cable Details: 2000mm Cable

Cable Details: 2000mm Cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



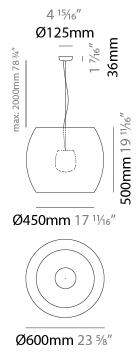






E111203-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

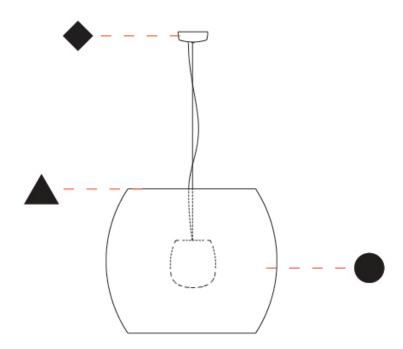





E111204-

base number

Finish Finish Finish
Options Options Option

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma
Brand: Ole
Division: Exterior
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient

Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 750
Diameter (in): 29 ½
Height (mm): 400
Height (in): 15 ³ / ₄
Max. Overall Height (mm): 2400
Max. Overall Height (in): 4 ½
Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI	
Holder Finish: MWH / MBK	
Accent Finish: WHI / BLK	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2000mm Cable	

Cable Details: 2000mm Cable
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120

LED

OPTICAL


Certified By: Certified for North American Standards


IP rating: IP66

RATINGS AND CERTIFICATIONS

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			







Ø750mm 29 ½"





E111204-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

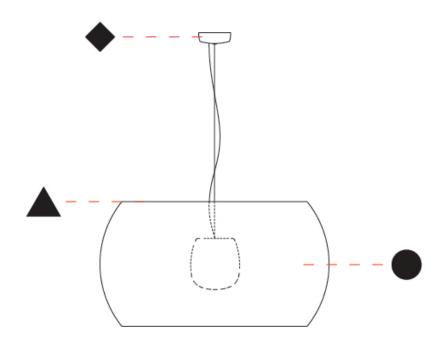





E112053-

base number

Finish Finish Finish
Options Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma
Brand: Ole
Division: Exterior
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Semi-Flush

Subcategory: Seriii-Flusii
PHYSICAL
Shape: Cylinder
Diameter (mm): 600
Diameter (in): 23 ½
Height (mm): 670
Height (in): 26 ³ / ₈
Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SI	L/SIN/IEK/WIII	
Holder	Finish: MWH / MBK	
Accent	Finish: WHI / BLK	
Fixture	Material: Fabric Cord / Metal	


Tixture material: Fabric Cora / Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












E112053-



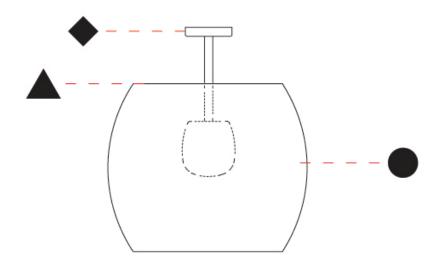





E112054-

base number

Options Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Poma	
Brand: Ole	
Division: Exterior	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Semi-Flush	

PHYSICAL

Shape: Drum
Diameter (mm): 750
Diameter (in): 29 ½
Height (mm): 570

Height (in): 22 1/4 Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Accent Finish: WHI / BLK

Fixture Material: Fabric Cord / Metal Cable Details: 2000mm Cable

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

RATINGS AND CERTIFICATIONS

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED


OPTICAL

Certified By: Certified for North American Standards

IP rating: IP66








Ø750mm 29 1/2"





E112054-



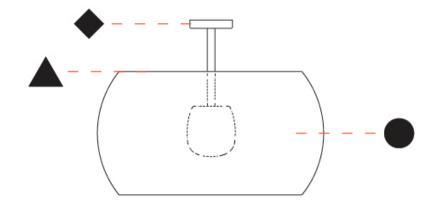





E114036-

base number

Options Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

CLITETOLE
Series: Poma
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL	
Shape: Cylinder	
Diameter (mm): 450	
Diameter (in): 17 11/16	
Height (mm): 730	

Height (in): 28 3/4 Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / BLK Accent Finish: GBL / GWT Fixture Material: Fabric Cord / Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards









Ø450mm 17 11/16"





E114036-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

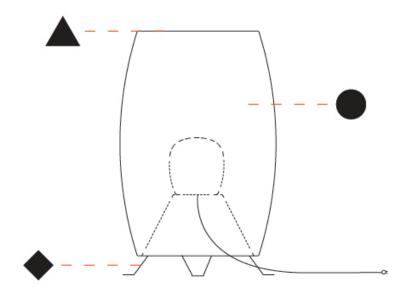





E114037-

base number

Finish Options

Finish Options Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

OLIVLIAL
Series: Poma
Brand: Ole
Division: Exterior
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL

Shape: Drum	
Diameter (mm): 750	
Diameter (in): 29 ½	

 $\frac{\text{Height (mm): 480}}{\text{Height (in): 18}^{7}/_{8}}$

Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / BLK

Accent Finish: GBL / GWT

Fixture Material: Fabric Cord / Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

LED


OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards


IP rating: IP66







480mm 18 %"




Ø750mm 29 ½"





E114037-

PROJECT	
TYPE	-
SPECIFIER	_
QUANTITY	-
DATE	-

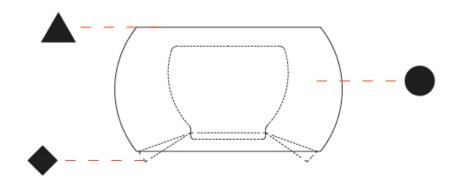






POMA


COLOR FINISH CHART


PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish






























Holder Finish













POMA SUSPENSION, SURFACE, PORTABLE

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Acc	₽nt	Fin	ιιςh

White - WHI	





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT
TYPE
NOTES
QUANTITY
DATE





















OLIVE - OLV Pant. 5625C	323
6	ALL STATES
¥	W. T.

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	





PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











POMA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

T at I					anasial LED (unan request) DCD_DCDW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	1H00	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(X)	lumen (luminous flux)
Y	indirect light distribution	*	lens	(₹	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\mathbf{A}}$	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
€ €	the supplied jig specifies the cutout dimensions	Č	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d •→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	4 ⊚	100
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	։ (Մ) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) $$
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm