ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

## D111023-

base number — Finish Options

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Diameter (mm): 160
Diameter (in): 6 5/16
Height (mm): 140
Height (in): 5 1/2
Max. Overall Height (mm): 1340
Max. Overall Height (in): 52 3/4
Weight (kg): 1
Weight (lbs): 2.2
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / SND / OLV / TER
Fixture Material: Metal
Cable Details: 1200mm Cable

**ELECTRICAL**

Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A15
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

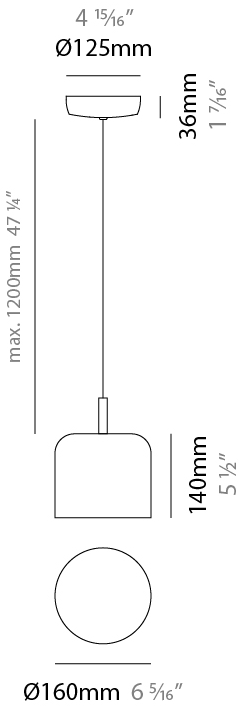


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

June 22, 2026, 4:13 pm

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

D111023-

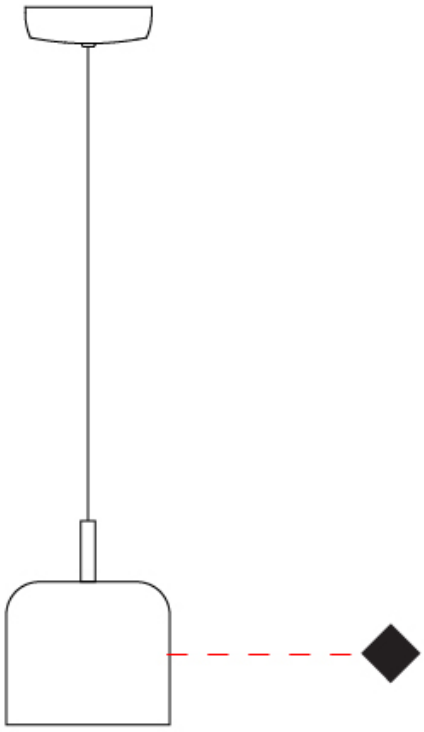

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

## D111024-

base number — Finish Options

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Diameter (mm): 260
Diameter (in): 10 1/4
Height (mm): 140
Height (in): 5 1/2
Max. Overall Height (mm): 1340
Max. Overall Height (in): 52 3/4
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / SND / OLV / TER
Fixture Material: Metal
Cable Details: 1200mm Cable

**ELECTRICAL**

Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

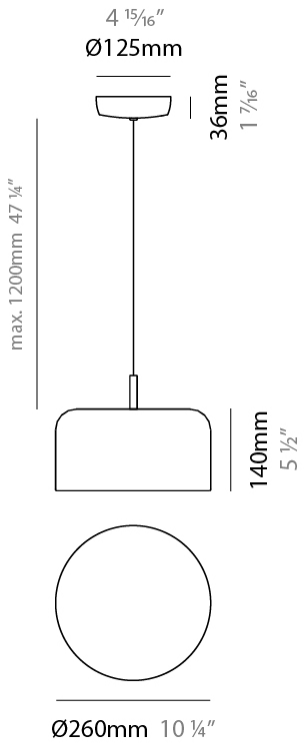


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

D111024-

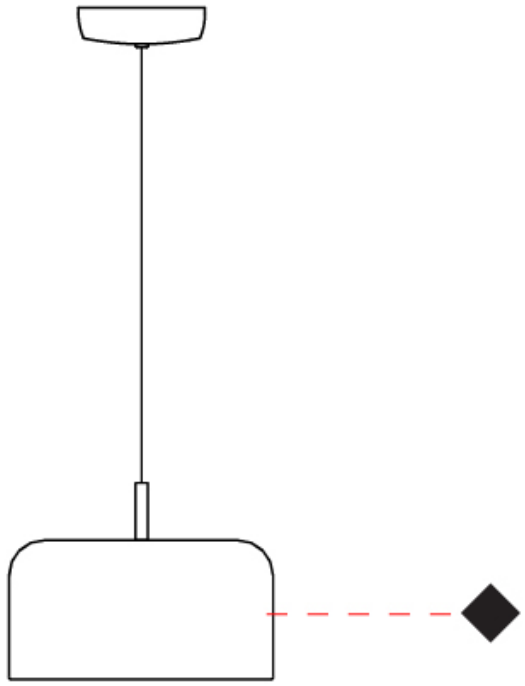

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

## D111025-

base number — Finish Options

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Diameter (mm): 310
Diameter (in): 12 3/16
Height (mm): 120
Height (in): 4 3/4
Max. Overall Height (mm): 1320
Max. Overall Height (in): 51 15/16
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / SND / OLV / TER
Fixture Material: Metal
Cable Details: 1200mm Cable

**ELECTRICAL**

Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

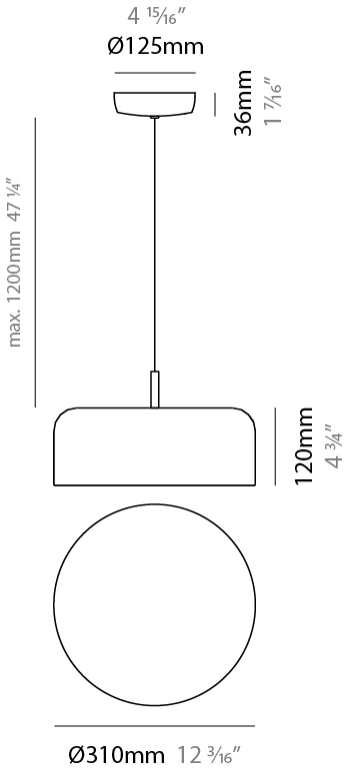


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

# POT SUSPENSION

D111025-

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

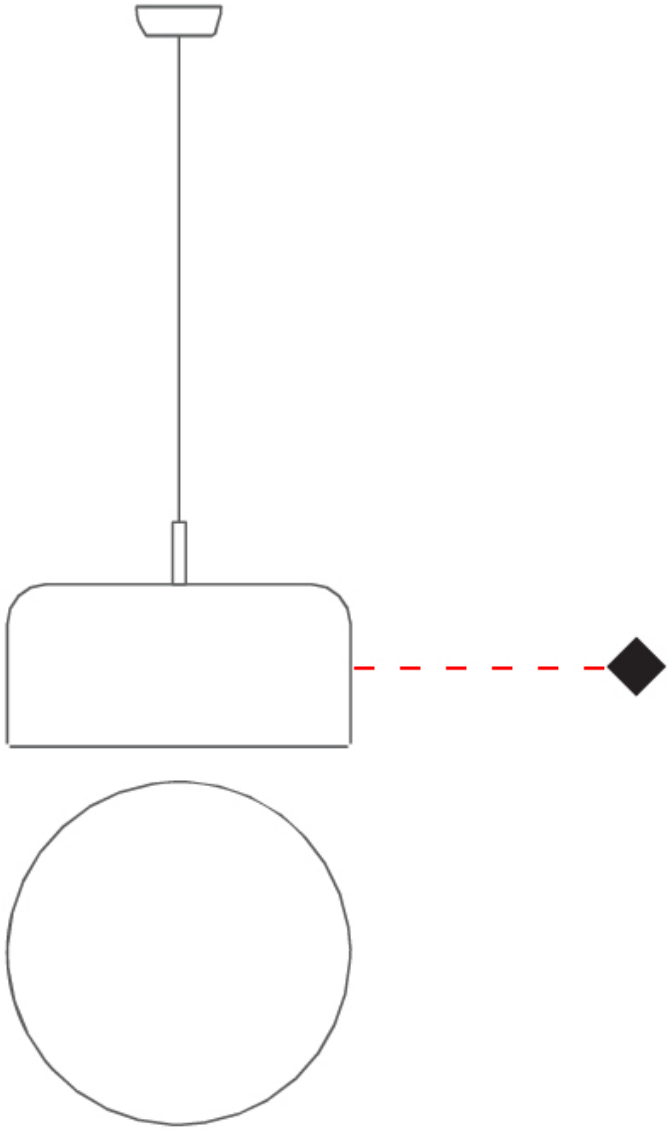

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

# POT SUSPENSION

**D111027-**

base number | Finish Options

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Length (mm): 570
Length (in): 22 7/16
Width (mm): 500
Width (in): 19 11/16
Height (mm): 140
Height (in): 5 1/2
Max. Overall Height (mm): 1340
Max. Overall Height (in): 52 3/4
Weight (kg): 4
Weight (lbs): 8.8
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / WSA / WSV
Fixture Material: Metal
Cable Details: 1200mm Cable

**ELECTRICAL**

Number of Lamps: 5
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

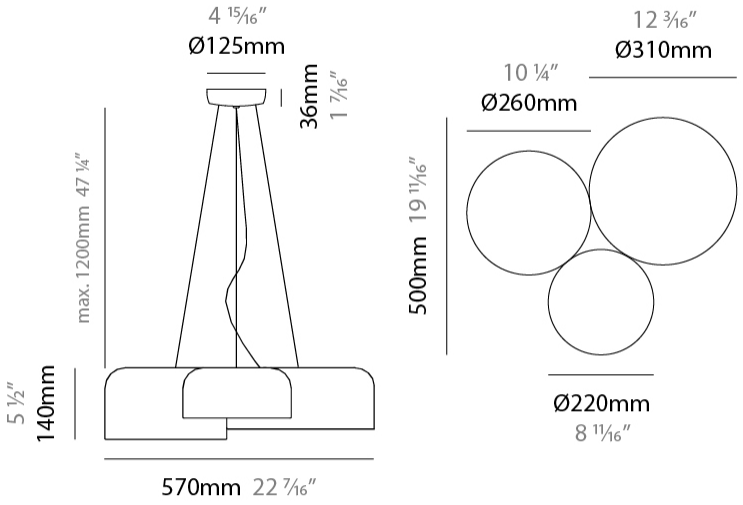


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SUSPENSION

D111027-

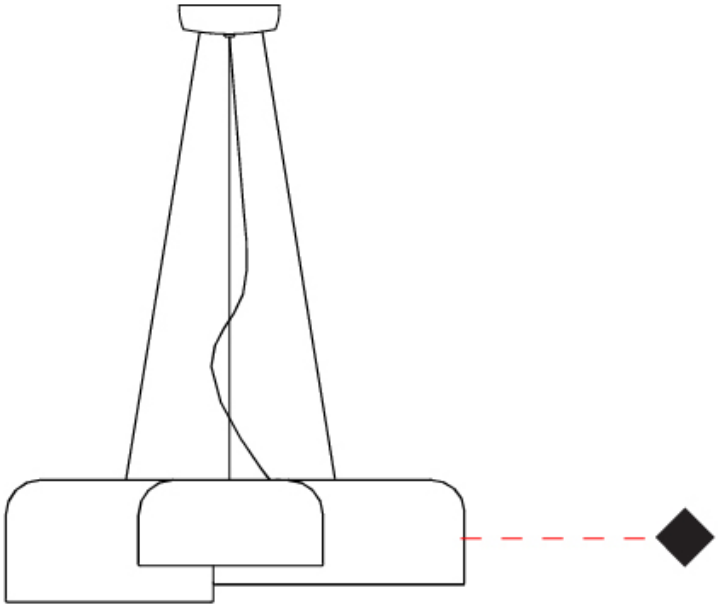

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SURFACE

## D112002-

base number — Finish Options

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Surface
Product Type: Ceiling Surface
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Diameter (mm): 310
Diameter (in): 12 3/16
Height (mm): 120
Height (in): 4 3/4
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / SND / OLV / TER
Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

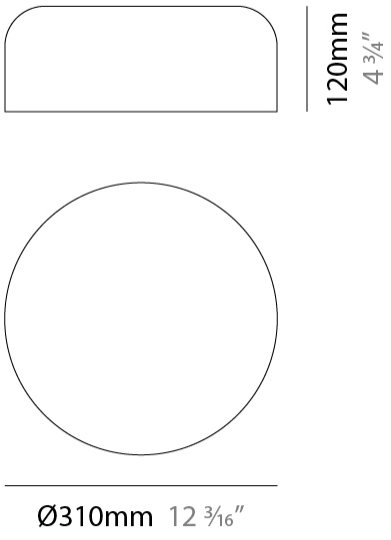


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

## POT SURFACE

D112002-

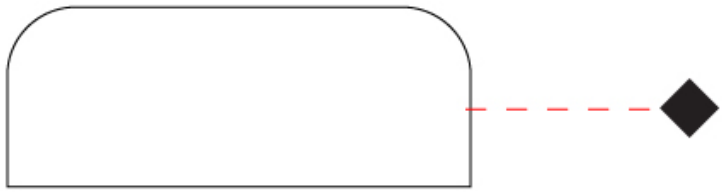

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT SURFACE

## D112004-

base number — Finish Options

*1.To build a product code in our configurator select the specify button on the base model # product page*
*2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #*

**GENERAL**

Series: Pot
Partner: Ole
Division: Design
Installation: Surface
Product Type: Ceiling Surface
Mounting Location: Ceiling
Light Distribution: Direct

**PHYSICAL**

Shape: Dome
Length (mm): 570
Length (in): 22 7/16
Width (mm): 500
Width (in): 19 11/16
Height (mm): 140
Height (in): 5 1/2
Weight (kg): 3.7
Weight (lbs): 8.1
Diffuser: Acrylic - Satin
Fixture Finish: WHI / BLK / WSA / WSV
Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 5
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards
IP rating: IP20

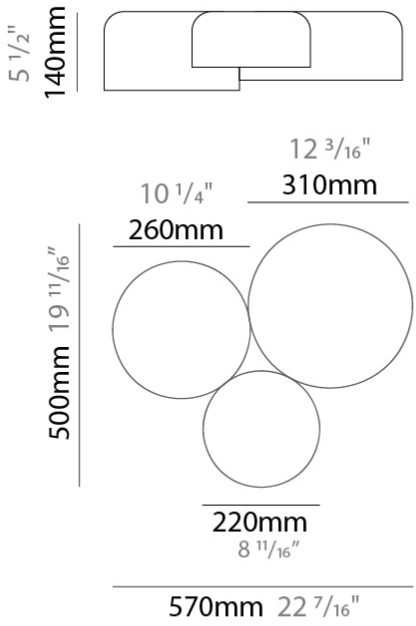


D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

**POT** SURFACE

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

D112004-

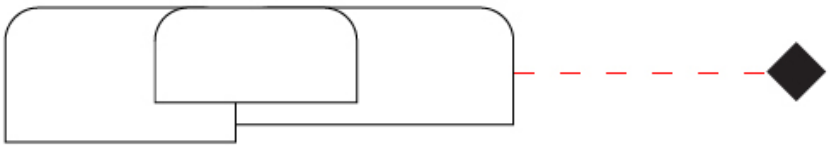

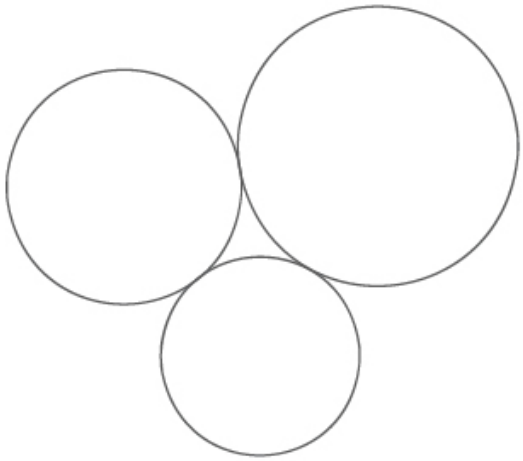

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

# POT

## COLOR FINISH CHART

**Fixture Finish**

White - WHI



Black - BLK



Olive - OLV

Terracotta - TER



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

D



Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

PROJECT
TYPE
NOTES
QUANTITY
DATE

# COMPLETE COLOR FINISH CHART

## Standard Colors of Recycles Cords

STONE
Pant. 7582C
1196



BEIGE
Pant. 727C
196



MUSTARD
Pant. 1245C
168



TERRACOTTA
Pant. 153C
205



MAROON
Pant. 1955C
224



WHITE
Pant. White
71

OLIVE
Pant. 5625C
323



DARK GREEN
Pant. 5615C
301

MOCHA
Pant. 7504C
175

COGNAC
Pant. 181C
255



BLUE
Pant. 663C
61

SILVER
Pant. Cool Gray 7C
129



GREY
Pant. Cool Gray 10C
120



BLACK
Pant. Black C
211

## Sustainable Thin Cord

REDCLAY

TERRA

TYPHOON



BLACK

FOREST

Standard Colors with [S-]
Other fabric cord colors available upon request. Price increase and minimum quantities may apply
**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.
Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

PROJECT

TYPE

NOTES

QUANTITY

DATE

# COMPLETE COLOR FINISH CHART

## Special Colors (for indoor use only)

CRISTAL
Pant. Glass
75



Crudo
Pant. 7401C
170

ORO
Pant. 872C
16

GOLDEN
Pant. 7403C
7

AVELLANA
Pant. 1955C
152



ALPACA
Pant. 429C
1401



ARENA
Pant. 465C
151



CASTOR
Pant. P7530C
167



TABACO
Pant. 1545C
203

MARRON
Pant. 476C
187

TUNEL
Pant. Black 7C
169

BURDEOS
Pant. 188C
163



FRESILLA
Pant. 695C
273



ARCILLA
Pant. 1675C
205



SATAN
Pant. 207C
19



MUSGO
Pant. 5535C
320



NOCTURNO
Pant. 7547
66

MEDAS
Pant. 295C
168

LAVA
Pant. 151C
1334



FUEGO
Pant. 185C
245



VERDE OSCURO
Pant. 3298C
358



MARINO
Pant. 289C
63



AZUL ELECTRICO
Pant. 2945C
168



CALABAZA
Pant. 158C
84



ROJO
Pant. 186C
241



JUNGLA
Pant. 356C
310



AZUL ROYAL
Pant. 288C
1075



VIOLETA
Pant. 7676U
147



AMARILLO
Pant. 109U
1



CICLAMOR
Pant. 205C
264

Standard Colors with [S-]
Other fabric cord colors available upon request. Price increase and minimum quantities may apply

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

ZANEEN®

# POT

| | |
|---|---|
| PROJECT | |
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

## LEGEND

| | | | | | |
|---|---|---|---|---|---|
| | floor-mounted | | pivotable | | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
| | wall and ceiling: recessed and surface mounted | | rotating | | warm dim / natural dimming LED |
| | ceiling-mounted and wall-mounted | | illuminate tilted | | rechargeable battery powered |
| | wall-mounted | | color of suspension cable | | fixture with natural vivid LED (upon request) |
| | omni-directional light distribution | | length of suspension cable | CRI | color rendering index |
| | direct light distribution | | reflector degree selection | °K | color temperature |
| | direct/indirect light distribution | | super spot | LM | lumen (luminous flux) |
| | indirect light distribution | | lens | LM/W | efficacy (lumens per watt) |
| | asymmetric light distribution | | lens pack | UGR | Unified Glare Rating (UGR) range from 5-40 |
| | aura light distribution | | shine ring | 316 | marine grade (AISI 316 stainless steel) |
| | round wall or ceiling cut-out | | integrated shine ring with diffuser | | walk on |
| | square wall or ceiling cut-out | | free individual colors 01-29 | | drive on |
| | the supplied jig specifies the cutout dimensions | | individual colors: 00 (free of charge), 01-25 (extra charge) | DSC | Dark Sky Compliance |
| M | minimum distance (meters) lamp - object | | luminaire part to be colored (F1) | | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| | recessed depth | | luminaire part to be colored (F2) | | lamp protected against explosion |
| | ceiling thickness in mm | | luminaire part to be colored (F3) | | blown glass using traditional methods by master glass blower |
| | ceiling thickness selection | | luminaire part to be colored (F4) | | acoustic material |
| Dimmable | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) | | luminaire part to be colored (F5) | | protection class I, protection insulation |
| INCLUDED | included or excluded LED driver/transformer/ control gear | | color of 3-circuit adaptor | | protection class II, protection insulation |
| | separately switchable | | indirect diffuser | | ETL Certified to UL and CSA Standards |
| | sensor | D | direct diffuser | | UL Certified to UL and CSA Standards |
| | remote control | | ball-proof (upon request) | | CSA Certified to UL and CSA Standards |
| | available upon request | | accessory | | Certified for North American Standards |

## IP RATING

| | |
|---|---|
| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
| IP33 | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions |
| IP65 | protected against ingress of dust<br>protected against jets of water |
| IP66 | protected against ingress of dust<br>protected against powerful jets of water or heavy seas |
| IP67 | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes |
| IP68 | protected against ingress of dust<br>protected against immersion of water under pressure for long periods |

## IK RATING

| | |
|---|---|
| IK01 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
| IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
| IK03 | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
| IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
| IK06 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
| IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
| IK08 | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
| IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
| IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |