

RULED LINEAR SURFACE

E10C0122-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 132
Length (in): 5 3/16
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Height (in): 4 3/8
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 2048 / 2150
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

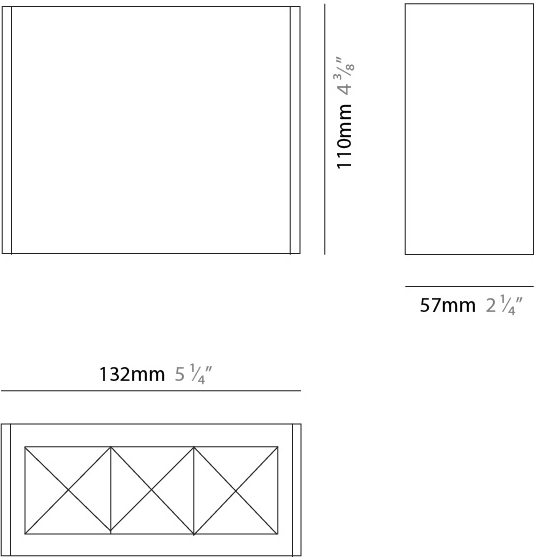

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

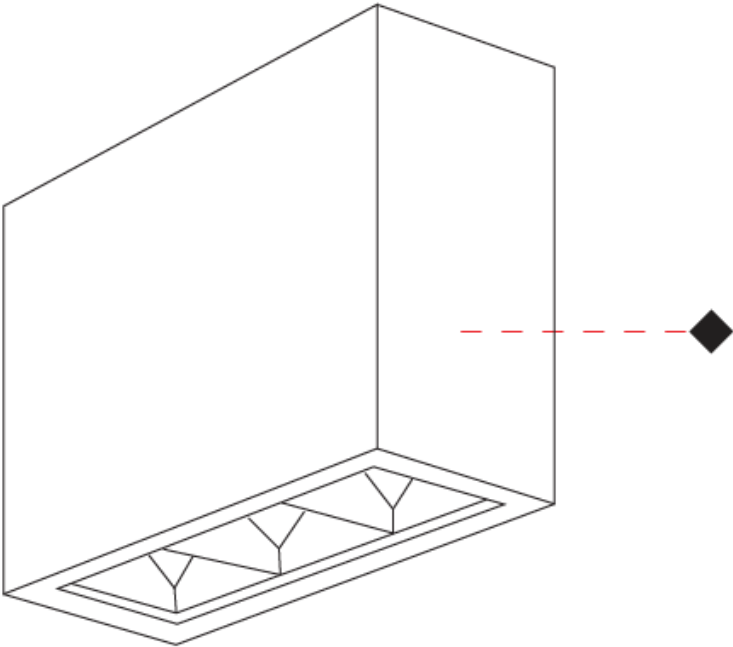

RULED LINEAR SURFACE

E10C0123-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 248
Length (in): 9 3/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Height (in): 4 3/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 22
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 4096 / 4300
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12°- 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

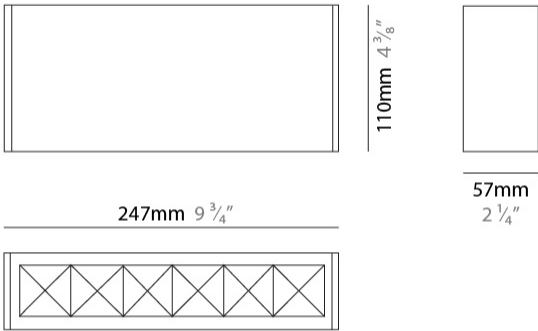

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

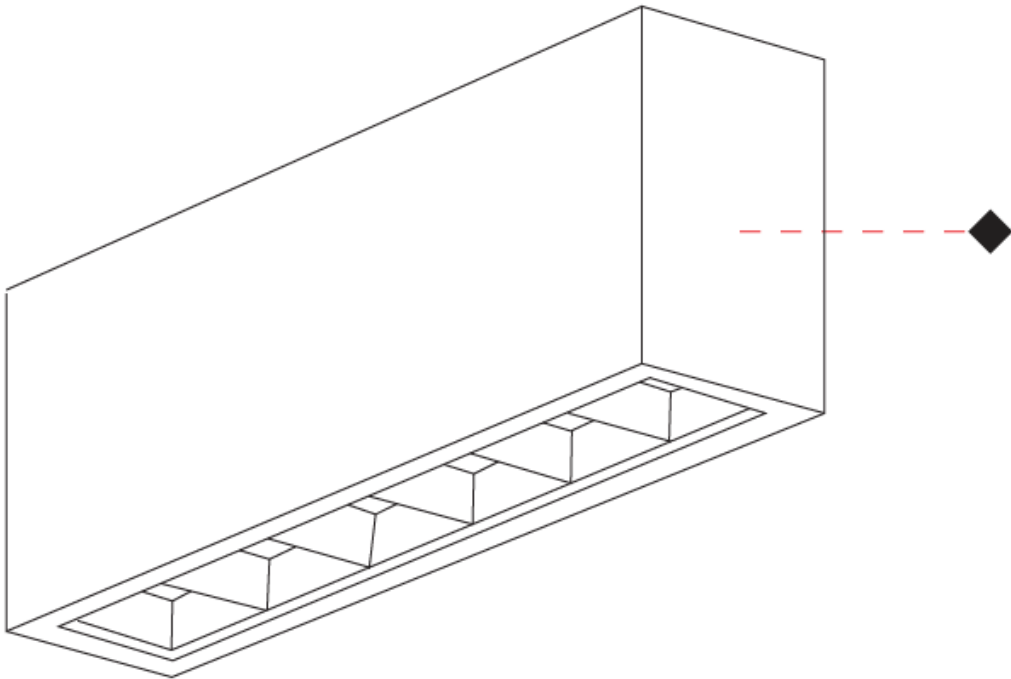

RULED LINEAR SURFACE

E10C0124-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 362
Length (in): 14 1/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Height (in): 4 3/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 32.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 6144 / 6450
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12°- 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

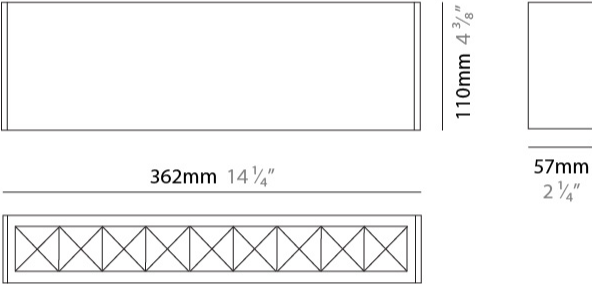

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

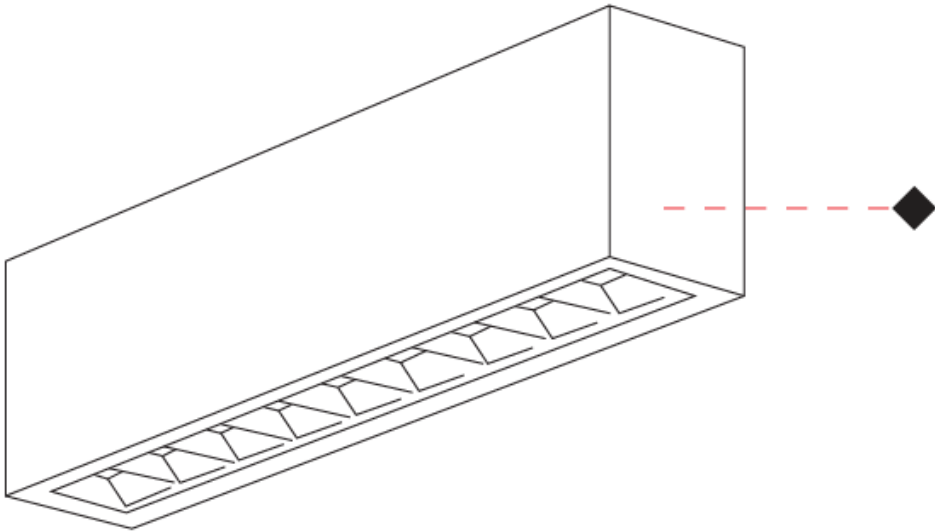

RULED LINEAR SURFACE

E10F0045-

base number Color Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Flood
Mounting Location: Above Ground
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 132
Length (in): 6 3/16
Width (mm): 57
Width (in): 2 1/4
Height (mm): 161
Height (in): 4 5/16
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 1278 / 1383
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Adjustability: Tilt 90°
Upon Request: Beams 12°- 55° - AS - AE

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

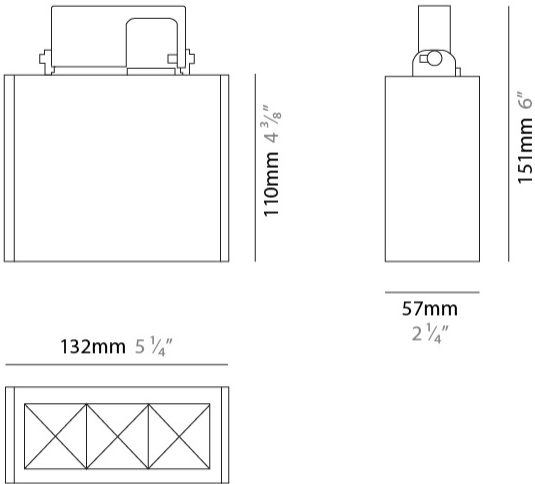

E10F0045-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

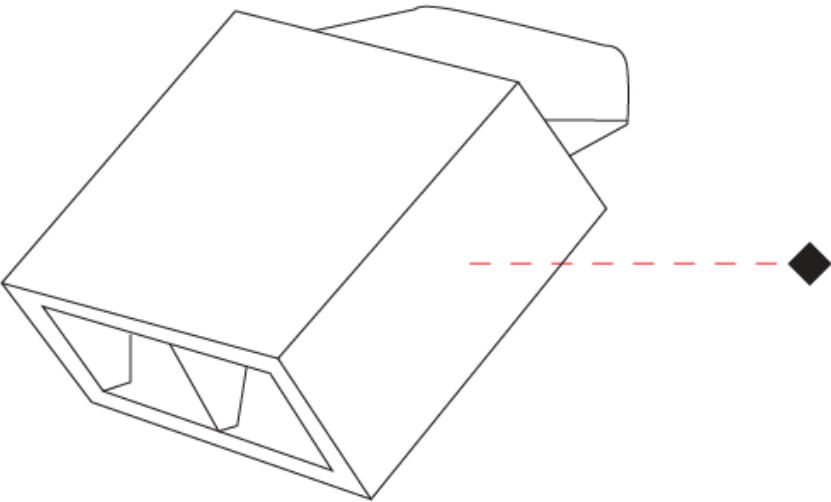

RULED LINEAR SURFACE

E10F0046-

base number Color Temperature

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Flood
Mounting Location: Above Ground
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 248
Length (in): 9 3/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 161
Height (in): 6 5/16
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 22
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 4096 / 4300
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Adjustability: Tilt 90°
Upon Request: Beams 12°- 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

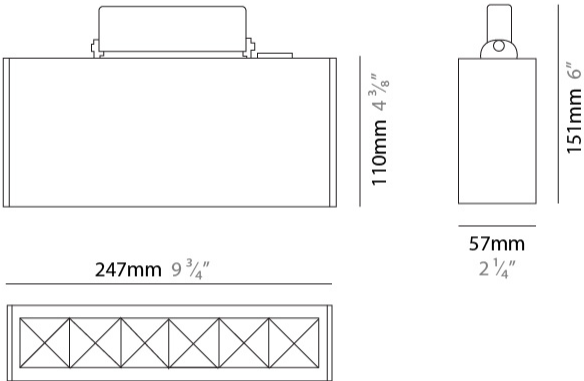

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

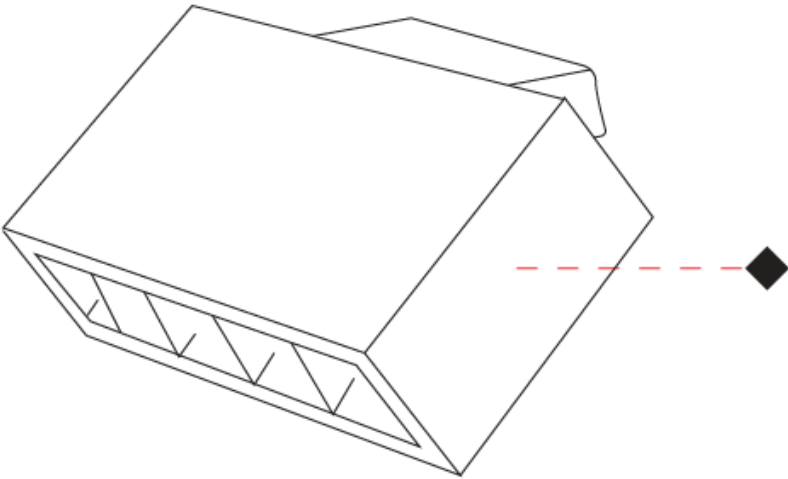

RULED LINEAR SURFACE

E10F0047-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Flood
Mounting Location: Above Ground
Light Distribution: Adjustable

PHYSICAL

Shape: Rectangle
Length (mm): 362
Length (in): 14 1/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 161
Height (in): 4 5/16
Weight (kg): 2
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 32.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 6144 / 6450
CRI: >80 CRI


OPTICAL

Beam Angle: 75
Adjustability: Tilt 90°
Upon Request: Beams 12°- 55° - AS - AE

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

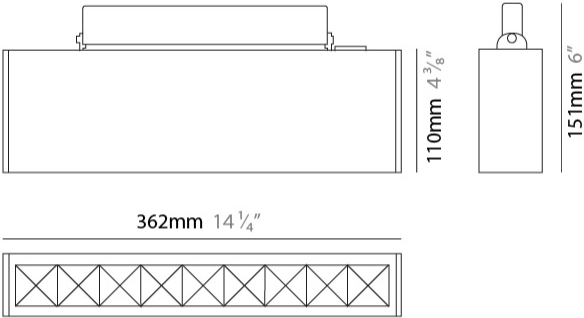

E10F0047-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

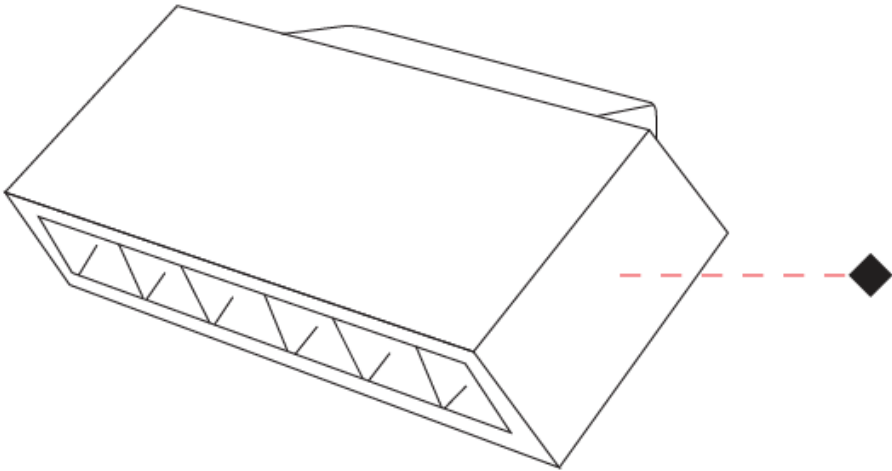

RULED LINEAR RECESSED

E10R0154-

base number Color Finish
Temperature Options

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Recessed
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 142
Length (in): 5 9/16
Width (mm): 67
Width (in): 2 5/8
Depth (mm): 56
Depth (in): 2 3/16
Ceiling Thickness (mm): 5-40
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: BLK / WHI
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 60mm/2 3/8" x 135 mm/5 5/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 9.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 2048 / 2150
CRI: >80 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 75
Upon Request: Beams 12°- 55° - AS - AE

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0


PROJECT _____

TYPE _____


SPECIFIER _____

QUANTITY _____

DATE _____

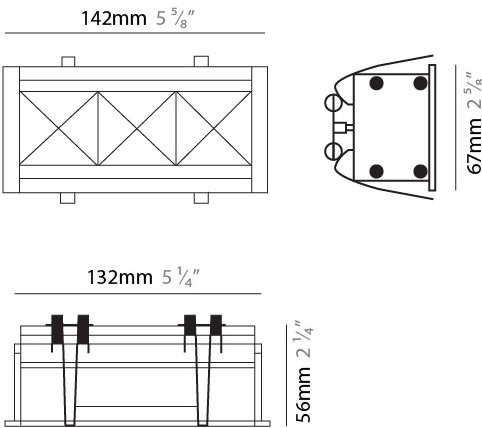

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

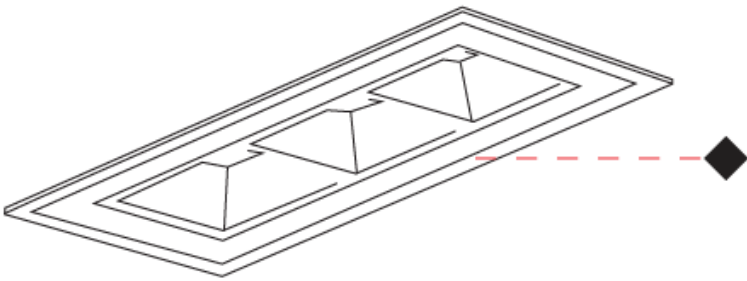

RULED LINEAR RECESSED

E10R0155-

base number Color Finish
Temperature Options

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Recessed
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 257
Length (in): 5 9/16
Width (mm): 67
Width (in): 2 5/8
Depth (mm): 56
Depth (in): 2 3/16
Ceiling Thickness (mm): 5-40
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: BLK / WHI
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 60mm/2 3/8" x 250 mm/9 13/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 19
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 4096 / 4300
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

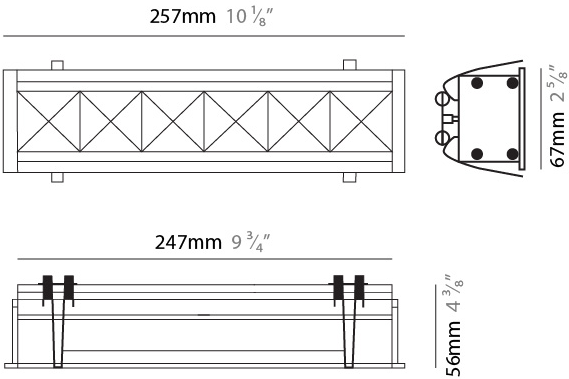

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

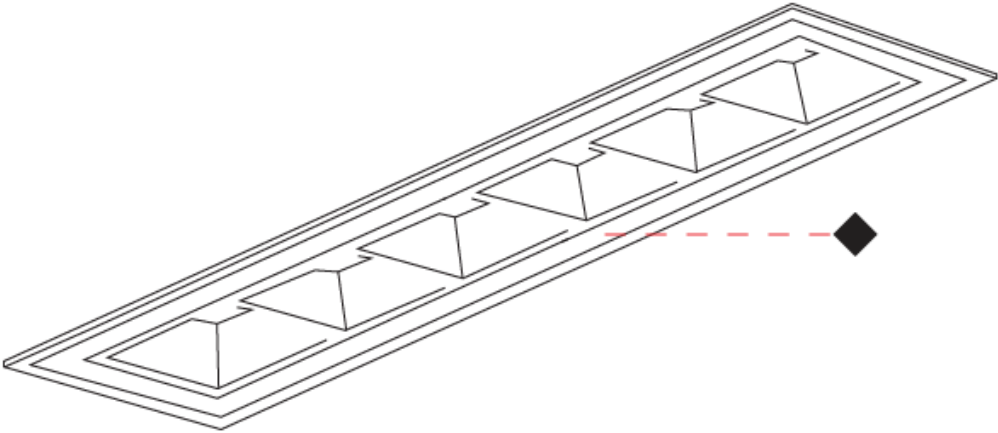

RULED LINEAR RECESSED

E10R0156-

base number Color Finish
Temperature Options

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Recessed
Product Type: Downlight
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 371
Length (in): 14 5/8
Width (mm): 67
Width (in): 2 5/8
Depth (mm): 56
Depth (in): 2 3/16
Ceiling Thickness (mm): 5-40
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: BLK / WHI
Fixture Material: Aluminum Die Cast
Cut-out Measurements: 60mm/2 3/8" x 365 mm/14 3/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 28.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 6144 / 6450
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

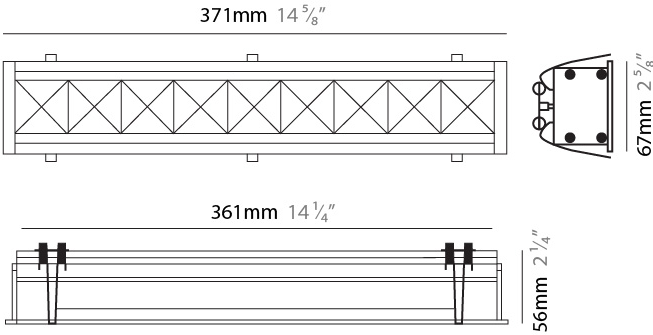

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

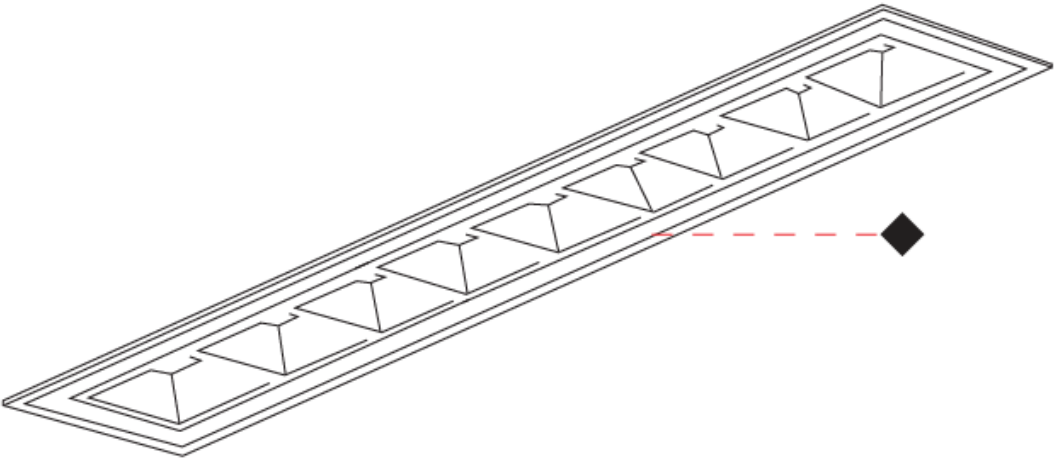

RULED LINEAR SURFACE

E10W0170-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 132
Length (in): 5 3/16
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/16
Depth (in): 2 7/8
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 594 / 644
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

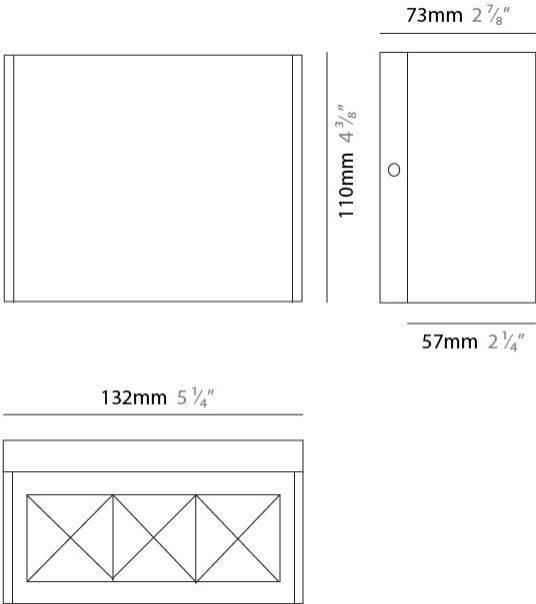

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

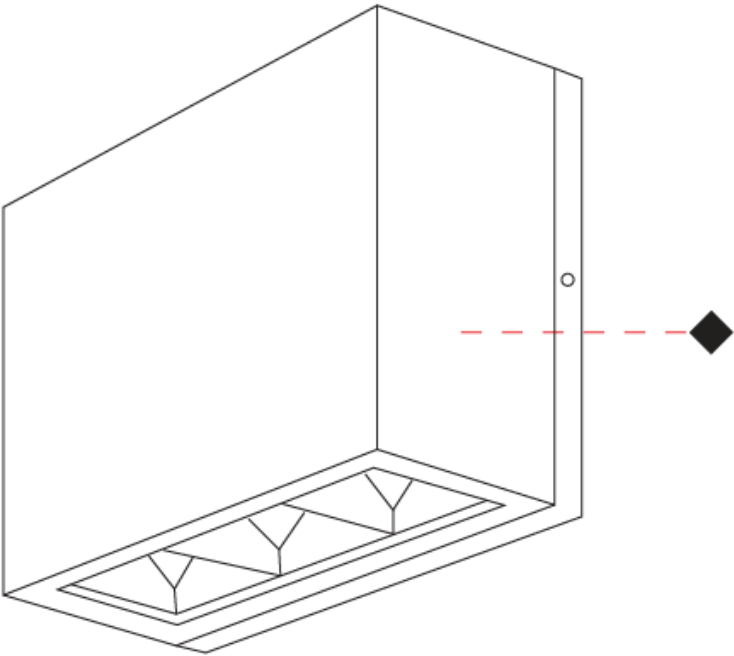

RULED LINEAR SURFACE

E10W0171-

base number Color Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 248
Length (in): 9 3/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/8
Depth (in): 2 7/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 22
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 1189 / 1287
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

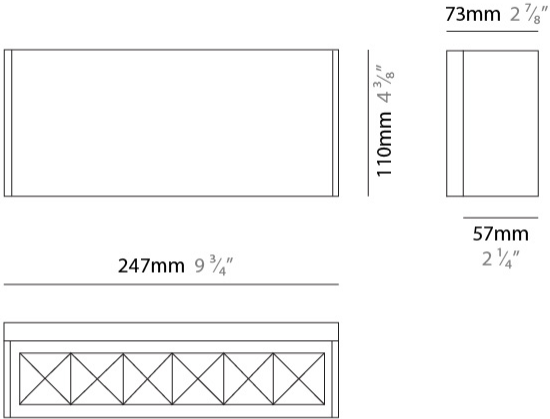

E10W0171-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

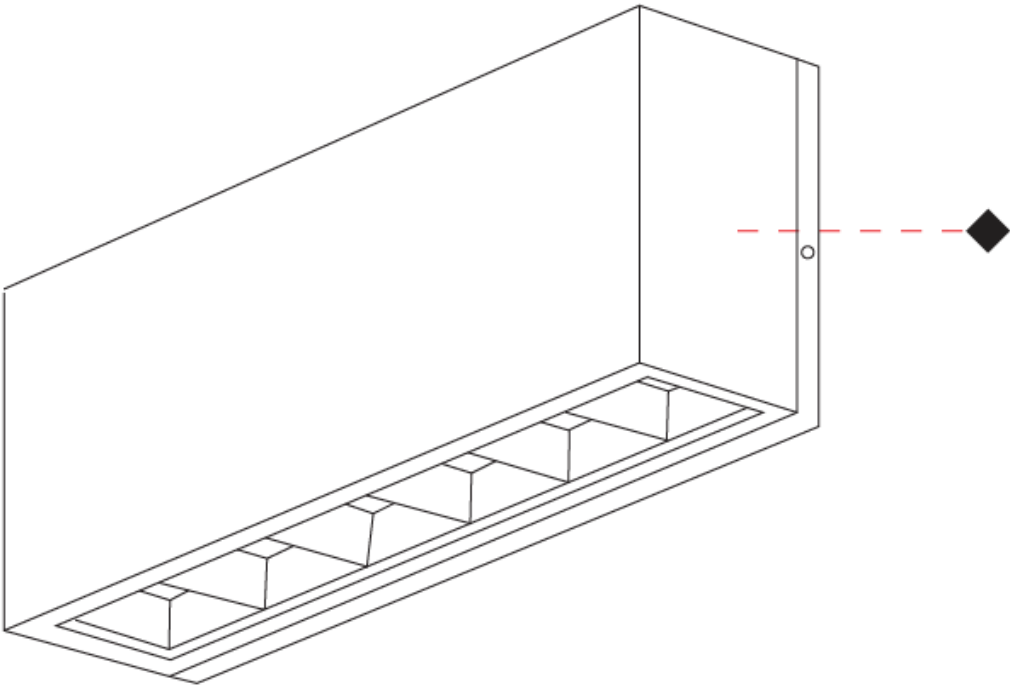

RULED LINEAR SURFACE

E10W0172-

base number Color Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 362
Length (in): 14 1/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/8
Depth (in): 2 7/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 32.5
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 1783 / 1931
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

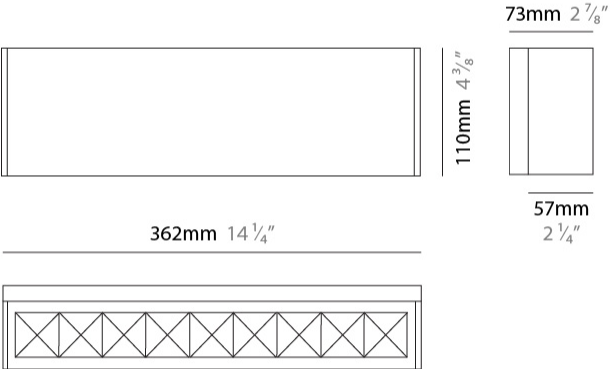

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

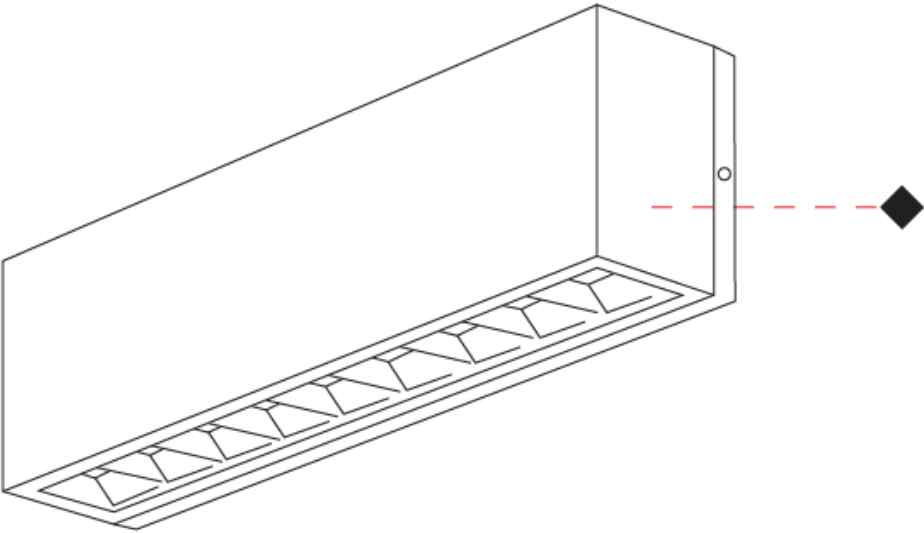

RULED LINEAR SURFACE

E10W0173-

base number Color
Temperature

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle
Length (mm): 132
Length (in): 5 3/16
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/16
Depth (in): 2 7/8
Weight (kg): 1
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 22
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 1189 / 1287
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12°- 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

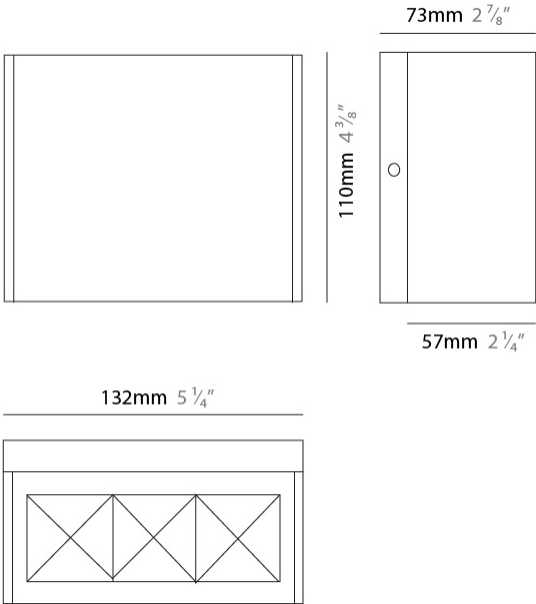

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

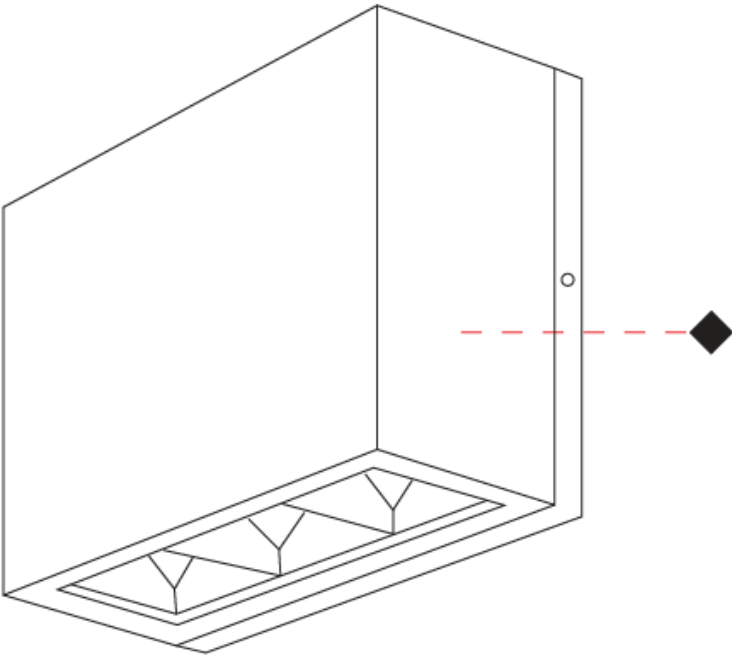

RULED LINEAR SURFACE

E10W0174-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle
Length (mm): 248
Length (in): 9 3/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/8
Depth (in): 2 7/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 42
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 2378 / 2574
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12° - 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

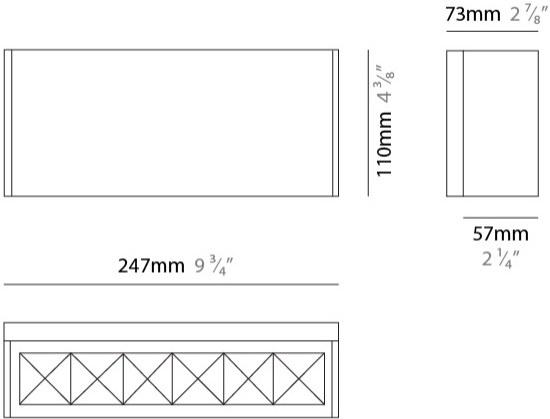

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

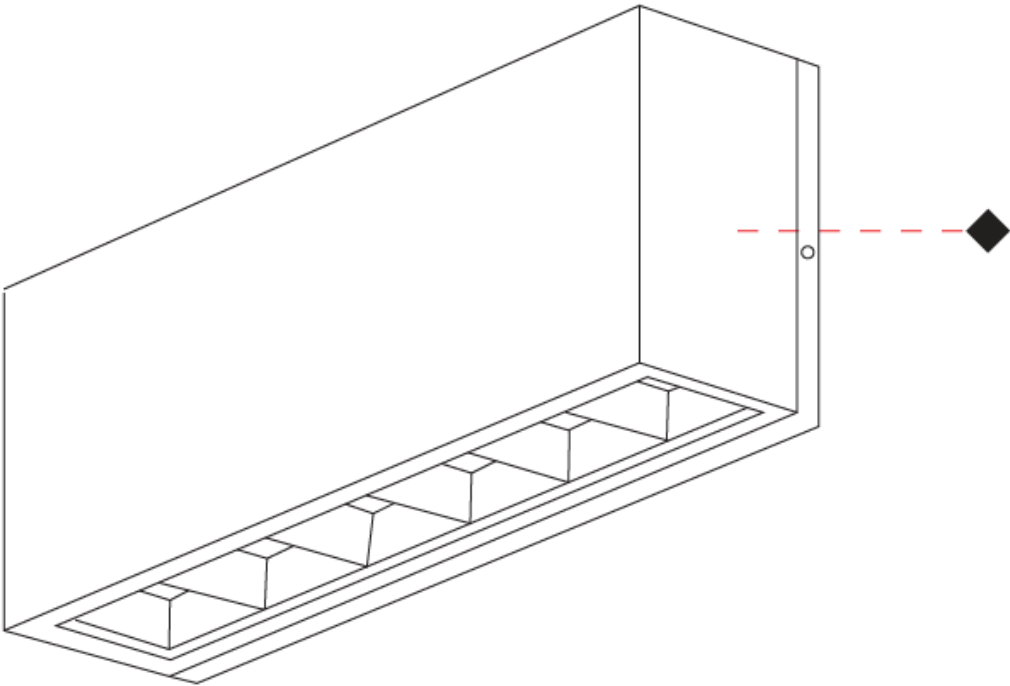

RULED LINEAR SURFACE

E10W0175-

base number Color
Temperature

- 1. To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Ruled Linear
Partner: Side
Division: Exterior
Installation: Surface
Product Type: Wall Surface
Mounting Location: Wall
Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle
Length (mm): 362
Length (in): 14 1/4
Width (mm): 57
Width (in): 2 1/4
Height (mm): 110
Depth (mm): 73
Height (in): 4 3/8
Depth (in): 2 7/8
Weight (kg): 1.5
Diffuser: Transparent extra clear screen printed
Fixture Finish: WBK
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 64
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 400mA
Upon Request: Phase Dimming / 0-10V Dimming

LED

Color Temperature (°K): 3000 / 4000
Max. Delivered Lumen (lm): 3567 / 3861
CRI: >80 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 75
Upon Request: Beams 12°- 55° - AS - AE


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP65
IK Rating: IK07
Glare Rating: ≤ 19
Bug Rating: B1 U0 G0

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

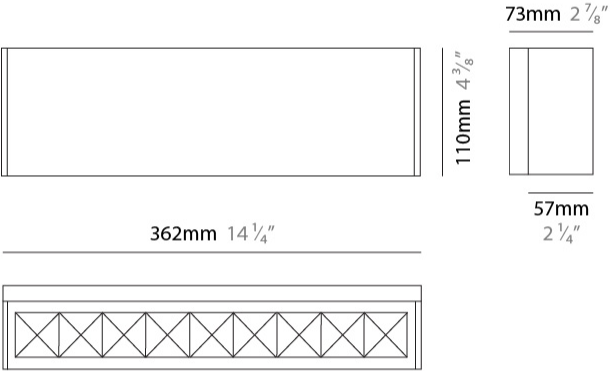


PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

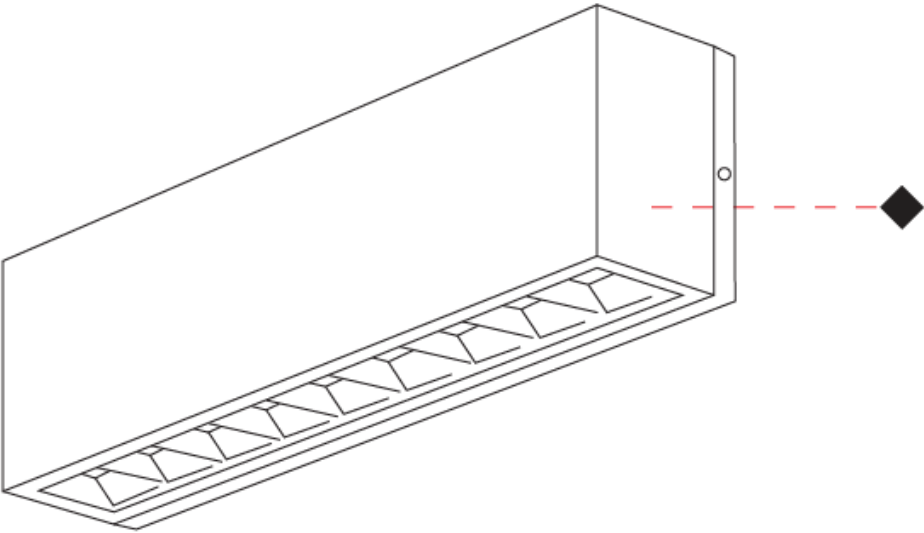

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish

Black - BLK



White - WHI



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)