

D111076-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

CENTEROLE	
Series: Savina	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcutegory: / wilbicite
PHYSICAL
Shape: Cone
Diameter (mm): 250
Diameter (in): 9 ¹³ / ₁₆
Height (mm): 600
Height (in): 23 ½
Max. Overall Height (mm): 2600
Max. Overall Height (in): 102 $\frac{3}{2}$
Light Distribution: Direct
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Fixture Material: Fabric Cord / Metal Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: MR16 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 5.5 Lamp Base: GU10 Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D111076-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

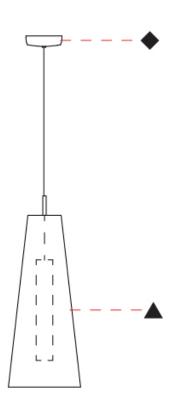





D111077-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Savina
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient

Subcategory: Ambient

PHYSICAL

Shape: Cone

Diameter (mm): 350

Diameter (in): 13 ³/₄

Height (mm): 1100

Height (in): 43 ⁵/₁₆

Max. Overall Height (mm): 3100

Max. Overall Height (in): 122 ¹/₁₆

Light Distribution: Direct

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5.5
Lamp Base: GU10
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	










D111077-

PROJECT	
TYPE	-
SPECIFIER	_
QUANTITY	-
DATE	-

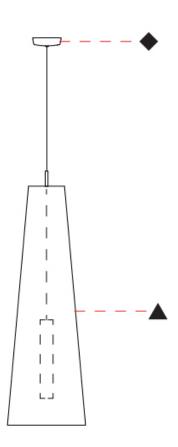





SAVINA


COLOR FINISH CHART


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE


Fixture Finish






























Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











SAVINA

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

100				-	1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	℃	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ ←,→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	()	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	շ (Մ) սո	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)