

D111028-

base number

Finish (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): $5\frac{1}{2}$
Max. Overall Height (mm): 2140
Max. Overall Height (in): 84 ½
Light Distribution: Direct
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / OGR / MWH
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: GU10	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D111028-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_







D111029-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Sento
	Brand: Ole
	Division: Design
	Mounting Type: Suspension
	Mounting Location: Ceiling
	Subcategory: Pendant

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): $5\frac{1}{2}$
Max. Overall Height (mm): 3140
Max. Overall Height (in): 123 $\frac{5}{8}$
Light Distribution: Direct
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 2000mm Cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: GU10
Input Voltage (V): 120

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20





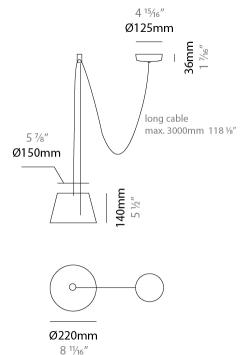






D111029-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE







D111030-

base number

Finish (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): 5 ½
Max. Overall Height (mm): 3140
Max. Overall Height (in): 123 $\frac{5}{8}$
Light Distribution: Direct
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / OGR / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: GU10
Input Voltage (V): 120

LED

OPTICAL


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE










D111030-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE

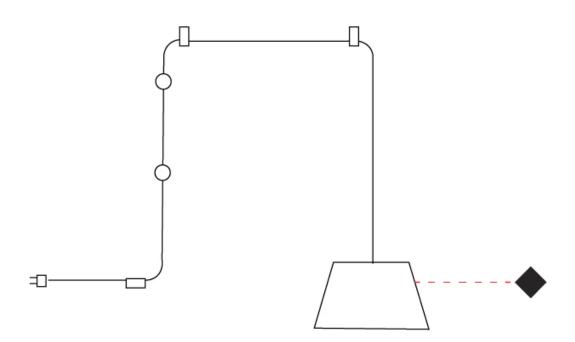





D111031-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiting
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): $5\frac{1}{2}$
Max. Overall Height (mm): 3140
Max. Overall Height (in): 123 ⅓
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 3.6
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL	
Number of Lamps: 2	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: GU10	
Input Voltage (V): 120	

LED

OPTICAL

Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT


TYPE

SPECIFIER

QUANTITY

DATE










D111031-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

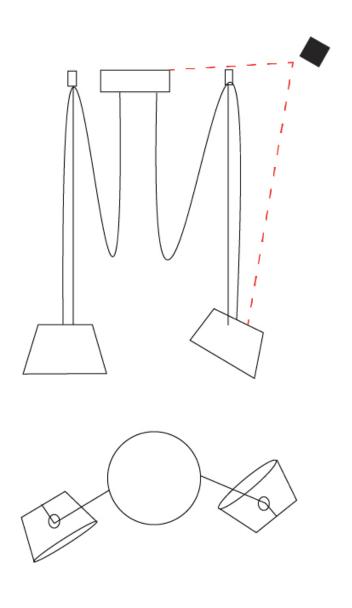





D111032-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location. Centing	
Subcategory: Pendant	
PHYSICAL	
Shape: Bell	
Diameter (mm): 220	
Diameter (in): 8 ¹¹ / ₁₆	
Height (mm): 140	
Height (in): 5 ½	
Max. Overall Height (mm): 3140	
Max. Overall Height (in): 123 $\frac{5}{8}$	
Light Distribution: Direct	
Weight (kg): 2.4	
Weight (lbs): 5.3	
Diffuser: Arylic - Satin	
Fixture Finish: WHi / MBK / MWH	
Fixture Material: Metal	
Cable Details: 3000mm Cable	

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: GU10	
Input Voltage (V): 120	

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





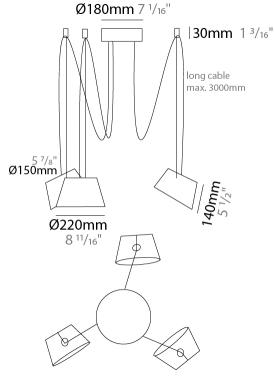






D111032-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	_

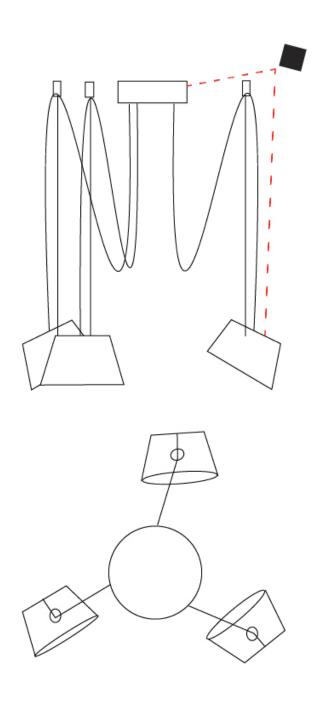





D111033-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): 5 ½
Max. Overall Height (mm): 3140
Max. Overall Height (in): 123 ⅓
Light Distribution: Direct
Weight (kg): 3
Weight (lbs): 6.6
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: GU10	
Input Voltage (V): 120	

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



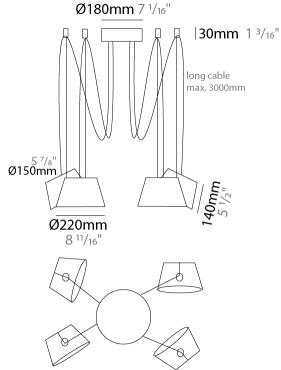







D111033-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

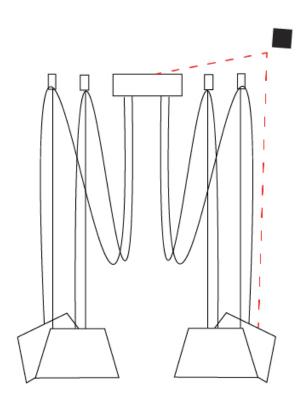







D111034-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiting
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 ¹¹ / ₁₆
Height (mm): 140
Height (in): 5 ½
Max. Overall Height (mm): 3140
Max. Overall Height (in): 123 $\frac{5}{8}$
Light Distribution: Direct
Weight (kg): 3.6
Weight (lbs): 7.9
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL	
Number of Lamps: 5	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: GU10	
Input Voltage (V): 120	

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





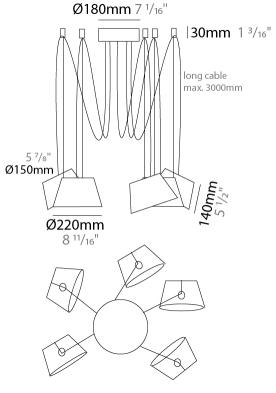






D111034-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

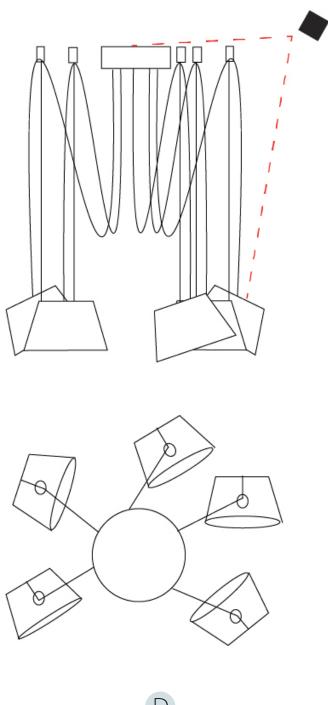



D111035-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento Brand: Ole Division: Design Mounting Type: Suspension Mounting Location: Ceiling

Subcategory: Pendant PHYSICAL Shape: Bell Diameter (mm): 220 Diameter (in): 8 11/16 Height (mm): 140 Height (in): $5\frac{1}{2}$ Max. Overall Height (mm): 3140 Max. Overall Height (in): 123 1/8 Light Distribution: Direct Weight (kg): 4.5 Weight (lbs): 9.9 Diffuser: Arylic - Satin Fixture Finish: WHi / MBK / MWH Fixture Material: Metal Cable Details: 3000mm Cable

ELECTRICAL

Number of Lamps: 6 Lamp Type: LED Retrofit Lamp Shape: MR16 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 7 Lamp Base: GU10 Input Voltage (V): 120

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





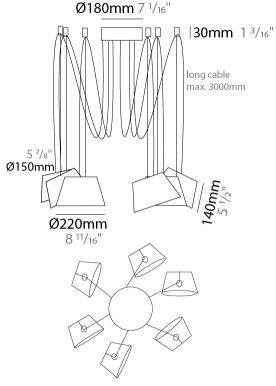






D111035-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

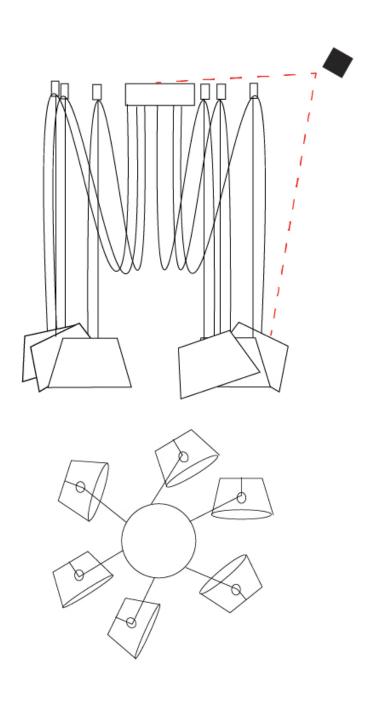





D111036-

base number

(Diamond) (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento			
Brand: Ole			
Division: Des	ign		
Mounting Ty	pe: Suspension		
Mounting Lo	cation: Ceiling		
Subcategory	: Pendant		

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 140
Height (in): $5\frac{1}{2}$
Max. Overall Height (mm): 1340
Max. Overall Height (in): 52 ³ / ₄
Light Distribution: Direct
Weight (kg): 3.7
Weight (lbs): 8.1
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / OGR / MWH
Holder Finish: WHI / MBK
Fixture Material: Metal

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: GU10
Input Voltage (V): 120

LED

OPTICAL

Adjustability: Tilting


RATINGS AND CERTIFICATIONS

Cable Details: 3000mm Cable

Certified By: Certified for North American Standards





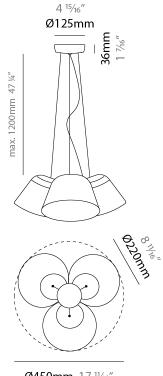








D111036-

PROJECT	
ГҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_







D111037-

base number

Finish (Triangle)

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): $12\frac{3}{16}$
Height (mm): 180
Height (in): 7 ½
Max. Overall Height (mm): 2180
Max. Overall Height (in): 85 $^{13}\!\!/_{16}$
Light Distribution: Direct
Weight (kg): 1.3
Weight (lbs): 2.9
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / OGR / MWH
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	



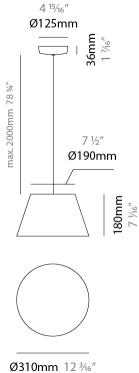






D111037-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

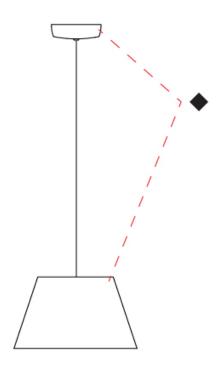





D111038-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ³ / ₁₆
Height (mm): 180
Height (in): $7\frac{1}{16}$
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $\frac{3}{16}$
Light Distribution: Direct
Weight (kg): 1.3
Weight (lbs): 2.9
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 2000mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



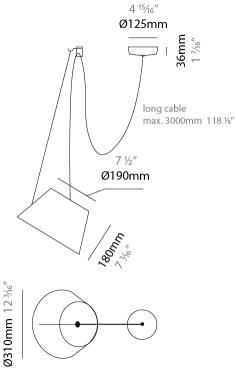






D111038-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

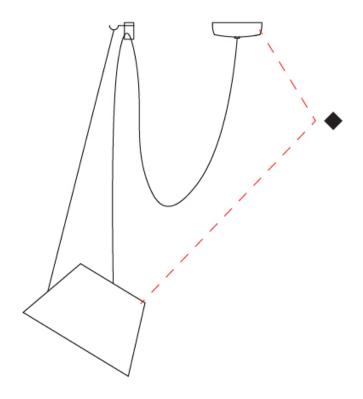





D111039-

base number

Finish (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ³ / ₁₆
Height (mm): 180
Height (in): $7\frac{1}{16}$
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $^3\!\!/_{16}$
Light Distribution: Direct
Weight (kg): 1.3
Weight (lbs): 2.9
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / GRN
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



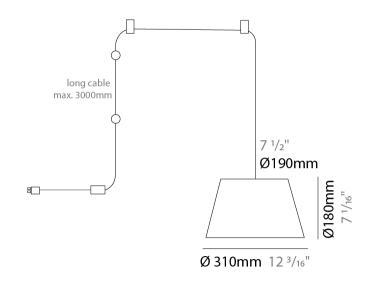





D111039-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

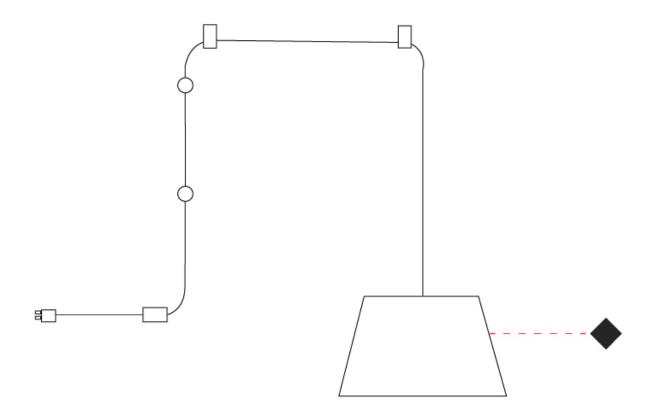





D111040-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ³ / ₁₆
Height (mm): 180
Height (in): 7 ½
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $\frac{3}{16}$
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 4
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20





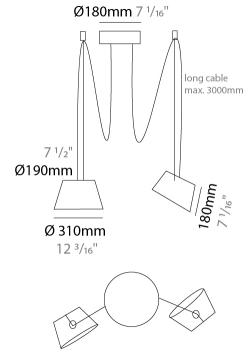






D111040-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

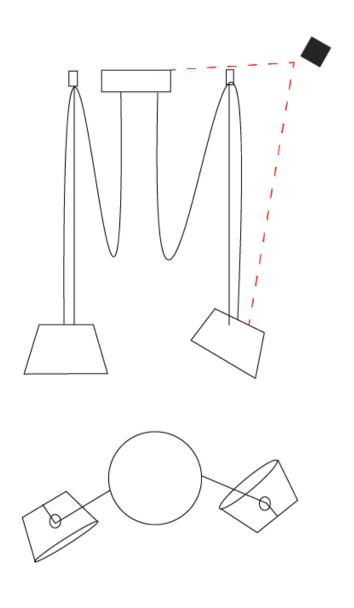





D111041-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ³ / ₁₆
Height (mm): 180
Height (in): 7 ½
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $^3\!\!/_{16}$
Light Distribution: Direct
Weight (kg): 2.3
Weight (lbs): 5.1
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL

ELEC	LIRICAL
Num	nber of Lamps: 3
Lamp	p Type: LED Retrofit
Lamp	p Shape: A19
Bulb	Included: Bulb Not Included
Max.	Wattage Per Lamp (W): 7
Lamp	p Base: E26
Input	t Voltage (V): 120
Upor	n Request: 277Vac / GU24

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$





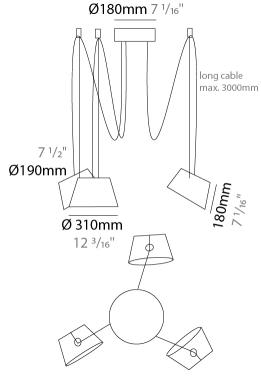






D111041-

PROJECT
ТУРЕ
SPECIFIER
QUANTITY
DATE

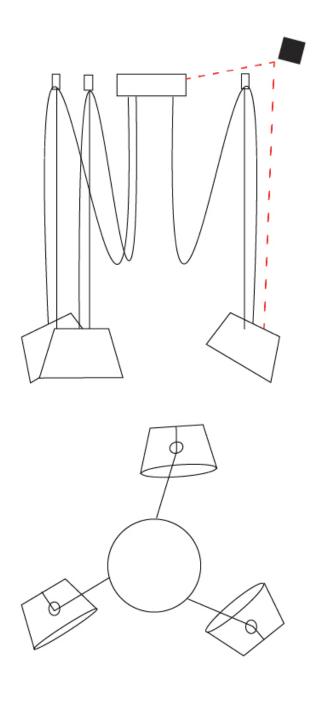





D111042-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ½
Height (mm): 180
Height (in): 7 ½,6
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $\frac{3}{16}$
Light Distribution: Direct
Weight (kg): 2.9
Weight (lbs): 6.4
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 7	
Lamp Base: E26	
Input Voltage (V): 120	


LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

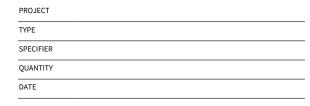



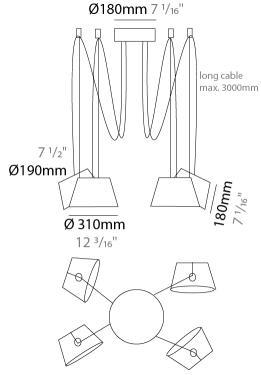







D111042-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	_

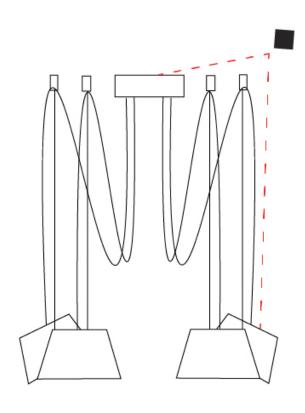







D111043-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Sento
	Brand: Ole
	Division: Design
	Mounting Type: Suspension
	Mounting Location: Ceiling
	Subcategory: Pendant

Mounting Location. Centing	
Subcategory: Pendant	
PHYSICAL	
Shape: Bell	
Diameter (mm): 310	
Diameter (in): 12 ³ / ₁₆	
Height (mm): 180	
Height (in): 7 ½,6	
Max. Overall Height (mm): 3180	
Max. Overall Height (in): 125 $\frac{3}{16}$	
Light Distribution: Direct	
Weight (kg): 3.6	
Weight (lbs): 7.9	
Diffuser: Arylic - Satin	
Fixture Finish: WHi / MBK / MWH	
Fixture Material: Metal	
Cable Details: 3000mm Cable	

ELECTRICAL

ELECTRICAL
Number of Lamps: 5
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





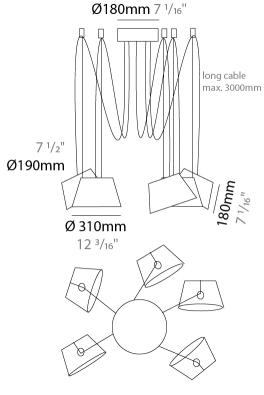






D111043-

PROJECT		
ГҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

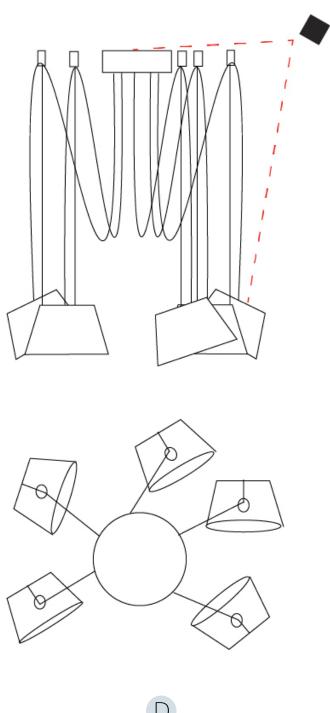



D111044-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 12 ³ / ₁₆
Height (mm): 180
Height (in): $7\frac{1}{1_{16}}$
Max. Overall Height (mm): 3180
Max. Overall Height (in): 125 $^3\!\!/_{16}$
Light Distribution: Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: Arylic - Satin
Fixture Finish: WHi / MBK / MWH
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL

ELECTRICAL
Number of Lamps: 6
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

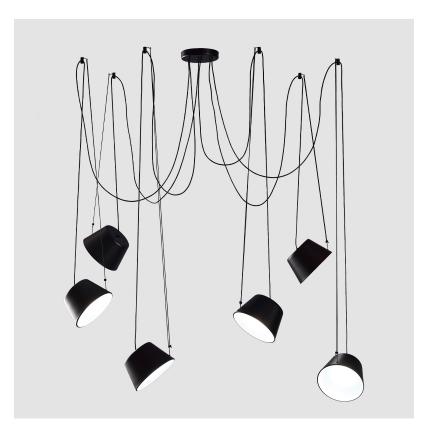

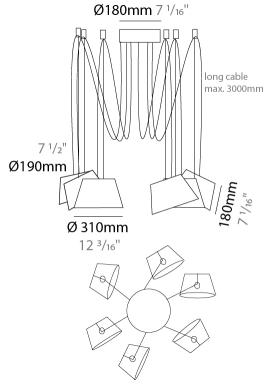






D111044-

ROJECT	
YPE	
PECIFIER	
UANTITY	
ATE	

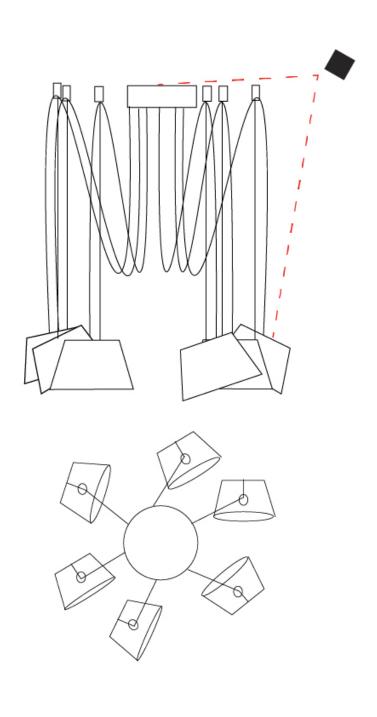





D111045-

base number

Finish Finish (Diamond) (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sento
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Bell
Diameter (mm): 310
Diameter (in): 25 1/16
Height (mm): 180
Height (in): 7 ½
Max. Overall Height (mm): 1416
Max. Overall Height (in): 55 $\frac{3}{4}$
Light Distribution: Direct
Weight (kg): 4.7
Weight (lbs): 10.3
Diffuser: Arylic - Satin
Fixture Finish: WHI / MBK / BEI/ MSA / OGR / MWH
Holder Finish: WHI / MBK
Fixture Material: Metal
Cable Details: 3000mm Cable

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 7
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


Adjustability: Tilting

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

DATE				
QUANTITY				
SPECIFIER				
TYPE				
PROJECT				



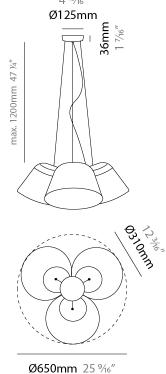






D111045-

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
DATE	_

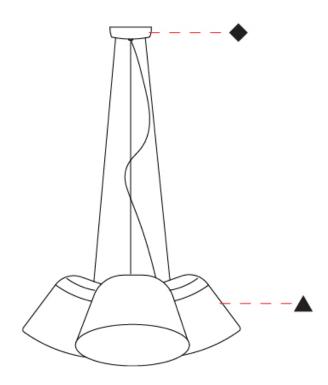





SENTO

COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish













Holder Finish

Green - GRN





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT
TYPE
NOTES
QUANTITY
DATE





















OLIVE - OLV Pant. 5625C	323
6	ALL STATES
¥	W. T.

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	





PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











SENTO

PI	DJECT	
T	PE .	
SF	CIFIER	
Q	ANTITY	
D	TE	

LEGEND

\downarrow	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
ラ	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
1	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	ill neo	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
Ä	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(M)	lumen (luminous flux)
M	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out	Ġ	free individual colors 01-29	9	drive on
4	the supplied jig specifies the cutout dimensions	ē	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d+ .≯	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	()	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
み	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	.(H).	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	(B)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

100000	281994000 PA-24598000 DEVENOUS PARTIES O
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09)	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)