

SERENII SUSPENSION

A3001158-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Serenii

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle

Length (mm): 1760

Length (in): 69 1/4

Width (mm): 580

Width (in): 22 7/8

Height (mm): 91

Height (in): 3 9/16

Max. Overall Height (mm): 2091

Max. Overall Height (in): 82 5/16

Weight (kg): 6.2

Weight (lbs): 13.67

Diffuser: [PMMA - Opal](#) / [Clear](#) / [Microprism](#) / [Clear Microprism](#) / [Wallwash Double Asymmetric](#) / [Glare Control](#) / [Black Raster](#) / [Black Raster / Wallwash Left](#) / [Wallwash Right](#)

Fixture Finish: [SSR / BKV](#) / [CWI](#) / [CRY](#) / [HAB](#) / [UFT](#) / [ITA](#) / [RUA](#) / [FTG](#) / [MYG](#) / [LOD](#) / [PUS](#) / [FRO](#) / [FUP](#) / [KIA](#) / [POP](#) / [BLS](#) / [SPG](#) / [MEY](#) / [GOH](#) / [CHC](#) / [COM](#) / [ABZ](#) / [JAG](#) / [OBR](#) / [MOS](#) / [ROR](#) / [GMS](#)

Holder Finish: [SSR / BKV](#) / [CWI](#) / [CRY](#) / [HAB](#) / [LAG](#) / [UFT](#) / [ITA](#) / [RUA](#) / [RUR](#) / [MIC](#) / [FTG](#) / [MYG](#) / [TWT](#) / [LOD](#) / [PUS](#) / [FRO](#) / [FUP](#) / [KIA](#) / [POP](#) / [BLS](#) / [SPG](#) / [MEY](#) / [GOH](#) / [GMS](#) / [CHC](#) / [COM](#) / [ABZ](#) / [JAG](#)

Accent Finish: [OPL](#) / [MPM](#) / [CMP](#) / [BKR](#) / [WHR](#) / [GCL](#) / [WWR](#) / [WWL](#) / [WDA](#)

Acoustic Finish: [SFW](#) / [CYW](#) / [SEE](#) / [SYN](#) / [MTS](#) / [PMB](#) / [TTN](#) / [CYB](#) / [STO](#) / [DPE](#) / [BES](#) / [SHB](#) / [ARE](#) / [ANE](#) / [VRD](#) / [CRF](#)

Fixture Material: [Acoustic](#) / [Aluminum](#) / [PMMA](#)

Primary Material: [Acoustic](#)

Cable Details: [2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent](#)

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 47.3

Total Output Wattage (W): 42.7

Dimming: [Non-dimming](#) / [DALI Dimming](#) / [MATTER Dimming](#)

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Upon Request: [0 - 10V Dimming](#) / [Phase Dimming](#)

LED

Color Temperature (°K): [2700](#) / [3000](#) / [3500](#) / [4000](#)

Max. Delivered Lumen (lm): Max 6567

Nominal Lumen (lm): Max 7840

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS



Certified By: Certified for North American Standards

Intertek IP20


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

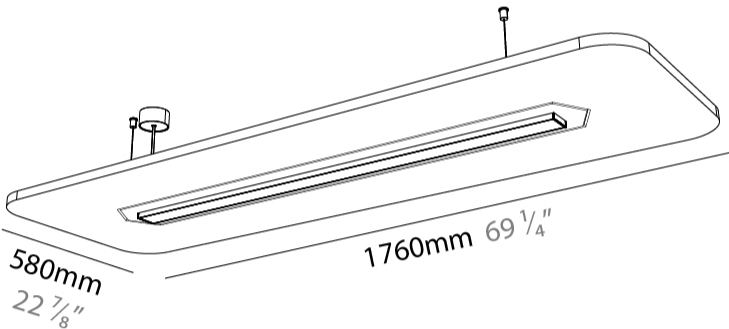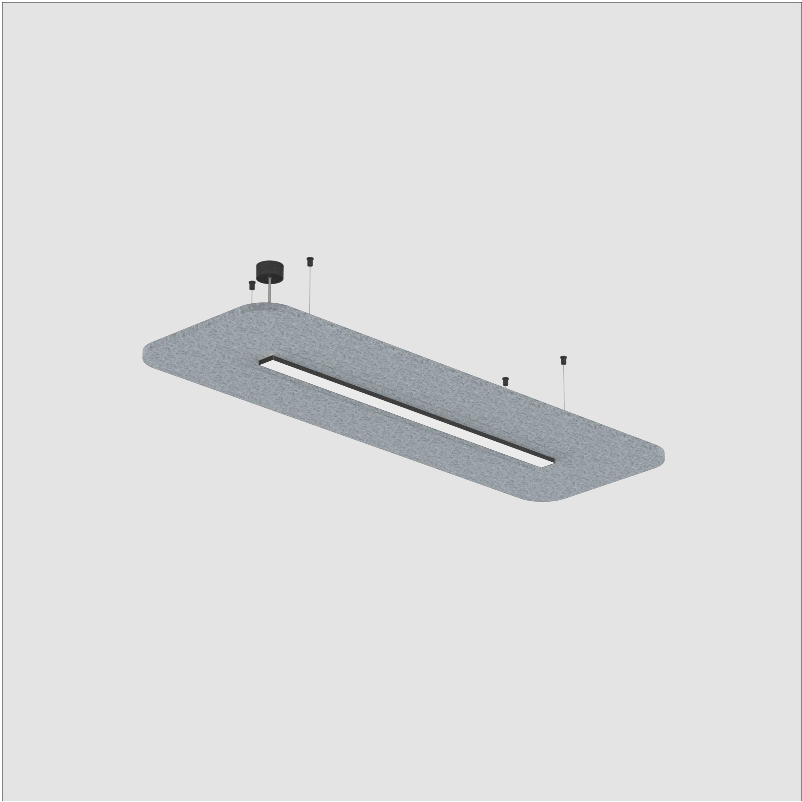

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

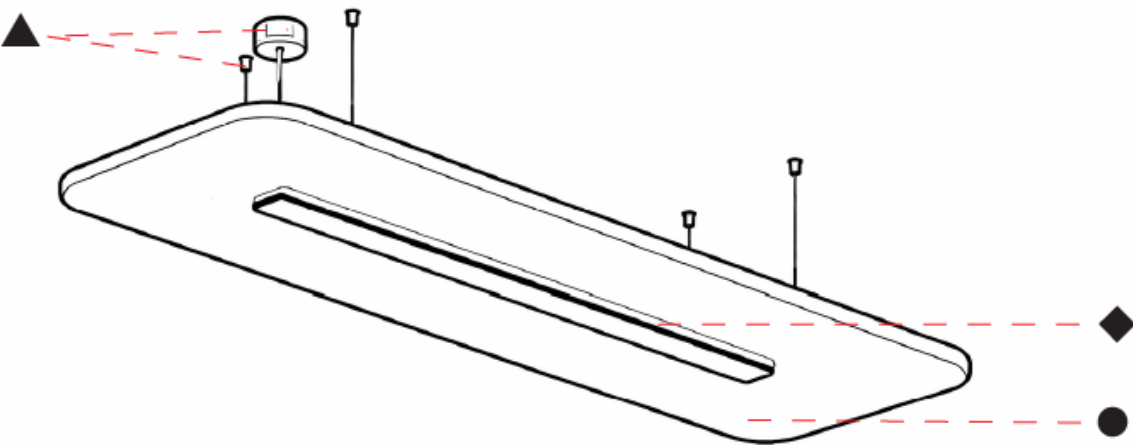

SERENII SUSPENSION

A3001160-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                       |
|---------------------------------------|
| Series: Serenii                       |
| Partner: Prolicht                     |
| Division: Architectural               |
| Installation: Suspension              |
| Product Type: Acoustic                |
| Mounting Location: Ceiling            |
| Light Distribution: Direct / Indirect |

PHYSICAL

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Rectangle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Length (mm): 1760                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Length (in): 69 3/4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Width (mm): 1060                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Width (in): 41 3/4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Height (mm): 91                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Height (in): 3 9/16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Max. Overall Height (mm): 2091                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. Overall Height (in): 82 5/16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Weight (kg): 6.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Weight (lbs): 13.67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Diffuser: <a href="#">PMMA - Opal</a> / <a href="#">Clear</a> / <a href="#">Microprism</a> / <a href="#">Clear Microprism</a> / <a href="#">Wallwash Double Asymmetric</a> / <a href="#">Glare Control</a> / <a href="#">Black Raster</a> / <a href="#">Black Raster</a> / <a href="#">Wallwash Left</a> / <a href="#">Wallwash Right</a>                                                                                                                                                                                                                                                                                                                  |
| Fixture Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> / <a href="#">OBR</a> / <a href="#">MOS</a> / <a href="#">ROR</a> / <a href="#">GMS</a>                      |
| Holder Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">LAG</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">RUR</a> / <a href="#">MIC</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">TWT</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">GMS</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> |
| Accent Finish: <a href="#">OPL</a> / <a href="#">MPM</a> / <a href="#">CMP</a> / <a href="#">BKR</a> / <a href="#">WHR</a> / <a href="#">GCL</a> / <a href="#">WWR</a> / <a href="#">WWL</a> / <a href="#">WDA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Acoustic Finish: <a href="#">SFW</a> / <a href="#">CYW</a> / <a href="#">SEE</a> / <a href="#">SYN</a> / <a href="#">MTS</a> / <a href="#">PMB</a> / <a href="#">TTN</a> / <a href="#">CYB</a> / <a href="#">STO</a> / <a href="#">DPE</a> / <a href="#">BES</a> / <a href="#">SHB</a> / <a href="#">ARE</a> / <a href="#">ANE</a> / <a href="#">VRD</a> / <a href="#">CRF</a>                                                                                                                                                                                                                                                                             |
| Fixture Material: <a href="#">Acoustic</a> / <a href="#">Aluminum</a> / <a href="#">PMMA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Primary Material: <a href="#">Acoustic</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Cable Details: <a href="#">2000mm/78 3/4" or 6000mm/236 1/4" Cable</a> , - <a href="#">Transparent</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

ELECTRICAL

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| Lamp Type: LED                                                                                       |
| Input Wattage (W): 47.3                                                                              |
| Total Output Wattage (W): 42.7                                                                       |
| Dimming: <a href="#">Non-dimming</a> / <a href="#">DALI Dimming</a> / <a href="#">MATTER Dimming</a> |
| Driver Included: No                                                                                  |
| Driver Location: Remote                                                                              |
| Driver Class: Class 2                                                                                |
| Input Voltage (V): 120 - 277                                                                         |
| Upon Request: <a href="#">0 - 10V Dimming</a> / <a href="#">Phase Dimming</a>                        |

LED

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| Color Temperature (°K): <a href="#">2700</a> / <a href="#">3000</a> / <a href="#">3500</a> / <a href="#">4000</a> |
| Max. Delivered Lumen (lm): Max 6567                                                                               |
| Nominal Lumen (lm): Max 7840                                                                                      |
| CRI: >90 CRI                                                                                                      |
| Lamp Life (hrs): 50000                                                                                            |

OPTICAL



RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| Intertek IP20                                        |


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

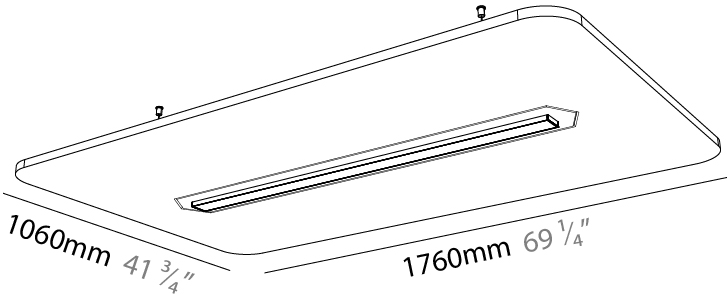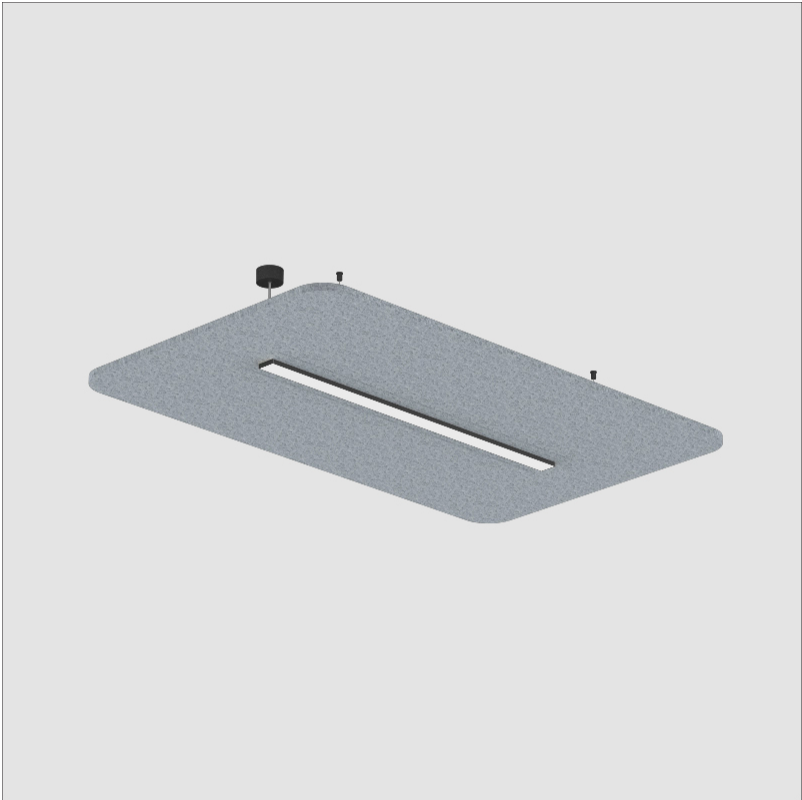

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

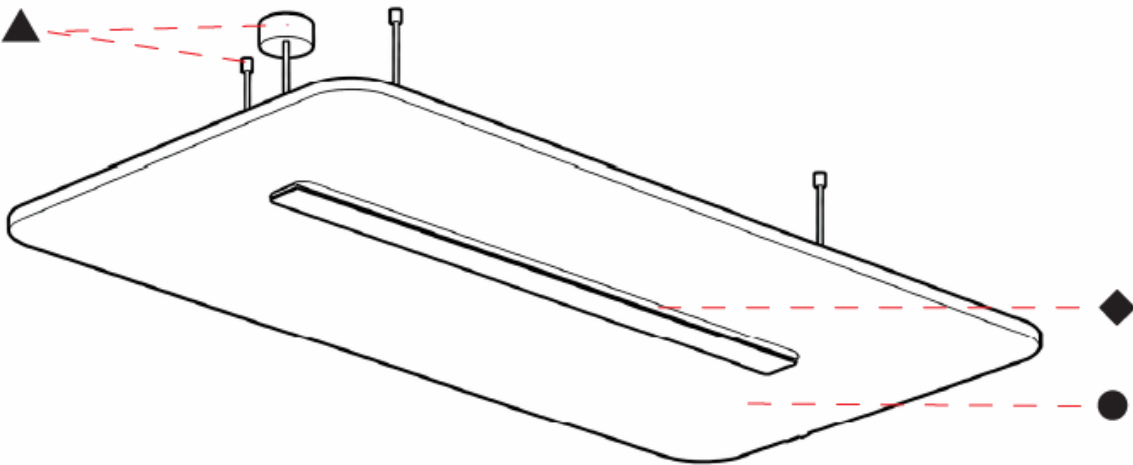

SERENII SUSPENSION

A3001168-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                       |
|---------------------------------------|
| Series: Serenii                       |
| Partner: Prolicht                     |
| Division: Architectural               |
| Installation: Suspension              |
| Product Type: Acoustic                |
| Mounting Location: Ceiling            |
| Light Distribution: Direct / Indirect |

PHYSICAL

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Rectangle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Length (mm): 1760                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Length (in): 69 7⁄8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Width (mm): 580                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Width (in): 22 7⁄8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Height (mm): 91                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Height (in): 3 9⁄16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Max. Overall Height (mm): 2091                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. Overall Height (in): 82 5⁄16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Weight (kg): 6.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Weight (lbs): 13.67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Diffuser: <a href="#">PMMA - Opal</a> / <a href="#">Clear</a> / <a href="#">Microprism</a> / <a href="#">Clear Microprism</a> / <a href="#">Wallwash Double Asymmetric</a> / <a href="#">Glare Control</a> / <a href="#">Black Raster</a> / <a href="#">Black Raster / Wallwash Left</a> / <a href="#">Wallwash Right</a>                                                                                                                                                                                                                                                                                                                                  |
| Fixture Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> / <a href="#">OBR</a> / <a href="#">MOS</a> / <a href="#">ROR</a> / <a href="#">GMS</a>                      |
| Holder Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">LAG</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">RUR</a> / <a href="#">MIC</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">TWT</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">GMS</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> |
| Accent Finish: <a href="#">OPL</a> / <a href="#">MPM</a> / <a href="#">CMP</a> / <a href="#">BKR</a> / <a href="#">WHR</a> / <a href="#">GCL</a> / <a href="#">WWR</a> / <a href="#">WWL</a> / <a href="#">WDA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Acoustic Finish: <a href="#">SFW</a> / <a href="#">CYW</a> / <a href="#">SEE</a> / <a href="#">SYN</a> / <a href="#">MTS</a> / <a href="#">PMB</a> / <a href="#">TTN</a> / <a href="#">CYB</a> / <a href="#">STO</a> / <a href="#">DPE</a> / <a href="#">BES</a> / <a href="#">SHB</a> / <a href="#">ARE</a> / <a href="#">ANE</a> / <a href="#">VRD</a> / <a href="#">CRF</a>                                                                                                                                                                                                                                                                             |
| Fixture Material: <a href="#">Acoustic</a> / <a href="#">Aluminum</a> / <a href="#">PMMA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Primary Material: <a href="#">Acoustic</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Cable Details: <a href="#">2000mm/78 3⁄4" or 6000mm/236 1⁄4" Cable, - Transparent</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

ELECTRICAL

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| Lamp Type: LED                                                                                       |
| Input Wattage (W): 47.3                                                                              |
| Total Output Wattage (W): 42.7                                                                       |
| Dimming: <a href="#">Non-dimming</a> / <a href="#">DALI Dimming</a> / <a href="#">MATTER Dimming</a> |
| Driver Included: No                                                                                  |
| Driver Location: Remote                                                                              |
| Driver Class: Class 2                                                                                |
| Input Voltage (V): 120 - 277                                                                         |
| Upon Request: <a href="#">0 - 10V Dimming</a> / <a href="#">Phase Dimming</a>                        |

LED

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| Color Temperature (°K): <a href="#">2700</a> / <a href="#">3000</a> / <a href="#">3500</a> / <a href="#">4000</a> |
| Max. Delivered Lumen (lm): Max 6567                                                                               |
| Nominal Lumen (lm): Max 7840                                                                                      |
| CRI: >90 CRI                                                                                                      |
| Lamp Life (hrs): 50000                                                                                            |

OPTICAL



RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| UL Listing: <a href="#">UL 0</a>                     |


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

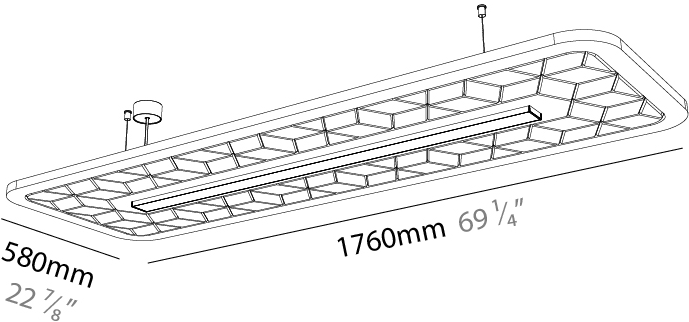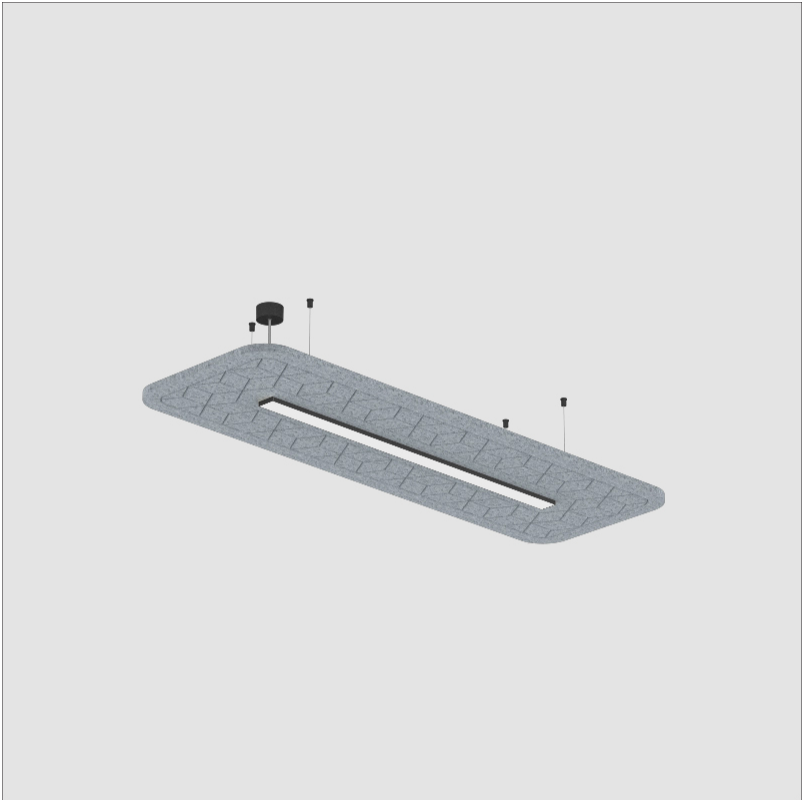

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

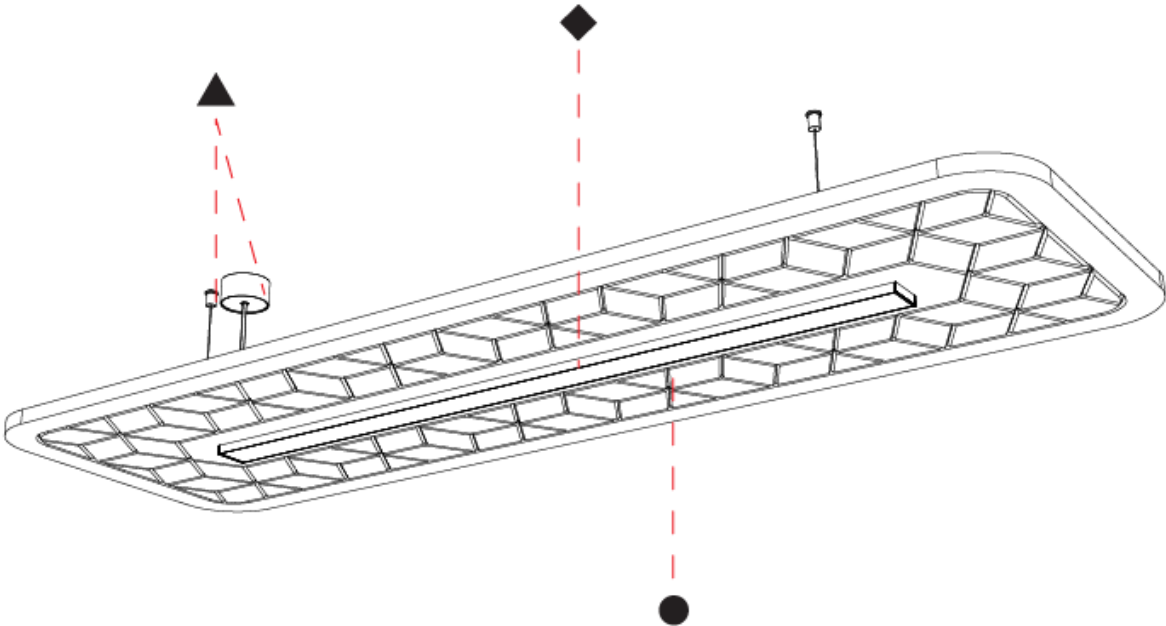

SERENII SUSPENSION

A3001170-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                       |
|---------------------------------------|
| Series: Serenii                       |
| Partner: Prolicht                     |
| Division: Architectural               |
| Installation: Suspension              |
| Product Type: Acoustic                |
| Mounting Location: Ceiling            |
| Light Distribution: Direct / Indirect |

PHYSICAL

|                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Rectangle                                                                                                                                                                                           |
| Length (mm): 1760                                                                                                                                                                                          |
| Length (in): 69 1/4                                                                                                                                                                                        |
| Width (mm): 1060                                                                                                                                                                                           |
| Width (in): 41 3/4                                                                                                                                                                                         |
| Height (mm): 91                                                                                                                                                                                            |
| Height (in): 3 9/16                                                                                                                                                                                        |
| Max. Overall Height (mm): 2091                                                                                                                                                                             |
| Max. Overall Height (in): 82 5/16                                                                                                                                                                          |
| Weight (kg): 6.2                                                                                                                                                                                           |
| Weight (lbs): 13.67                                                                                                                                                                                        |
| Diffuser: <a href="#">PMMA - Opal / Clear / Microprism / Clear Microprism / Wallwash Double Asymmetric / Glare Control / Black Raster / Black Raster / Wallwash Left / Wallwash Right</a>                  |
| Fixture Finish: <a href="#">SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS</a>      |
| Holder Finish: <a href="#">SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GMS / CHC / COM / ABZ / JAG</a> |
| Accent Finish: <a href="#">OPL / MPM / CMP / BKR / WHR / GCL / WWR / WWL / WDA</a>                                                                                                                         |
| Acoustic Finish: <a href="#">SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF</a>                                                                             |
| Fixture Material: <a href="#">Acoustic / Aluminum / PMMA</a>                                                                                                                                               |
| Primary Material: <a href="#">Acoustic</a>                                                                                                                                                                 |
| Cable Details: <a href="#">2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent</a>                                                                                                                      |

ELECTRICAL

|                                                                      |
|----------------------------------------------------------------------|
| Lamp Type: LED                                                       |
| Input Wattage (W): 47.3                                              |
| Total Output Wattage (W): 42.7                                       |
| Dimming: <a href="#">Non-dimming / DALI Dimming / MATTER Dimming</a> |
| Driver Included: No                                                  |
| Driver Location: Remote                                              |
| Driver Class: Class 2                                                |
| Input Voltage (V): 120 - 277                                         |
| Upon Request: <a href="#">0 - 10V Dimming / Phase Dimming</a>        |

LED

|                                                                   |
|-------------------------------------------------------------------|
| Color Temperature (°K): <a href="#">2700 / 3000 / 3500 / 4000</a> |
| Max. Delivered Lumen (lm): Max 6567                               |
| Nominal Lumen (lm): Max 7840                                      |
| CRI: >90 CRI                                                      |
| Lamp Life (hrs): 50000                                            |

OPTICAL



RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| Intertek IP20                                        |


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

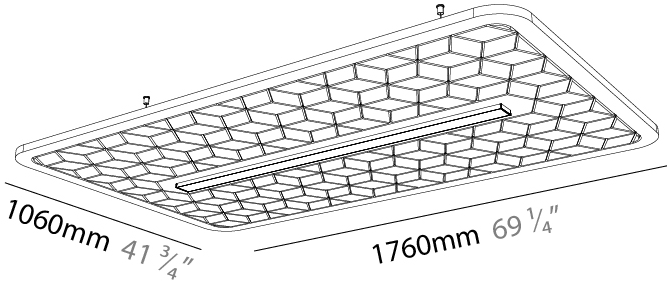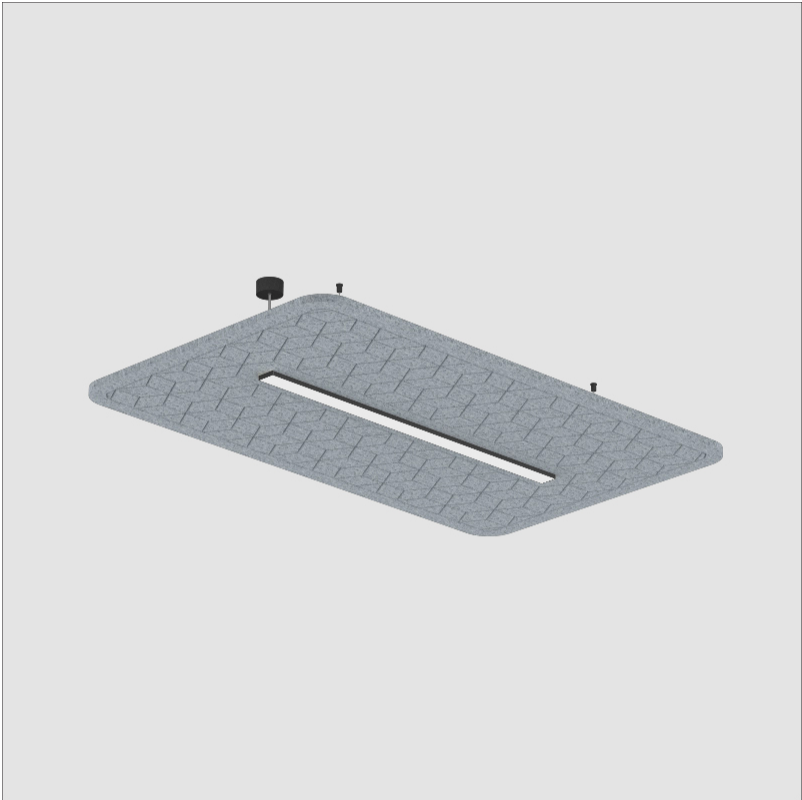

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

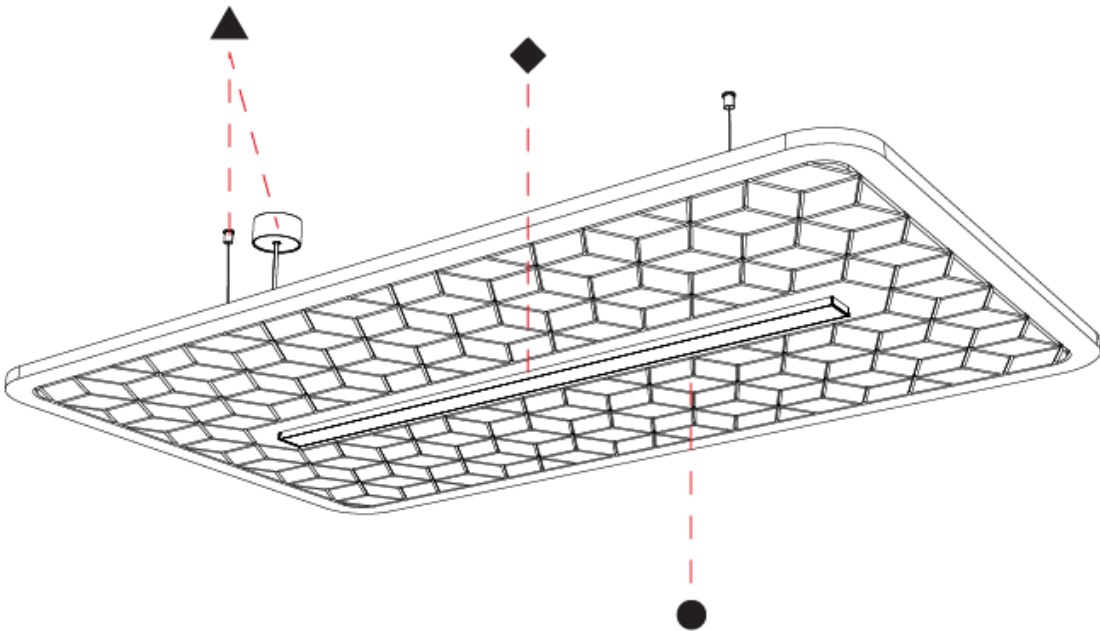

|                             |                             |                              |                                |                           |                         |
|-----------------------------|-----------------------------|------------------------------|--------------------------------|---------------------------|-------------------------|
| Sparkling Silver - 01 (SSR) | Black Velvet - 02 (BKV)     | Crystal White - 03 (CWI)     | Creamy - 04 (CRY)              | Hampton Bay - 05 (HAB)    | Urban Forest - 07 (UFT) |
| In the Army - 08 (ITA)      | Rusty Angel - 09 (RUA)      | Fade to Gray - 12 (FTG)      | Mysterious Gray - 13 (MYG)     | Lost Dream - 15 (LOD)     | Purple Sky - 16 (PUS)   |
| Fresh Oh - 17 (FRO)         | Funky P. - 18 (FUP)         | Kissing Aphrodite - 19 (KIA) | Poseidon's Paradise - 20 (POP) | Blue Sky - 21 (BLS)       | Spring Green - 22 (SPG) |
| Mellow Yellow - 23 (MEY)    | Golden Heart - 24 (GOH)     | Champagne Cream - 26 (CHC)   | Copper Mine - 27 (COM)         | Ancient Bronze - 28 (ABZ) | Jazz Gold - 29 (JAG)    |
| Olive Breeze - 30 (OBR)     | Moonlight Silver - 31 (MOS) | Rosewood Red - 32 (ROR)      | Gun Metal Solid - 33 (GMS)     |                           |                         |

|                              |                                |                         |                           |                                                                                                |                         |
|------------------------------|--------------------------------|-------------------------|---------------------------|------------------------------------------------------------------------------------------------|-------------------------|
| Sparkling Silver - 01 (SSR)  | Black Velvet - 02 (BKV)        | Crystal White - 03 (CW) | Creamy - 04 (CRY)         | Hampton Bay - 05 (HAB)                                                                         | Lagoon - 06 (LAG)       |
| Urban Forest - 07 (UFT)      | In the Army - 08 (ITA)         | Rusty Angel - 09 (RUA)  | Rusty Rush - 10 (RUR)     | Milk and Chocolate - 11 (MIC)                                                                  | Fade to Gray - 12 (FTG) |
| Mysterious Gray - 13 (MYG)   | Twilight - 14 (TWT)            | Lost Dream - 15 (LOD)   | Purple Sky - 16 (PUS)     | Fresh Oh - 17 (FRO)                                                                            | Funky P. - 18 (FUP)     |
| Kissing Aphrodite - 19 (KIA) | Poseidon's Paradise - 20 (POP) | Blue Sky - 21 (BLS)     | Spring Green - 22 (SPG)   | Mellow Yellow - 23 (MEY)                                                                       | Golden Heart - 24 (GOH) |
| Gun Metal Solid - 33 (GMS)   | Champagne Cream - 26 (CHC)     | Copper Mine - 27 (COM)  | Ancient Bronze - 28 (ABZ) |  - 29 (JAG) |                         |



SERENII SUSPENSION  
COLOR FINISH CHART

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Accent Finish

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.  
**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.




|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Acoustic Finish


Snowfall White - 44 (SFW)




Creamy White - 97 (CYW)




Stone Echo - 83 (SEE)




Smoky Iron - 50 (SYN)



Midnight Stone - 51 (MTS)



Phantom Black - 71 (PMB)




Twilight Navy - 69 (TTN)




Cloudy Blue - 73 (CYB)




Soft Olive - 82 (STO)



Deep Evergreen - 91 (DPE)



Bronze Shadow - 87 (BES)




Savannah Brown - 42 (SHB)




Amber Earth - 55 (ARE)



Autumn Ember - 90 (ANE)



Vintage Red - 99 (VRD)



Coral Reef - 98 (CRF)



### LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

### IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

### IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |