

SERENII SUSPENSION

A3001155-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Serenii

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Square

Length (mm): 1060

Length (in): 41 3/4

Width (mm): 1060

Width (in): 41 3/4

Height (mm): 91

Height (in): 3 9/16

Max. Overall Height (mm): 2091

Max. Overall Height (in): 82 5/16

Weight (kg): 6.2

Diffuser: PMMA - Opal / Clear / Microprism / Clear Microprism / Wallwash Double Asymmetric / Glare Control / Black Raster / Black Raster / Wallwash Left / Wallwash Right

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS

Holder Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GMS / CHC / COM / ABZ / JAG

Accent Finish: OPL / MPM / CMP / BKR / WHR / GCL / WWR / WWL / WDA

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Fixture Material: Acoustic / Aluminum / PMMA

Primary Material: Acoustic

Cable Details: 2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 12.9

Total Output Wattage (W): 11.8

Dimming: Non-dimming / DALI Dimming / MATTER Dimming

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Upon Request: 0 - 10V Dimming / Phase Dimming

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): Max 1847

Nominal Lumen (lm): Max 2140

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

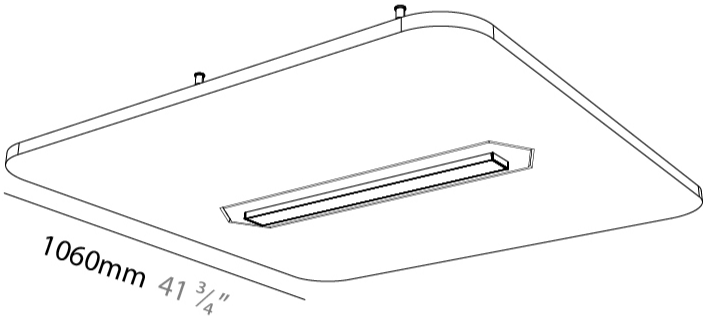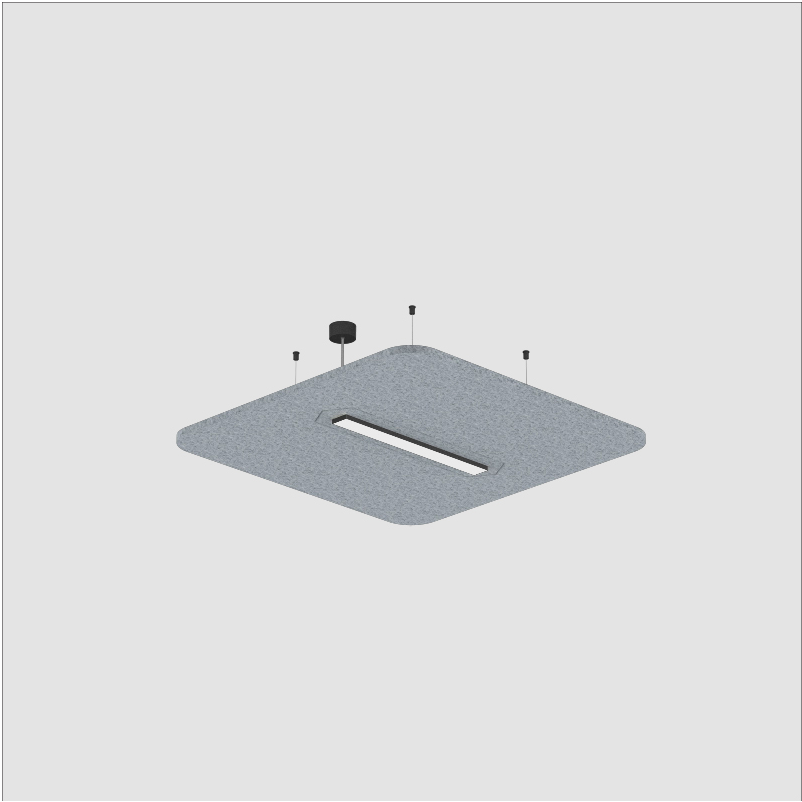

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

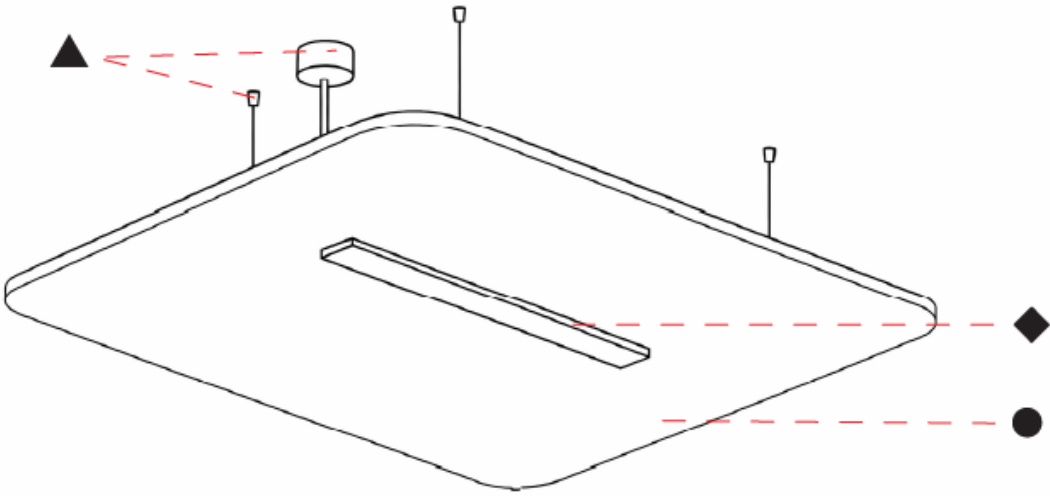

SERENII SUSPENSION

A3001156-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Serenii

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Acoustic

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Square

Length (mm): 1060

Length (in): 41 3/4

Width (mm): 1060

Width (in): 41 3/4

Height (mm): 91

Height (in): 3 9/16

Max. Overall Height (mm): 2091

Max. Overall Height (in): 82 5/16

Weight (kg): 6.2

Diffuser: [PMMA - Opal / Clear / Microprism / Clear Microprism / Wallwash Double Asymmetric / Glare Control / Black Raster / Black Raster / Wallwash Left / Wallwash Right](#)

Fixture Finish: [SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS](#)

Holder Finish: [SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GMS / CHC / COM / ABZ / JAG](#)

Accent Finish: [OPL / MPM / CMP / BKR / WHR / GCL / WWR / WWL / WDA](#)

Acoustic Finish: [SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF](#)

Fixture Material: [Acoustic / Aluminum / PMMA](#)

Primary Material: [Acoustic](#)

Cable Details: [2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent](#)

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 21.5

Total Output Wattage (W): 20

Dimming: [Non-dimming / DALI Dimming / MATTER Dimming](#)

Driver Included: No

Driver Location: Remote

Driver Class: Class 2

Input Voltage (V): 120 - 277

Upon Request: [0 - 10V Dimming / Phase Dimming](#)

LED

Color Temperature (°K): [2700 / 3000 / 3500 / 4000](#)

Max. Delivered Lumen (lm): Max 2993

Nominal Lumen (lm): Max 3560

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

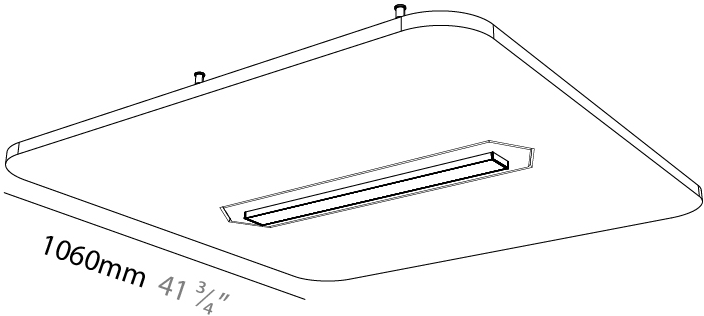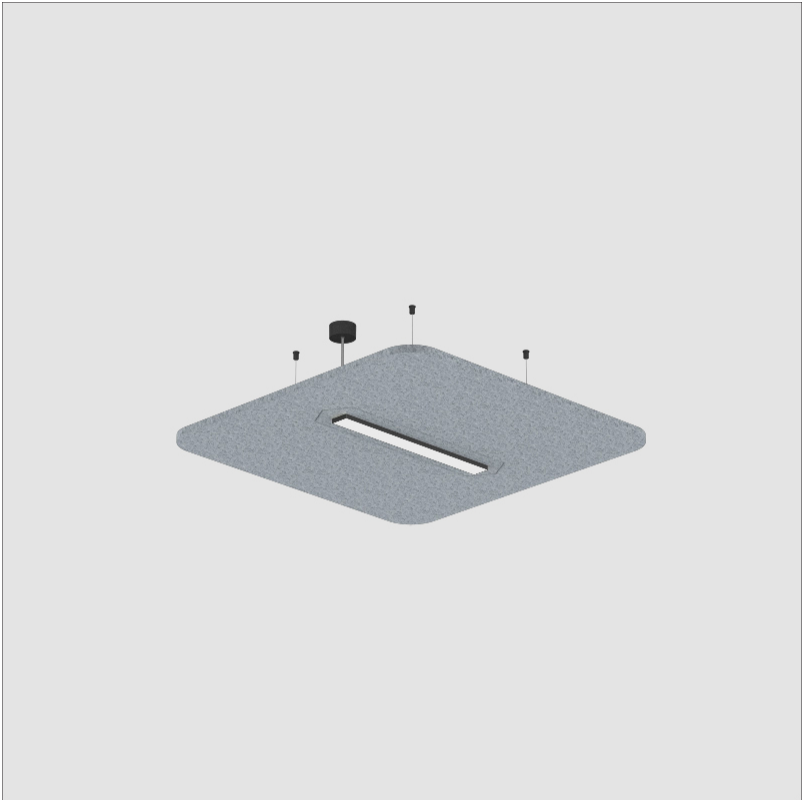

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

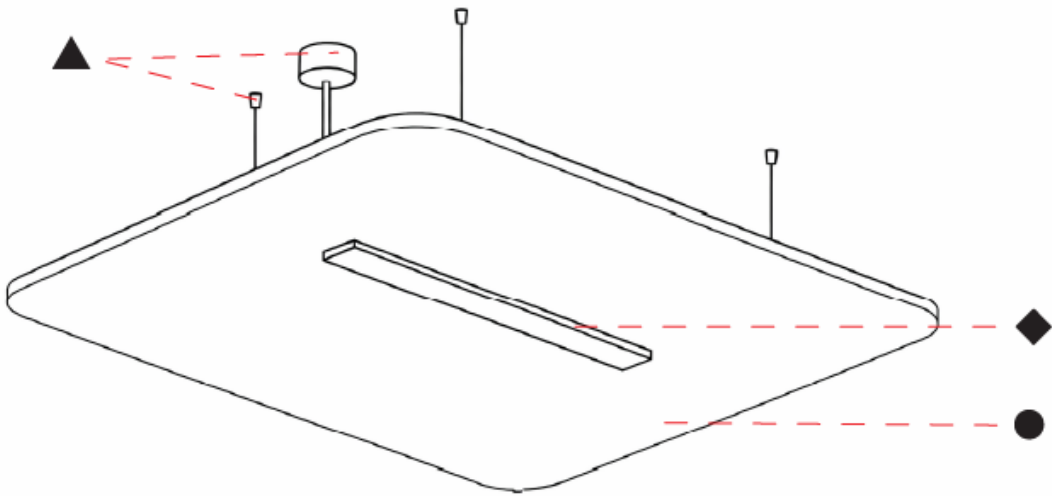

SERENII SUSPENSION

A3001165-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Serenii            |
| Partner: Prolicht          |
| Division: Architectural    |
| Installation: Suspension   |
| Product Type: Acoustic     |
| Mounting Location: Ceiling |
| Light Distribution: Direct |

PHYSICAL

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Square                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Length (mm): 1060                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Length (in): 41 3/4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Width (mm): 1060                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Width (in): 41 3/4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Height (mm): 91                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Height (in): 3 9/16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Max. Overall Height (mm): 2091                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. Overall Height (in): 82 7/16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Weight (kg): 6.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Weight (lbs): 13.67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Diffuser: <a href="#">PMMA - Opal</a> / <a href="#">Clear</a> / <a href="#">Microprism</a> / <a href="#">Clear Microprism</a> / <a href="#">Wallwash Double Asymmetric</a> / <a href="#">Glare Control</a> / <a href="#">Black Raster</a> / <a href="#">Black Raster / Wallwash Left</a> / <a href="#">Wallwash Right</a>                                                                                                                                                                                                                                                                                                                                  |
| Fixture Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> / <a href="#">OBR</a> / <a href="#">MOS</a> / <a href="#">ROR</a> / <a href="#">GMS</a>                      |
| Holder Finish: <a href="#">SSR / BKV</a> / <a href="#">CWI</a> / <a href="#">CRY</a> / <a href="#">HAB</a> / <a href="#">LAG</a> / <a href="#">UFT</a> / <a href="#">ITA</a> / <a href="#">RUA</a> / <a href="#">RUR</a> / <a href="#">MIC</a> / <a href="#">FTG</a> / <a href="#">MYG</a> / <a href="#">TWT</a> / <a href="#">LOD</a> / <a href="#">PUS</a> / <a href="#">FRO</a> / <a href="#">FUP</a> / <a href="#">KIA</a> / <a href="#">POP</a> / <a href="#">BLS</a> / <a href="#">SPG</a> / <a href="#">MEY</a> / <a href="#">GOH</a> / <a href="#">GMS</a> / <a href="#">CHC</a> / <a href="#">COM</a> / <a href="#">ABZ</a> / <a href="#">JAG</a> |
| Accent Finish: <a href="#">OPL</a> / <a href="#">MPM</a> / <a href="#">CMP</a> / <a href="#">BKR</a> / <a href="#">WHR</a> / <a href="#">GCL</a> / <a href="#">WWR</a> / <a href="#">WWL</a> / <a href="#">WDA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Acoustic Finish: <a href="#">SFW</a> / <a href="#">CYW</a> / <a href="#">SEE</a> / <a href="#">SYN</a> / <a href="#">MTS</a> / <a href="#">PMB</a> / <a href="#">TTN</a> / <a href="#">CYB</a> / <a href="#">STO</a> / <a href="#">DPE</a> / <a href="#">BES</a> / <a href="#">SHB</a> / <a href="#">ARE</a> / <a href="#">ANE</a> / <a href="#">VRD</a> / <a href="#">CRF</a>                                                                                                                                                                                                                                                                             |
| Fixture Material: <a href="#">Acoustic</a> / <a href="#">Aluminum</a> / <a href="#">PMMA</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Primary Material: <a href="#">Acoustic</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Cable Details: <a href="#">2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

ELECTRICAL

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| Lamp Type: LED                                                                                       |
| Input Wattage (W): 12.9                                                                              |
| Total Output Wattage (W): 11.8                                                                       |
| Dimming: <a href="#">Non-dimming</a> / <a href="#">DALI Dimming</a> / <a href="#">MATTER Dimming</a> |
| Driver Included: No                                                                                  |
| Driver Location: Remote                                                                              |
| Driver Class: Class 2                                                                                |
| Input Voltage (V): 120 - 277                                                                         |
| Upon Request: <a href="#">0 - 10V Dimming</a> / <a href="#">Phase Dimming</a>                        |

LED

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| Color Temperature (°K): <a href="#">2700</a> / <a href="#">3000</a> / <a href="#">3500</a> / <a href="#">4000</a> |
| Max. Delivered Lumen (lm): Max 1847                                                                               |
| Nominal Lumen (lm): Max 2140                                                                                      |
| CRI: >90 CRI                                                                                                      |
| Lamp Life (hrs): 50000                                                                                            |

OPTICAL



RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP Rating: <a href="#">IP20</a>                      |


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

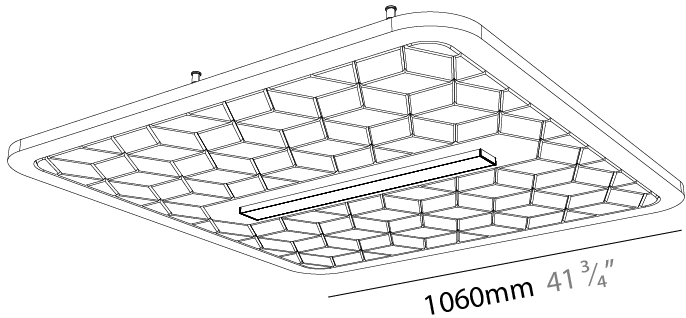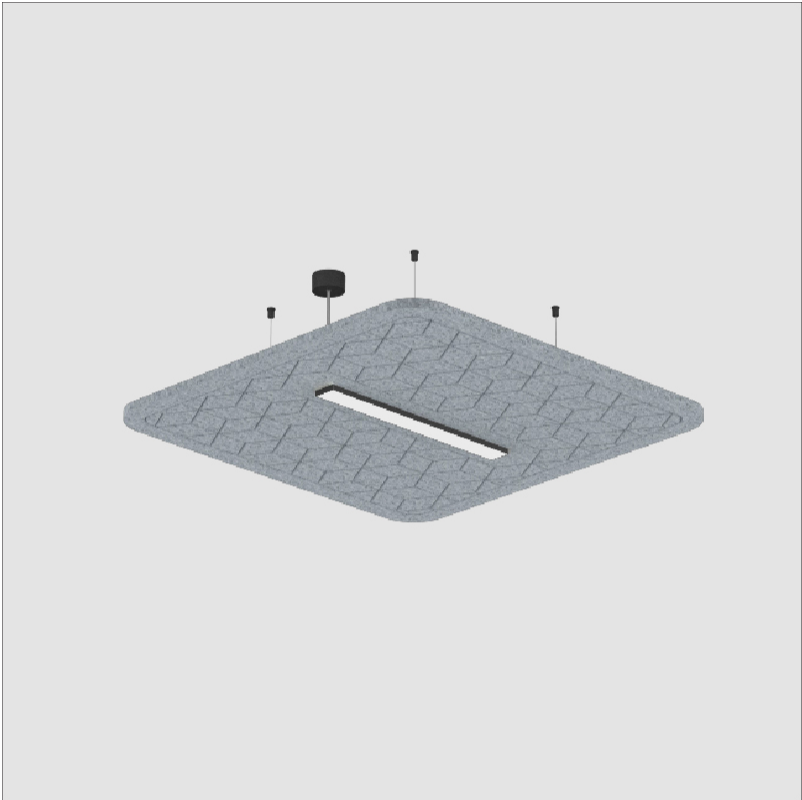

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

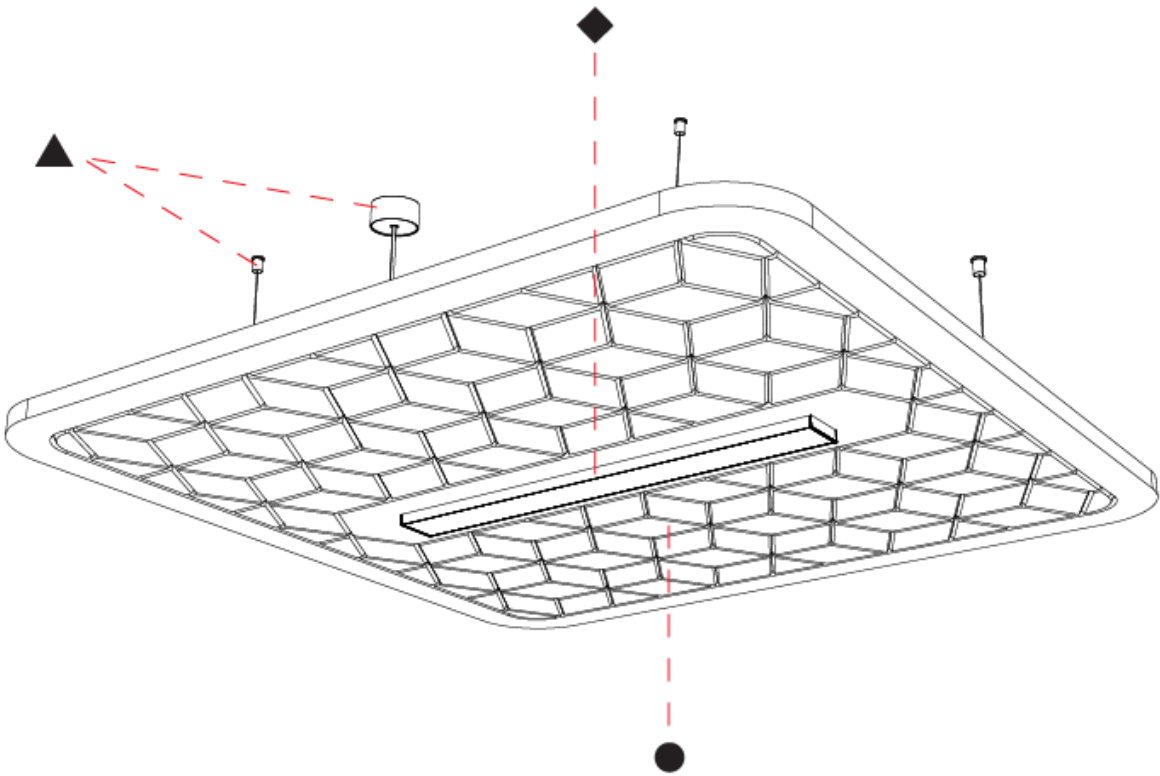

A

SERENII SUSPENSION

A3001166-

|             |                      |                       |                        |                     |                 |                     |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|
| base number | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Acoustic<br>Options | Cable<br>Length | Diffuser<br>Options |
|-------------|----------------------|-----------------------|------------------------|---------------------|-----------------|---------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                       |
|---------------------------------------|
| Series: Serenii                       |
| Partner: Prolicht                     |
| Division: Architectural               |
| Installation: Suspension              |
| Product Type: Acoustic                |
| Mounting Location: Ceiling            |
| Light Distribution: Direct / Indirect |

PHYSICAL

|                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Square                                                                                                                                                                                              |
| Length (mm): 1060                                                                                                                                                                                          |
| Length (in): 41 3/4                                                                                                                                                                                        |
| Width (mm): 1060                                                                                                                                                                                           |
| Width (in): 41 3/4                                                                                                                                                                                         |
| Height (mm): 91                                                                                                                                                                                            |
| Height (in): 3 9/16                                                                                                                                                                                        |
| Max. Overall Height (mm): 2091                                                                                                                                                                             |
| Max. Overall Height (in): 82 7/16                                                                                                                                                                          |
| Weight (kg): 6.2                                                                                                                                                                                           |
| Weight (lbs): 13.67                                                                                                                                                                                        |
| Diffuser: <a href="#">PMMA - Opal / Clear / Microprism / Clear Microprism / Wallwash Double Asymmetric / Glare Control / Black Raster / Black Raster / Wallwash Left / Wallwash Right</a>                  |
| Fixture Finish: <a href="#">SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS</a>      |
| Holder Finish: <a href="#">SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GMS / CHC / COM / ABZ / JAG</a> |
| Accent Finish: <a href="#">OPL / MPM / CMP / BKR / WHR / GCL / WWR / WWL / WDA</a>                                                                                                                         |
| Acoustic Finish: <a href="#">SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF</a>                                                                             |
| Fixture Material: <a href="#">Acoustic / Aluminum / PMMA</a>                                                                                                                                               |
| Primary Material: <a href="#">Acoustic</a>                                                                                                                                                                 |
| Cable Details: <a href="#">2000mm/78 3/4" or 6000mm/236 1/4" Cable, - Transparent</a>                                                                                                                      |

ELECTRICAL

|                                                                      |
|----------------------------------------------------------------------|
| Lamp Type: LED                                                       |
| Input Wattage (W): 21.5                                              |
| Total Output Wattage (W): 20                                         |
| Dimming: <a href="#">Non-dimming / DALI Dimming / MATTER Dimming</a> |
| Driver Included: No                                                  |
| Driver Location: Remote                                              |
| Driver Class: Class 2                                                |
| Input Voltage (V): 120 - 277                                         |
| Upon Request: <a href="#">0 - 10V Dimming / Phase Dimming</a>        |

LED

|                                                                   |
|-------------------------------------------------------------------|
| Color Temperature (°K): <a href="#">2700 / 3000 / 3500 / 4000</a> |
| Max. Delivered Lumen (lm): Max 2993                               |
| Nominal Lumen (lm): Max 3560                                      |
| CRI: >90 CRI                                                      |
| Lamp Life (hrs): 50000                                            |

OPTICAL



RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| Intertek IP20                                        |


© 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

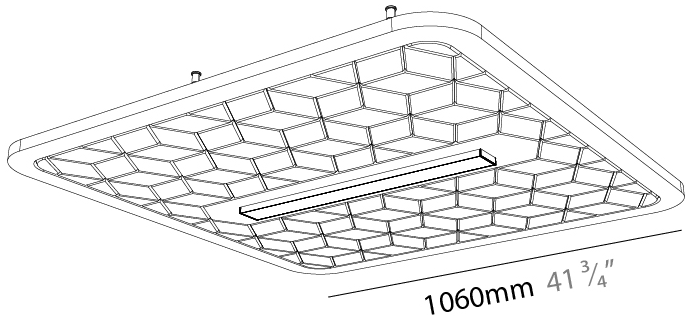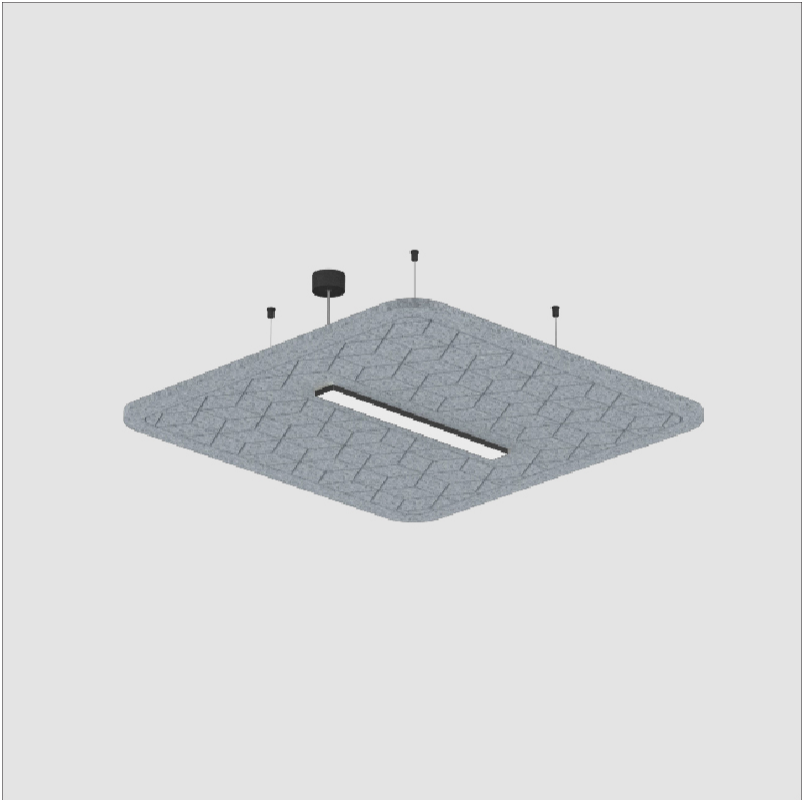

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

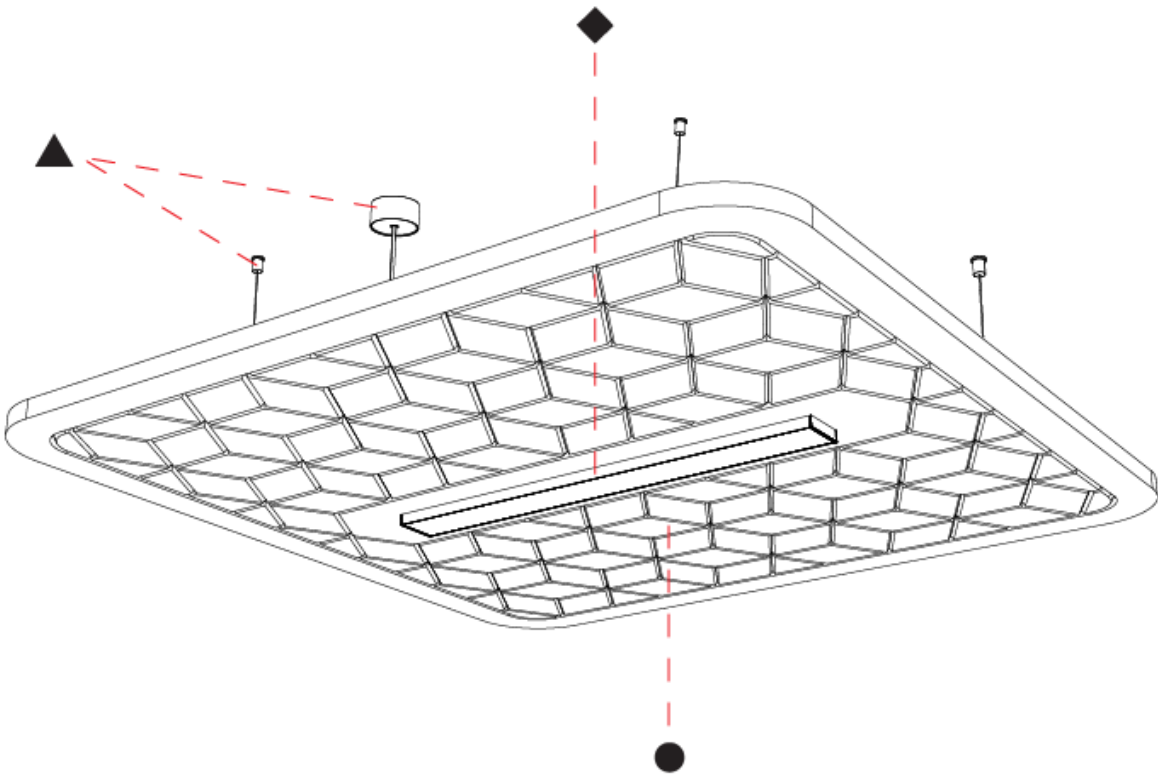

A

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish

Sparkling Silver - 01 (SSR)

Black Velvet - 02 (BKV)

Crystal White - 03 (CWI)

Creamy - 04 (CRY)

Hampton Bay - 05 (HAB)

Urban Forest - 07 (UFT)

In the Army - 08 (ITA)

Rusty Angel - 09 (RUA)

Fade to Gray - 12 (FTG)

Mysterious Gray - 13 (MYG)

Lost Dream - 15 (LOD)

Purple Sky - 16 (PUS)

Fresh Oh - 17 (FRO)

Funky P. - 18 (FUP)

Kissing Aphrodite - 19 (KIA)

Poseidon's Paradise - 20 (POP)

Blue Sky - 21 (BLS)

Spring Green - 22 (SPG)

Mellow Yellow - 23 (MEY)

Golden Heart - 24 (GOH)

Champagne Cream - 26 (CHC)

Copper Mine - 27 (COM)

Ancient Bronze - 28 (ABZ)

Jazz Gold - 29 (JAG)

Olive Breeze - 30 (OBR)

Moonlight Silver - 31 (MOS)

Rosewood Red - 32 (ROR)

Gun Metal Solid - 35 (GMS)

Holder Finish

Sparkling Silver - 01 (SSR)

Black Velvet - 02 (BKV)

Crystal White - 03 (CWI)

Creamy - 04 (CRY)

Hampton Bay - 05 (HAB)

Lagoon - 06 (LAG)

Urban Forest - 07 (UFT)

In the Army - 08 (ITA)

Rusty Angel - 09 (RUA)

Rusty Rush - 10 (RUR)

Milk and Chocolate - 11 (MIC)

Fade to Gray - 12 (FTG)

Mysterious Gray - 13 (MYG)

Twilight - 14 (TWT)

Lost Dream - 15 (LOD)

Purple Sky - 16 (PUS)

Fresh Oh - 17 (FRO)

Funky P. - 18 (FUP)

Kissing Aphrodite - 19 (KIA)

Poseidon's Paradise - 20 (POP)

Blue Sky - 21 (BLS)

Spring Green - 22 (SPG)

Mellow Yellow - 23 (MEY)

Golden Heart - 24 (GOH)

Gun Metal Solid - 35 (GMS)

Champagne Cream - 26 (CHC)

Copper Mine - 27 (COM)

Ancient Bronze - 28 (ABZ)

Jazz Gold - 29 (JAG)



SERENII SUSPENSION  
COLOR FINISH CHART

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Accent Finish

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.  
**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.




|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Acoustic Finish


Snowfall White - 44 (SFW)




Creamy White - 97 (CYW)




Stone Echo - 83 (SEE)



Smoky Iron - 50 (SYN)



Midnight Stone - 51 (MTS)



Phantom Black - 71 (PMB)




Twilight Navy - 69 (TTN)




Cloudy Blue - 73 (CYB)




Soft Olive - 82 (STO)



Deep Evergreen - 91 (DPE)



Bronze Shadow - 87 (BES)




Savannah Brown - 42 (SHB)




Amber Earth - 55 (ARE)



Autumn Ember - 90 (ANE)



Vintage Red - 99 (VRD)



Coral Reef - 98 (CRF)



## LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

## IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

## IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |