SIGN DIVA DANCER SUSPENSION

base number	LED	Color	Finishes	Finishes	Finishes	Diffuse
base number	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with R
1.To build a p	roduct code i	n our configura	ntor select th	ne specify bu	tton on	
the base mod		0				
2. To build a n	nanual produ	ict code on this	datasheet d	choose from	the	
options listed	below in blue	e font and add	the suffix to	the base mo	odel #	
GENERAL						
Series: Sign D	iva Dancer					
Subseries: Sig	gn Diva Dance	er				
Brand: Prolici	nt					
Division: Arch	itectural					
Mounting Typ	e: Suspensio	n				
Mounting Loc	ation: Ceiling	5				
Subcategory:	Pendant					
PHYSICAL						
Shape: Round						
Diameter (mn						
Diameter (in):	: 7 1/8					
Height (mm):	72					
Height (in): 2	¹³ / ₁₆					
Max. Overall H	leight (mm):	870				
Max. Overall H	leight (in): 34	↓ ¹ / ₄				
Extension (m	m): 750					
Extension (in)	: 29 ½					
Light Distribu	tion: Adjusta	ble / Direct				
Weight (kg): 1	.999					
Weight (lbs): 4	1.407					
Diffuser: PMM Industrial	A - Opal / Mic	cro-Prism / Spa	arkling Secr	et / Vintage		
Fixture Finish	: SSR / BKV /	CWI / CRY / HA	B / UFT / ITA	A/RUA/FTC	G / MYG /	
		A / POP / BLS /	SPG / MEY /	GOH / GUM	/ CHC /	
COM / ABZ / J Fixture Mater		OS / ROR Aluminum / SI	teel			
ELECTRICAL						
Lamp Type: L	ED (Zhaga St	andard)				
Input Wattage	e (W): 10					
		Dimming and F	hase Dimm	ing (120Vac	only)	
and 0-10V Din						
Driver Include	ed: Yes					
Driver Locatio	0					
		ent - Universa	l			
Driver Class: (
Input Voltage						
Constant Cur	rent (MA): 350)				
LED						
Color Temper	ature (°K): 27	/00 / 3000 / 350	00 / 4000			
Max. Delivere	d Lumen (lm)	: 776 / 830 / 83	87 / 854			
Nominal Lum	en (lm): 1280	/ 1370 / 1382	/ 1410			

OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$


RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

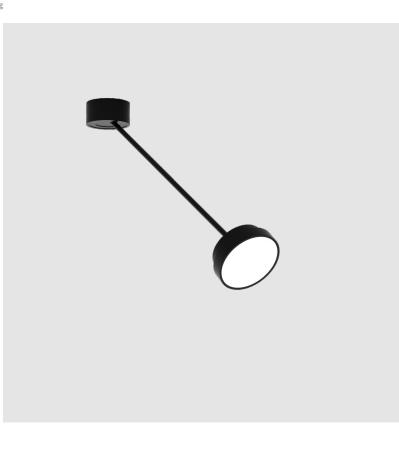





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A300037-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

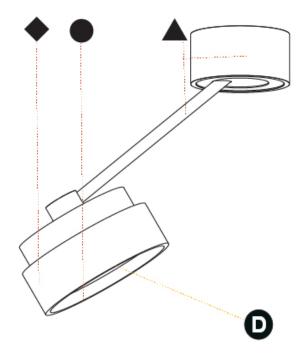



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

SIGN DIVA DANCER SUSPENSION

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature		(Triangle)	(Circle)	with Ring
1		n our configura	ator select t	he specify bu	itton on	
the base mod 2. To build a n		ict code on this	datasheet	choose from	the	
		e font and add				
GENERAL						
Series: Sign D	iva Dancer					
Subseries: Sig		r.				
Brand: Prolich						
Division: Arch						
Mounting Typ	e: Suspensio	n				
Mounting Loc						
Subcategory:		,				
PHYSICAL						
Shape: Round						
Diameter (mn						
Diameter (in):						
Height (mm):	-					
Height (in): 2	10					
Max. Overall H						
Max. Overall H	leight (in): 34	4 ¹ / ₄				
Extension (mr	n): 750					
Extension (in)	: 29 1/2					
Light Distribu	tion: Adjusta	ble / Direct				
Weight (kg): 3	.140					
Weight (lbs): 6	5.922					
Diffuser: PMM Industrial	A - Opal / Mic	cro-Prism / Spa	arkling Secr	et / Vintage		
	RO / FUP / KI	CWI / CRY / HA A / POP / BLS / OS / ROR				
Fixture Materi	al: Extruded	Aluminum / St	teel			
ELECTRICAL						
Lamp Type: Ll	ED (Zhaga St	andard)				
Input Wattage		,				
Total Output		16				
· · ·	0) imming and F	hase Dimm	ning (120Vac	only)	
and 0-10V Dim	nming)					
Driver Include	d: Yes					
Driver Locatio	n: Integrated	ł				
Driver Type: C	onstant Curr	ent - Universa	l			
Driver Class: C	lass 2					
Input Voltage	(V): 120 - 277	•				
Constant Curr	ent (MA): 500)				
LED						
Color Temper	ature (°K): 27	700 / 3000 / 350	00 / 4000			
Max. Delivere	d Lumen (lm)	: 1807 / 1943 /	1951 / 1991	1		
Nominal Lum	en (lm): 2250	/ 2420 / 2430 ,	/ 2480			1
CRI: >90 CRI						(
Lamp Life (hrs	s): 50000					\
OPTICAL						\
	Rotational C	anopy 170°; Ti	lting Canop	y ±50°; Tiltir	ng Head	
	CERTIFICA					

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			

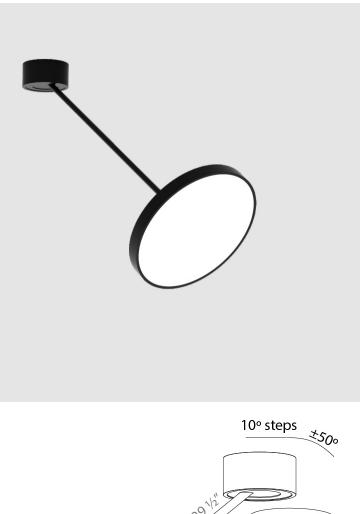

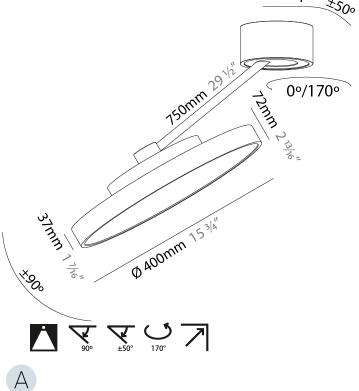

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 3/42

SIGN DIVA DANCER SUSPENSION

A300039-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

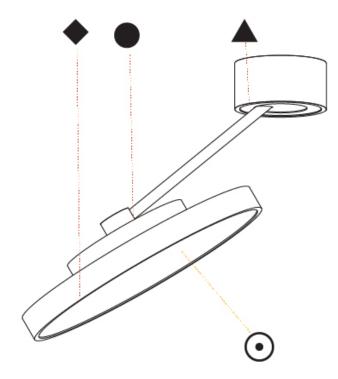

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A300041-

base number LED Color Finishes Finishes Finishes Diffuser Dimming Temperature (Diamond) (Triangle) (Circle) with Ring

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 570	
Diameter (in): 22 ⁷ / ₁₆	
Height (mm): 870	
Depth (mm): 72	
Height (in): 34 ¼	
Depth (in): 2 ¹³ / ₁₆	
Extension (mm): 750	
Extension (in): 29 ¹ / ₂	
Light Distribution: Adjustable / I	Direct
Weight (kg): 4.660	
Weight (lbs): 10.273	
Diffuser: PMMA - Opal / Micro-Pr Industrial	ism / Sparkling Secret / Vintage
	CRY / HAB / UFT / ITA / RUA / FTG / MYG / P / BLS / SPG / MEY / GOH / GUM / CHC / OR
Fixture Material: Extruded Alum	inum / Steel
ELECTRICAL	
Lamp Type: LED (Zhaga Standar	rd)
Input Wattage (W): 49	
Dimming: Tri-Mode (Non-Dimmi and 0-10V Dimming)	ing and Phase Dimming (120Vac only)
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current -	Universal
Driver Class: Class 2	

Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 350	

LED

|--|

Max. Delivered Lumen (lm): 4978 / 5337/ 5384 / 5494
Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842
CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards


IP rating: IP20

PROJECT TYPE SPECIFIER

QUANTITY

DATE

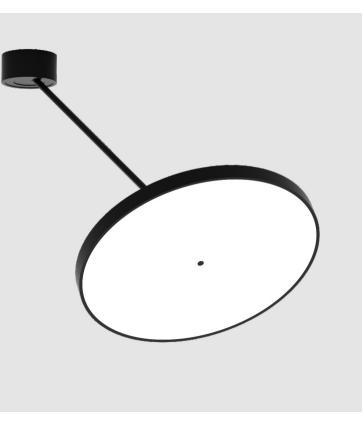

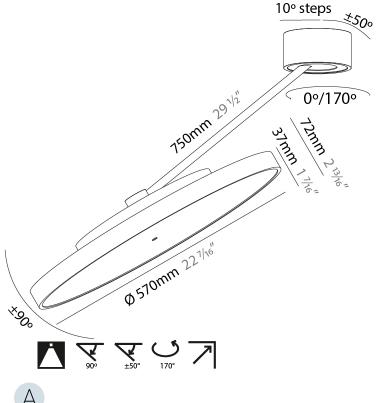


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A300041-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

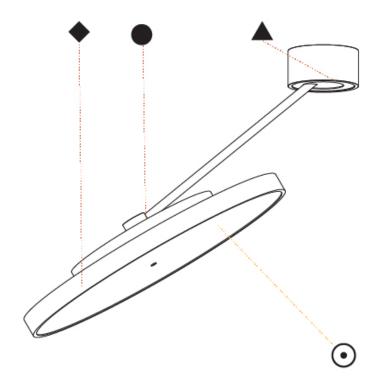

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


SIGN DIVA DANCER KORONA SUSPENSION

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	
1.To build a p	roduct code i	n our configure	ator select ti	he specifv bu	itton on	
the base mod		5				
	1	ict code on this				
options listed	below in blu	e font and add	the suffix to	the base mo	odel #	
GENERAL						
Series: Sign D	iva Dancer					
Subseries: Sig	n Diva Dance	er Korona				
Brand: Prolich						
Division: Arch	itectural					
Mounting Typ						
Mounting Loc		5				
Subcategory:	Pendant					
PHYSICAL						
Shape: Round						
Diameter (mn	n): 200					
Diameter (in):	7 1/8					
Height (mm):	870					
Depth (mm): 8	36					
Height (in): 34	1/4					
Depth (in): 3 ³ /	, В					
Light Distribu	tion: Adjusta	ble / Direct				
Weight (kg): 2	.09					
Weight (lbs): 4	1.607					
Diffuser: PMM	A - Opal / Mi	cro-Prism / Spa	arkling Secr	et / Vintage		
Industrial						
		CWI / CRY / HA				
COM / ABZ / J		A / POP / BLS / OS / ROR	SPG/MET	GOH / GUM		
		Aluminum / S	teel			
ELECTRICAL		,				
	ED (Zhaga St	andard)				
Lamp Type: Ll Input Wattage		anuaru)				
Total Output		10				
		Dimming and F	Phase Dimm	ing (120Vac	only)	
and 0-10V Din			nuse biinii	1115 (120100	onty)	
Driver Include	d: Yes					
Driver Locatio	n: Integrate	d				
Driver Type: C	onstant Cur	rent - Universa	il			
Driver Class: C	lass 2					
Input Voltage	(V): 120 - 277	7				
Constant Curr	ent (MA): 35	0				
LED						
	ature (°K): 21	700 / 3000 / 350	00 / 4000			
): 860 / 1080 / 1				
CRI: >90 CRI		,, 2000 / .	, 1110			
Lamp Life (hrs	s): 50000					
	PotationalC	2000y 170% T	Iting Conce	v +50°• ∓il+:∽	ng Hood	
Adjuctability	RULALIONALC	anopy 110.; 11	ung canop	y ±o∪ ; mth	ів пеай	
Adjustability: ±90°						
	CEDTIFICS	TIONS				

PROJECT

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE



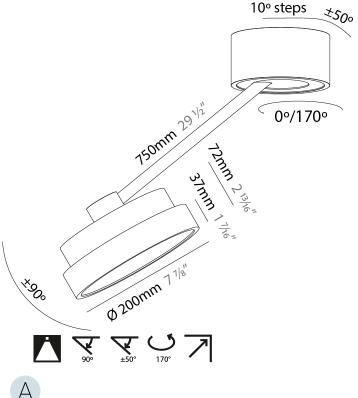


Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

A300043-

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

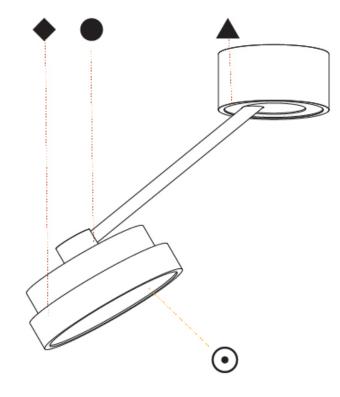

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


SIGN DIVA DANCER KORONA SUSPENSION


base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser	
the base mode 2. To build a n	el # product µ nanual produ	n our configuro bage Ict code on this e font and add	datasheet	choose from	the		
,							
GENERAL	va Dancar						
Series: Sign Di		or Korona					
Subseries: Sig Brand: Prolich							
Division: Archi							
Mounting Typ		n					
Mounting Loc							
Subcategory:		>					
	cinaant						
PHYSICAL							
Shape: Round							
Diameter (mm							
Diameter (in):	-						
Height (mm):							
Depth (mm): 8							
Height (in): 34							
Depth (in): 3 3/2	3						
Light Distribut	ion: Adjusta	ble / Direct					
Weight (kg): 3	.5						
Weight (lbs): 7	.716						
Diffuser: PMM Industrial	A - Opal / Mio	cro-Prism / Spa	arkling Secr	et / Vintage			
	RO / FUP / KI	CWI / CRY / HA A / POP / BLS / OS / ROR					
Fixture Materi	al: Extruded	Aluminum / St	teel				
ELECTRICAL							
Lamp Type: Ll	-D (7haga St	andard)					
Input Wattage							
Total Output \		16					
	Mode (Non-E	Dimming and F	hase Dimm	ing (120Vac	only)		
Driver Include	0.						
Driver Locatio	n: Integrated	ł					
	-	rent - Universa	l				
Driver Class: C							
Input Voltage	(V): 120 - 277	7					
Constant Curr	ent (MA): 50	0					
LED							
	ature (°K)• 27	700 / 3000 / 350	00 / 4000				
): 1870 / 2340 /)			
CRI: >90 CRI		, 2010 / 2040 /	2312/2720				
Lamp Life (hrs): 50000						
	,						
OPTICAL	Detetterelo				a llaa -		1
	kutational C	anopy 170°; Ti	ung canop	y ±50°; Liltin	ів неаб		\
±90°			-				\.

IP rating: IP20

PROJECT

ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

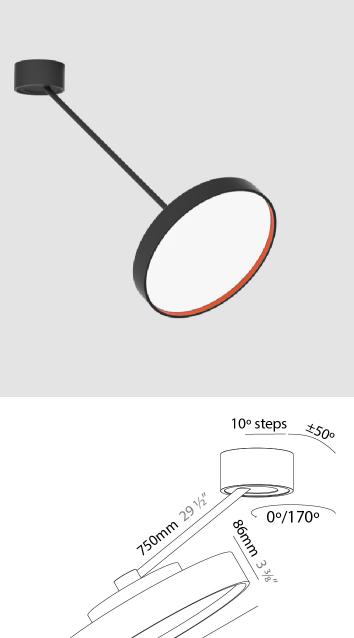



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

A300045-

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

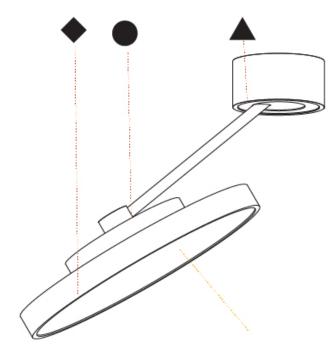

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 10/42

A

A300047-

SIGN DIVA DANCER KORONA SUSPENSION

1 To build a com		remperature	(Diamond)	(Triangle)	(Circle)	
1. I O DUILA A DIC	oduct code ii	n our configur	ator select ti	he specify bı	ıtton on	
the base model						
2. To build a mo	1					
options listed b	elow in blue	e font and add	the suffix to	the base mo	odel #	
GENERAL						
Series: Sign Div	a Dancer					
Subseries: Sign	Diva Dance	er Korona				
Brand: Prolicht						
Division: Archit	ectural					
Mounting Type	: Suspensio	n				
Mounting Loca	tion: Ceiling	5				
Subcategory: P	endant					
PHYSICAL						
Shape: Round						
Diameter (mm)	: 570					
Diameter (in): 2	22 1/16					
Height (mm): 8	70					
Depth (mm): 86	5					
Height (in): 34 ¹	/4					
Depth (in): 3 ³ / ₈						
Light Distributi	on: Adjusta	ble / Direct				
Weight (kg): 5	-					
Weight (lbs): 11	.023					
Diffuser: PMMA Industrial	- Opal / Mic	cro-Prism / Sp	arkling Secr	et / Vintage		
Fixture Finish: S LOD / PUS / FR COM / ABZ / JA	0 / FUP / KI/	A / POP / BLS /				
Fixture Materia			teel			
ELECTRICAL						
Lamp Type: LEI	D (Zhaga St	andard)				
Input Wattage						
Total Output W		47.52				
Dimming: Tri-M and 0-10V Dimi	lode (Non-D		Phase Dimm	ning (120Vac	only)	
Driver Included						
Driver Location	: Integrated	ł				
Driver Type: Co	onstant Curr	ent - Universa	ıl			
Driver Class: Cl	ass 2					
Input Voltage (V): 120 - 277					
Constant Curre	ent (MA): 350)				
LED						
Color Tempera	ture (°K): 27	<u>/00 / 3000 / 35</u>	00 / 4000			
Max. Delivered	Lumen (lm)	: 5060 / 6320 /	6448 / 6580)		
CRI: >90 CRI						
Lamp Life (hrs)	: 50000					


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

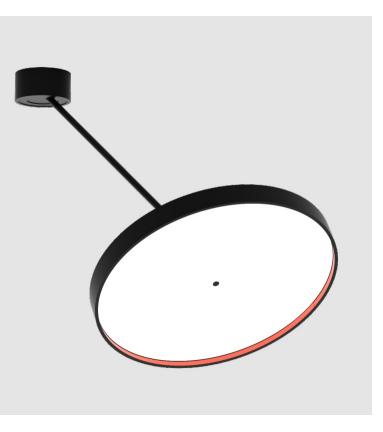

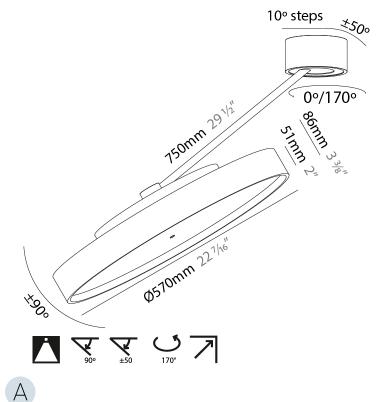

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 11/42

SIGN DIVA DANCER KORONA SUSPENSION

A300047-

PROJECT

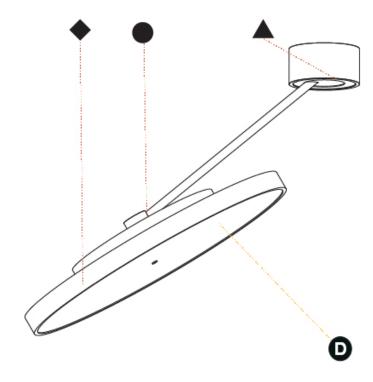

SIGN DIVA DANCER SUSPENSION

A30871-

7.5001 I						
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 200	
Diameter (in): 7 $\frac{7}{8}$	
Height (mm): 1620	
Height (in): 63 ¾	
Light Distribution: Adjustable / Direct	
Weight (kg): 3	
Weight (lbs): 6.6	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintag	ge
Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / F	
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GL COM / ABZ / JAG / OBR / MOS / ROR	JM / CHC /
Fixture Material: Extruded Aluminum / Steel	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 12.1	
Total Output Wattage (W): 11	
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Va	ac only)
and 0-10V Dimming)	
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 350	
LED	
Color Temperature (°K): 2700 / 3000 / 3500 / 4000	

color remperature (11). 21007 50007 55007 1000
Max. Delivered Lumen (lm): 836 / 895 / 903 / 921
Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

101111111111111111111111111111111111111	
CRI: >90 CRI	
Lamp Life (hrs): 50000	

OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

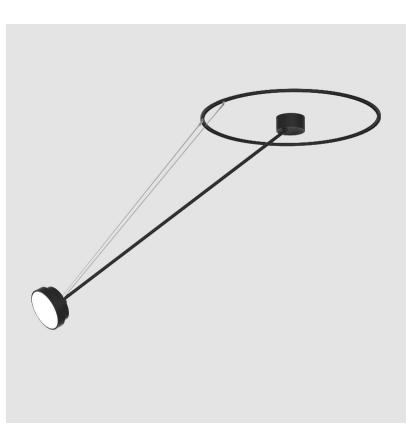

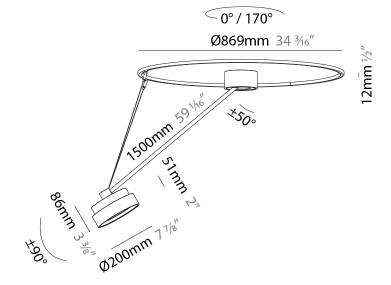



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 13/42

SIGN DIVA DANCER SUSPENSION

A30871-

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

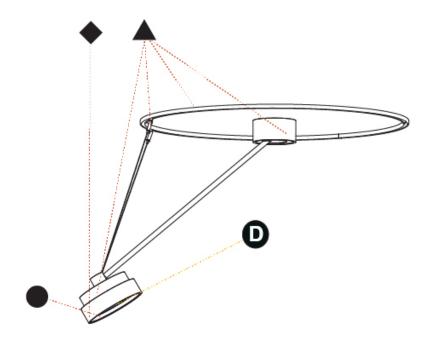

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 14/42

SIGN DIVA DANCER SUSPENSION

A3	0	87	72	-

b

-30012	-		-	-	-	-
ase number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Rir

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 400	
Diameter (in): $15\frac{3}{4}$	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 4.5	
Weight (lbs): 9.9	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	
Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / M	
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / C COM / ABZ / JAG / OBR / MOS / ROR	HC /
Fixture Material: Extruded Aluminum / Steel	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 19.8 Total Output Wattage (W): 18	
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac onl	
and 0-10V Dimming)	y)
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 500	
LED	
Color Temperature (°K): 2700 / 3000 / 3500 / 4000	

Color Temperature (1	<pre></pre>	/ 3000 /	3500/	4000	
Max Delivered Lumer	n (lm)• 18	807 / 19	43/19	51 / 199	1

Max. Delivered Editien (iii): 1001 / 1345 / 1351 / 1351	
Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480	
CRI: >90 CRI	
Lamp Life (hrs): 50000	


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

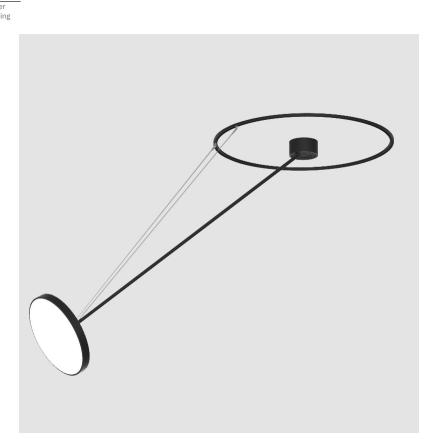

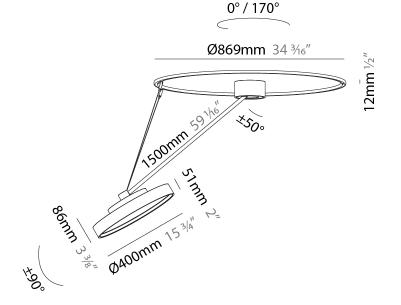




Zaneen Group Inc. © 2024. T 1800-388-3382. F 416-247-9319. www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A30872-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

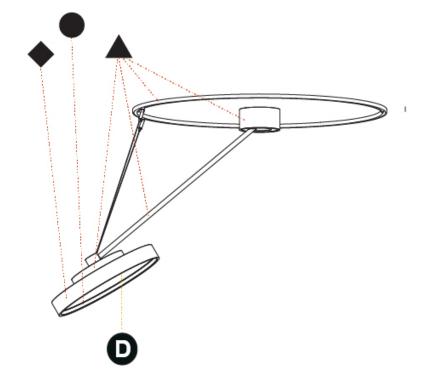

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

SIGN DIVA DANCER SUSPENSION

A30873	-		-	-	-		
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)		
the base mo 2. To build a	del # produc manual pro	e in our configu t page duct code on t lue font and ac	his datashee	et choose fro	m the		
Series: Sign I	Diva Dancer						
Subseries: Si	Subseries: Sign Diva Dancer						
Brand: Prolic	Brand: Prolicht						
Division: Architectural							
Mounting Type: Suspension							
Mounting Location: Ceiling							

PHYSICAL

Subcategory: Pendant

Shape: Round	
Diameter (mm): 570
Diameter (in):	22 ⁷ / ₁₆
Height (mm): 1	1620
Height (in): 63	3/4
Light Distribut	ion: Adjustable / Direct
Weight (kg): 6.	0
Weight (lbs): 1	3.22
Diffuser: PMM/ Industrial	A - Opal / Micro-Prism / Sparkling Secret / Vintage
LOD / PUS / FF	SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / RO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / AG / OBR / MOS / ROR
Fixture Materia	al: Extruded Aluminum / Steel
ELECTRICAL	
Lamp Type: LE	ED (Zhaga Standard)
Input Wattage	(W): 58.3

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 58.3
Total Output Wattage (W): 46.9
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Color Temperature (°K): 3000 / 3500 / 4000	
Max. Delivered Lumen (lm): 6120 / 6233 / 6360	
CRI: >90 CRI	
Lamp Life (hrs): 50000	

OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

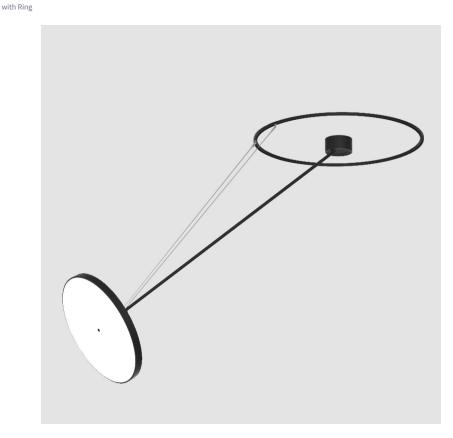

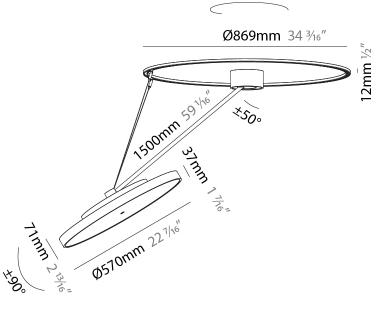

0°/170°



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Diffuser

SIGN DIVA DANCER SUSPENSION

A30873-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

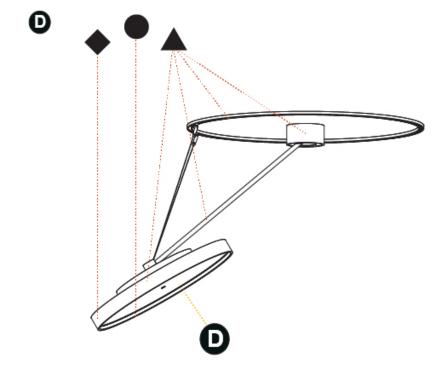

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A30874	-	-
base number	LED	

base number	Color Temperature	Finishes (Diamond)	 	Diffuser

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): 33 $\frac{7}{16}$	
Height (mm): 870	
Height (in): 34 ¼	
Light Distribution: Adjustable / Direct	
Weight (kg): 9.8	
Weight (lbs): 21.56	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	
Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / M	
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CH COM / ABZ / JAG / OBR / MOS / ROR	1C /
Fixture Material: Extruded Aluminum / Steel	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 96.8	
Total Output Wattage (W): 76.8	
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only and 0-10V Dimming)	()
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 600	
LED	
Color Tomporature (%): 2000 / 2500 / 4000	

Color Temperature (°K): 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

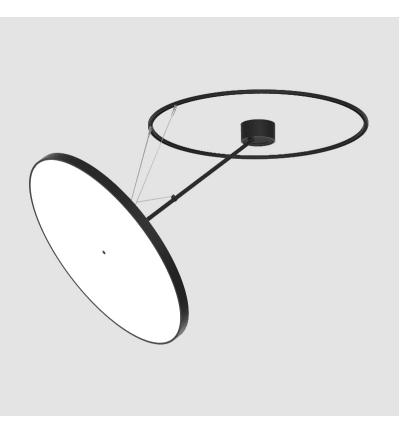

<u>0° / 170°</u>

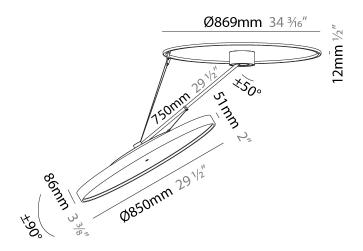




Zaneen Group Inc. © 2024. T 1800-388-3382. F 416-247-9319. www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A30874-

TYPE SPECIFIER		
QUANTITY		
 DATE		

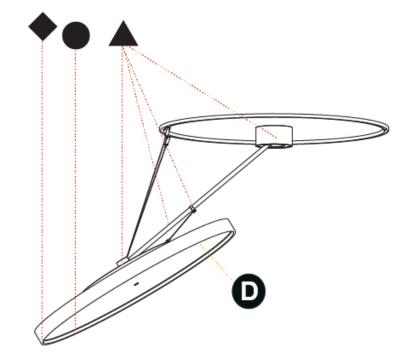

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

SIGN DIVA DANCER SUSPENSION

A30875-							
	-	Color	-	-	-	Diffusor	
		Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser	
1.To build a pr			urator select	t the specify l	button on		
the base mode			le te al estas e le con				
2. To build a m options listed b	anuai proau helow in hlue	ct coae on ti font and ac	nis aatasnee Id the suffix	et choose fro. to the hase r	m the model #		
		ione and de	ia anc sann	to the buse i	noucen		
GENERAL							
Series: Sign Div							
Subseries: Sigr Brand: Prolich		ſ					
Division: Archi							
Mounting Type		n					
Mounting Loca	· · · ·						
Subcategory: F							
PHYSICAL							
Shape: Round							
Diameter (mm							
Diameter (in):							
Height (mm): 1							
Height (in): 63		L (D:					
Light Distribut		ble / Direct					
Weight (kg): 9.							
Weight (lbs): 2 Diffuser: PMMA		na Driana / C	Second data of Co	anat /\lintaa			
Industrial	A - Opat / Mic	ro-Prism / S	sparking se	cret / vintag	e		
Fixture Finish: LOD / PUS / FR	RO / FUP / KIA	/ POP / BL					
COM / ABZ / JA	4G / UBR / MI	JS / RUR					
			Steel				
Fixture Materia			Steel				
Fixture Materia	al: Extruded	Aluminum /	Steel				
Fixture Materia ELECTRICAL Lamp Type: LE	al: Extruded D (Zhaga Sta	Aluminum /	Steel				0° / 170°
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage	al: Extruded D (Zhaga Sta (W): 96.8	Aluminum / andard)	Steel				<u>0° / 170°</u>
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N	al: Extruded D (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D	Aluminum / andard) 76.8		nming (120Va	ac only)		Ø860mm 24.3/~"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output W Dimming: Tri-N and 0-10V Dim	al: Extruded / ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming)	Aluminum / andard) 76.8		nming (120Va	ac only)		Ø860mm 24.3/~"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included	ED (Zhaga Sta (W): 96.8 Vattage (W): Vode (Non-D ming) d: Yes	Aluminum / andard) 76.8 imming and		uming (120Va	ac only)		Ø860mm 24.34.4"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included Driver Location	al: Extruded, ED (Zhaga Stat (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated	Aluminum / andard) 76.8 imming and	d Phase Dim	nming (120Va	ac only)		Ø869mm 34 ³ /16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included Driver Location Driver Type: Co	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated ponstant Curr	Aluminum / andard) 76.8 imming and	d Phase Dim	uming (120Va	ac only)		Ø869mm 34 ³ /16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Includee Driver Location Driver Type: Cc Driver Class: Cl	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim	ıming (120Va	ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-Mand 0-10V Dim Driver Includee Driver Location Driver Type: Co Driver Class: Cl Input Voltage (al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated ponstant Curr lass 2 (V): 120 - 277	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim	nming (120Va	ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-M and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Curre	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated ponstant Curr lass 2 (V): 120 - 277	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim	nming (120Va	ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-M and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim rsal	nming (120Va	ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-M and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera	al: Extruded , ED (Zhaga Stat (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim rsal		ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered	al: Extruded , ED (Zhaga Stat (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim rsal		ac only)		Ø869mm 34 3/16"
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output W Dimming: Tri-N and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600 ature (°K): 30 I Lumen (Im)	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim rsal		ac only)		Ø869mm 34 3/16" 500mm 59 1/16 × 500
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output W Dimming: Tri-N and 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI	al: Extruded , ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600 ature (°K): 30 I Lumen (Im)	Aluminum / andard) 76.8 imming and ent - Univer	d Phase Dim rsal		ac only)		Ø869mm 34 3/16" 500mm 59 1/16 × 500
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included Driver Included Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI Lamp Life (hrs) OPTICAL	al: Extruded . ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600 ature (°K): 30 I Lumen (Im)): 50000	Aluminum / andard) 76.8 imming and ent - Univer 00 / 3500 / 2 : 11160 / 11	d Phase Dim rsal 4000 388 / 11620				Ø869mm 34 3/16" 500mm 59 1/16 × 500
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-N and 0-10V Dim Driver Included Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI Lamp Life (hrs) OPTICAL Adjustability: F	al: Extruded . ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600 ature (°K): 30 I Lumen (Im)): 50000	Aluminum / andard) 76.8 imming and ent - Univer 00 / 3500 / 2 : 11160 / 11	d Phase Dim rsal 4000 388 / 11620				Ø869mm 34 3/16" Source of the state of the
Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-Mand 0-10V Dim Driver Includee Driver Location Driver Type: Cc Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI Lamp Life (hrs) OPTICAL Adjustability: F ±90°	al: Extruded . ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated postant Curr lass 2 (V): 120 - 277 ent (MA): 600 I Lumen (Im) Souther (MA): 30 I Lumen (Im) Souther (MA): 20 Souther (MA): 30 Souther (MA): 3	Aluminum / andard) 76.8 imming and ent - Univer 00 / 3500 / 4 : 11160 / 11: anopy 170°;	d Phase Dim rsal 4000 388 / 11620				Ø869mm 34 3/16" Source of the state of the
COM / ABZ / JA Fixture Materia ELECTRICAL Lamp Type: LE Input Wattage Total Output V Dimming: Tri-Mand 0-10V Dim Driver Included Driver Location Driver Class: Cl Input Voltage (Constant Currer LED Color Tempera Max. Delivered CRI: >90 CRI Lamp Life (hrs) OPTICAL Adjustability: F ±90° RATINGS AND Certified By: Co	al: Extruded . ED (Zhaga Sta (W): 96.8 Vattage (W): Mode (Non-D ming) d: Yes n: Integrated onstant Curr lass 2 (V): 120 - 277 ent (MA): 600 I Lumen (Im)	Aluminum / andard) 76.8 imming and ent - Univer 00 / 3500 / 2 : 11160 / 11: anopy 170°; TIONS	d Phase Dim rsal 4000 388 / 11620 Tilting Canc	opy ±50°; Tilt			Ø869mm 34 3/16" 500mm 501/16 ×500

PROJECT

TYPE SPECIFIER QUANTITY DATE

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

А


± 50°

Page 21/42

SIGN DIVA DANCER SUSPENSION

A30875-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

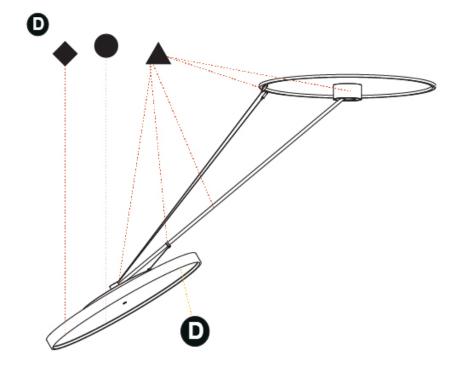

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

SIGN DIVA DANCER SUSPENSION

A30876-

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser	-
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)		

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 $\frac{5}{16}$	
Height (mm): 870	
Height (in): $34\frac{1}{4}$	
Light Distribution: Adjustable / Direct	
Weight (kg): 15.8	
Weight (lbs): 34.76	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	
Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /	
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / COM / ABZ / JAG / OBR / MOS / ROR	CHC /
Fixture Material: Extruded Aluminum / Steel	
,	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 169.4	
Total Output Wattage (W): 135	
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac or	ıly)
and 0-10V Dimming) Driver Included: Yes	
Driver Location: Integrated Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 600	
LED	
Color Temperature (°K): 3000 / 3500 / 4000	

Color Temperature (*K): 3000 / 3500 / 4000	
Max. Delivered Lumen (lm): 19520 / 19933 / 20340	
CRI: >90 CRI	
Lamp Life (hrs): 50000	


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
ТҮРЕ			
SPECIFIER			
QUANTITY			
DATE			

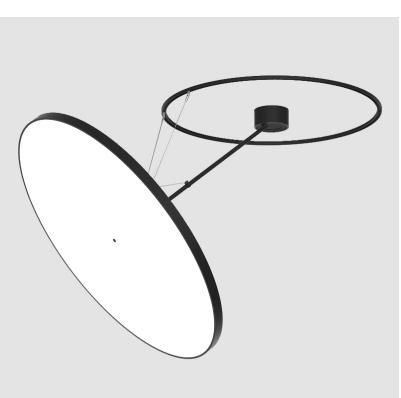

0° / 170° <

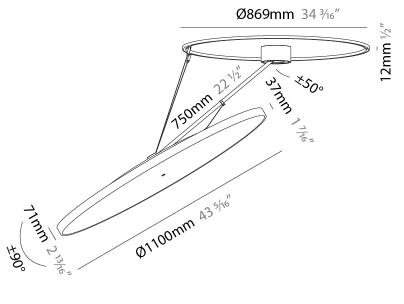




Zaneen Group Inc. © 2024. T 1800-388-3382. F 416-247-9319. www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER SUSPENSION

A30876-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

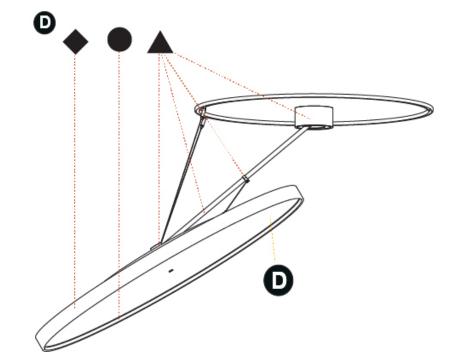



SIGN DIVA DANCER SUSPENSION

A30877-

base number	LED Dimming	 Finishes (Diamond)	 Finishes (Circle)	Diffuser	-

1. To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 ⁵ / ₁₆	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 16	
Weight (lbs): 35.2	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	
Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / I LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / C	
COM / ABZ / JAG / OBR / MOS / ROR	,nc /
Fixture Material: Extruded Aluminum / Steel	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 169.4	
Total Output Wattage (W): 135	
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac on	ly)
and 0-10V Dimming)	
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - Universal	
Driver Class: Class 2	
Input Voltage (V): 120 - 277	
Constant Current (MA): 600	
LED	

LED

Color Temperature	(°K): 3000	/ 3500	/ 4000	

Max. Delivered Lumen (lm): 19520 / 19933 / 20340
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

DATE			
QUANTITY			
SPECIFIER			
TYPE			
PROJECT			

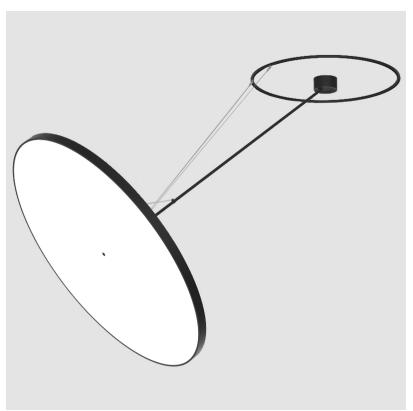

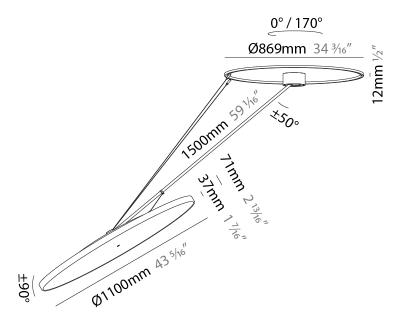



Zaneen Group Inc. © 2024. T 1800-388-3382. F 416-247-9319. www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 25/42

SIGN DIVA DANCER SUSPENSION

A30877-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

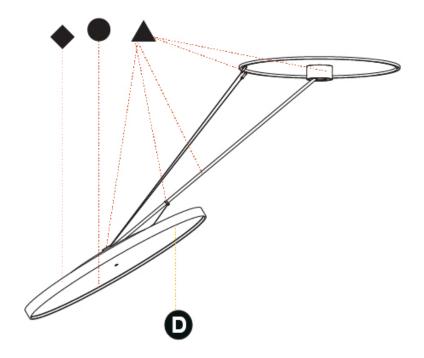



SIGN DIVA DANCER KORONA SUSPENSION

A30878		
base number LED Color Finishes Finishes Finishes	Diffuser	
Dimming Temperature (Diamond) (Triangle) (Circle)		
1. To build a product code in our configurator select the specify button on the base model " and advantage of the specify button of the base model."		
the base model # product page 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #		
GENERAL		
Series: Sign Diva Dancer		
Subseries: Sign Diva Dancer Korona		
Brand: Prolicht		
Division: Architectural		K L
Mounting Type: Suspension		
Mounting Location: Ceiling		
Subcategory: Pendant		
PHYSICAL		
Shape: Round		
Diameter (mm): 200		
Diameter (in): 7 ⁷ / ₈		
Height (mm): 1620		
Height (in): 63 ³ / ₄		
Light Distribution: Adjustable / Direct		
Weight (kg): 3.3		
Weight (lbs): 7.26		
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage		
Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /		·
COM / ABZ / JAG / OBR / MOS / ROR		
Fixture Material: Extruded Aluminum / Steel		
ELECTRICAL		
Lamp Type: LED (Zhaga Standard)		
Input Wattage (W): 11		
Total Output Wattage (W): 10		<u> </u>
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)		Ø869mm 34 ¾6″
Driver Included: Yes		
Driver Location: Integrated		
Driver Type: Constant Current - Universal		
Driver Class: Class 2		
Input Voltage (V): 120 - 277		59 ^{1/10} ×500
Constant Current (MA): 350		x 7'/ `20°
LED		1500mm 53 50°
Color Temperature (°K): 2700 / 3000 / 3500 / 4000		1500/2
Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110		
CRI: >90 CRI		$//$ $\langle 3_{3}$
Lamp Life (hrs): 50000		8
OPTICAL		STA ME
Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°		$H_{\text{Comm}}^{\text{Comm}} = 0200 \text{mm}^{1/8^{\text{H}}}$
RATINGS AND CERTIFICATIONS		8
Certified By: Certified for North American Standards		$ \oplus$ μ
IP rating: IP20		

¥ 50° 90° А

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Page 27/42

12mm ½"



TYPE

QUANTITY DATE


_ _

SIGN DIVA DANCER KORONA SUSPENSION

A30878-

PROJECT

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

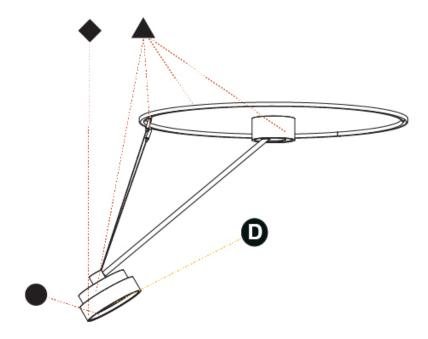

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


A30879-


SIGN DIVA DANCER KORONA SUSPENSION

A30019	-	-	-	-	-	-					
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser	_				
the base mod 2. To build a	del # produc manual pro	e in our configu It page duct code on tu lue font and ac	his datashee	t choose fro	m the						
GENERAL											
Series: Sign D Subseries: Sig											
Brand: Prolic	-										
Division: Arch											
Mounting Ty		sion									
Mounting Loo											//
Subcategory										//	//
	. i chuanc										
PHYSICAL											
Shape: Roun										//	
Diameter (mi	-								//		
Diameter (in)									//		
Height (mm):	2								//		
Height (in): 6											
		table / Direct									
Weight (kg): 5								Y			
Weight (lbs):											
Diffuser: PMN Industrial	MA - Opal / M	Aicro-Prism / S	parkling Se	cret / Vintag	je						
	RO/FUP/	/ CWI / CRY / I KIA / POP / BL: MOS / ROR									
		ed Aluminum /	Steel								
ELECTRICAL		,									
		Ctondord)									
Lamp Type: L		Stanuaru)									
Input Wattag		1.15 /									
Total Output Dimming: Tri and 0-10V Dir	-Mode (Nor	n-Dimming and	l Phase Dim	ming (120Va	ac only)						
Driver Includ											
Driver Locati		ted									
	÷	urrent - Univer	sal							(A	
Driver Class:										A Contraction	
Input Voltage		.77								/	
Constant Cur										//	6
											m?
LED Color Tompo	rature (%)	2700 / 2000 / 1	500 / 4000							~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	unn
		2700 / 3000 / 3 m): 1807 / 194		01						/5	//
		m): 1807 / 194 50 / 2420 / 243		31						1//	্ৎ
CRI: >90 CRI	ien (un): 22	50 / 2420 / 243	0/2400						1	V/	2 3
Lamp Life (hr	rs). 50000							ക	\geq		/ 1
	37. 30000							کې ر	//	// .	
OPTICAL	_							86mm			1534
Adjustability: ±90°	: Rotational	Canopy 170°;	Tilting Cano	py ±50°; Til	ting Head			0.	<u>, 10 </u>	00mm	•
RATINGS AN	D CERTIFIC	ATIONS					1500		$\phi = \Phi^{\mu}$	1-	
Certified By:	Certified for	r North Americ	an Standar	ls			Ъ,				
IP rating: IP2											

IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE

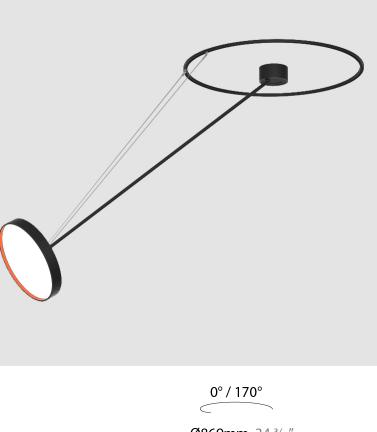

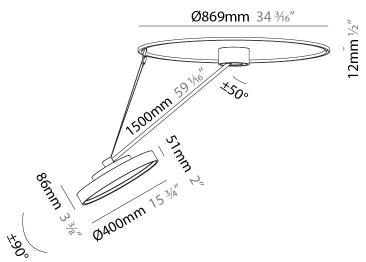



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

A30879-

PROJECT

FROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

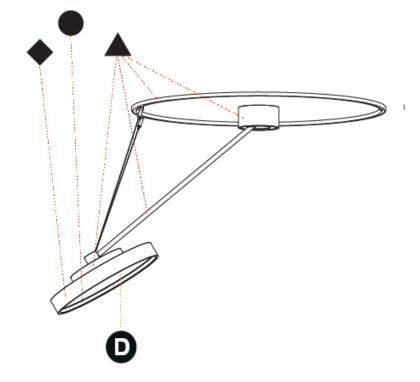

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 30/42

А

SIGN DIVA DANCER KORONA SUSPENSION

A30880-

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the

options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL
Series: Sign Diva Dancer
Subseries: Sign Diva Dancer Korona
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 $\frac{7}{16}$
Height (mm): 1620
Height (in): 63 ¾
Light Distribution: Adjustable / Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage
Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /
COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Extruded Aluminum / Steel
ELECTRICAL
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 58.3
Total Output Wattage (W): 46.9
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)
and 0-10V Dimming)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 4000	
Max_Delivered Lumen (lm): 5060 / 6320 / 6580	

Max. Delivered Lumen (iii). 5000 / 0520 / 0580
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20 PROJECT

TROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

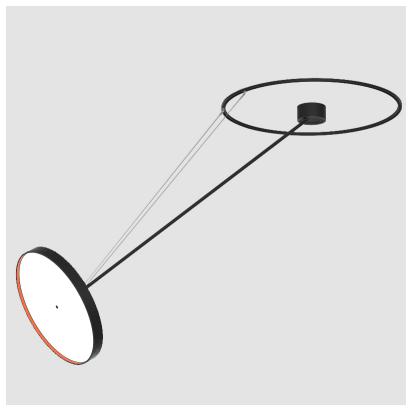

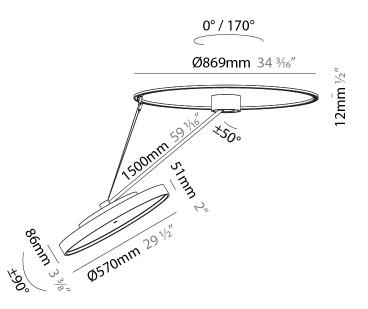



Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com


Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

A30880-

PROJECT

FROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

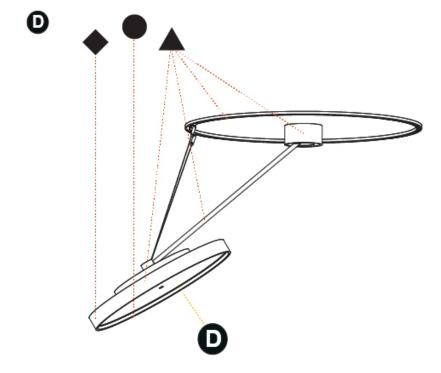

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

_

A30881-

SIGN DIVA DANCER KORONA SUSPENSION

_

_

_

_


H20001	-	-	-	-	-	-				
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser				
the base mod 2. To build a	del # produc manual pro	oduct code on t	his datashe	et choose fro	om the					
options listed	d below in b	olue font and a	dd the suffix	to the base	model #					
GENERAL										
Series: Sign I	Diva Dancei	r								
Subseries: Si	ign Diva Da	ncer Korona						1		
Brand: Prolic	cht									
Division: Arc	hitectural									0
Mounting Ty	pe: Suspen	sion								
Mounting Lo	cation: Ceil	ing								
Subcategory	: Pendant						(
PHYSICAL										
Shape: Roun	d									
Diameter (m										
Diameter (in										
Height (mm)										
Height (in): 3										
		stable / Direct								
Weight (kg):										
Weight (lbs):										
Diffuser: PMI Industrial	MA - Opal / I	Micro-Prism / S	Sparkling Se	ecret / Vinta	ge					
Fixture Finis LOD / PUS / F COM / ABZ /	FRO / FUP /	/ / CWI / CRY / KIA / POP / BL / MOS / ROR	HAB / UFT / S / SPG / ME	ITA / RUA / Y / GOH / G	FTG / MYG / UM / CHC /					
Fixture Mate	rial: Extrud	ed Aluminum /	/ Steel							
ELECTRICAL										
Lamp Type: I		Standard)								
Input Wattag										
Total Output										120
Dimming: Tr	i-Mode (No	n-Dimming an	d Phase Din	nming (120\	ac only)					0
and 0-10V Di										
Driver Includ		tod								Ø80
Driver Locati			rcal							200
		urrent - Univer	sal							
Driver Class:								6	1	
Input Voltage								1	/	1×1
Constant Cu	rrent (MA):	buU							29	`// `
LED									omm	س آ
Color Tempe	erature (°K):	2700 / 3000 / 4	4000					1.0	onix	
Max. Delivere	ed Lumen (lm): 11160 / 11	388 / 11620					/17	////) !!
CRI: >90 CRI									*//	
Lamp Life (h	rs): 50000)		
OPTICAL			-					// • /	/ /	
	· Rotationa	l Canopy 170°;	Tilting Can	00V +50°• Ti	lting Head		د_		331/16"	
±90°	. Notationa	, canopy 110;	Thing Call	opy±30,∏	ang neau		レン	/ /	33''	
								<u></u>	<u>۱</u>	

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

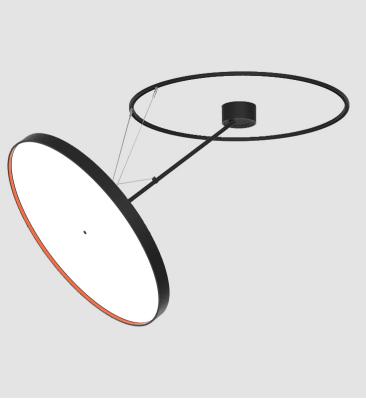

0° / 170°






Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

A30881-

PROJECT			
TYPE			-
SPECIFIER			
QUANTITY			
DATE			

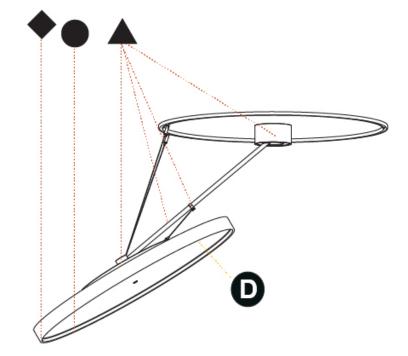

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

SIGN DIVA DANCER KORONA SUSPENSION

420002		DATE
A30882	Diffuser	
Dimming Temperature (Diamond) (Triangle) (Circle)	Diffuser	
1. To build a product code in our configurator select the specify button on the base model # product page 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #		
GENERAL		
Series: Sign Diva Dancer		
Subseries: Sign Diva Dancer Korona		
Brand: Prolicht		
Division: Architectural		
Mounting Type: Suspension		
Mounting Location: Ceiling		
Subcategory: Pendant		
PHYSICAL		
Shape: Round		
Diameter (mm): 850		
Diameter (init): 830 $\frac{1}{16}$		
Height (mm): 1620		
Height (in): 63 ³ / ₄ Light Distribution: Adjustable / Direct		
Weight (kg): 11.67		
Weight (lbs): 25.67		
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage		
Industrial		
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR		
Fixture Material: Extruded Aluminum / Steel		
ELECTRICAL		
Lamp Type: LED (Zhaga Standard)		
Input Wattage (W): 96.8		0° / 170°
Total Output Wattage (W): 76.8		0 / 1/0
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)		Ø869mm 34 3/16"
Driver Included: Yes		
Driver Location: Integrated		
Driver Type: Constant Current - Universal		12mm 2
Driver Class: Class 2		
Input Voltage (V): 120 - 277		
Constant Current (MA): 600		Nr.
LED		1500mm 52
Color Temperature (°K): 2700 / 3000 / 4000		
Max. Delivered Lumen (lm): 11160 / 11388 / 11620		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
CRI: >90 CRI		SI IN
Lamp Life (hrs): 50000		1/1/ 33 13
OPTICAL		
Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°		tts 0850mm 291/2"
RATINGS AND CERTIFICATIONS		an 2
Certified By: Certified for North American Standards		15 - 1050MIL
IP rating: IP20		$\sim^{\circ} \sim 0_{0}$

IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY

DATE

Page 35/42

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

А


¥ 50°

90°

SIGN DIVA DANCER KORONA SUSPENSION

A30882-

PROJECT

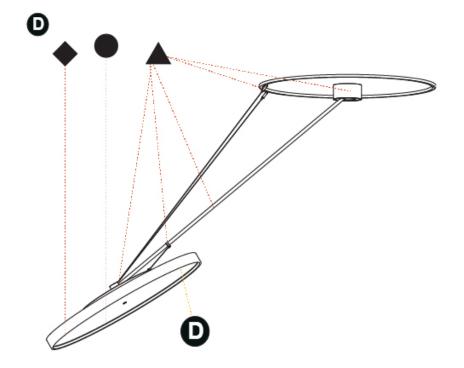

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

_

A30883-

SIGN DIVA DANCER KORONA SUSPENSION

_

-

_

_

	•							
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser		
the base mo 2. To build a	del # produc manual pro	e in our configu t page duct code on tl lue font and ac	his datashee	t choose fro	om the			
GENERAL								
Series: Sign	Diva Dancer							
Subseries: S							1	
Brand: Proli	0							
Division: Arc	hitectural							
Mounting Ty	/pe: Suspens	ion						
Mounting Lo	ocation: Ceili	ng						
Subcategory								
PHYSICAL								
Shape: Rour	hd							
Diameter (m								
Diameter (in								
Height (mm)								
-							`	
Height (in): 3		tabla / Divert						
		table / Direct						
Weight (kg):								
Weight (lbs):		/icro-Prism / S	parkling So	crot /Vintac				
Industrial								
	FRO / FUP / I	/ CWI / CRY / H KIA / POP / BLS MOS / ROR						
		d Aluminum /	Steel					
ELECTRICAL								
		Standard)						
Lamp Type: Input Wattag								0° / 170°
Total Outpu	-							<u>0° / 170°</u>
		n-Dimming and	l Phaco Dim	ming (1201/				
and 0-10V Di		I-Dimining and	I Fliase Dilli	11111g (120Va				Ø869mm 34 3/16"
Driver Includ	ded: Yes							
Driver Locat	ded: Yes ion: Integrat						F	
Driver Locat Driver Type:	ded: Yes ion: Integrat Constant Cu	ed ırrent - Univer	sal				F	
Driver Locat Driver Type: Driver Class:	ded: Yes ion: Integrat Constant Cu : Class 2	ırrent - Univer	sal				F	29.112 2 *500
Driver Locat Driver Type: Driver Class: Input Voltag	ded: Yes ion: Integrat Constant Cu : Class 2 ;e (V): 120 - 2	ırrent - Univer 77	sal					11 29 1/2 5 ×500
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu	ded: Yes ion: Integrat Constant Cu : Class 2 ;e (V): 120 - 2	ırrent - Univer 77	sal				150	.nn 29.1/2 57 ×500
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu	ded: Yes ion: Integrat Constant Cu : Class 2 ge (V): 120 - 2 prrent (MA): 3	irrent - Univer 77 50					150	mm III
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe	ded: Yes ion: Integrat Constant Cu : Class 2 ge (V): 120 - 2 mrrent (MA): 3 erature (°K):	177 - Univer 50 - 2700 / 3000 / 4	4000				150	nn 29/12 51 ×500
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver	ded: Yes ion: Integrat Constant CL : Class 2 ;e (V): 120 - 2 rrrent (MA): 3 erature (°K): ed Lumen (li	irrent - Univer 77 50	4000				150	mm III
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver CRI: >90 CRI	ded: Yes ion: Integrat Constant CL : Class 2 ;e (V): 120 - 2 irrrent (MA): 3 erature (°K): ed Lumen (li	177 - Univer 50 - 2700 / 3000 / 4	4000					nn IIII
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver	ded: Yes ion: Integrat Constant CL : Class 2 ;e (V): 120 - 2 irrrent (MA): 3 erature (°K): ed Lumen (li	177 - Univer 50 - 2700 / 3000 / 4	4000					nn IIII
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver CRI: >90 CRI	ded: Yes ion: Integrat Constant CL : Class 2 ;e (V): 120 - 2 irrrent (MA): 3 erature (°K): ed Lumen (li	177 - Univer 50 - 2700 / 3000 / 4	4000					nn IIII
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Max. Deliver CRI: >90 CRI Lamp Life (h OPTICAL	ded: Yes ion: Integrat Constant CL : Class 2 ge (V): 120 - 2 rrrent (MA): 3 erature (°K): red Lumen (li rrs): 50000	177 - Univer 50 - 2700 / 3000 / 4	1000 933 / 20340	py ±50°; Til		60 ⁰		nn IIII
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver CRI: >90 CRI Lamp Life (h OPTICAL Adjustability	ded: Yes ion: Integrat Constant CL : Class 2 ge (V): 120 - 2 rrrent (MA): 3 erature (°K): red Lumen (li rrs): 50000 y: Rotational	2700 / 3000 / 4 m): 19520 / 199 Canopy 170°;	1000 933 / 20340	py ±50°; Til	ting Head	80 ¹¹		nn IIII
Driver Locat Driver Type: Driver Class: Input Voltag Constant Cu LED Color Tempe Max. Deliver CRI: >90 CRI Lamp Life (h OPTICAL Adjustability ±90° RATINGS AN	ded: Yes ion: Integrat Constant Cu : Class 2 ge (V): 120 - 2 urrent (MA): 3 erature (°K): red Lumen (lu urs): 50000 y: Rotational	2700 / 3000 / 4 m): 19520 / 199 Canopy 170°;	1000 933 / 20340 Tilting Canc			bt.	150 01100mm	nut ing

PROJECT

TYPE			
SPECIFIER			
QUANTITY			
DATE			

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

Ż

А

र

± 50°

90°


_____ 170°

12mm ½"

SIGN DIVA DANCER KORONA SUSPENSION

A30883-

PROJECT

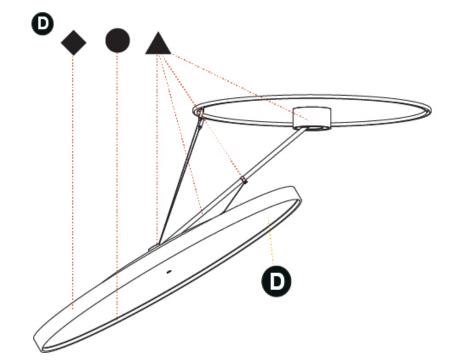



_

A30884-

SIGN DIVA DANCER KORONA SUSPENSION

-

-

_

_

base number LED Color Finishes Finishes Finishes Finishes Dimming Temperature (Diamond) (Triangle) (Circle)	Diffuser
 To build a product code in our configurator select the specify button on the base model # product page To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model # 	
GENERAL	
Series: Sign Diva Dancer	0
Subseries: Sign Diva Dancer Korona	X
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (ini): 43 $\frac{5}{6}$	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 15.5	
Weight (lbs): 34.1	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial	
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR	
Fixture Material: Extruded Aluminum / Steel	
ELECTRICAL	
Lamp Type: LED (Zhaga Standard)	
Input Wattage (W): 169.4	
Total Output Wattage (W): 135	0° / 17
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)	
and 0-10V Dimming)	Ø869mm
Driver Included: Yes	
Driver Location: Integrated	
Driver Type: Constant Current - Universal	
Driver Class: Class 2	01/10
Input Voltage (V): 120 - 277	// <u>_ ```// *</u> 50°
Constant Current (MA): 600	mm
LED	1500mm 591/6 ×50.
Color Temperature (°K): 2700 / 3000 / 4000	
Max. Delivered Lumen (lm): 19520 / 19933 / 20340	S.\3
CRI: >90 CRI	1 3 3
Lamp Life (hrs): 50000	
OPTICAL	
Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°	Ha 1100mm 435/16"
RATINGS AND CERTIFICATIONS	amm
Certified By: Certified for North American Standards	14 1001

Certified By: Certified for North American Standards IP rating: IP20

PROJECT

TYPE			
SPECIFIER			
QUANTITY			
DATE			

70° 2m^{_1}/₂" 34 ¾ 15 01100

± 90° А

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


Page 39/42

SIGN DIVA DANCER KORONA SUSPENSION

A30884-

PROJECT

PROJECT			
ТҮРЕ	-		
SPECIFIER			
QUANTITY			
DATE			

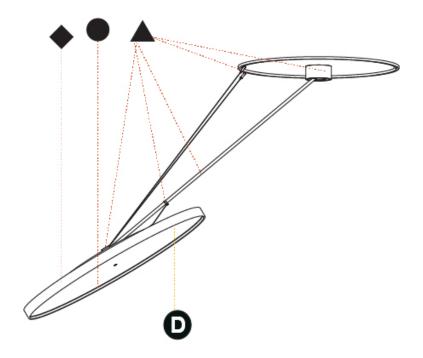

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com Page 40/42



SIGN DIVA DANCER

Fixture Finish

Sparkling Silver - 01 (SSR)	Black Velvet - 02 (BKV)	Crystal White - 03 (CWI)	Creamy - 04 (CRY)	Hampton Bay - 05 (HAB)	Urban Forest - 07 (UFT)
In the Army - 08 (ITA)	Rusty Angel - 09 (RUA)	Fade to Gray - 12 (FTG)	Mysterious Gray - 13 (MYG)	Lost Dream - 15 (LOD)	Purple Sky - 16 (PUS)
Fresh Oh - 17 (FRO)	Funky P 18 (FUP)	Kissing Aphrodite - 19 (KIA)	Poseidon's Paradise - 20 (POP)	Blue Sky - 21 (BLS)	Spring Green - 22 (SPG)
Mellow Yellow - 23 (MEY)	Golden Heart - 24 (GOH)	Gun Metal - 25 (GUM)	Champagne Cream - 26 (CHC)	Copper Mine - 27 (COM)	Ancient Bronze - 28 (ABZ)
Jazz Gold - 29 (JAG)	Olive Breeze - 30 (OBR)	Moonlight Silver - 31 (MOS)	Rosewood Red - 32 (ROR)		

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.



SIGN DIVA DANCER

PROJECT

TROJEC

TYPE SPECIFIER

QUANTITY

DATE

LEGEND					
↓	floor-mounted	¥	pivotable	\circledast	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
$\overline{}$	wall and ceiling: recessed and surface mounted	U	rotating	0	warm dim / natural dimming LED
Î	ceiling-mounted and wall-mounted	Œ	illuminate tilted	Ø	rechargeable battery powered
\rightarrow	wall-mounted	T	color of suspension cable		fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution		reflector degree selection	°K	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	Ť	lens		efficacy (lumens per watt)
	asymmetric light distribution	Ø	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
Ä	aura light distribution	0	shine ring	318	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	\odot	integrated shine ring with diffuser	٢	walk on
5	square wall or ceiling cut-out	Ó	free individual colors 01-29		drive on
୶ୖୢୢୖୢୢ	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	O SC	Dark Sky Compliance
(]**	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
£	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
\$	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)	(ه)	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	۲	luminaire part to be colored (F5)		protection class l, protection insulation
6	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
Ъ	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
11	sensor	D	direct diffuser	c (UL) us	UL Certified to UL and CSA Standards

ball-proof (upon request)

() accessory

IP RATING

remote control

available upon request

J

2

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
1940	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
1965	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
1967	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

SP:

Z

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1606	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

CSA Certified to UL and CSA Standards

Certified for North American Standards

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.