

A300037	<b>'-</b>	-	-	-	-
L	LED	Color	Finishes	Finishes	Fin

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Sub	Category: Peridant
PHY	<b>'SICAL</b>
Sha	pe: Round
Diar	meter (mm): 200
Diar	meter (in): 7 1/8
Heig	ght (mm): 72
Heig	ght (in): 2 <sup>13</sup> / <sub>16</sub>
Max	. Overall Height (mm): 870
Max	. Overall Height (in): 34 ½
Exte	ension (mm): 750
Exte	ension (in): 29 ½
Ligh	nt Distribution: Adjustable / Direct

Weight (kg): 1.999 Weight (lbs): 4.407

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 776 / 830 / 837 / 854

Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI

Lamp Life (hrs): 50000


## **OPTICAL**


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20

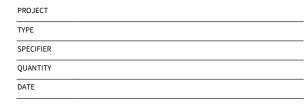

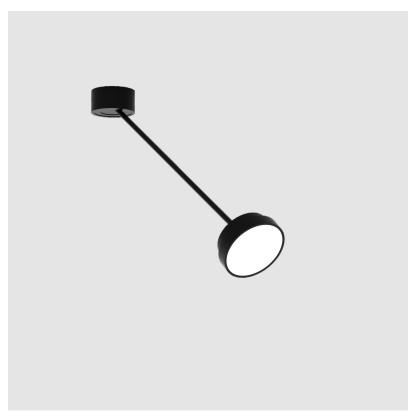

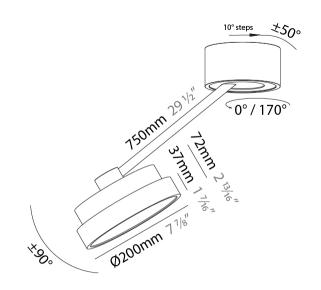




Page 1/42



A300037-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

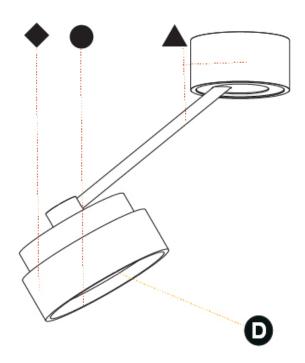





Color	Finishes	Finishes	Finishes	Diffuser with Ring
	00101	Color Finishes Temperature (Diamond)	COTOT THISTICS THISTICS	coto: Timbries Timbries

TROSECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

1.To	o bui	ild a	prod	uct (	code	in our	conf	igurd	ator	select	the	speci	fy L	button	on
the	bas	e mo	del#	pro	duct	page									

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Centing
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 72
Height (in): 2 <sup>13</sup> / <sub>16</sub>
Max. Overall Height (mm): 870
Max. Overall Height (in): 34 1/4
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 3.140

Weight (lbs): 6.922

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


## OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head +90°

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

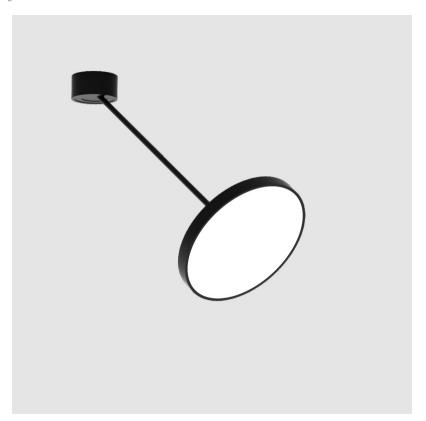

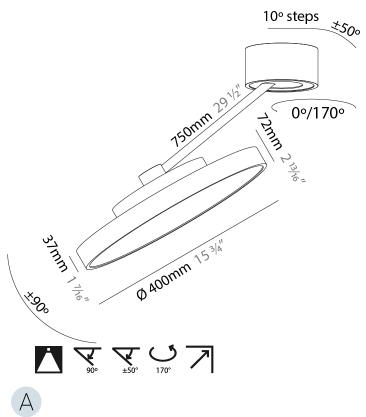






A300039-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

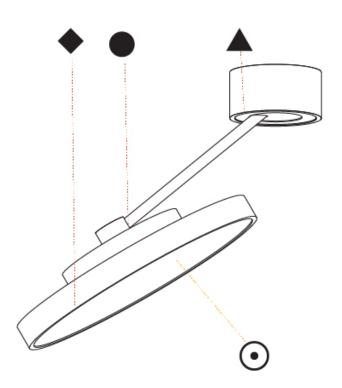





A300041	-	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 <sup>7</sup> / <sub>16</sub>
Height (mm): 870
Depth (mm): 72
Height (in): 34 ½
Depth (in): 2 13/16
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 4.660
Weight (lbs): 10.273

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 49

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

## LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4978 / 5337/ 5384 / 5494

Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842

CRI: >90 CRI

Lamp Life (hrs): 50000


### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20

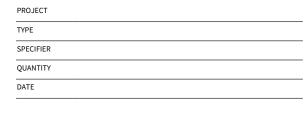

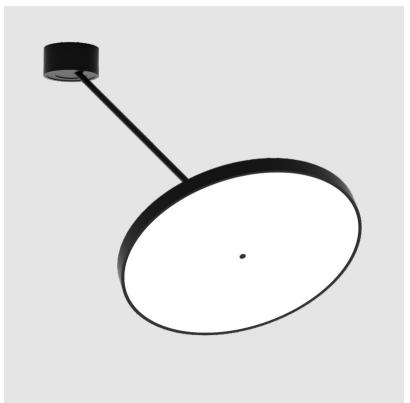

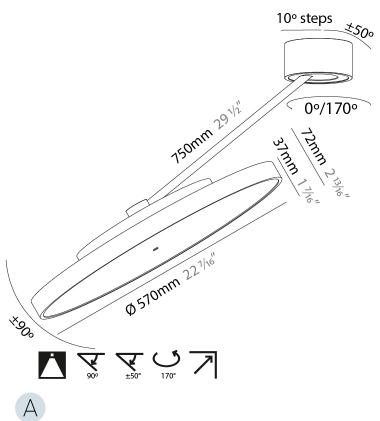


Page 5/42



A300041-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

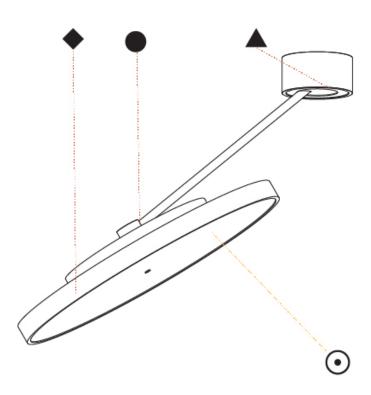





A300043	-		-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in oui	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 3/8
Light Distribution: Adjustable / Direct
Weight (kg): 2.09
Weight (lbs): 4.607
Diffuser: PMMA - Onal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110

CRI: >90 CRI

Lamp Life (hrs): 50000


## OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ$ ; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



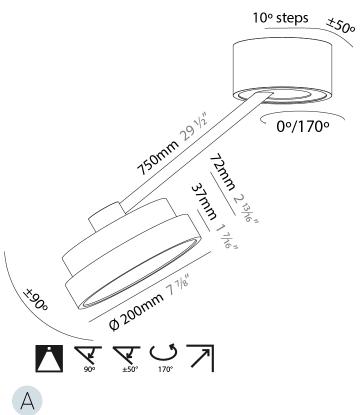






A300043-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

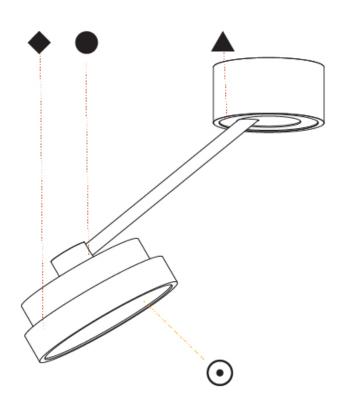





A300045					-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendar	nt
PHYSICAL	
Shape: Round	
Diameter (mm): 400	
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>	
Height (mm): 870	
Depth (mm): 86	
Height (in): 34 1/4	
Depth (in): 3 <sup>3</sup> / <sub>8</sub>	
Light Distribution: Ad	ljustable / Direct
Weight (kg): 3.5	
Weight (lbs): 7.716	
Diffusor: PMMA Ona	I / Micro Driem / Charleling Cocrot / Vintago

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 17.9
Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal

Driver Class: Class 2 Input Voltage (V): 120 - 277

Constant Current (MA): 500

### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1870 / 2340 / 2372 / 2420

CRI: >90 CRI


Lamp Life (hrs): 50000


## OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ$ ; Tilting Head  $\pm 90^\circ$ 

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

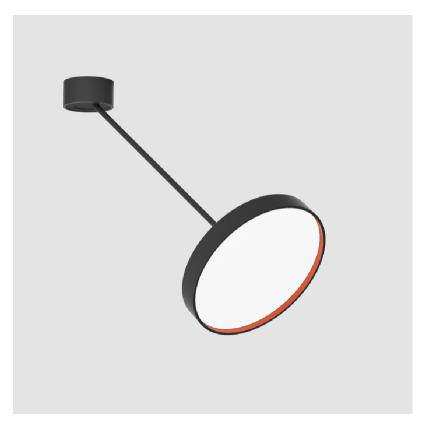

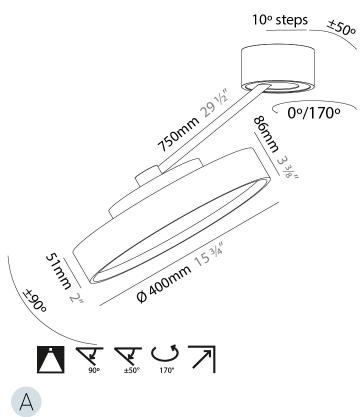






A300045-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

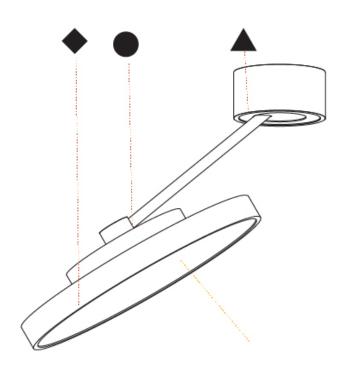





A300047	-	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

1.To build a product code in our	configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 $\frac{7}{16}$
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): $3\frac{3}{8}$
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11.023
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Industrial

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 52.8

Total Output Wattage (W): 47.52

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6448 / 6580

CRI: >90 CRI

Lamp Life (hrs): 50000


## OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



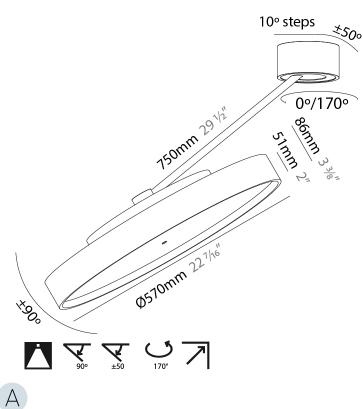






A300047-

PROJECT
ТУРЕ
SPECIFIER
QUANTITY
DATE

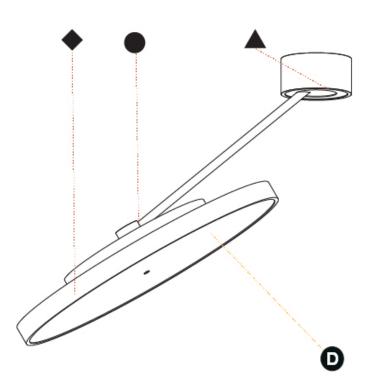





Λ	2	Λ	o	7	1	
н	5	u	O	•	ı	-

oase number L

er LED Dimming Color Finishes Temperature (Diamond) Finishes (Triangle nishes ircle) Diffuser with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer
Subseries: Sign Diva Dancer
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

### **PHYSICAL**

Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8

Height (mm): 1620 Height (in): 63 <sup>3</sup>/<sub>4</sub>

Light Distribution: Adjustable / Direct

Weight (kg): 3 Weight (lbs): 6.6

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 12.1

Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 836 / 895 / 903 / 921 Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI


Lamp Life (hrs): 50000


# OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head +90°

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

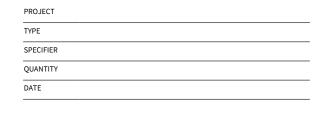

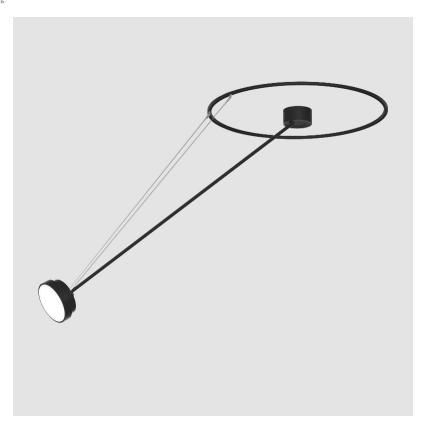

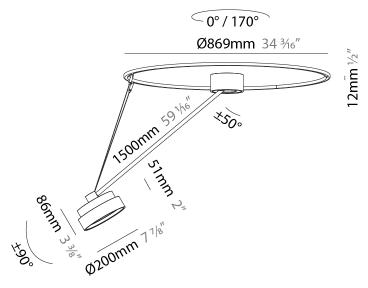






A30871-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

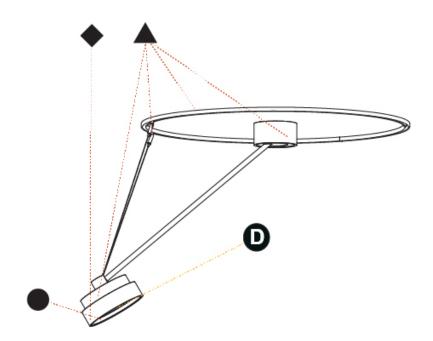





A30872-	
---------	--

Diffuser Temperature (Diamond)

<ol> <li>To build a product code in our configurator select the special</li> </ol>	fy but	ton (	on
the base model # product page			

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 19.8 Total Output Wattage (W): 18

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


## OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

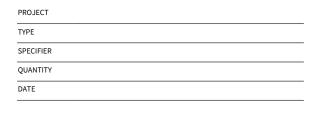

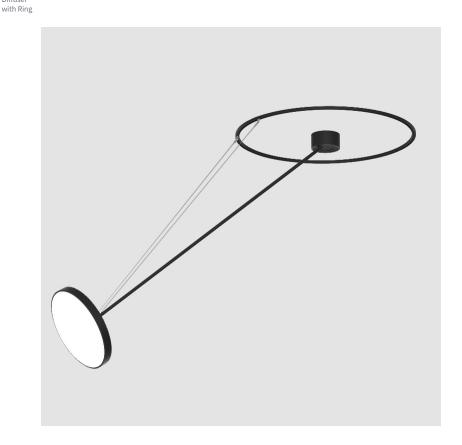

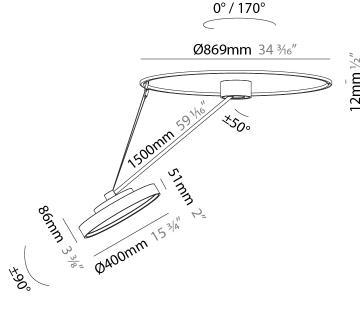






A30872-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

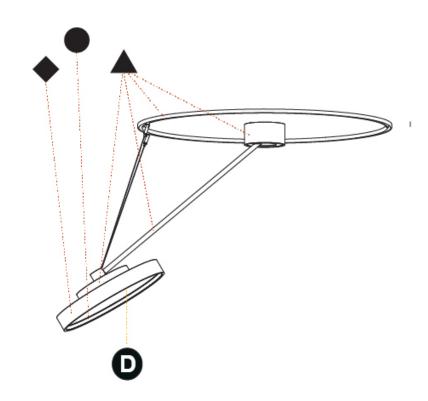





Λ3	Λ	Q	7	2.	
HЭ	u	0	•	Э.	•

base number	LED	Color	Finishes	F
	Dimming	Temperature	(Diamond)	(

Diffuser (Circle) with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 1/16
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 6.0
Weight (lbs): 13.22
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6120 / 6233 / 6360


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

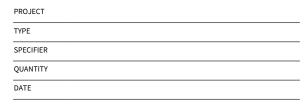

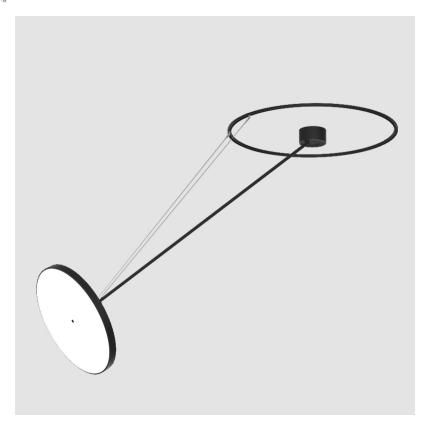

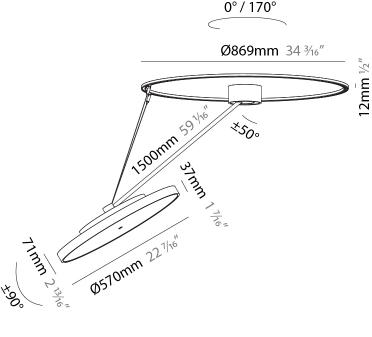






A30873-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

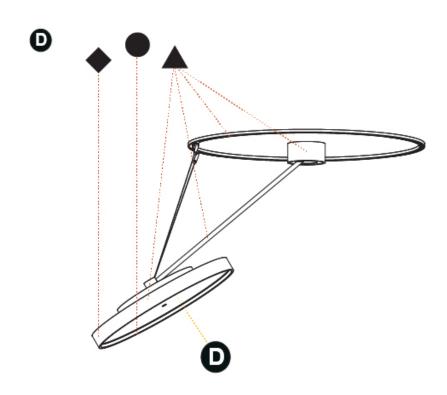





_	_	_	_	_	_
Λ	7	n	n	7	л
4	-	t J	м	•	4-

base number	LED	Colo
	p: .	_

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): 33 <sup>7</sup> / <sub>16</sub>	
Height (mm): 870	
Height (in): 34 1/4	
Light Distribution: Adjustable / Direct	
Weight (kg): 9.8	
Weight (lbs): 21.56	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI

Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

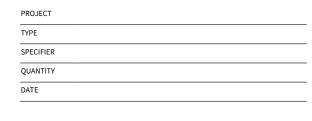





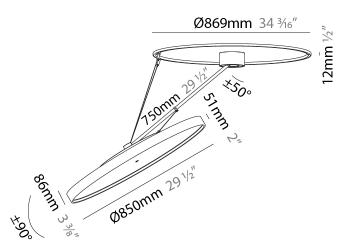






A30874-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

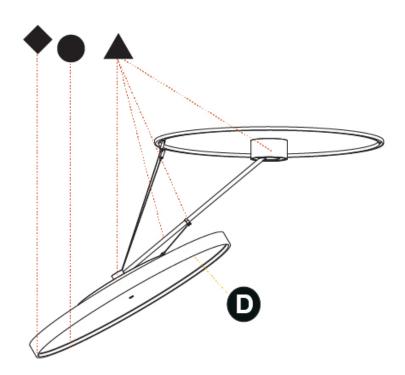





base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): 33 <sup>7</sup> / <sub>16</sub>	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 9.67	
Weight (lbs): 21.27	
Diffuser: PMMA - Onal / Micro-Prism / Sparkling Secret / Vintage	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



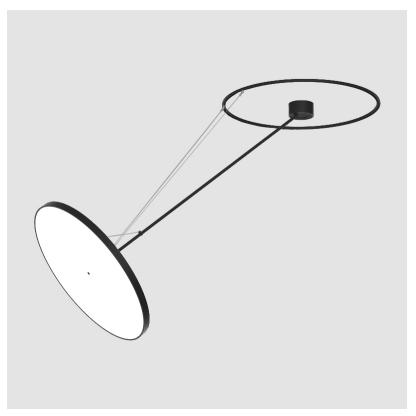

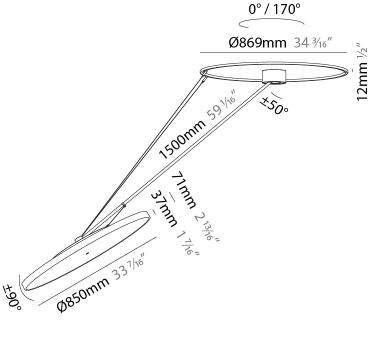






A30875-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

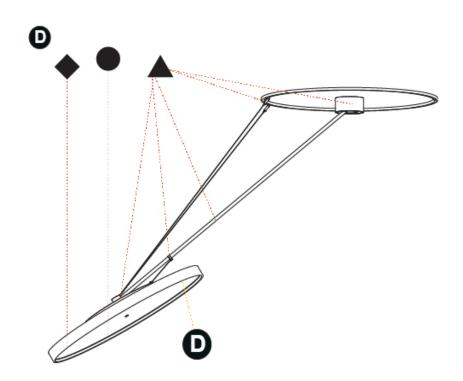





Λ2	Λ	Q	7	<b>6</b> _
<b>A</b> 5	u	ð	•	<b>0</b> -

base number Temperature (Diamond) (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer Subseries: Sign Diva Dancer Brand: Prolicht Division: Architectural Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Pendant

**PHYSICAL** Shape: Round Diameter (mm): 1100 Diameter (in): 43 1/16 Height (mm): 870 Height (in): 34 1/4 Light Distribution: Adjustable / Direct Weight (kg): 15.8 Weight (lbs): 34.76

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**


Certified By: Certified for North American Standards

IP rating: IP20

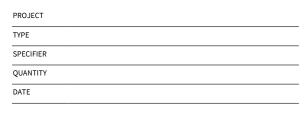

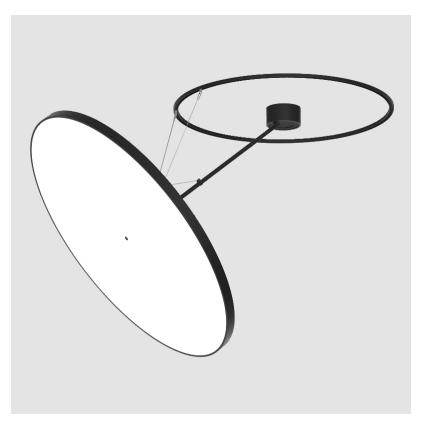

0°/170°

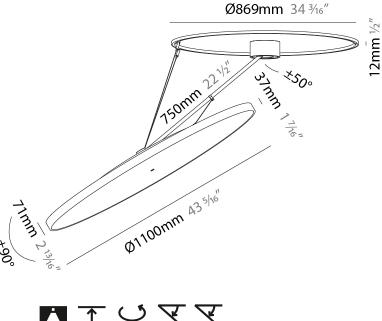






A30876-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

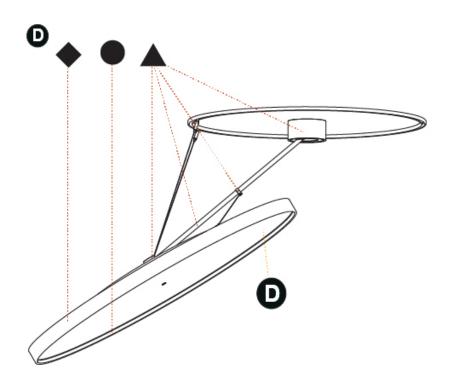





<b>D3</b>	n	R	7	7-

base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 1100
Diameter (in): 43 <sup>5</sup> / <sub>16</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 16
Weight (lbs): 35.2
Different DMMA Onel / Missa Driess / Spauling Count / Vintage

 ${\it Diffuser: PMMA-Opal/Micro-Prism/Sparkling Secret/Vintage } \\ {\it Industrial}$ 

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4 Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2 Input Voltage (V): 120 - 277

Constant Current (MA): 600

### LED

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 


## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

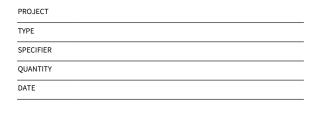

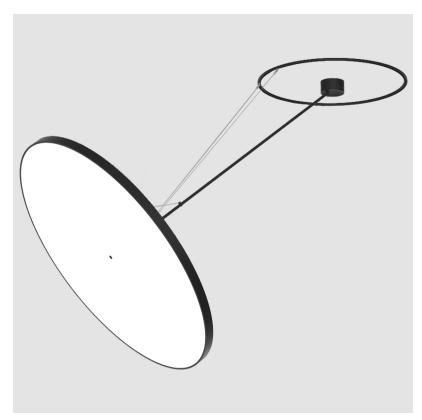

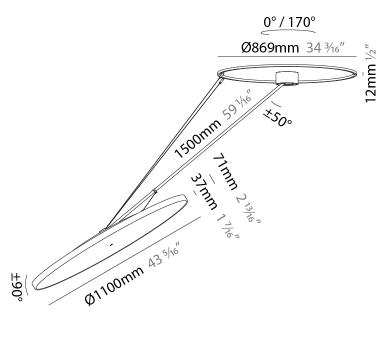






A30877-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

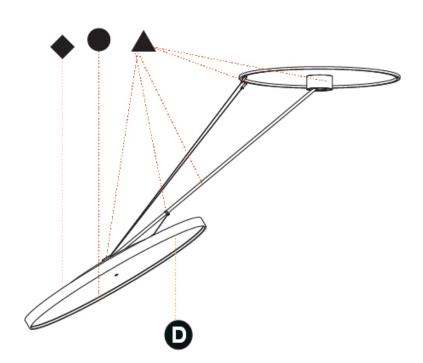





A30878	<b>-</b> .		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code in ou	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory. I chadite
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 3.3
Weight (lbs): 7.26
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /

COM / ABZ / JAG / OBR / MOS / ROR Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110


CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

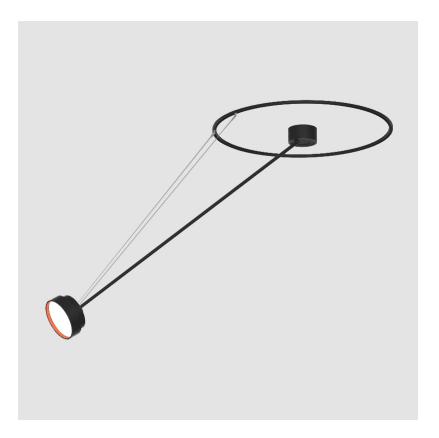

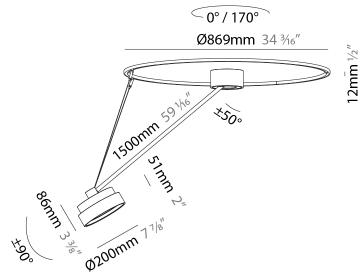






A30878-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

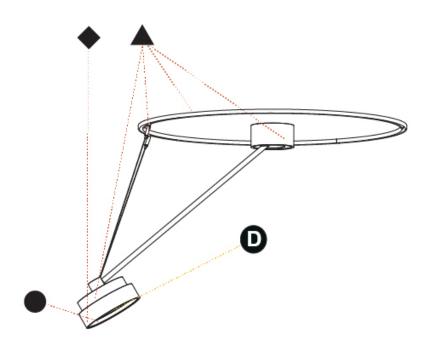





A30879	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17.0

Total Output Wattage (W): 15.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI

Lamp Life (hrs): 50000


### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20

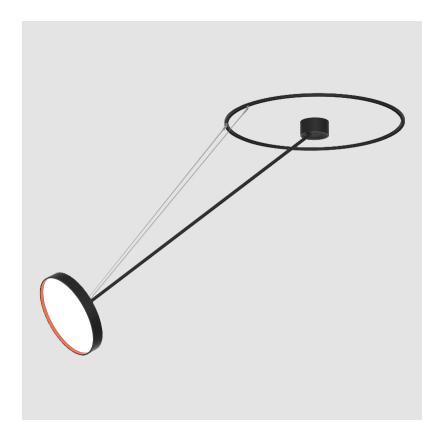

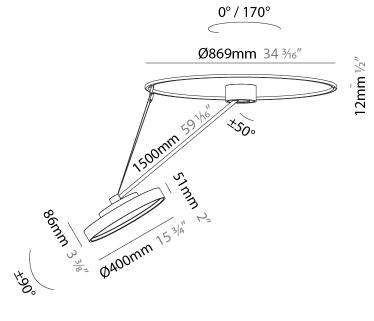




Page 29/42



A30879-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	_

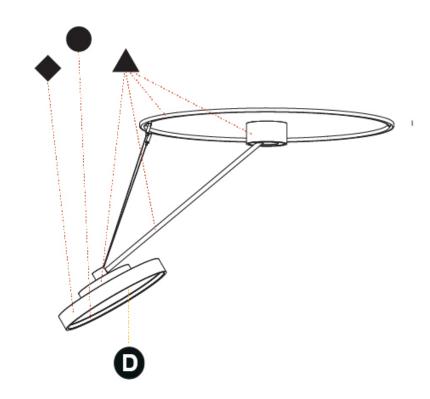





A30880	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT		
ТУРЕ		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in our	configurator	select the	specify	button (	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

mounting Locations octains	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 570	
Diameter (in): 22 ½	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 4.5	
Weight (lbs): 9.9	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes Driver Location: Integrated

Driver Type: Constant Current - Universal Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6580


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

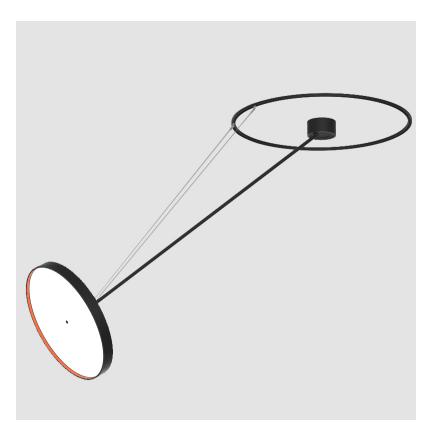

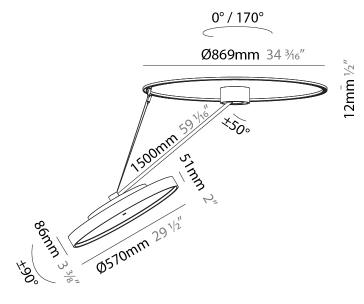






A30880-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

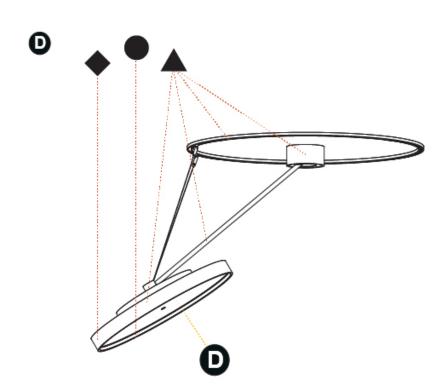





## SIGN DIVA DANCER KORONA SUSPENSION

A30881		-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuse

	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)
1.To build a	product cod	e in our configu	ırator seleci	t the specify i	button on
the base mo	del # produc	t page			

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): 33 <sup>7</sup> / <sub>16</sub>	
Height (mm): 870	
Height (in): 34 1/4	
Light Distribution: Adjustable / Direct	
Weight (kg): 10.5	
Weight (lbs): 23.1	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

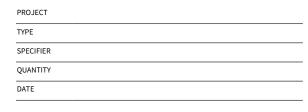

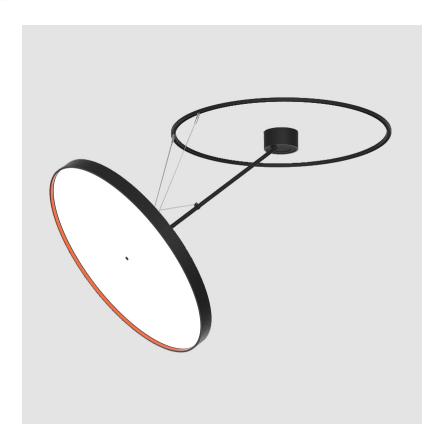

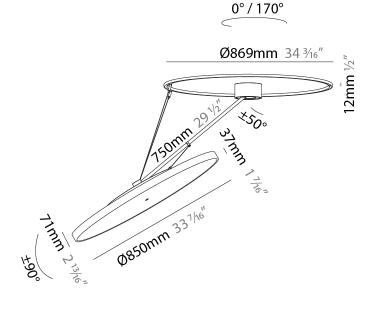






A30881-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

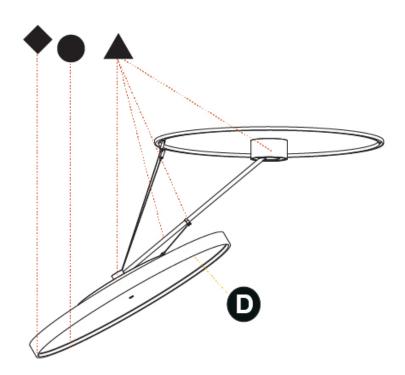





A30882	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 <sup>7</sup> / <sub>16</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 11.67
Weight (lbs): 25.67

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

### LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

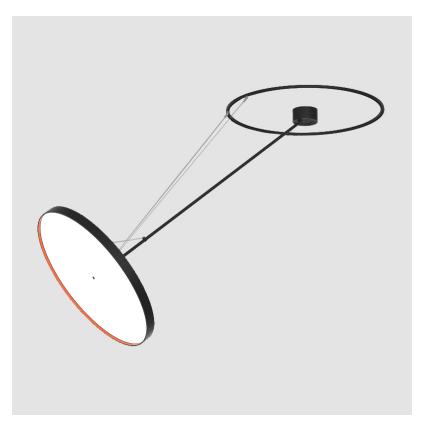

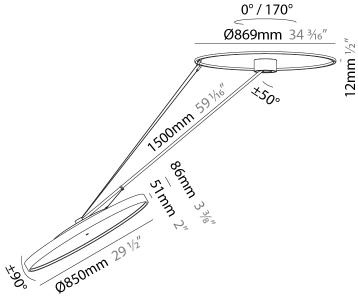





A30882-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

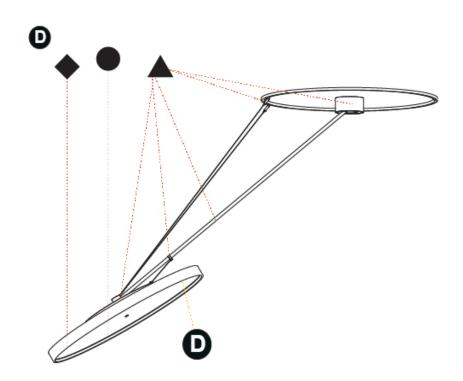





A30883	-		-	_	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

1.To build a product code	in our configurat	or select the specif	y button on
the base model # product	page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 <sup>5</sup> / <sub>16</sub>	
Height (mm): 870	
Height (in): 34 1/4	
Light Distribution: Adjustable / Direct	
Weight (kg): 16.1	
Weight (lbs): 35.42	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

### LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

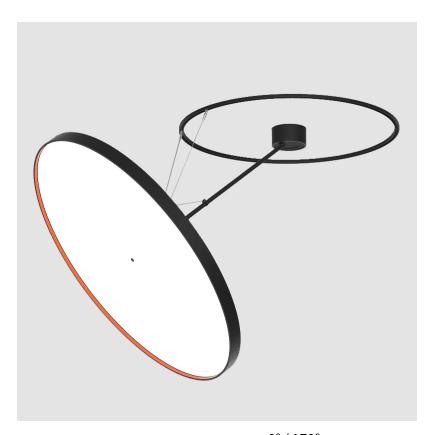

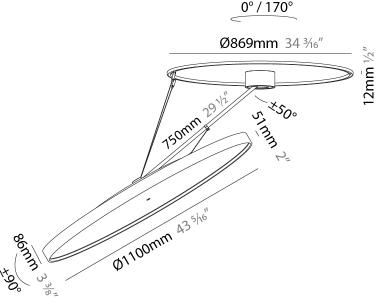






A30883-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	_

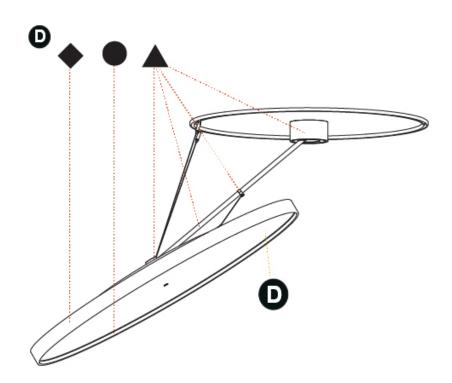





A30884	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 ½	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 15.5	
Weight (lbs): 34.1	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

## **ELECTRICAL**

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 169.4

Total Output Wattage (W): 135 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)

and 0-10V Dimming) Driver Included: Yes Driver Location: Integrated Driver Type: Constant Current - Universal Driver Class: Class 2 Input Voltage (V): 120 - 277 Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340 CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

IP rating: IP20

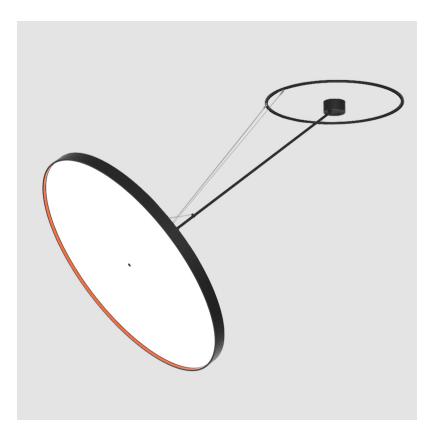

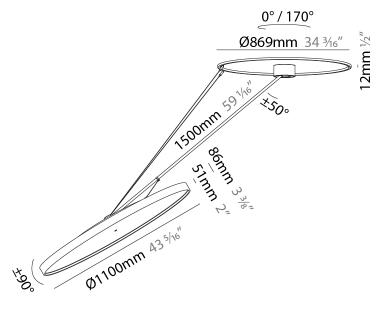




Page 39/42



A30884-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

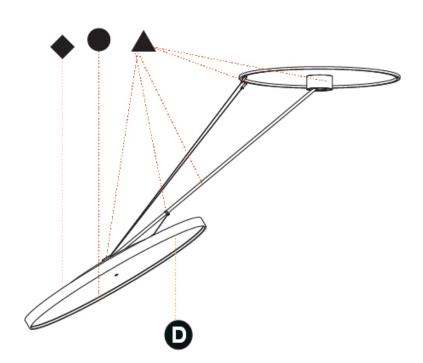





## **SIGN DIVA DANCER**

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

### **Fixture Finish**



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. **Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.





# **SIGN DIVA DANCER**

# **LEGEND**

T		_	a 85		special LED (upon request) PGR_PGRW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	71-600	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
Z√	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
<b>□</b> •+	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	4⊚	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>.</b>	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	0	direct diffuser	دول) ه	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	<b>(II</b> )	CSA Certified to UL and CSA Standards
J	available upon request	O	accessory	$\mathbf{Z}$	Certified for North American Standards

## **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

## **IK RATING**

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
<b>ІКОЗ</b>	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm