

| base | number | |
|------|--------|--|
| | | |

LED Dimming

Color Finishes Temperature (Diamond)

Finishes d) (Triangle) Finishes (Circle) Diffuser with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |
| | |

| PHYSICAL | |
|--|--|
| Shape: Round | |
| Diameter (mm): 200 | |
| Diameter (in): 7 1/8 | |
| Height (mm): 72 | |
| Height (in): 2 ¹³ / ₁₆ | |
| Max. Overall Height (mm): 870 | |
| Max. Overall Height (in): 34 1/4 | |
| Extension (mm): 750 | |

Extension (mm): 750
Extension (in): 29 ½

Light Distribution: Adjustable / Direct

Weight (kg): 1.999 Weight (lbs): 4.407

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 776 / 830 / 837 / 854

Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



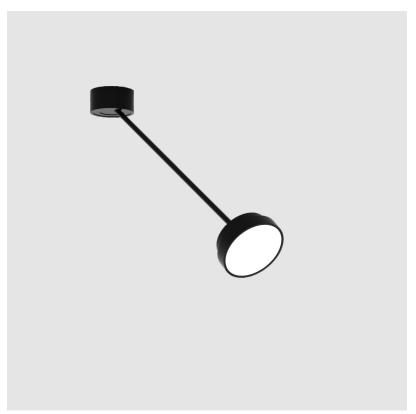






Page 1/42



A300037-

| PROJECT | |
|-----------|---|
| ТҮРЕ | _ |
| SPECIFIER | _ |
| QUANTITY | _ |
| DATE | _ |

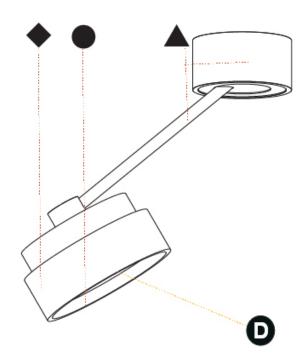





| A300 | 039- |
|------|------|
|------|------|

| base number | LED | Color | Finishes | Finishes | Finishes |
|-------------|---------|-------------|-----------|------------|----------|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |

with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory: Pendant |
|---|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 400 |
| Diameter (in): 15 ³ / ₄ |
| Height (mm): 72 |
| Height (in): 2 ¹³ / ₁₆ |
| Max. Overall Height (mm): 870 |
| Max. Overall Height (in): 34 1/4 |
| Extension (mm): 750 |
| Extension (in): 29 ½ |
| Light Distribution: Adjustable / Direct |
| |

Weight (kg): 3.140 Weight (lbs): 6.922

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head +90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

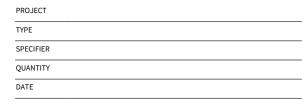

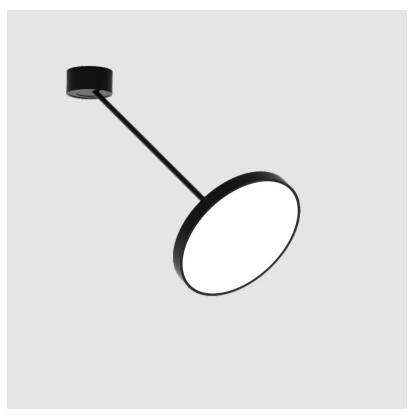

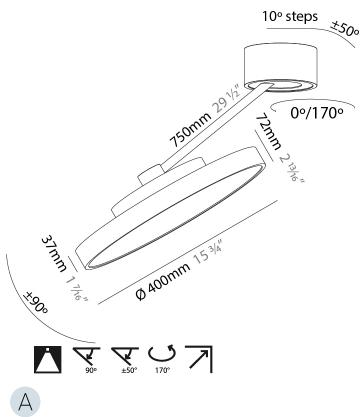






A300039-

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

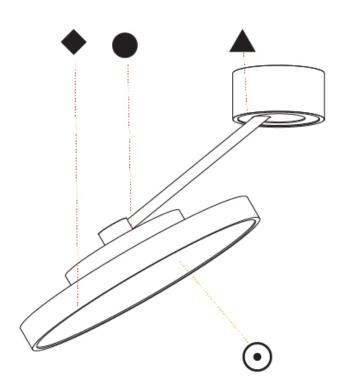





| A300041 | - | - | - | - | - | - |
|-------------|-----|-------|----------|----------|----------|----------|
| base number | LED | Color | Finishes | Finishes | Finishes | Diffuser |

| A300041 | • | | - | - | - | - |
|-------------|---------|-------------|-----------|------------|----------|-----------|
| base number | LED | Color | Finishes | Finishes | Finishes | Diffuser |
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) | with Ring |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Mounting Type: Suspension |
|---|
| Mounting Location: Ceiling |
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 570 |
| Diameter (in): 22 ½ |
| Height (mm): 870 |
| Depth (mm): 72 |
| Height (in): 34 ½ |
| Depth (in): 2 13/16 |
| Extension (mm): 750 |
| Extension (in): 29 ½ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 4.660 |
| Weight (lbs): 10.273 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial |

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD/PUS/FRO/FUP/KIA/POP/BLS/SPG/MEY/GOH/GUM/CHC/COM/ABZ/JAG/OBR/MOS/ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 49

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4978 / 5337/ 5384 / 5494

Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



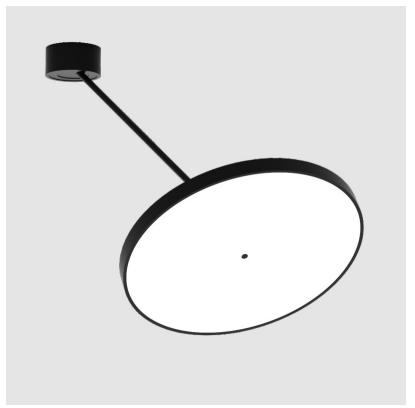

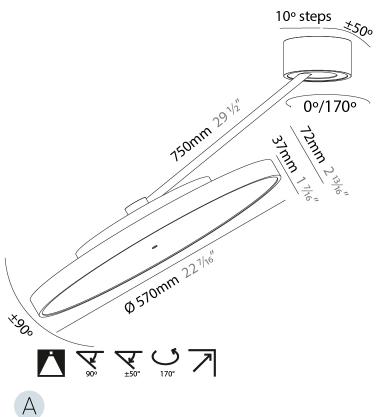


Page 5/42



A300041-

| PROJECT | |
|-----------|---|
| ТҮРЕ | _ |
| SPECIFIER | _ |
| QUANTITY | _ |
| DATE | _ |

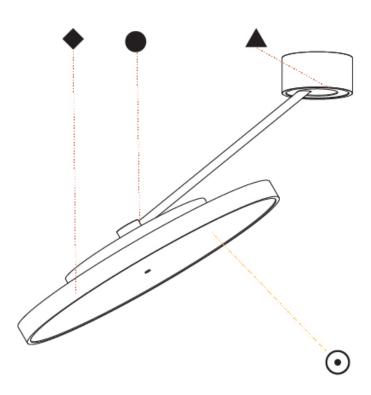





| A300043 | - | | - | - | - | - |
|-------------|-----|-------|----------|----------|----------|----------|
| base number | LED | Color | Finishes | Finishes | Finishes | Diffuser |

| TROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Mounting Location: Ceiling |
|--|
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 200 |
| Diameter (in): 7 1/8 |
| Height (mm): 870 |
| Depth (mm): 86 |
| Height (in): 34 1/4 |
| Depth (in): 3 3/8 |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 2.09 |
| Weight (lbs): 4.607 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |
| |

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards




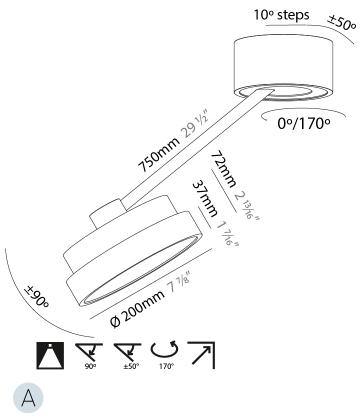



A300043-

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

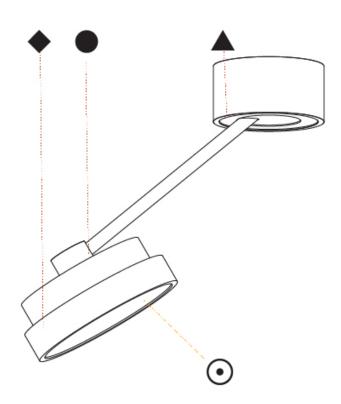





| A300045 | | | - | - | - | - |
|-------------|----------------|-------|----------|------------------------|----------------------|----------|
| base number | LED Dimming | Color | Finishes | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | |
|-----------|--|
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

| 1.To build a product code in ou | r configurator | select the | specify | button | on |
|---------------------------------|----------------|------------|---------|--------|----|
| the base model # product page | | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Mounting Location: Ceiling |
|--|
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 400 |
| Diameter (in): 15 ³ / ₄ |
| Height (mm): 870 |
| Depth (mm): 86 |
| Height (in): 34 1/4 |
| Depth (in): 3 ³ / ₈ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 3.5 |
| Weight (lbs): 7.716 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |
| |

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.9

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1870 / 2340 / 2372 / 2420

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

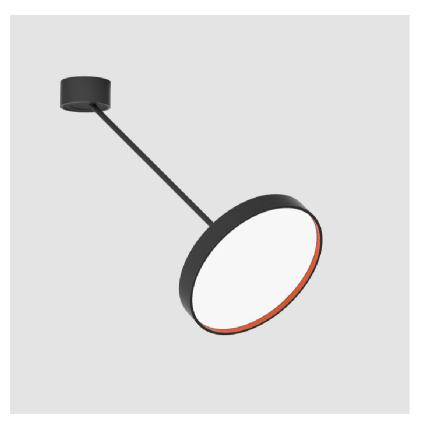

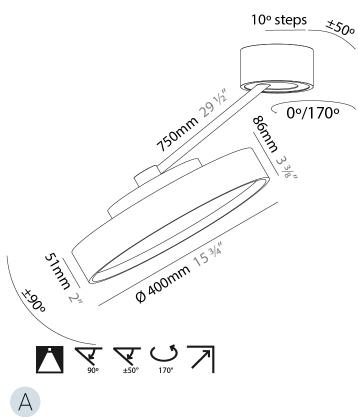






A300045-

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

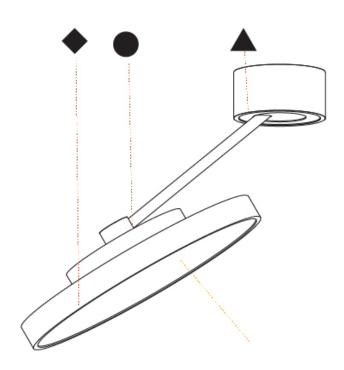





| A300047 | - | | _ | - | - | - |
|-------------|----------------|-------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | |
|-----------|--|
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Mounting Location: Ceiling |
|--|
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 570 |
| Diameter (in): 22 $\frac{7}{16}$ |
| Height (mm): 870 |
| Depth (mm): 86 |
| Height (in): 34 1/4 |
| Depth (in): 3 3/8 |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 5 |
| Weight (lbs): 11.023 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Industrial

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 52.8
Total Output Wattage (W): 47.52

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6448 / 6580

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards




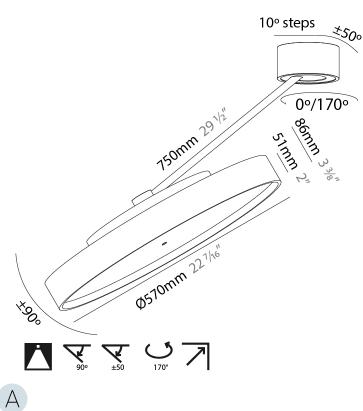



A300047-

| PROJECT | |
|----------|--|
| YPE | |
| PECIFIER | |
| QUANTITY | |
| ATE | |

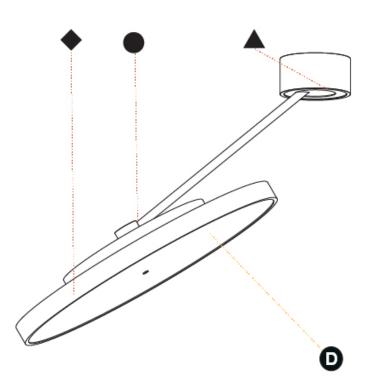





| Α. | 20 | O. | - | |
|----|----|----|----------|--|
| A. | | × | • | |

| base number | LED | Color | Finishes | Finishes | Finishes |
|-------------|---------|-------------|-----------|------------|----------|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |

| 1.To build a product code in our | configurator | select the | specify | button | on |
|----------------------------------|--------------|------------|---------|--------|----|
| the base model # product page | | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| 8 8 |
|--|
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 200 |
| Diameter (in): $7\frac{7}{4}$ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 3 |
| Weight (lbs): 6.6 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 12.1

Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 836 / 895 / 903 / 921 Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



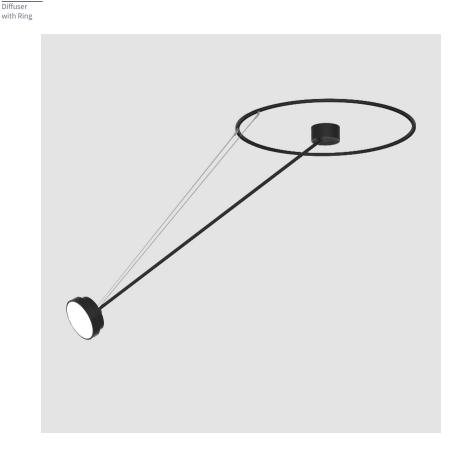

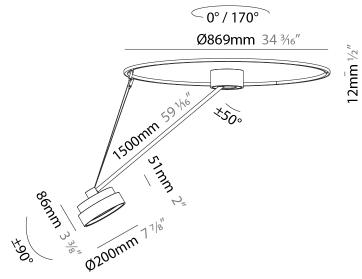





A30871-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

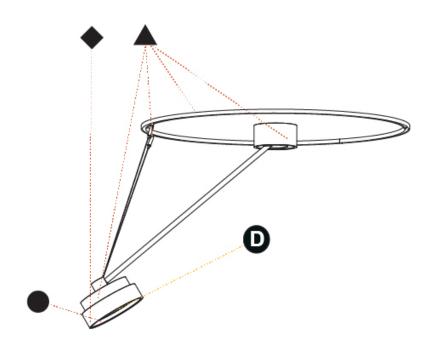





| A308 | 872- | |
|---|-------|--|
| ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | J . Z | |

Diffuser Temperature (Diamond) with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer Subseries: Sign Diva Dancer Brand: Prolicht Division: Architectural Mounting Type: Suspension Mounting Location: Ceiling

Subcategory: Pendant **PHYSICAL** Shape: Round Diameter (mm): 400 Diameter (in): 15 1/4 Height (mm): 1620 Height (in): 63 3/4 Light Distribution: Adjustable / Direct Weight (kg): 4.5 Weight (lbs): 9.9 Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 19.8 Total Output Wattage (W): 18

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991 Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



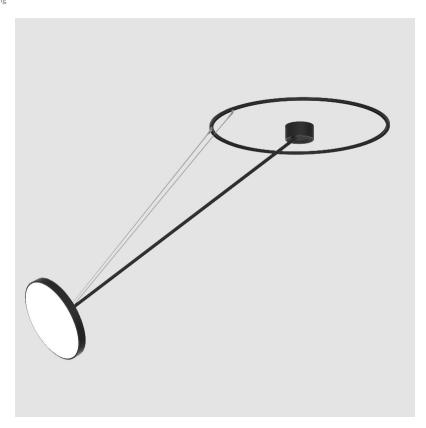

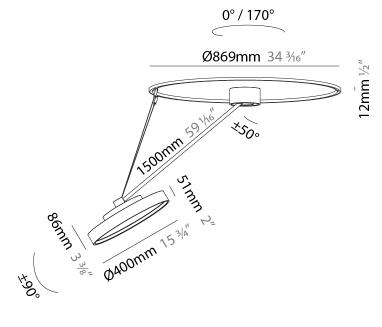






A30872-

| PROJECT | |
|-----------|---|
| TYPE | |
| SPECIFIER | _ |
| QUANTITY | _ |
| DATE | |

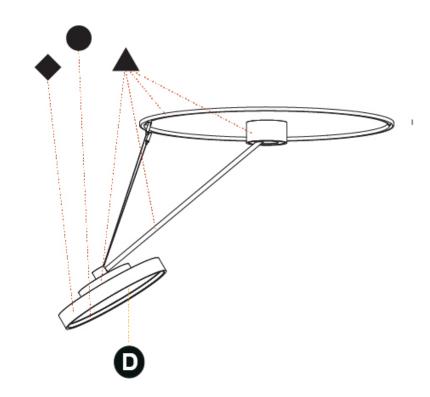





| Δ | 3 | n | Q T | 73 | 2_ |
|---|----|----|-----|----|----|
| м | Э, | U. | 0 | | • |

| base number | LED | Color | Finishes | Finishes | Finish |
|-------------|---------|-------------|-----------|------------|---------|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Mounting Location: Ceiling |
|--|
| Subcategory: Pendant |
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 570 |
| Diameter (in): 22 ⁷ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 6.0 |
| Weight (lbs): 13.22 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6120 / 6233 / 6360

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



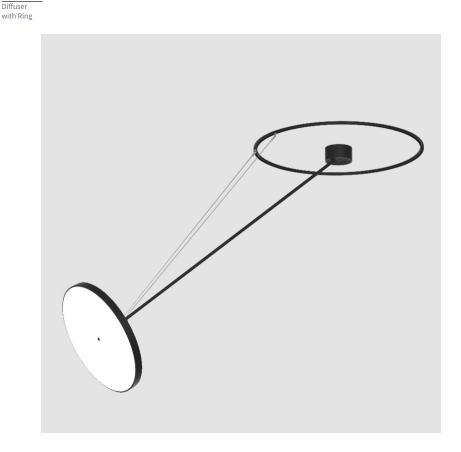

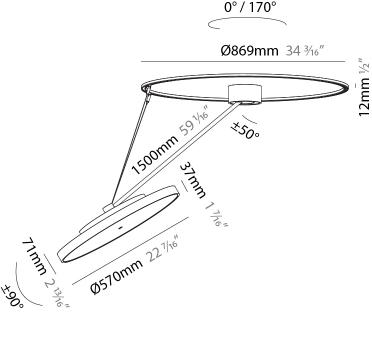






A30873-

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

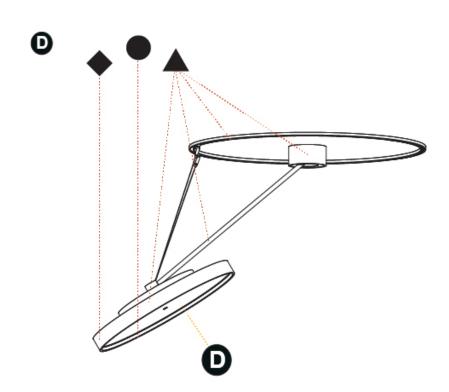





| A 20074 | |
|-------------|--|
| A 301X / 4. | |

| base number | LED | Color | Finishes | Ī |
|-------------|-----------|--------------|-----------|---|
| | Dimonoina | Tomonoroturo | (Diamond) | |

Diffuser

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory, Feridant |
|--|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 850 |
| Diameter (in): 33 ⁷ / ₁₆ |
| Height (mm): 870 |
| Height (in): 34 1/4 |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 9.8 |
| Weight (lbs): 21.56 |
| |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



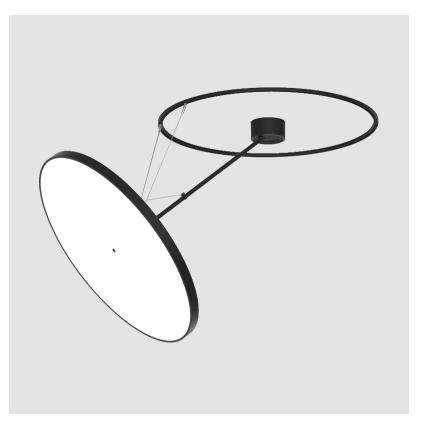

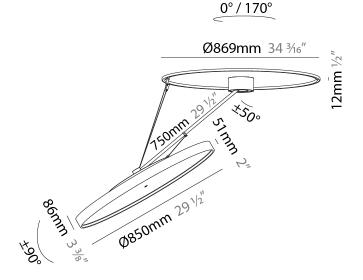




Page 19/42



A30874-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

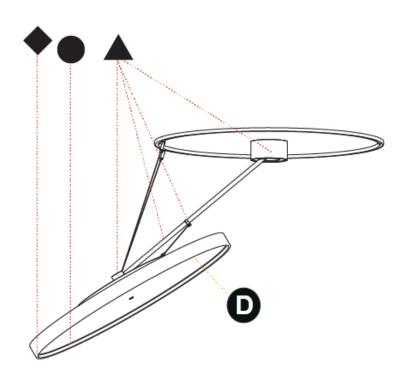





| Δ3 | O | R7 | 75 | _ |
|--------------------|---|----|----|---|
| $\boldsymbol{\pi}$ | v | • | | |

| base number | LED | Color | Finishes | Finishes | Finishes | _ |
|-------------|---------|-------------|-----------|------------|----------|---|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) | |

Diffuser

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory: Pendant |
|---|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 850 |
| Diameter (in): 33 ⁷ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 9.67 |
| Weight (lbs): 21.27 |
| Diffusor DMMA Onal / Micro Bricm / Sparkling Socret / Vintage |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



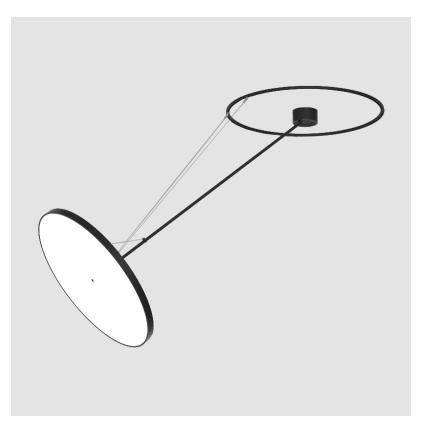

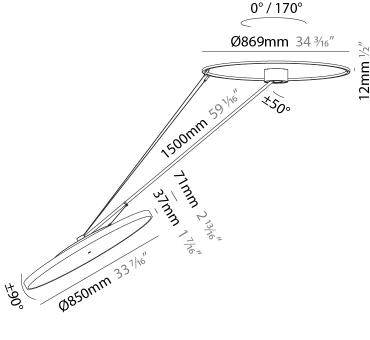





A30875-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

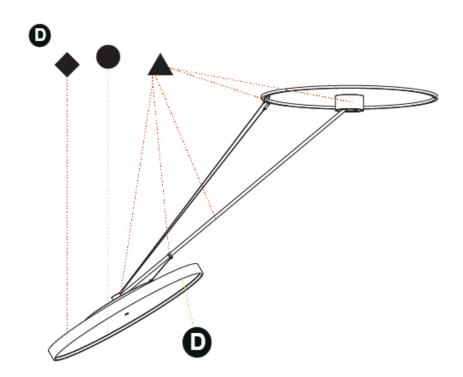





| _ | _ | _ | _ | _ | _ |
|---|---|---|---|---|----|
| Δ | 3 | n | x | 7 | 6- |
| | | | | | |

| base number | LED |
|-------------|------|
| | D: . |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

PHYSICAL

| Shape: Round |
|---------------------|
| Diameter (mm): 1100 |
| |

Diameter (in): 43 1/16

Height (mm): 870 Height (in): 34 1/4

Light Distribution: Adjustable / Direct

Weight (kg): 15.8 Weight (lbs): 34.76

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI

Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards


IP rating: IP20



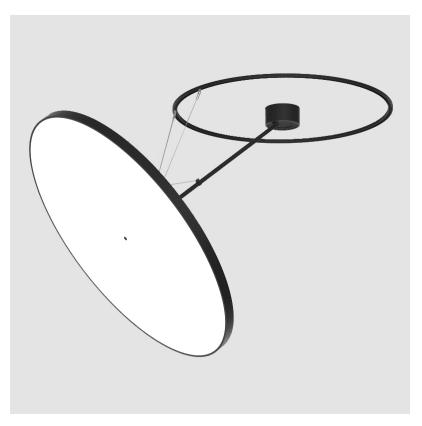

0°/170°

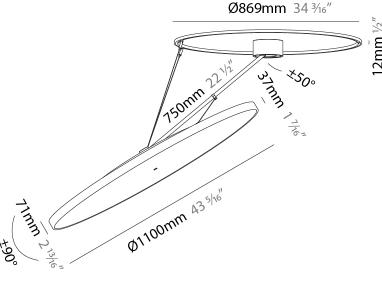





A30876-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

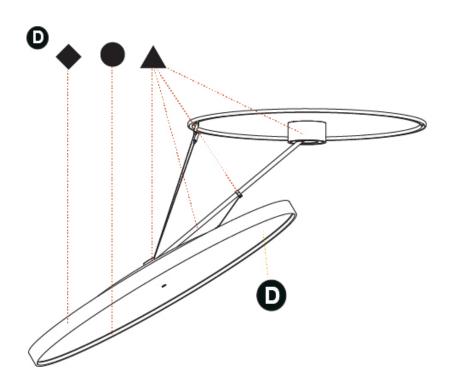





| Δ | 3 | n | R | 7 | 7 | _ |
|---|---|---|---|---|---|---|
| | | | | | | |

| base number | LED | Color | Finishes | Finishes | Finishes | Diffuser |
|-------------|---------|-------------|-----------|------------|----------|----------|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) | |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|-----------------------------|--|
| Subseries: Sign Diva Dancer | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory: Pendant |
|--|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 1100 |
| Diameter (in): 43 ⁵ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 16 |
| Weight (lbs): 35.2 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4 Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes Driver Location: Integrated

Driver Type: Constant Current - Universal Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

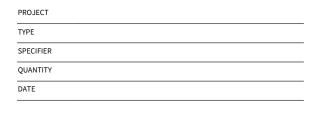

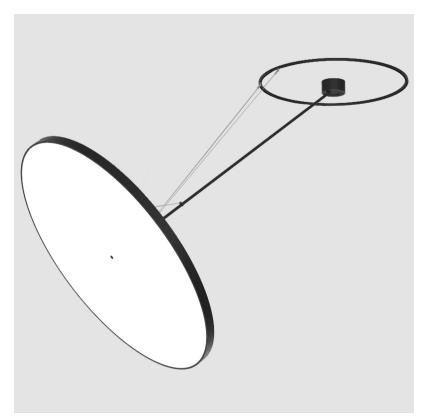

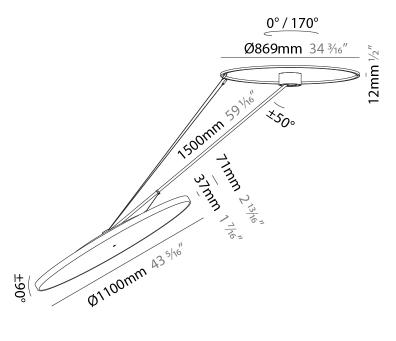






A30877-

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

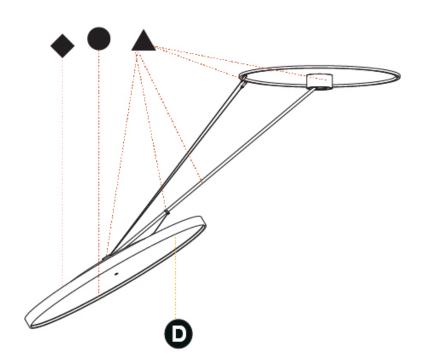





| A30878 | - . | | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | | |
|-----------|--|--|
| ТҮРЕ | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

| 1.To build a product code in ou | r configurator | select the | specify | button | on |
|---------------------------------|----------------|------------|---------|--------|----|
| the base model # product page | | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory. i endant |
|--|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 200 |
| Diameter (in): 7 1/8 |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 3.3 |
| Weight (lbs): 7.26 |
| Diffusor: PMMA Onal / Micro Brigm / Sparkling Socret / Vintage |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110


CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

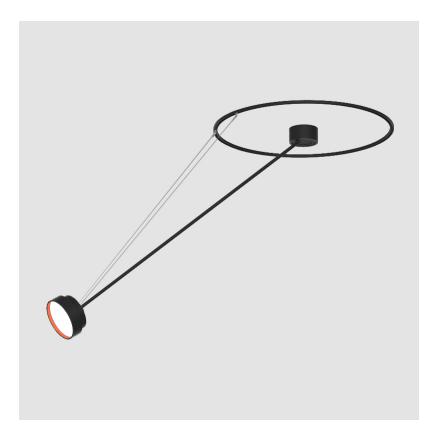

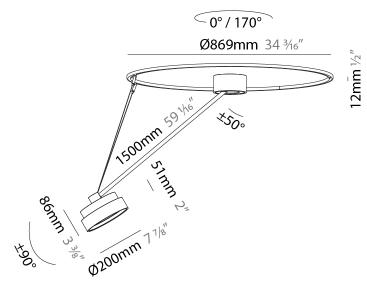






A30878-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

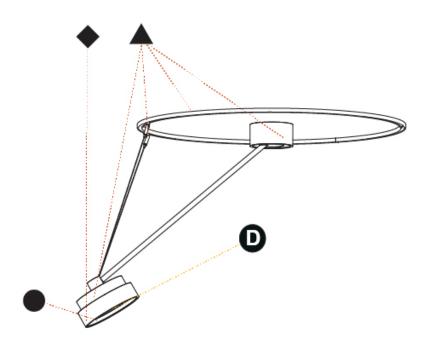





| A30879 | - | | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory: Pendant | |
|--|--|
| PHYSICAL | |
| Shape: Round | |
| Diameter (mm): 400 | |
| Diameter (in): 15 ¾ | |
| Height (mm): 1620 | |
| Height (in): 63 ³ / ₄ | |
| Light Distribution: Adjustable / Direct | |
| Weight (kg): 5 | |
| Weight (lbs): 11 | |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage | |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17.0

Total Output Wattage (W): 15.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

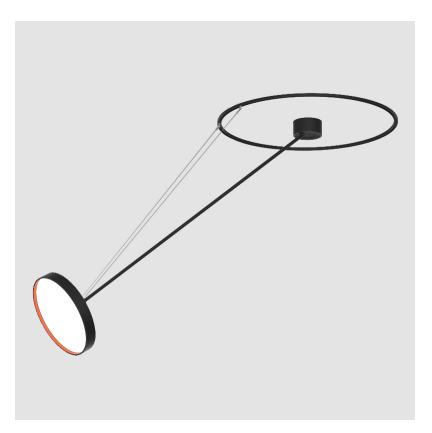

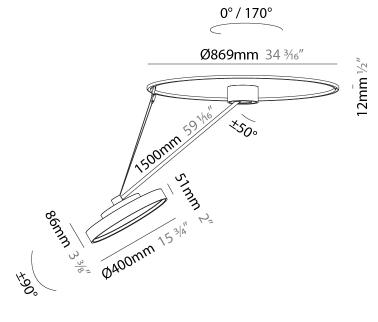






A30879-

| PROJECT |
|-----------|
| ТУРЕ |
| SPECIFIER |
| QUANTITY |
| DATE |

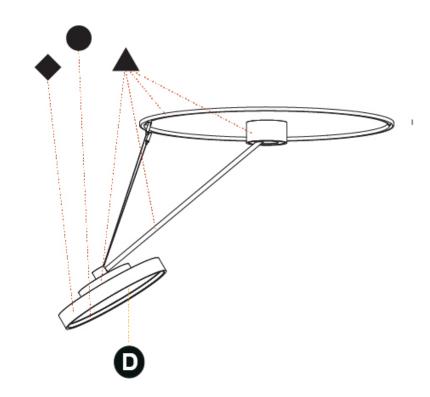





| A30880 | - | | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

| 1.To build a product code in ou | r configurator | select the | specify | button | on |
|---------------------------------|----------------|------------|---------|--------|----|
| the base model # product page | | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| Subcategory: Pendant |
|--|
| PHYSICAL |
| Shape: Round |
| Diameter (mm): 570 |
| Diameter (in): 22 ⁷ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 4.5 |
| Weight (lbs): 9.9 |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage |
| |

Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /
LOD / PLIS / FRO / FLIP / KIA / POP / RLS / SPG / MEY / GOH / GLIM / CHC /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes
Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2 Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6580

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

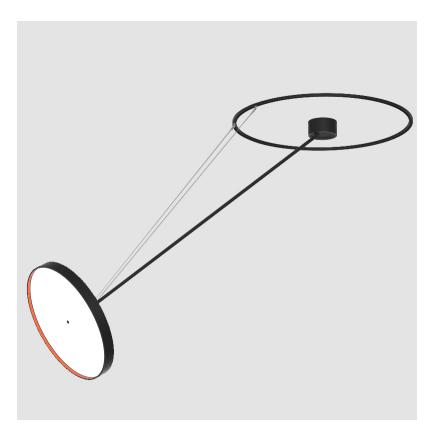

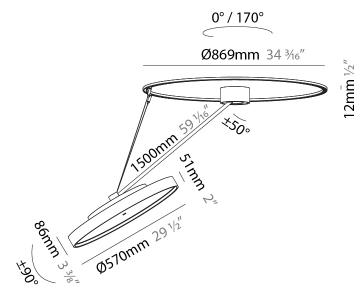






A30880-

| PROJECT | |
|-----------|--|
| ТҮРЕ | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

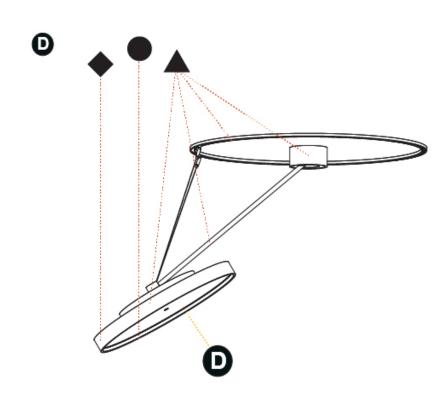





| A3 | 0881 | - | - | - | - |
|-----------|------|-------|---|--------|---|
| | | | | E: : I | |

| oase number | LED | Color | Finishes | Finishes | Finishes | Diffuser |
|-------------|---------|-------------|-----------|------------|----------|----------|
| | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) | |

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer |
|------------------------------------|
| Subseries: Sign Diva Dancer Korona |
| Brand: Prolicht |
| Division: Architectural |
| Mounting Type: Suspension |
| Mounting Location: Ceiling |
| Subcategory: Pendant |
| |

| PHYSICAL | |
|--|--|
| Shape: Round | |
| Diameter (mm): 850 | |
| Diameter (in): 33 ⁷ / ₁₆ | |
| Height (mm): 870 | |
| Height (in): 34 1/4 | |
| Light Distribution: Adjustable / Direct | |
| Weight (kg): 10.5 | |
| Weight (lbs): 23.1 | |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



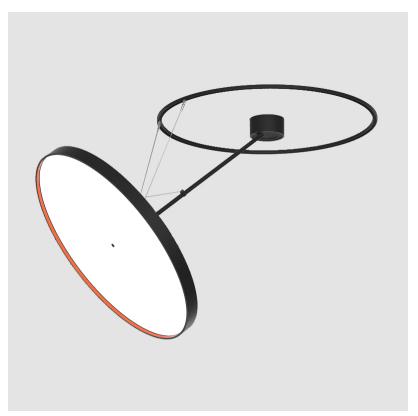

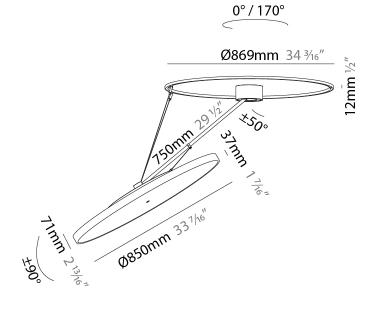






A30881-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

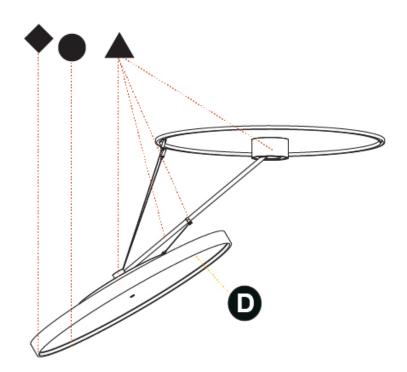





| A30882 | - | | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | | | |
|-----------|--|--|--|
| TYPE | | | |
| SPECIFIER | | | |
| QUANTITY | | | |
| DATE | | | |

| 1.To build a product code in our | configurator | select the | specify | button | on |
|----------------------------------|--------------|------------|---------|--------|----|
| the base model # product page | | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| PHYSICAL |
|--|
| Shape: Round |
| Diameter (mm): 850 |
| Diameter (in): 33 ⁷ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 11.67 |
| Weight (lbs): 25.67 |
| |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

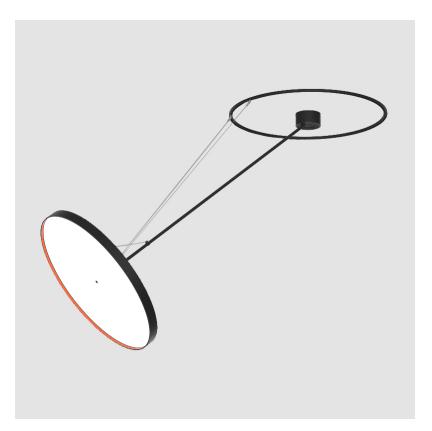

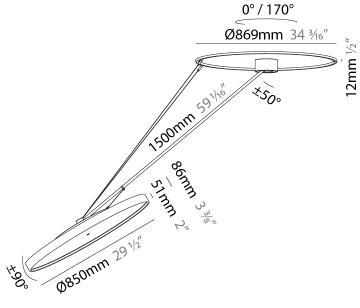






A30882-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

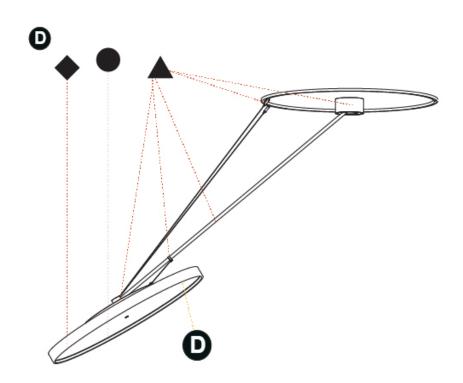





| A30883 | - | _ | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT |
|-----------|
| ТҮРЕ |
| SPECIFIER |
| QUANTITY |
| DATE |

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| PHYSICAL | |
|--|--|
| Shape: Round | |
| Diameter (mm): 1100 | |
| Diameter (in): 43 ⁵ / ₁₆ | |
| Height (mm): 870 | |
| Height (in): 34 ¹ / ₄ | |
| Light Distribution: Adjustable / Direct | |
| Weight (kg): 16.1 | |
| Weight (lbs): 35.42 | |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 350

Constant

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

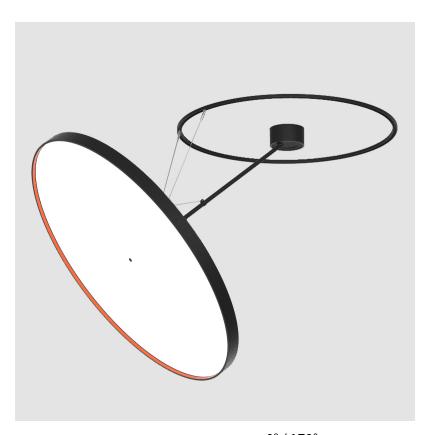

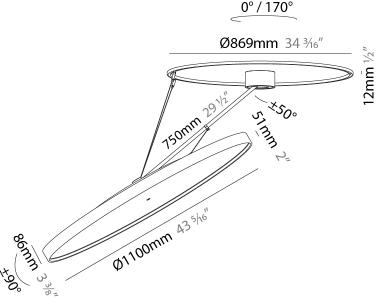






A30883-

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

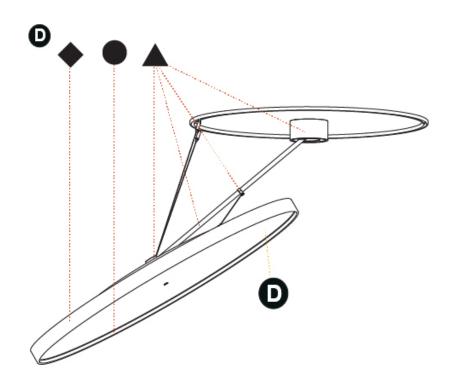





| A30884 | - | | - | - | - | - |
|-------------|----------------|----------------------|-----------------------|------------------------|----------------------|----------|
| base number | LED Dimming | Color Temperature | Finishes (Diamond) | Finishes (Triangle) | Finishes (Circle) | Diffuser |

| PROJECT | |
|-----------|--|
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

| 1.To build a product code in o | ır configurato | r select the | specify | button (| on |
|--------------------------------|----------------|--------------|---------|----------|----|
| the base model # product pag | 9 | | | | |

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

| Series: Sign Diva Dancer | |
|------------------------------------|--|
| Subseries: Sign Diva Dancer Korona | |
| Brand: Prolicht | |
| Division: Architectural | |
| Mounting Type: Suspension | |
| Mounting Location: Ceiling | |
| Subcategory: Pendant | |

| PHYSICAL |
|--|
| Shape: Round |
| Diameter (mm): 1100 |
| Diameter (in): 43 ⁵ / ₁₆ |
| Height (mm): 1620 |
| Height (in): 63 ³ / ₄ |
| Light Distribution: Adjustable / Direct |
| Weight (kg): 15.5 |
| Weight (lbs): 34.1 |

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

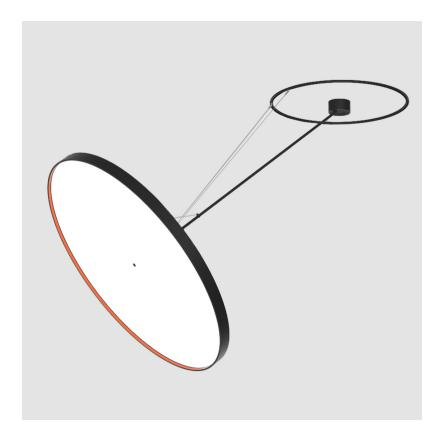

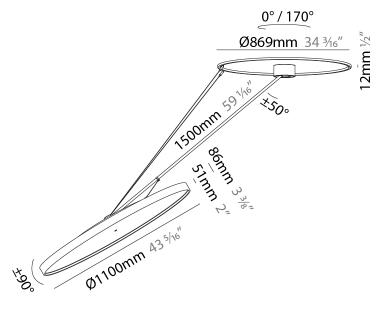



Page 39/42



A30884-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

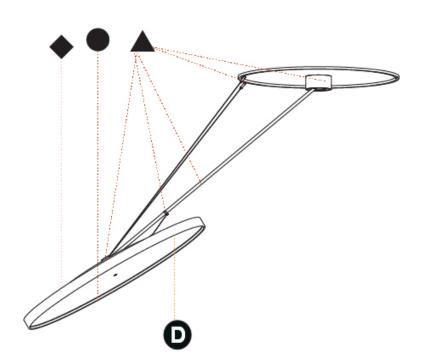





SIGN DIVA DANCER

COLOR FINISH CHART

| PROJECT | |
|-----------|--|
| TYPE | |
| SPECIFIER | |
| QUANTITY | |
| DATE | |

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. **Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.





SIGN DIVA DANCER

| PROJECT | | |
|-----------|--|--|
| TYPE | | |
| SPECIFIER | | |
| QUANTITY | | |
| DATE | | |

LEGEND

| | | | | | special LED (upon request) PGB_PGBW_tunable |
|-----------------------|--|----------|--|------------|--|
| <u></u> | floor-mounted | ¥ | pivotable | ⊛ | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
| 7 | wall and ceiling: recessed and surface mounted | C | rotating | 0 | warm dim / natural dimming LED |
| $\overline{\uparrow}$ | ceiling-mounted and wall-mounted | Œ | illuminate tilted | 0 | rechargeable battery powered |
| \rightarrow | wall-mounted | I | color of suspension cable | | fixture with natural vivid LED (upon request) |
| Y | omni-directional light distribution | 1 | length of suspension cable | CRI | color rendering index |
| $\dot{\Delta}$ | direct light distribution | | reflector degree selection | (K) | color temperature |
| X | direct/indirect light distribution | s s | super spot | LM | lumen (luminous flux) |
| Y | indirect light distribution | * | lens | ₩ | efficacy (lumens per watt) |
| | asymmetric light distribution | 8 | lens pack | UGR | Unified Glare Rating (UGR) range from 5-40 |
| | aura light distribution | 0 | shine ring | * | marine grade (AISI 316 stainless steel) |
| R | round wall or ceiling cut-out | 0 | integrated shine ring with diffuser | 3 | walk on |
| Z) | square wall or ceiling cut-out | | free individual colors 01-29 | ② | drive on |
| 4 | the supplied jig specifies the cutout dimensions | Ĉ | individual colors: 00 (free of charge), 01-25 (extra charge) | DSC | Dark Sky Compliance |
| □ ←,→ | minimum distance (meters) lamp - object | ♦ | luminaire part to be colored (F1) | Ġ | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| $\hat{\pm}$ | recessed depth | | luminaire part to be colored (F2) | | lamp protected against explosion |
| <u></u> | ceiling thickness in mm | • | luminaire part to be colored (F3) | | blown glass using traditional methods by master glass blower |
| 1 | ceiling thickness selection | | luminaire part to be colored (F4) | ● ® | acoustic material |
| | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) | • | luminaire part to be colored (F5) | | protection class I, protection insulation |
| C. CO | included or excluded LED driver/transformer/ control gear | • | color of 3-circuit adaptor | | protection class II, protection insulation |
| 8 | separately switchable | \odot | indirect diffuser | . . | ETL Certified to UL and CSA Standards |
| 9 | sensor | 0 | direct diffuser | շ (Մը) us | UL Certified to UL and CSA Standards |
| | remote control | (1) | ball-proof (upon request) | ® : | CSA Certified to UL and CSA Standards |
| 9 | available upon request | O | accessory | ② | Certified for North American Standards |

IP RATING

| IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
|------|---|
| IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
| IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
| IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
| IP65 | protected against ingress of dust protected against jets of water |
| IP66 | protected against ingress of dust protected against powerful jets of water or heavy seas |
| IP67 | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
| IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

above the surface)

| | management (in the Contraction of the Contraction o |
|------|--|
| IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
| ІКОЗ | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
| IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
| IK06 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
| IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$ |
| IKOB | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) $$ |
| IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm