

base number	LED	Color	Finishes	Finishes	Finishes
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)

1.To build a product code	in our configurator	select the specify	button on
he base model # product	page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcutegory: remaine	
PHYSICAL	
Shape: Round	
Diameter (mm): 200	
Diameter (in): 7 1/8	
Height (mm): 72	
Height (in): 2 13/16	
Max. Overall Height (mm): 870	
Max. Overall Height (in): 34 1/4	
Extension (mm): 750	
Extension (in): 29 ½	

Light Distribution: Adjustable / Direct

Weight (kg): 1.999 Weight (lbs): 4.407

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

#### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

#### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 776 / 830 / 837 / 854

Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI


Lamp Life (hrs): 50000


## OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



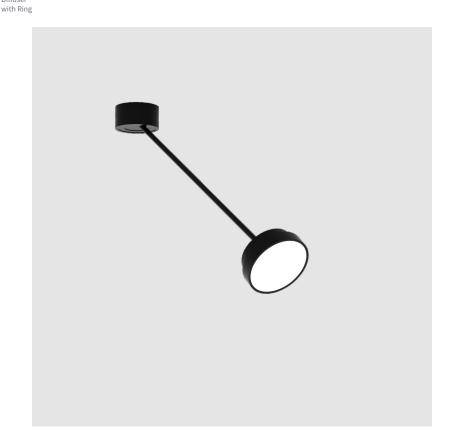








A300037-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

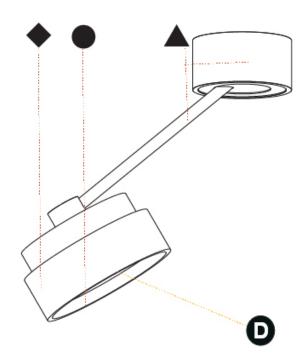





A300039	9-	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiting
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 870
Max. Overall Height (in): 34 1/4
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 3.140

Weight (lbs): 6.922

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

#### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

#### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head +90°

#### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

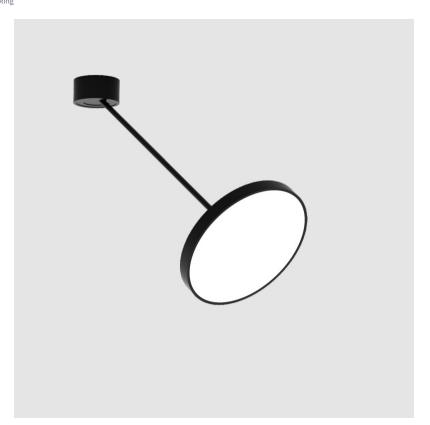

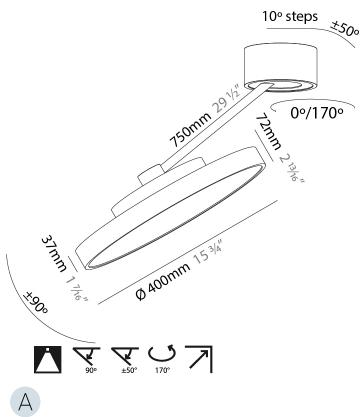






A300039-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

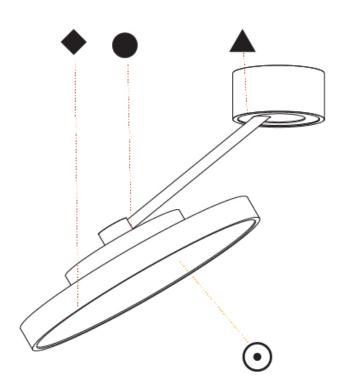





A300041			-	-	- ,	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 1/16
Height (mm): 870
Depth (mm): 72
Height (in): 34 ½
Depth (in): 2 13/16
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 4.660
Weight (lbs): 10.273
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Extruded Aluminum / Steel

## ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 49

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4978 / 5337/ 5384 / 5494

Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

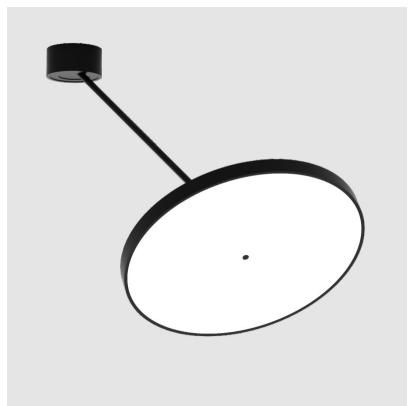

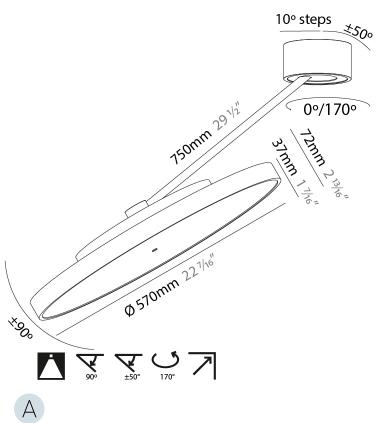


Page 5/42



A300041-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

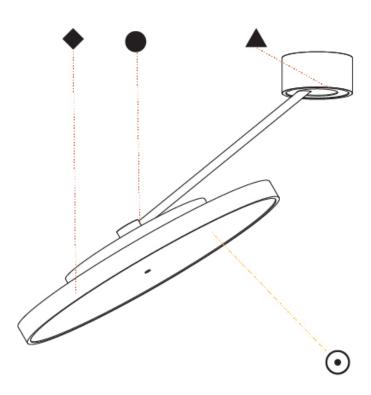





A300043	-		-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

1.To build a product code in ou	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer
Subseries: Sign Diva Dancer Korona
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 3/8
Light Distribution: Adjustable / Direct
Weight (kg): 2.09
Weight (lbs): 4.607
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

#### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110

CRI: >90 CRI


Lamp Life (hrs): 50000


### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ$ ; Tilting Head

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

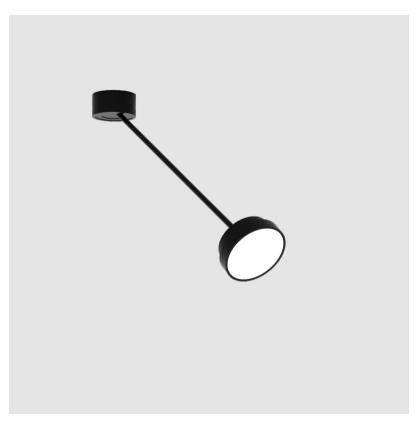


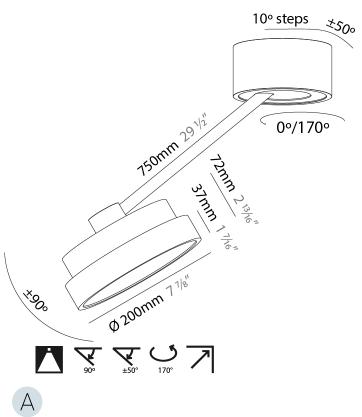



A300043-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

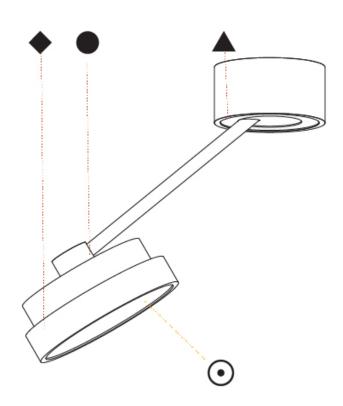





A300045	-		-	-	-	-
base number	LED Dimming	Color	Finishes	Finishes	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiting
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 <sup>3</sup> / <sub>8</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 3.5
Weight (lbs): 7.716
Different DMMA Onel / Missa Driess / Specializer Count / Vinters

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

#### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17.9
Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

#### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1870 / 2340 / 2372 / 2420

CRI: >90 CRI


Lamp Life (hrs): 50000


# OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

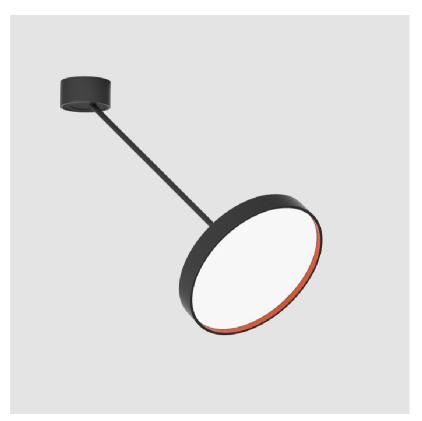

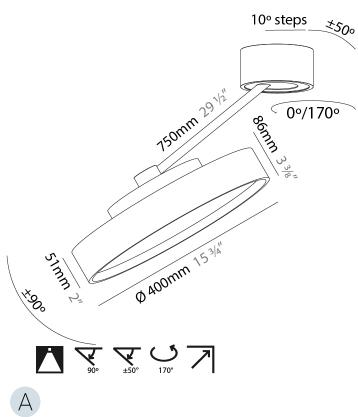






A300045-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

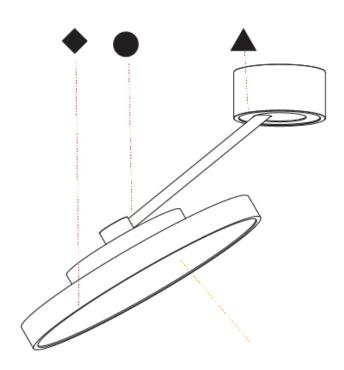





A300047	-	-	-	-	-	_
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 $\frac{7}{16}$
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 <sup>3</sup> / <sub>8</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11.023
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

#### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 52.8 Total Output Wattage (W): 47.52

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6448 / 6580

CRI: >90 CRI

Lamp Life (hrs): 50000


### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



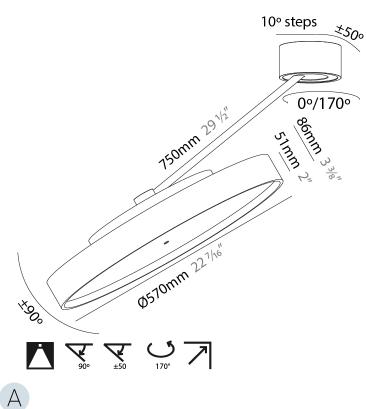






A300047-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

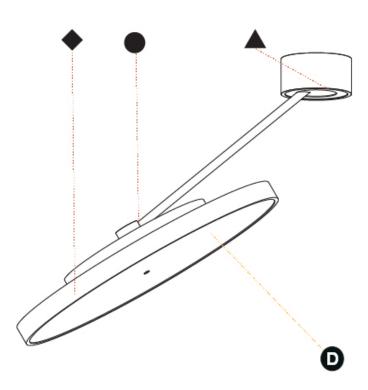





Δ	3	n	R	7	1	_

base number	LED	Color	Finishes
	Dimming	Temperature	(Diamond)

(Triangle)

Diffuser (Circle) with Ring

1.To build a product code in our configurator select the specify button on the base model # product page 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 200	
Diameter (in): 7 1/8	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 3	
Weight (lbs): 6.6	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 12.1 Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 836 / 895 / 903 / 921 Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI


Lamp Life (hrs): 50000


#### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



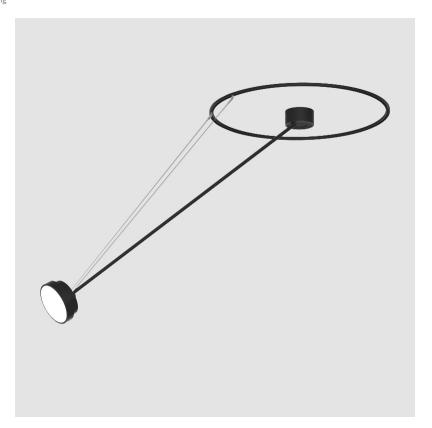

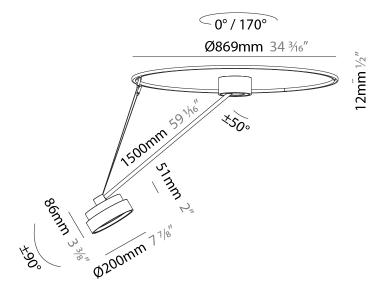






A30871-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

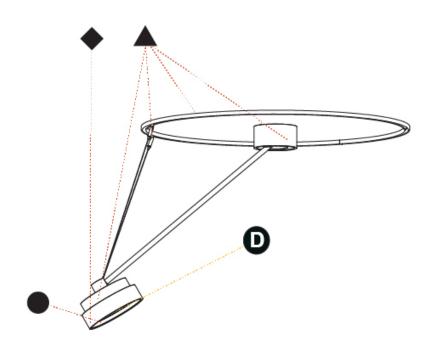





base number LED Color Finishes Finishes Finishes Diffuser
Dimming Temperature (Diamond) (Triangle) (Circle) with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 19.8

Total Output Wattage (W): 18

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

<u>Driver Type: Constant Current - Universal</u> <u>Driver Class: Class 2</u>

Input Voltage (V): 120 - 277

input voltage (v). 120 - 277

Constant Current (MA): 500

#### LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ$ ; Tilting Head  $\pm 90^\circ$ 

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



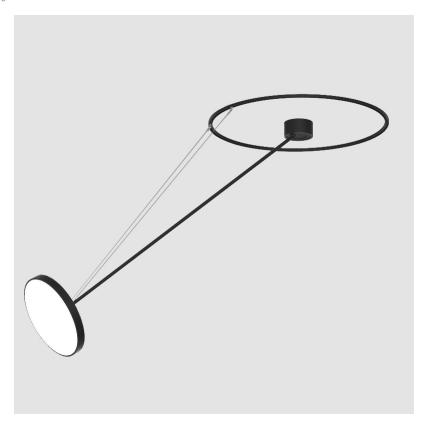

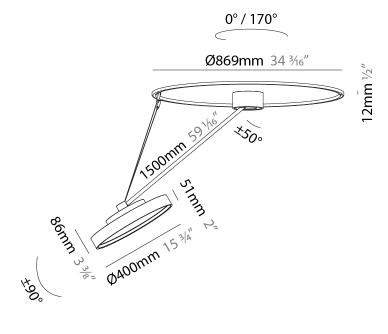






A30872-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

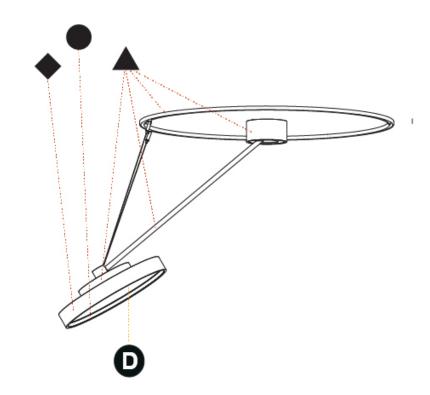





Δ	3	n	Q T	73	2_
м	Э,	U.	0		•

base number	LED	Color	Finishes	Fin
	Dimming	Temperature	(Diamond)	(Tr

Diffuser (Circle) with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 ½
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 6.0
Weight (lbs): 13.22
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6120 / 6233 / 6360


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



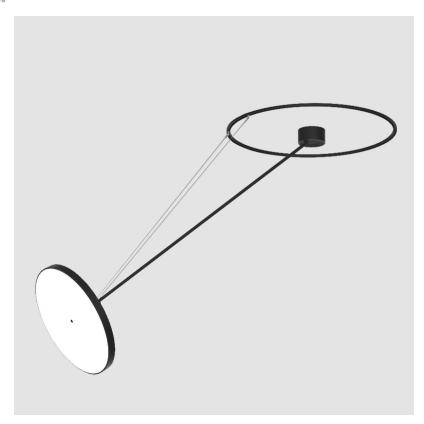

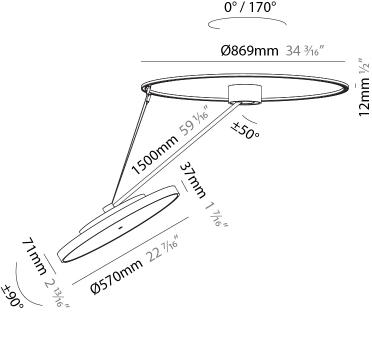






A30873-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

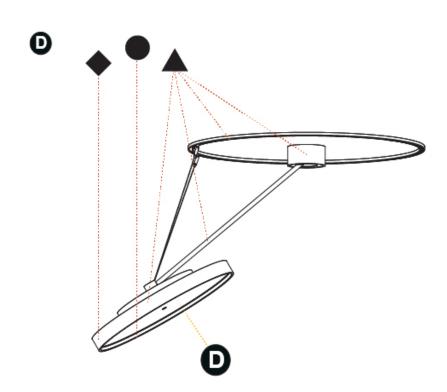





Δ	3	n	Q	7	4-
$\boldsymbol{n}$	_	u	u		┱-

base	number	

Temperature (Diamond)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Brand: Prolicht Division: Architectural Mounting Type: Suspension	

### **PHYSICAL**

Shape: Round Diameter (mm): 850

Diameter (in): 33 1/16

Subcategory: Pendant

Height (mm): 870 Height (in): 34 1/4

Light Distribution: Adjustable / Direct

Weight (kg): 9.8 Weight (lbs): 21.56

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI

Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards







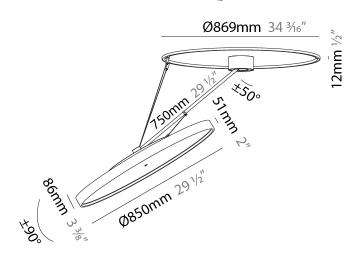






A30874-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

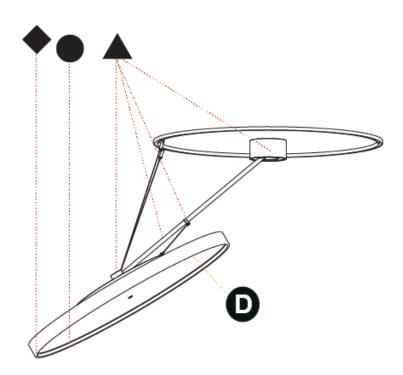





^	~	^	^	_	_
А	3	U	8	1	5-

base number	LED	Color	Finishes	Finishes	Finishes
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 $\frac{7}{16}$
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 9.67
Weight (lbs): 21.27
Diffuser: PMMA - Onal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



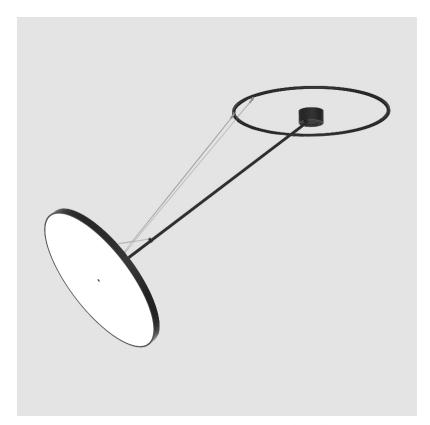

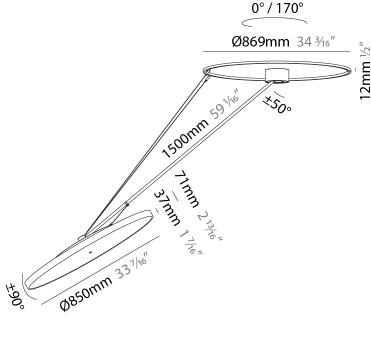





A30875-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

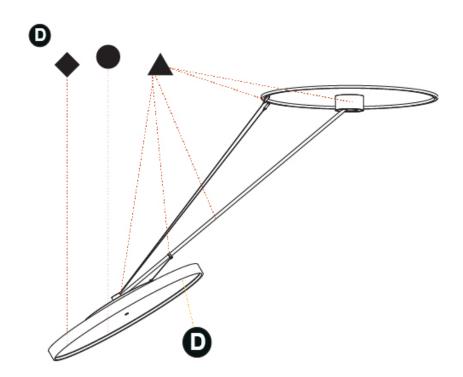





_				_	
	~	Λ	a	7	_
ч	•		ж		<b>n</b> -
$\boldsymbol{-}$		v	u		u-

ase	number	LED	
		Dimming	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

#### **PHYSICAL**

Shape: Round	
D:	

Diameter (mm): 1100 Diameter (in): 43 1/16

Height (mm): 870 Height (in): 34 1/4

Light Distribution: Adjustable / Direct

Weight (kg): 15.8 Weight (lbs): 34.76

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**


Certified By: Certified for North American Standards

IP rating: IP20



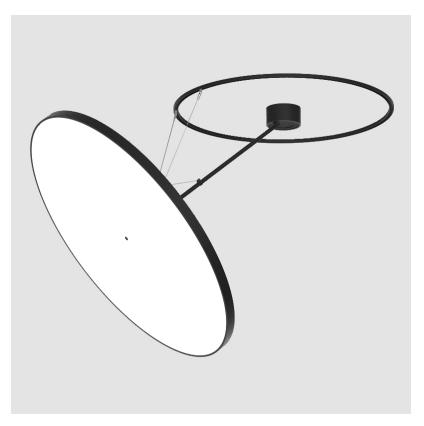

0°/170°

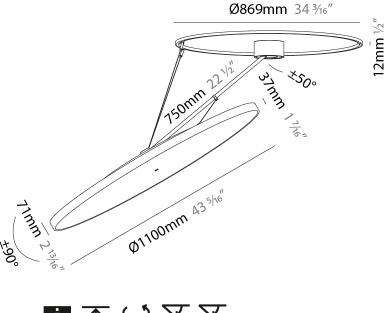






A30876-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

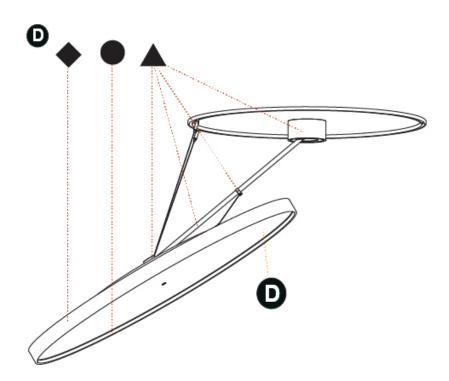





Δ	3	n	R	7	7.	

base number	LED	Color	Finishes	Finishes	Finishes	_
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

Diffuser

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 ½	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 16	
Weight (lbs): 35.2	
Diffuser: PMMA - Onal / Micro-Prism / Sparkling Secret / Vintage	

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



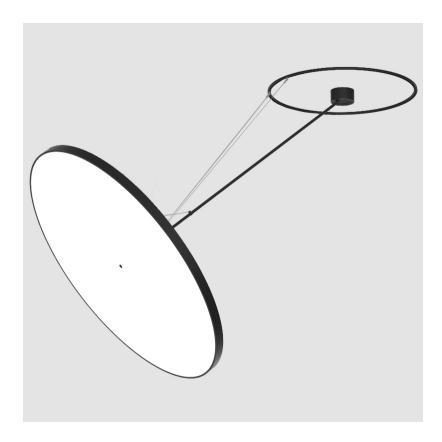

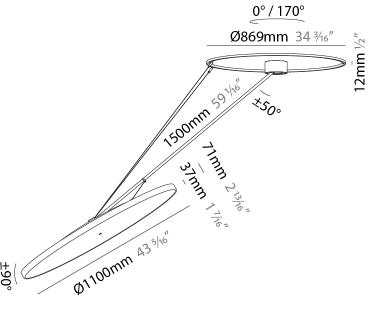






A30877-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

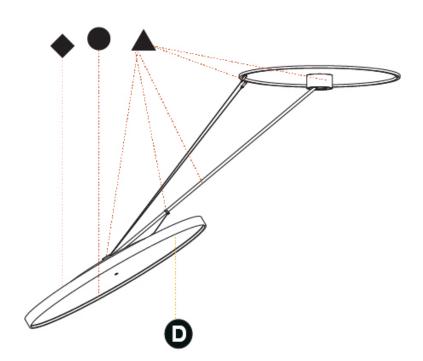





A30878			-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code in oui	configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

oubcategory r chaunt
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 3.3
Weight (lbs): 7.26
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110


CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

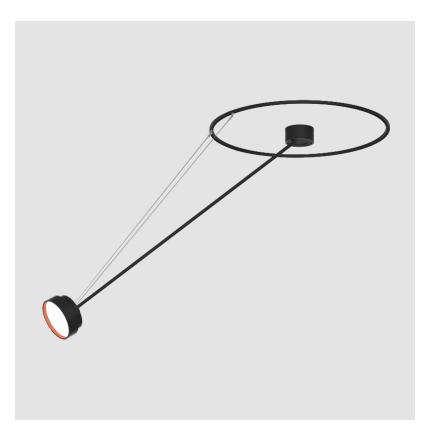

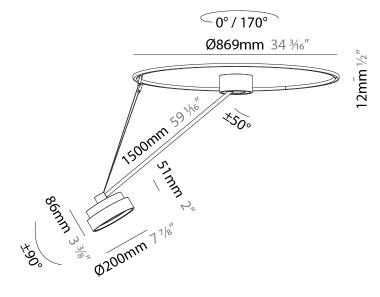






A30878-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

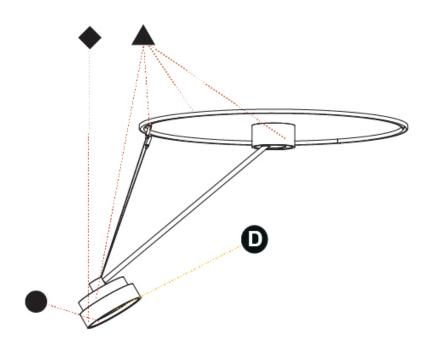





A30879	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 <sup>3</sup> / <sub>4</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17.0

Total Output Wattage (W): 15.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


# OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

### **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards

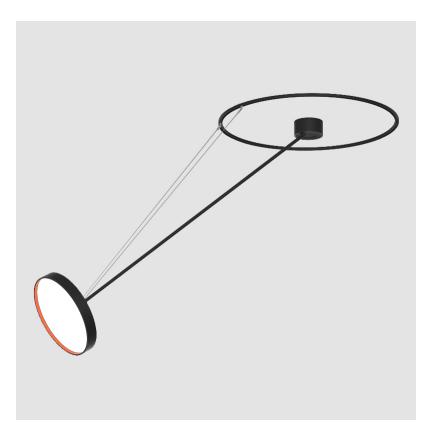

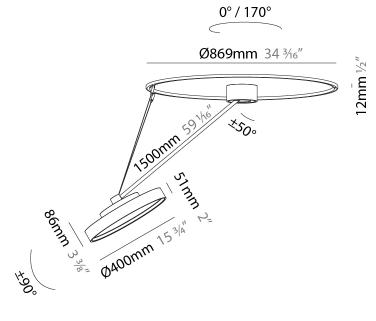





A30879-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

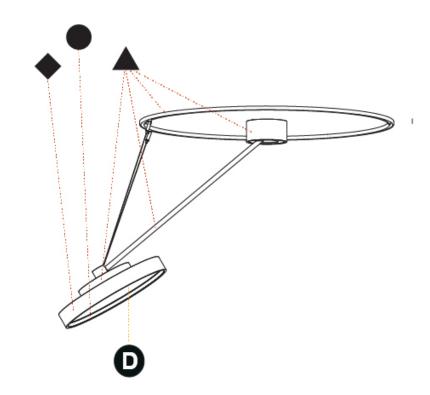





A30880	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in oui	configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 <sup>7</sup> / <sub>16</sub>
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /
COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

#### LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6580

CRI: >90 CRI


Lamp Life (hrs): 50000


#### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

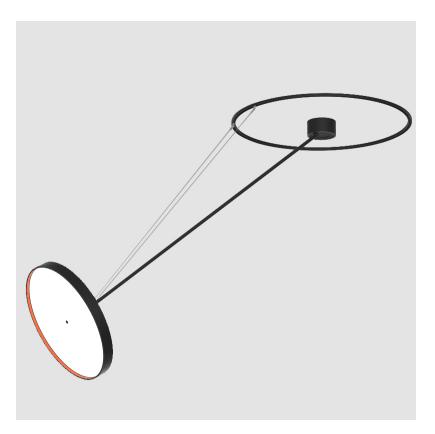

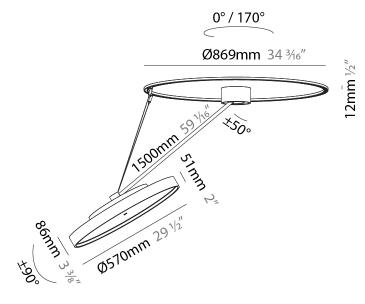






A30880-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

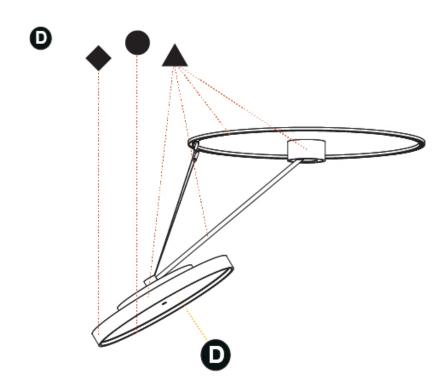





A30881-	ı	-	-		-
	LED	C-1	Finishes	Ethelia Indiana	ministrate and

ase number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 <sup>7</sup> / <sub>16</sub>
Height (mm): 870
Height (in): 34 1/4
Light Distribution: Adjustable / Direct
Weight (kg): 10.5
Weight (lbs): 23.1

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



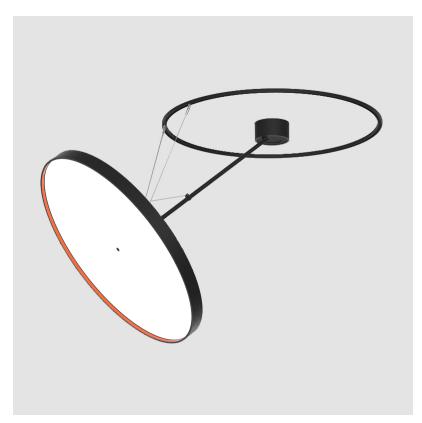

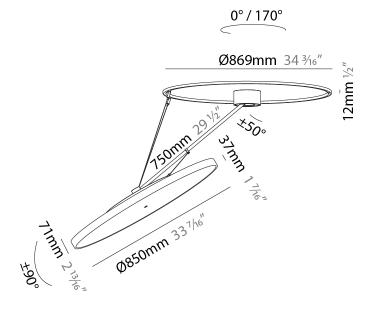






A30881-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

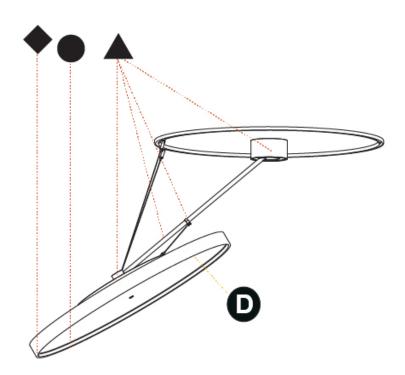





A30882	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in ou	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 $\frac{7}{16}$
Height (mm): 1620
Height (in): 63 <sup>3</sup> / <sub>4</sub>
Light Distribution: Adjustable / Direct
Weight (kg): 11.67
Weight (lbs): 25.67
Diff. Division of Living Division Living and Living

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

#### LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


#### OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

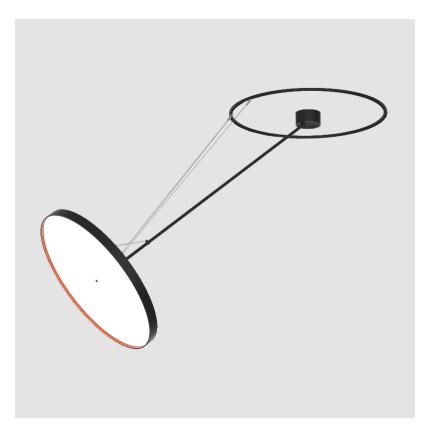

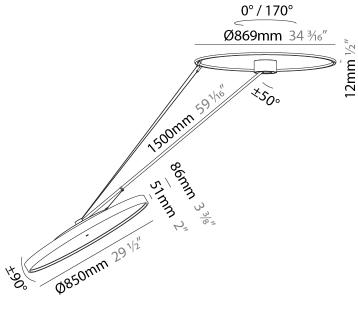





A30882-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

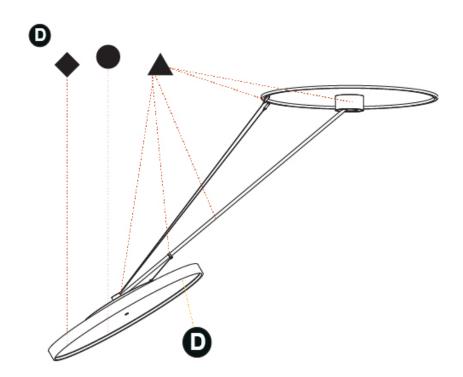





A30883						_
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

1.To build a product code in oui	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL
Shape: Round
Diameter (mm): 1100
Diameter (in): 43 ½
Height (mm): 870
Height (in): 34 1/4
Light Distribution: Adjustable / Direct
Weight (kg): 16.1
Weight (lbs): 35.42

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 169.4
Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

#### LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI Lamp Life (hrs): 50000


amp Life (firs): 50000


#### OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy  $\pm 50^\circ;$  Tilting Head  $\pm 90^\circ$ 

## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

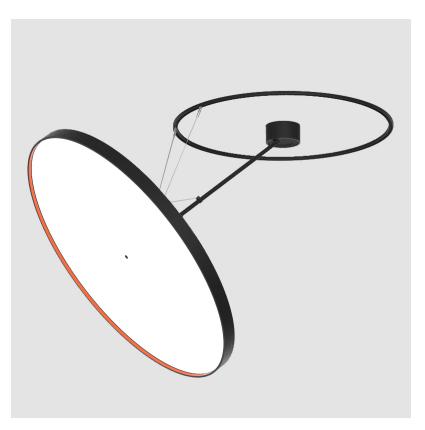

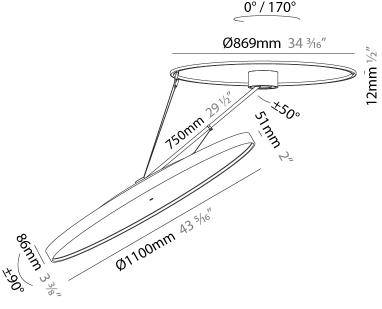





A30883-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

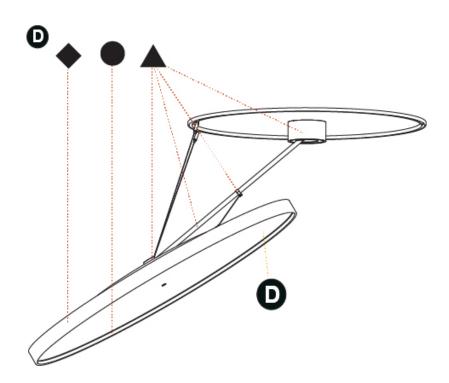





A30	)884·	-	-	-	-	-

A3000T	_	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 <sup>5</sup> / <sub>16</sub>	
Height (mm): 1620	
Height (in): 63 <sup>3</sup> / <sub>4</sub>	
Light Distribution: Adjustable / Direct	
Weight (kg): 15.5	
Weight (lbs): 34.1	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

### **ELECTRICAL**

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4 Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)

and 0-10V Dimming) Driver Included: Yes

Driver Location: Integrated Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


## **RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards



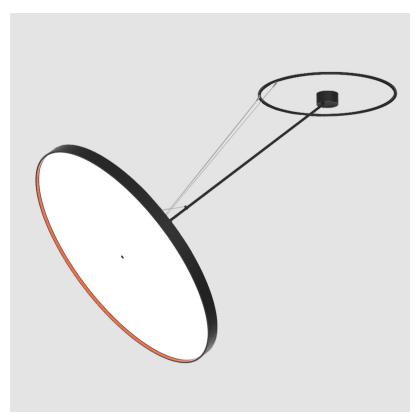

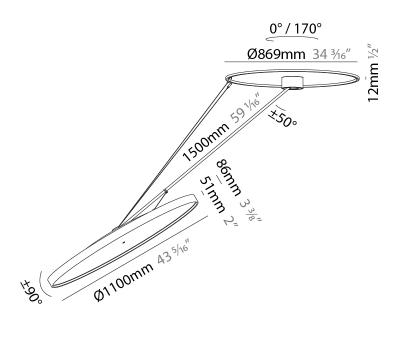





A30884-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

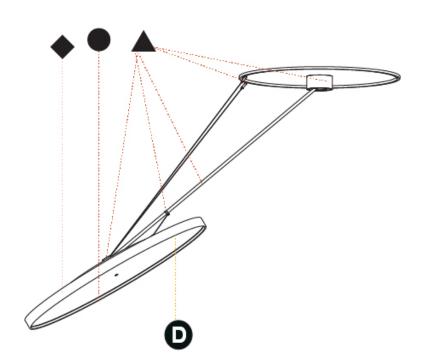





# **SIGN DIVA DANCER**

COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

#### **Fixture Finish**



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. **Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.





# **SIGN DIVA DANCER**

# **LEGEND**

100				-	1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	<b>℃</b>	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
M	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	$\otimes$	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
ZŢ	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□</b> ←,+	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\pm$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)	4	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>●</b> ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
み	separately switchable	$\odot$	indirect diffuser		ETL Certified to UL and CSA Standards
<b>•</b>	sensor	0	direct diffuser	շ <b>(</b> Մ) սո	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	<b>(II</b> )	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	<b>Z</b>	Certified for North American Standards

# **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

# **IK RATING**

above the surface)

IK02	above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm