

A300037-	_
----------	---

1300031	,	_	_	_	_	_
oase number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

1.To build a product code	e in our configurator	select the specify	button on
the base model # produc	t page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 870
Max. Overall Height (in): 34 1/4
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct

Weight (kg): 1.999 Weight (lbs): 4.407

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 776 / 830 / 837 / 854

Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head ±90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

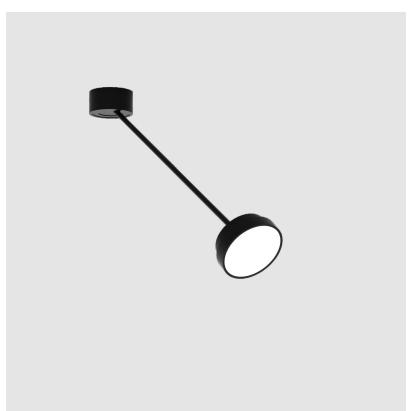

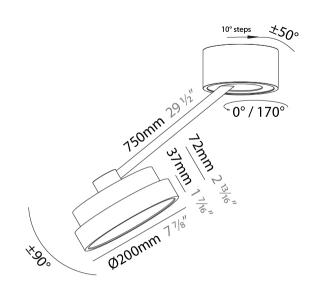




Page 1/42



A300037-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

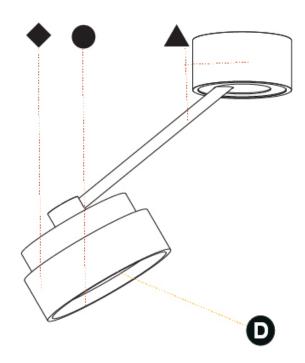





A300039	9-	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	with Ring

TYPE		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code	in our configurator	select the specify	/ button on
the base model # product	page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location. Centing
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 ³ / ₄
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 870
Max. Overall Height (in): 34 ½
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 3.140

Weight (lbs): 6.922 Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG , LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head +90°


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

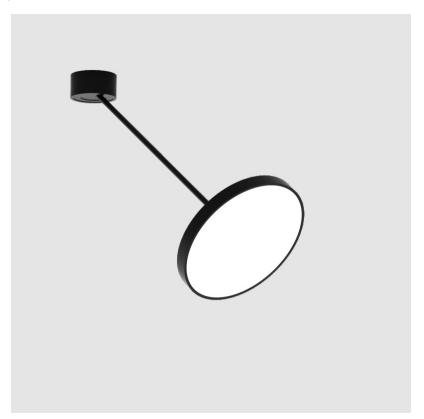

PROJECT

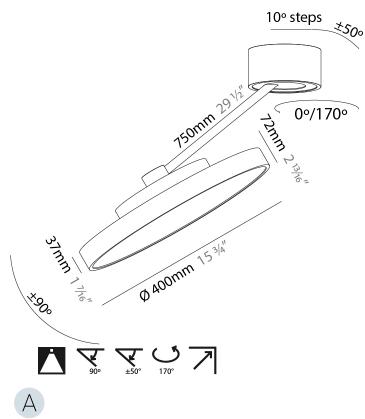






A300039-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

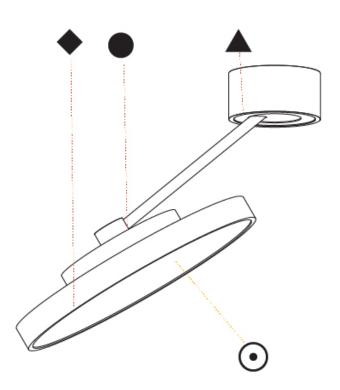





A300041	-	-	-	-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

1.To build a product code in	our configurator	select the specify	/ button on
the base model # product p	age		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 ½
Height (mm): 870
Depth (mm): 72
Height (in): 34 ½
Depth (in): 2 13/16
Extension (mm): 750
Extension (in): 29 ½
Light Distribution: Adjustable / Direct
Weight (kg): 4.660
Weight (lbs): 10.273
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

LOD/PUS/FRO/FUP/KIA/POP/BLS/SPG/MEY/GOH/GUM/CHC/COM/ABZ/JAG/OBR/MOS/ROR Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 49

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 4978 / 5337/ 5384 / 5494

Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

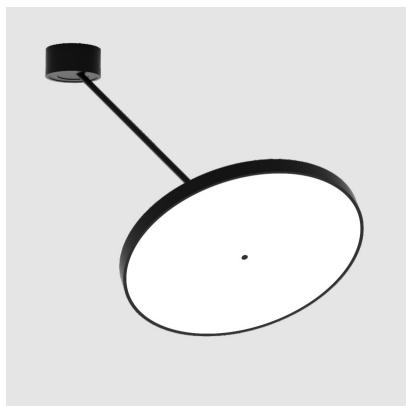

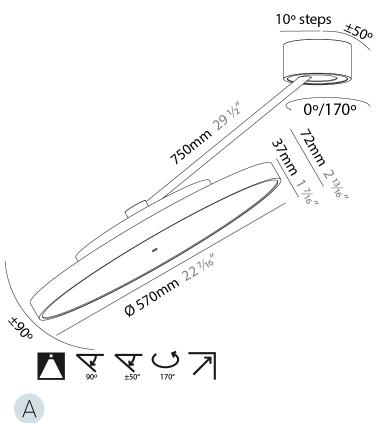


Page 5/42



A300041-

PROJECT	
ГҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

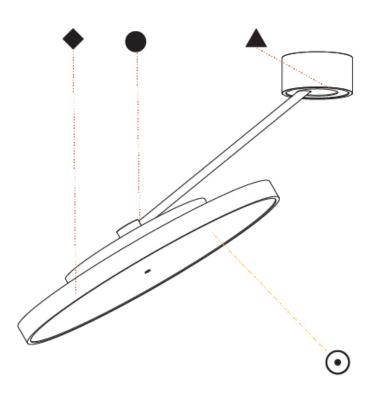





A300043	-			-	-	-
base number	LED	Color	Finishes	Finishes	Finishes	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code	in our configurat	or select the specif	y button on
the base model # product	page		

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

mountaing Typer outpention
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): $7\frac{7}{4}$
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 ³ / ₈
Light Distribution: Adjustable / Direct
Weight (kg): 2.09
Weight (lbs): 4.607
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Industrial

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

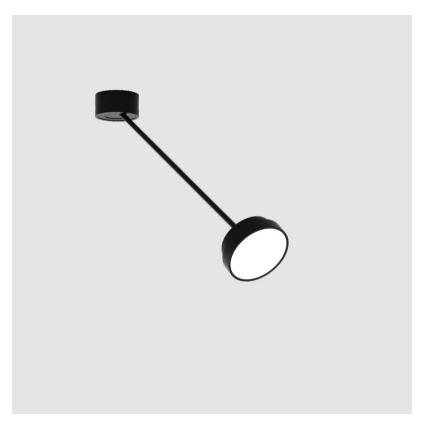


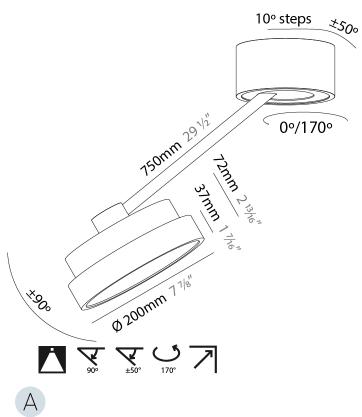



A300043-

PROJECT	
ТҮРЕ	
SPECIFIER	_
QUANTITY	
DATE	

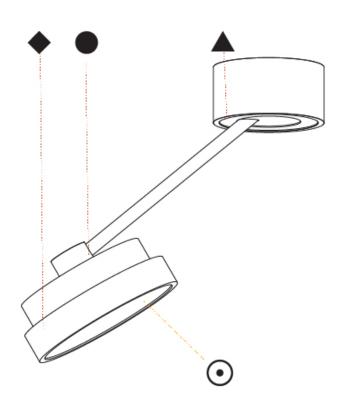





A300045					- ,	_
base number	LED Dimming	Color	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location. Centing
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 ³ / ₄
Height (mm): 870
Depth (mm): 86
Height (in): 34 ¹ / ₄
Depth (in): 3 ³ / ₈
Light Distribution: Adjustable / Direct
Weight (kg): 3.5
Weight (lbs): 7.716
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 17.9

Total Output Wattage (W): 16

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1870 / 2340 / 2372 / 2420

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

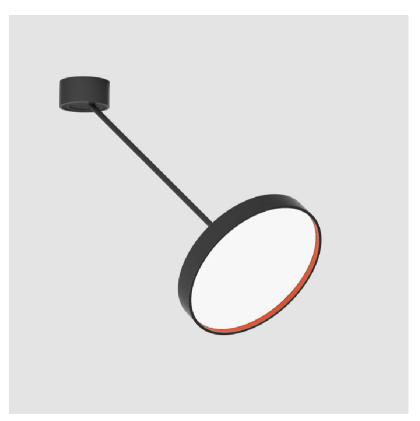

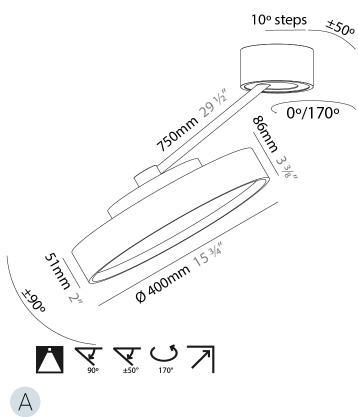






A300045-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE

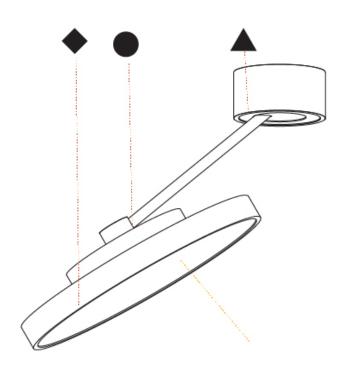





A300047	-		-	-	-	-
base number	LED Dimming	Color	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code in our	configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 1/16
Height (mm): 870
Depth (mm): 86
Height (in): 34 1/4
Depth (in): 3 ³ / ₈
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11.023

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 52.8 Total Output Wattage (W): 47.52

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes Driver Location: Integrated Driver Type: Constant Current - Universal Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6448 / 6580 CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



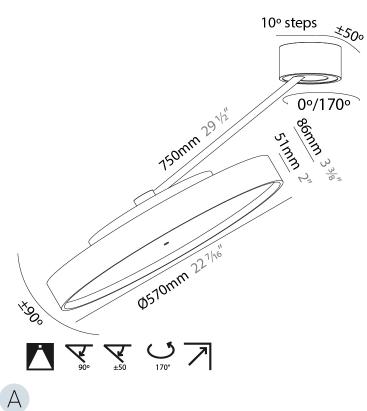






A300047-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

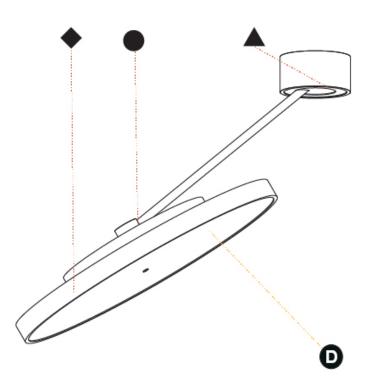





Δ	3	n	Q	7	1	_
\boldsymbol{n}	_	u	u		_	_

ase	number	LED
		Dim

Diffuser with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 200	
Diameter (in): 7 1/8	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 3	
Weight (lbs): 6.6	
Diffusor: DMMA Onal / Micro Driem / Sparkling Socret / Vintage	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 12.1 Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 836 / 895 / 903 / 921 Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



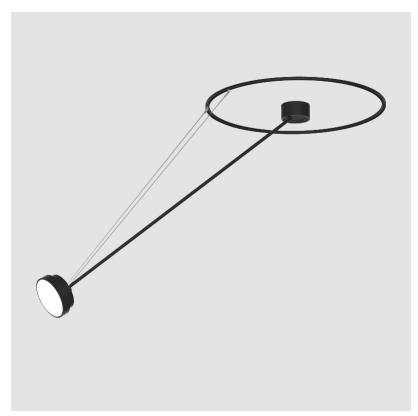

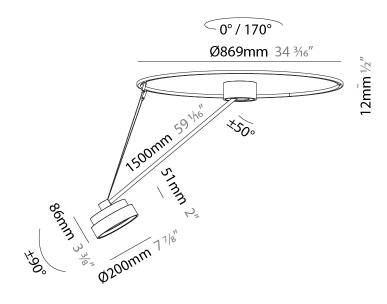






A30871-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

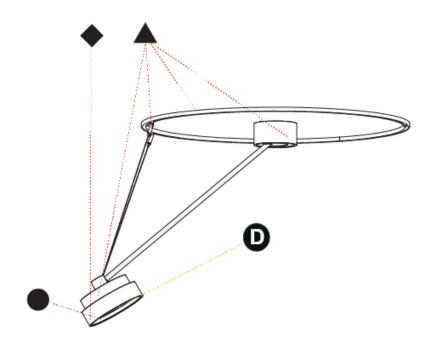





A30872-	
---------	--

base number	LED

Diffuser with Ring

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 ³ / ₄
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 4.5
Weight (lbs): 9.9
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 19.8

Total Output Wattage (W): 18

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277 Constant Current (MA): 500

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

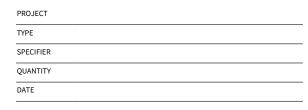

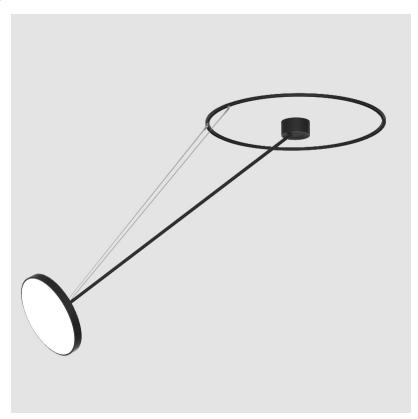

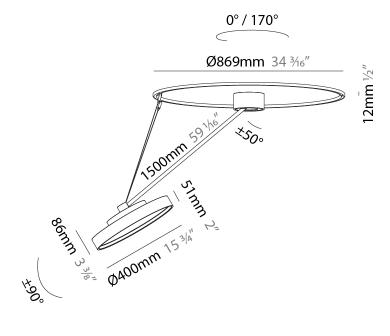






A30872-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

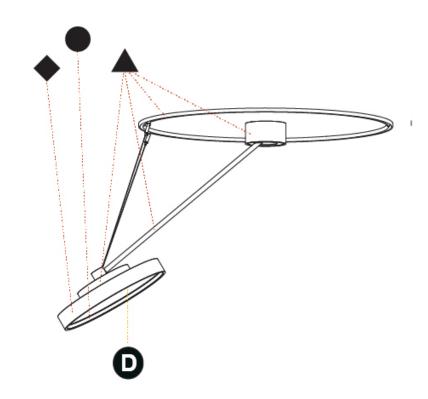





Δ	3	n	Q	7	3	_
м	3	u	o			-

base number	LED	Color	Finishe
	Dimming	Temperature	(Diamo

with Ring

Diffuser

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Centing
Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 570
Diameter (in): 22 $\frac{7}{16}$
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 6.0
Weight (lbs): 13.22
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6120 / 6233 / 6360

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

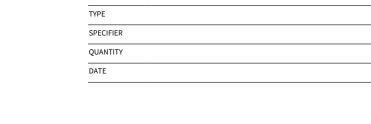

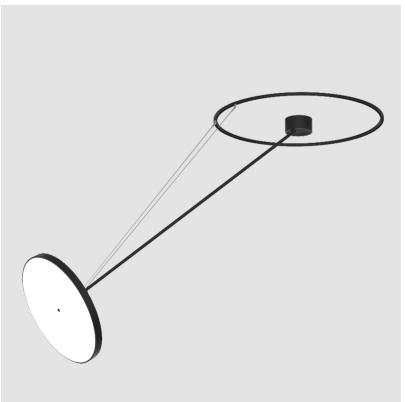

PROJECT

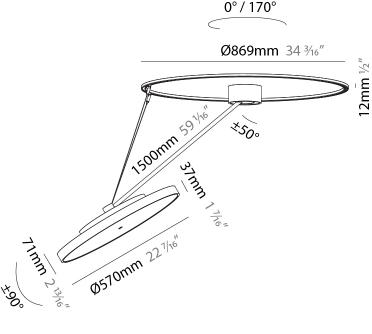






A30873-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

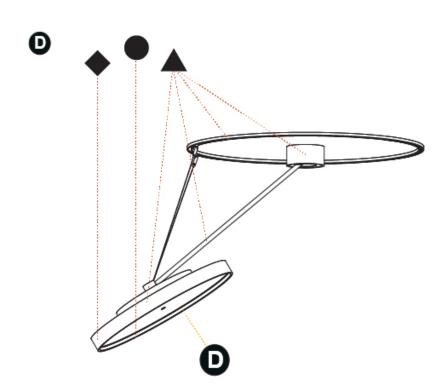





	•	Λ	^	_		
Δ	~	"		•	4-	

base number	LED	Color	Finishes	Finisl
	Dimming	Temperature	(Diamond)	(Tria

Diffuser

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 ⁷ / ₁₆
Height (mm): 870
Height (in): 34 ¹ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 9.8
Weight (lbs): 21.56

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI

Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20



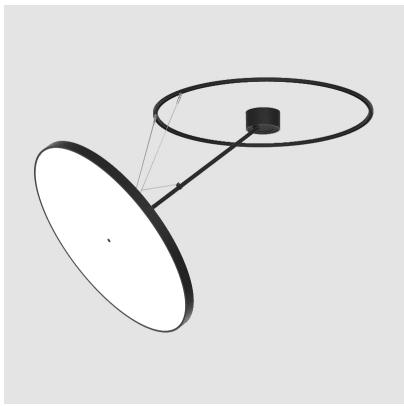

0° / 170°

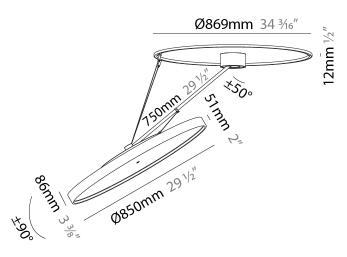






A30874-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

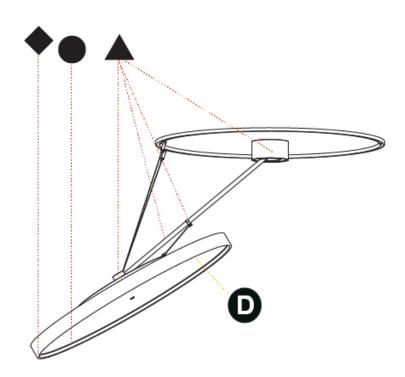





Λ	2	n	Q	7	5 _
н	.5	U	ō	•	J -

base number	LED	Color	Finishes	Finishes	Finishes
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): 33 $\frac{7}{16}$	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 9.67	
Weight (lbs): 21.27	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

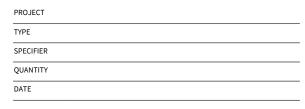

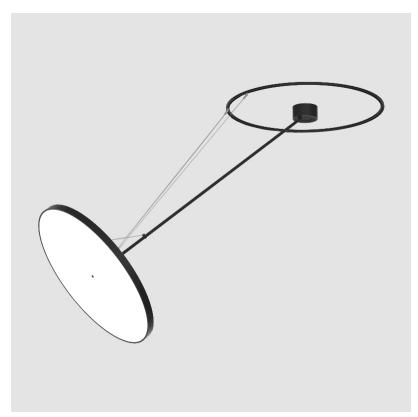

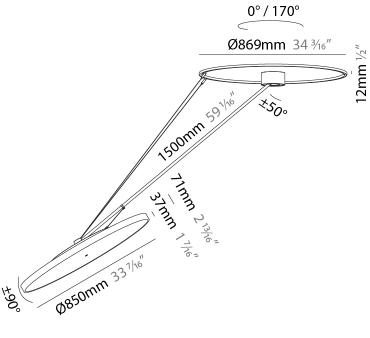





A30875-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

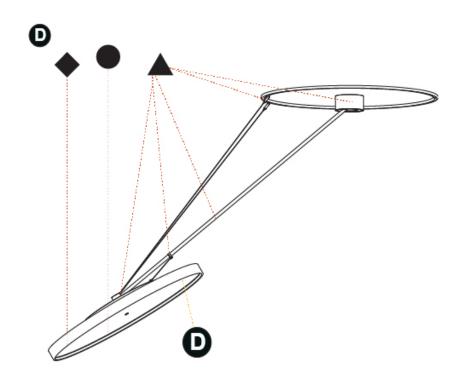





Λ:	R۸	8.	76	:_
m .	31,	0		,-

base number Temperature (Diamond) (Triangle)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer Subseries: Sign Diva Dancer Brand: Prolicht Division: Architectural Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Pendant

PHYSICAL Shape: Round Diameter (mm): 1100 Diameter (in): 43 1/16 Height (mm): 870 Height (in): 34 1/4 Light Distribution: Adjustable / Direct Weight (kg): 15.8 Weight (lbs): 34.76

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI

Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards


IP rating: IP20



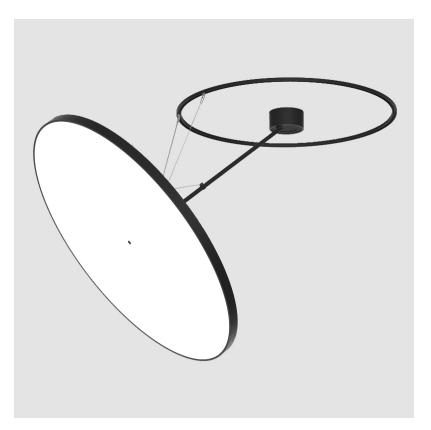

0°/170°

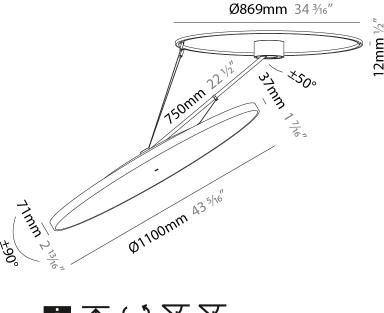






A30876-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

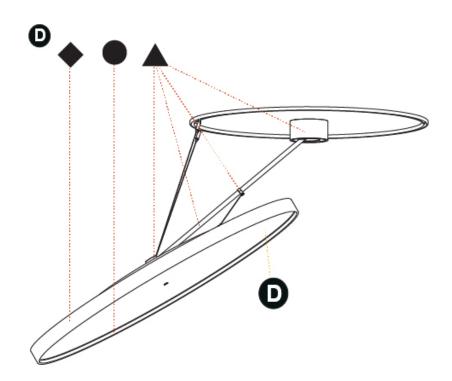





Δ	3	n	R	7	7.	

base number	LED	Color	Finishes	Finishes	Finishes	_
	Dimming	Temperature	(Diamond)	(Triangle)	(Circle)	

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 1100
Diameter (in): 43 ½
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 16
Weight (lbs): 35.2
Diffusor: DMMA - Onal / Micro-Prism / Sparkling Secret / Vintage

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



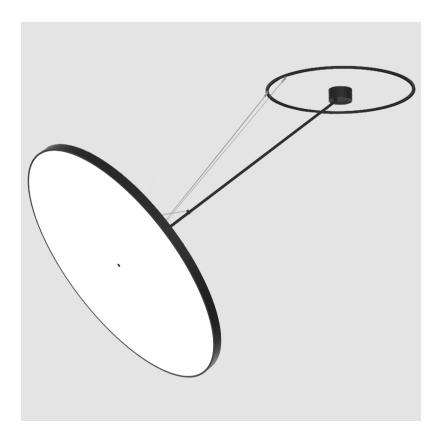

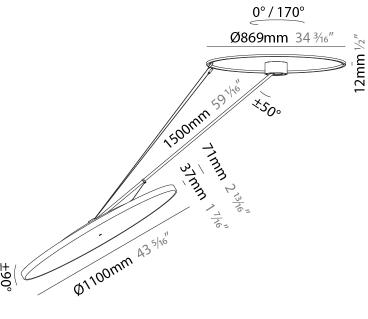






A30877-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

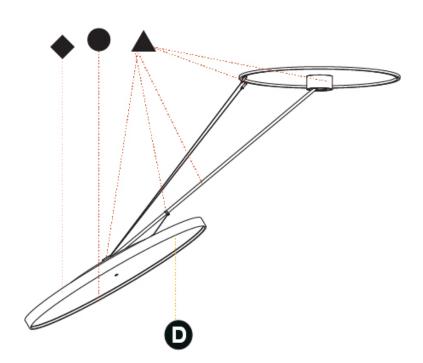





A30878	- .		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

1.To build a product code in ou	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: 1 chadite
PHYSICAL
Shape: Round
Diameter (mm): 200
Diameter (in): 7 1/8
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 3.3
Weight (lbs): 7.26
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /
LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 11

Total Output Wattage (W): 10

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 860 / 1080 / 1088 / 1110

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

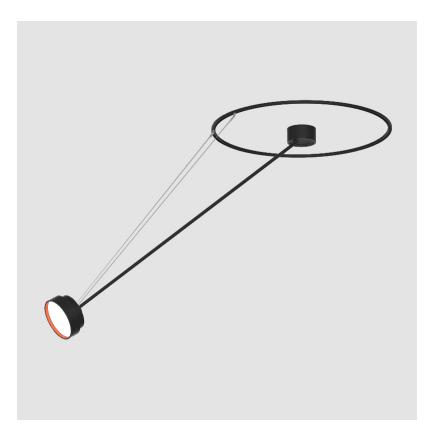

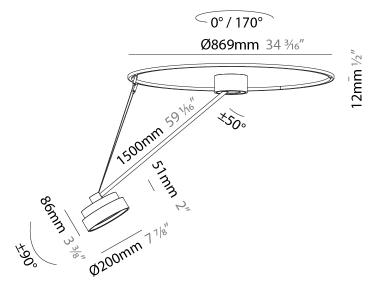






A30878-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

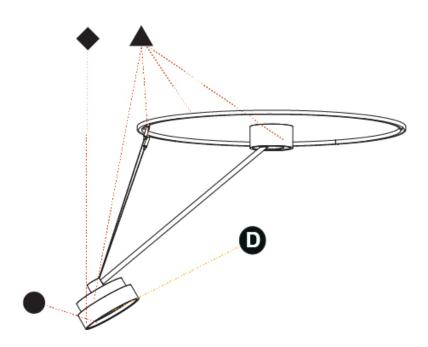





A30879	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code in oui	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Round
Diameter (mm): 400
Diameter (in): 15 ³ / ₄
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 5
Weight (lbs): 11
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17.0

Total Output Wattage (W): 15.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL


Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ$; Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

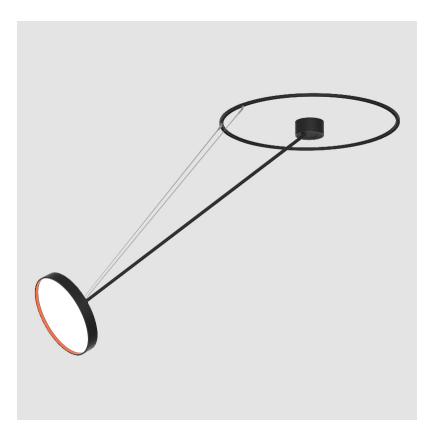

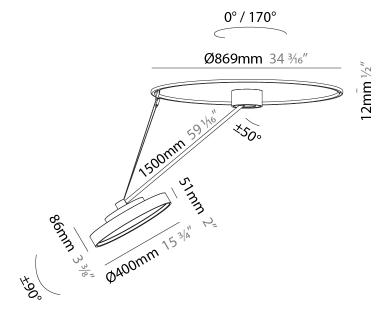




Page 29/42



A30879-

PROJECT
ТУРЕ
SPECIFIER
QUANTITY
DATE

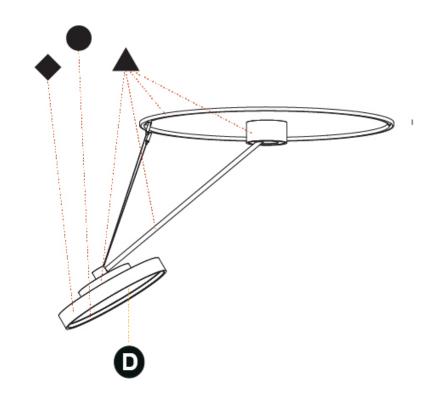





A30880	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

mounting Locations octains	
Subcategory: Pendant	
PHYSICAL	
Shape: Round	
Diameter (mm): 570	
Diameter (in): $22\frac{7}{16}$	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 4.5	
Weight (lbs): 9.9	
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage	

Industrial Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 58.3

Total Output Wattage (W): 46.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 5060 / 6320 / 6580


CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

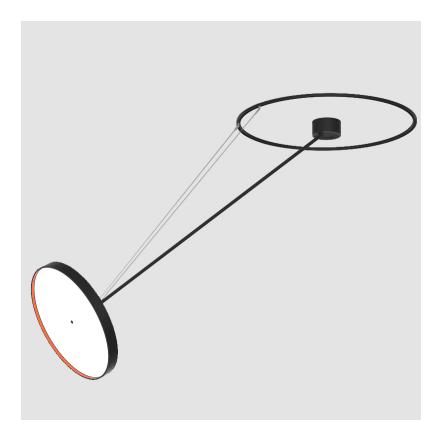

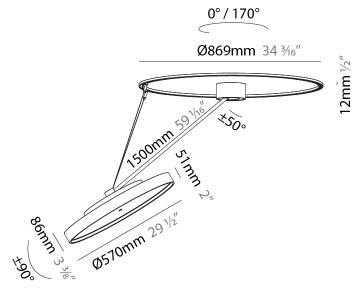






A30880-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

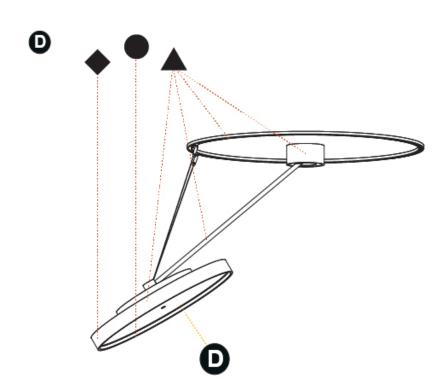





A30881	-		_	_	_	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

T NOSECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: 1 chaunt	
PHYSICAL	
Shape: Round	
Diameter (mm): 850	
Diameter (in): $33\frac{7}{16}$	
Height (mm): 870	
Height (in): 34 1/4	
Light Distribution: Adjustable / Direct	
Weight (kg): 10.5	
Weight (lbs): 23.1	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

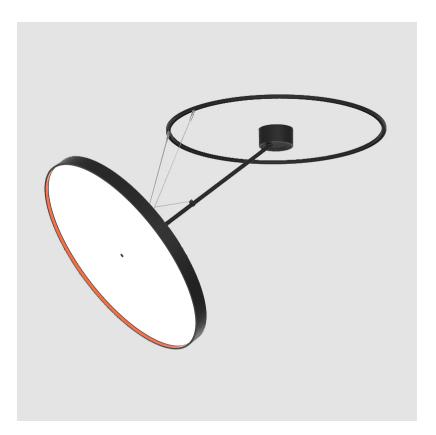

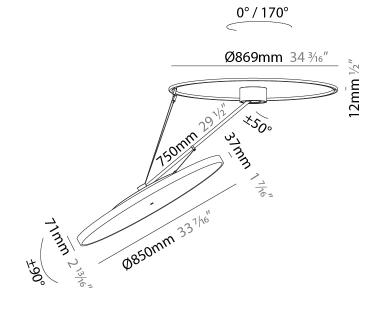






A30881-

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

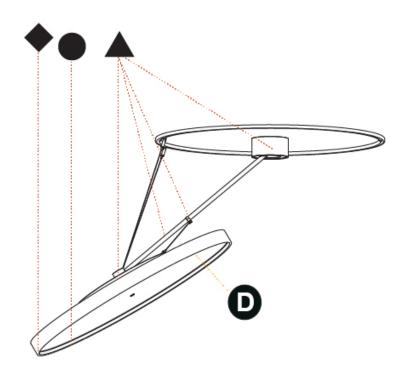





A30882	-		-	_	_	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

1.To build a product code in oui	r configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

PHYSICAL
Shape: Round
Diameter (mm): 850
Diameter (in): 33 1/16
Height (mm): 1620
Height (in): 63 ³ / ₄
Light Distribution: Adjustable / Direct
Weight (kg): 11.67
Weight (lbs): 25.67

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 11160 / 11388 / 11620


CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

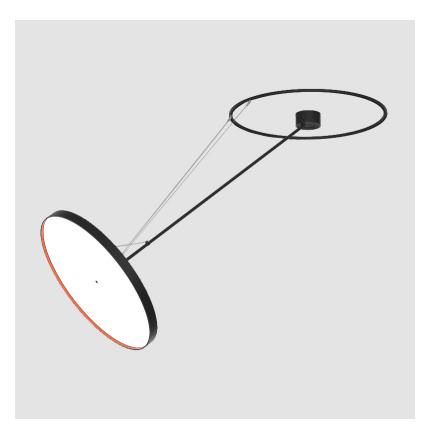

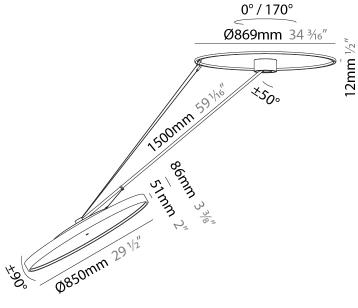





A30882-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

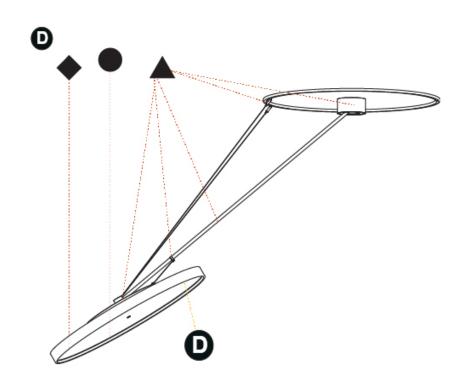





A30883	-		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

1.To build a product code in our	configurator	select the	specify	button	on
the base model # product page					

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer
Subseries: Sign Diva Dancer Korona
Brand: Prolicht
Division: Architectural
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Shape: Round
Diameter (mm): 1100
Diameter (in): 43 ⁵ / ₁₆
Height (mm): 870
Height (in): 34 1/4
Light Distribution: Adjustable / Direct
Weight (kg): 16.1
Weight (lbs): 35.42
Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage

Industrial
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG /

LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Total Output Wattage (W): 135

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 169.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)

and 0-10V Dimming)
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000


OPTICAL

Adjustability: Rotational Canopy 170°; Tilting Canopy $\pm 50^\circ;$ Tilting Head $\pm 90^\circ$

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

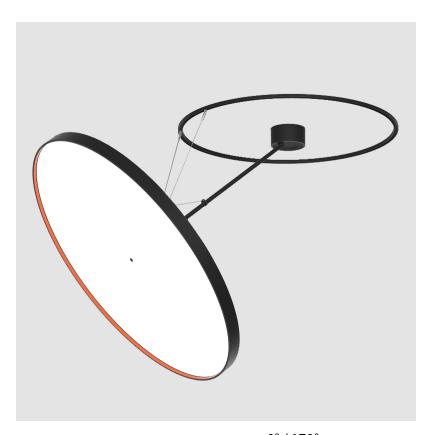

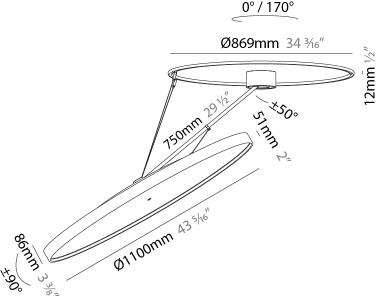






A30883-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

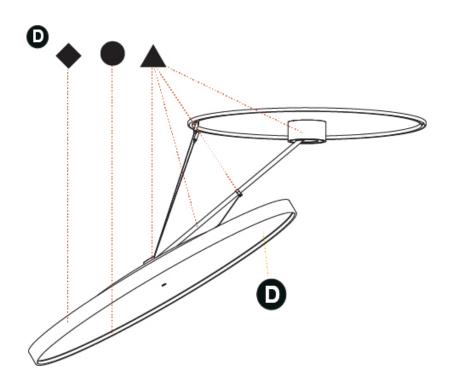





SIC

A30884	.=		-	-	-	-
base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Finishes (Circle)	Diffuser

GN DIVA DANCER KORONA SUSPENSION					QUANTITY				
								DATE	
0884	.=	-	-	-	-	-			
number	LED	Color	Finishes	Finishes	Finishes	Diffuser			

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva Dancer	
Subseries: Sign Diva Dancer Korona	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Peridant	
PHYSICAL	
Shape: Round	
Diameter (mm): 1100	
Diameter (in): 43 ⁵ / ₁₆	
Height (mm): 1620	
Height (in): 63 ³ / ₄	
Light Distribution: Adjustable / Direct	
Weight (kg): 15.5	
Weight (lbs): 34.1	

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4 Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 19520 / 19933 / 20340

CRI: >90 CRI


Lamp Life (hrs): 50000

Adjustability: Rotational Canopy 170°; Tilting Canopy ±50°; Tilting Head


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

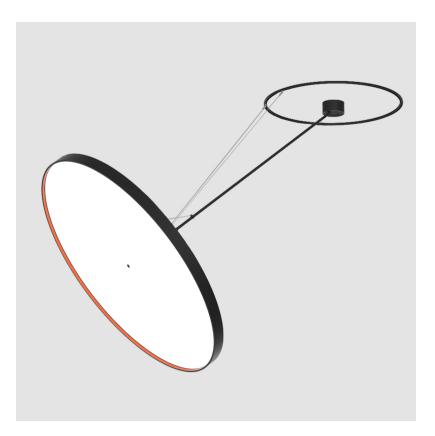

PROJECT TYPE SPECIFIER

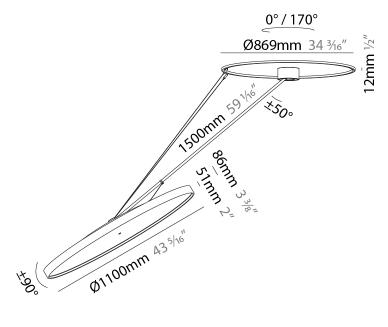



Page 39/42



A30884-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

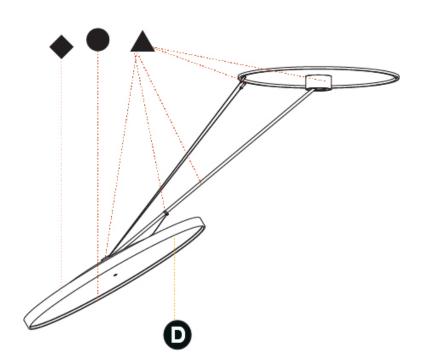





SIGN DIVA DANCER

COLOR FINISH CHART

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical. **Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.





SIGN DIVA DANCER

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

=	loor-mounted				
7 w		¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
× 1	vall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
↑ ce	eiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
→ w	vall-mounted	I	color of suspension cable	THEO	fixture with natural vivid LED (upon request)
or	mni-directional light distribution	←···	length of suspension cable	CRI	color rendering index
di	lirect light distribution	D	reflector degree selection	(K)	color temperature
di	lirect/indirect light distribution	s s	super spot	(<u>X</u>)	lumen (luminous flux)
in	ndirect light distribution	*	lens	₹	efficacy (lumens per watt)
as	symmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
au	ura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
₯ ro	ound wall or ceiling cut-out	\odot	integrated shine ring with diffuser	3	walk on
Sc	quare wall or ceiling cut-out		free individual colors 01-29	②	drive on
ද ි දු th	he supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d•₊+ m	ninimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u></u> re	ecessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
‡ ce	eiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1 ce	eiling thickness selection		luminaire part to be colored (F4)		acoustic material
== (st	limmable DP (phase), DV (0-10V), DD (dali), DS step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
in cc	ncluded or excluded LED driver/transformer/ ontrol gear	•	color of 3-circuit adaptor		protection class II, protection insulation
රි se	eparately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
•் y se	ensor	0	direct diffuser	շ (Մ) տ	UL Certified to UL and CSA Standards
[re	emote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
) av	vailable upon request	9	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm