

SIGN DIVA SUSPENSION

A300001-

|             |                |                      |                       |                        |                       |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser<br>with Ring | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 200

Diameter (in): 7 7/8

Height (mm): 72

Height (in): 2 13/16

Max. Overall Height (mm): 2072

Max. Overall Height (in): 81 9/16

Light Distribution: Direct

Weight (kg): 1.732

Weight (lbs): 3.818

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial with Shine Ring

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2000mm or 6000mm Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 12.1

Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 776 / 970 / 980 / 1000

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

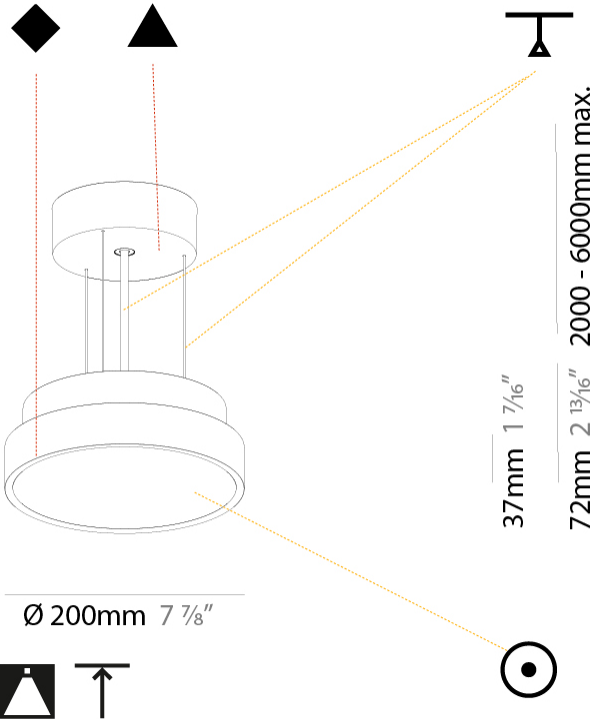


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

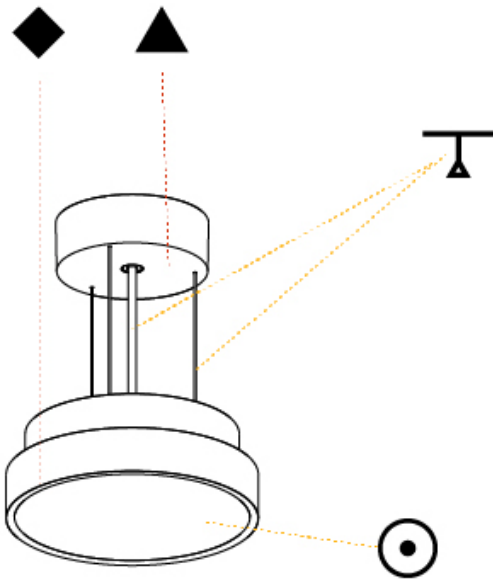



|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

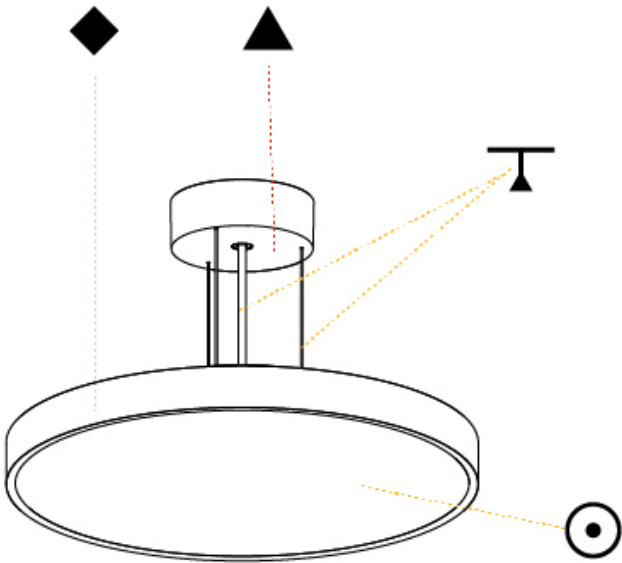

SIGN DIVA SUSPENSION

A300003-

|             |                |                      |                       |                        |                       |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser<br>with Ring | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 400

Diameter (in): 15 3/4

Height (mm): 72

Height (in): 2 13/16

Max. Overall Height (mm): 2072

Max. Overall Height (in): 81 9/16

Light Distribution: Direct / Indirect

Weight (kg): 3.398

Weight (lbs): 7.49

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial with Shine Ring

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2000mm or 6000mm Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 34.1

Total Output Wattage (W): 16 / 12

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2676 / 2651 / 2681 / 2736

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

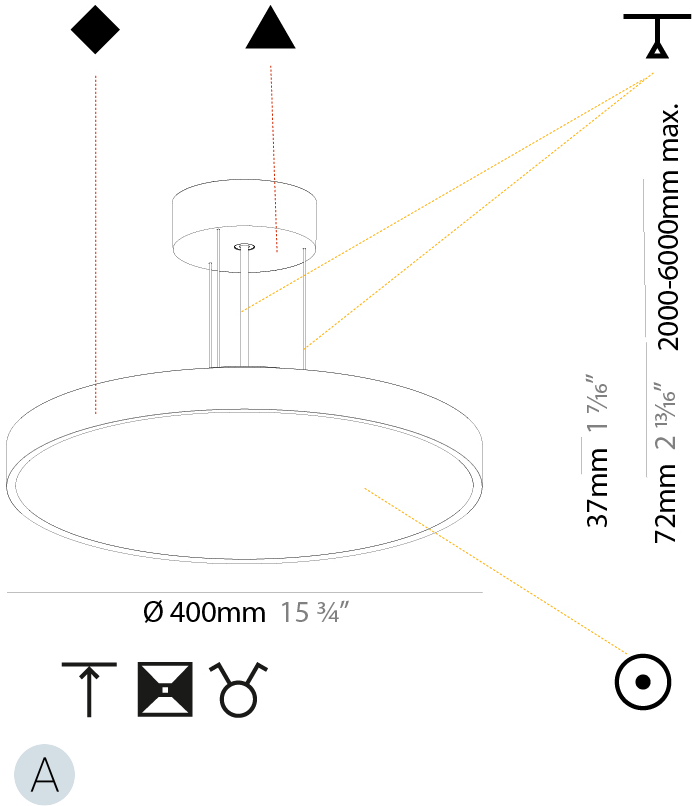

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

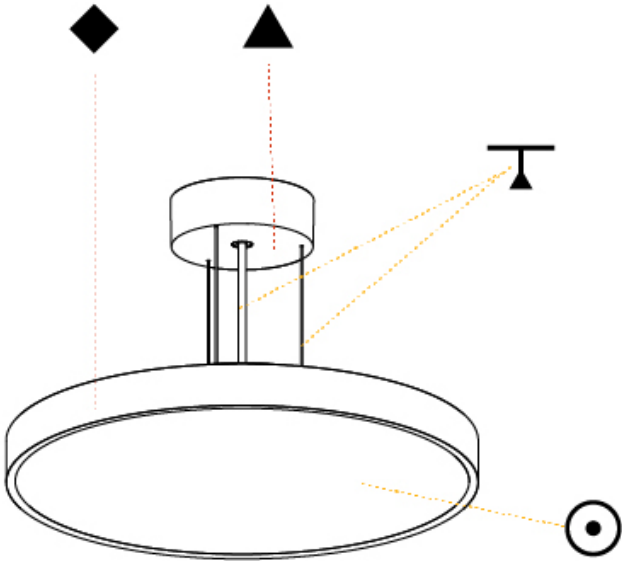

SIGN DIVA SUSPENSION

A300004-

|             |                |                      |                       |                        |                       |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser<br>with Ring | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Sign Diva          |
| Subseries: Sign Diva       |
| Brand: Prolicht            |
| Division: Architectural    |
| Mounting Type: Suspension  |
| Mounting Location: Ceiling |
| Subcategory: Pendant       |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 570                                                                                                                                                                    |
| Diameter (in): 22 7/16                                                                                                                                                                |
| Height (mm): 72                                                                                                                                                                       |
| Height (in): 2 13/16                                                                                                                                                                  |
| Max. Overall Height (mm): 6072                                                                                                                                                        |
| Max. Overall Height (in): 239 1/16                                                                                                                                                    |
| Light Distribution: Direct                                                                                                                                                            |
| Weight (kg): 7.802                                                                                                                                                                    |
| Weight (lbs): 17.2                                                                                                                                                                    |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial with Shine Ring                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2000mm or 6000mm Transparent Cable                                                                                                                                     |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 58.3                                                           |
| Total Output Wattage (W): 53                                                      |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 350                                                        |

LED


|                                                      |
|------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000    |
| Max. Delivered Lumen (lm): 5060 / 6120 / 6233 / 6360 |
| CRI: >90 CRI                                         |
| Lamp Life (hrs): 50000                               |

OPTICAL


RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

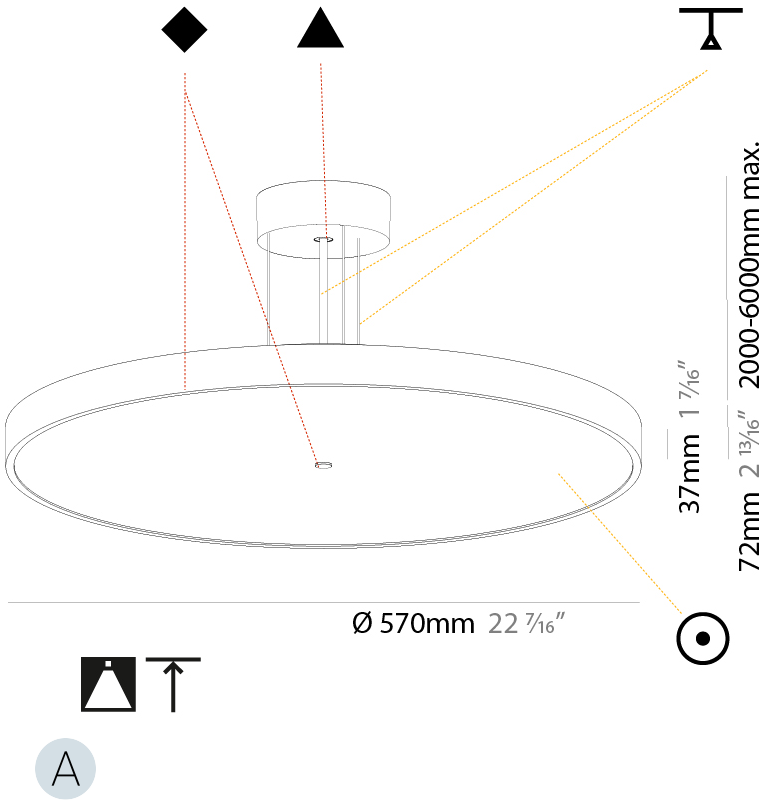

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

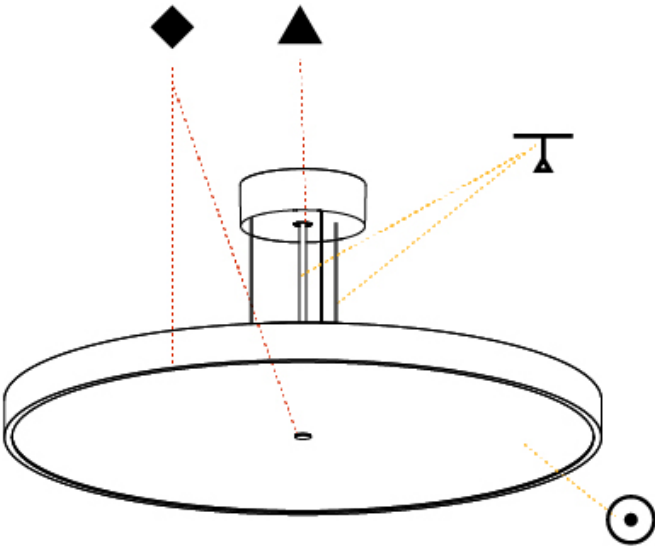

SIGN DIVA SUSPENSION

A300005-

|             |                |                      |                       |                        |                       |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser<br>with Ring | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|-----------------------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Sign Diva          |
| Subseries: Sign Diva       |
| Brand: Prolicht            |
| Division: Architectural    |
| Mounting Type: Suspension  |
| Mounting Location: Ceiling |
| Subcategory: Pendant       |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 570                                                                                                                                                                    |
| Diameter (in): 22 7/16                                                                                                                                                                |
| Height (mm): 72                                                                                                                                                                       |
| Height (in): 2 13/16                                                                                                                                                                  |
| Max. Overall Height (mm): 6072                                                                                                                                                        |
| Max. Overall Height (in): 239 1/16                                                                                                                                                    |
| Light Distribution: Direct / Indirect                                                                                                                                                 |
| Weight (kg): 8.548                                                                                                                                                                    |
| Weight (lbs): 18.85                                                                                                                                                                   |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial with Shine Ring                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2000mm or 6000mm Transparent Cable                                                                                                                                     |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 80.3                                                           |
| Total Output Wattage (W): 53 / 18                                                 |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 350                                                        |

LED


|                                                      |
|------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000    |
| Max. Delivered Lumen (lm): 6110 / 7650 / 7801 / 7960 |
| CRI: >90 CRI                                         |
| Lamp Life (hrs): 50000                               |

OPTICAL


RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

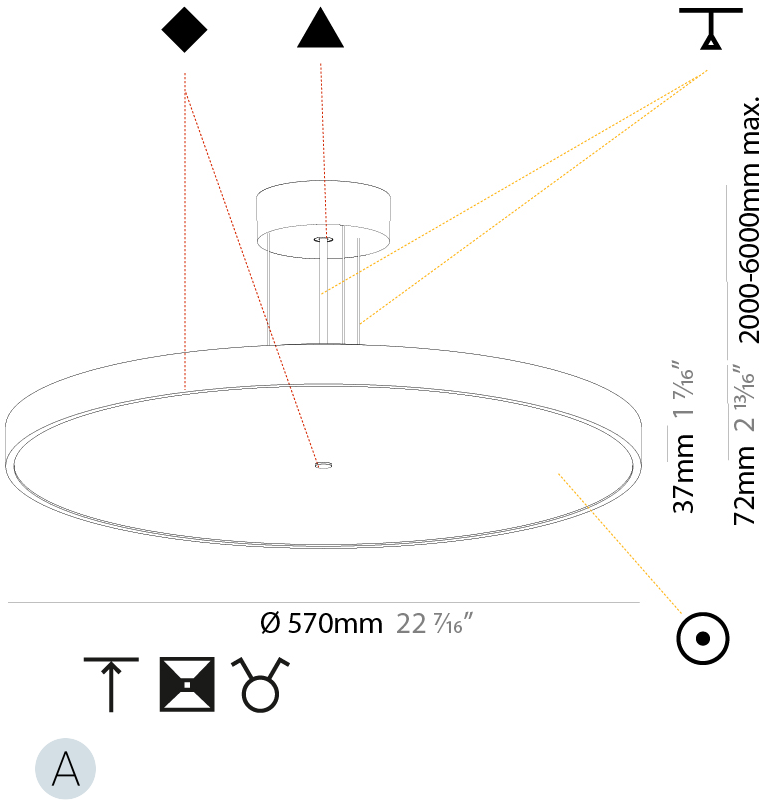

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

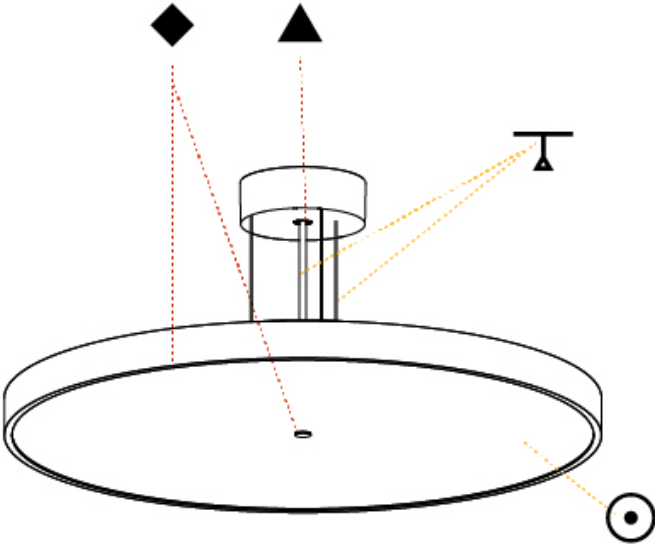

SIGN DIVA SUSPENSION

A300006-

|             |                |                      |                       |                        |          |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Sign Diva          |
| Subseries: Sign Diva       |
| Brand: Prolicht            |
| Division: Architectural    |
| Mounting Type: Suspension  |
| Mounting Location: Ceiling |
| Subcategory: Pendant       |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 850                                                                                                                                                                    |
| Diameter (in): 33 7/16                                                                                                                                                                |
| Height (mm): 72                                                                                                                                                                       |
| Height (in): 2 13/16                                                                                                                                                                  |
| Max. Overall Height (mm): 6072                                                                                                                                                        |
| Max. Overall Height (in): 239 1/16                                                                                                                                                    |
| Light Distribution: Direct                                                                                                                                                            |
| Weight (kg): 14.005                                                                                                                                                                   |
| Weight (lbs): 30.88                                                                                                                                                                   |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial                                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2000mm or 6000mm Transparent Cable                                                                                                                                     |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 96.8                                                           |
| Total Output Wattage (W): 76.8                                                    |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 600                                                        |

LED


|                                                        |
|--------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000      |
| Max. Delivered Lumen (lm): 7960 / 9950 / 10153 / 10360 |
| CRI: >90 CRI                                           |
| Lamp Life (hrs): 50000                                 |

OPTICAL


RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

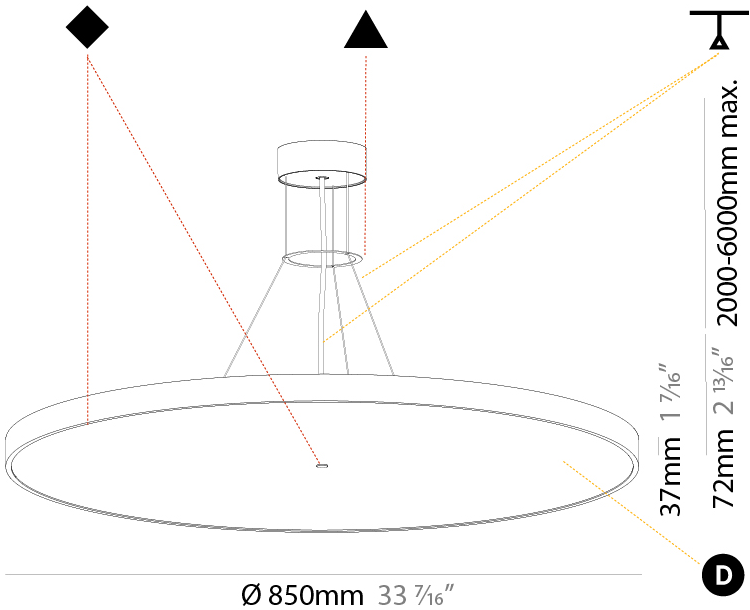


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

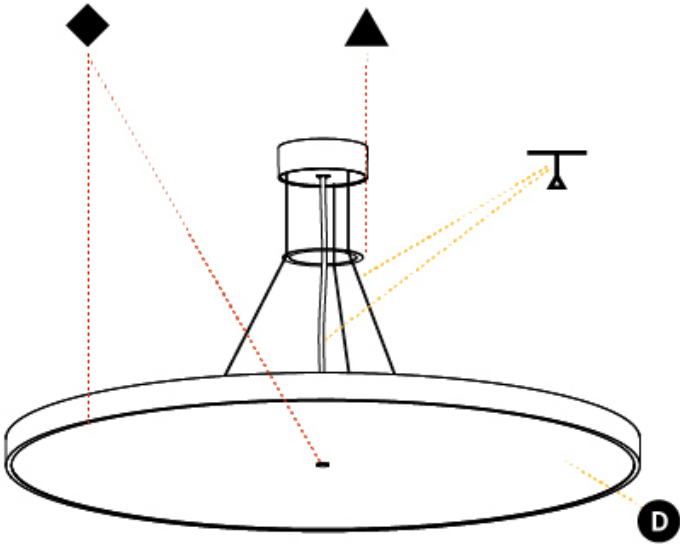



|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

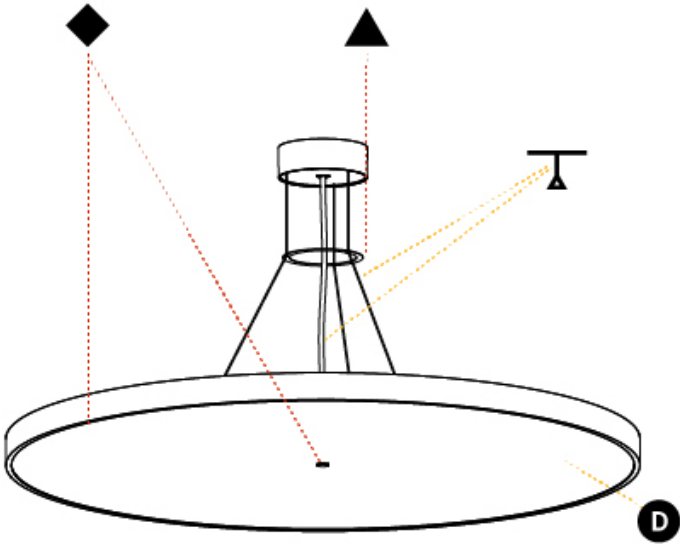

SIGN DIVA SUSPENSION

A300008-

|             |                |                      |                       |                        |          |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 1100

Diameter (in): 43 5/16

Height (mm): 86

Height (in): 3 3/8

Light Distribution: Direct

Weight (kg): 19.475

Weight (lbs): 42.94

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4

Total Output Wattage (W): 134

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 16140 / 19520 / 19933 / 20340

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

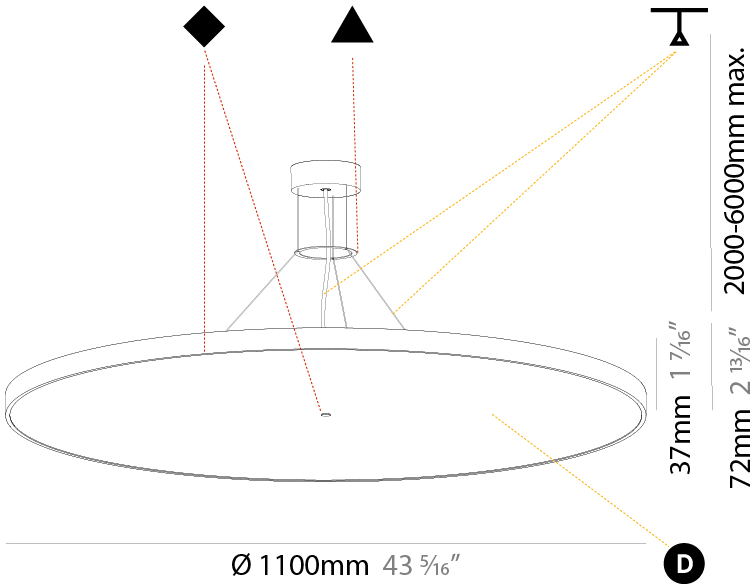

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

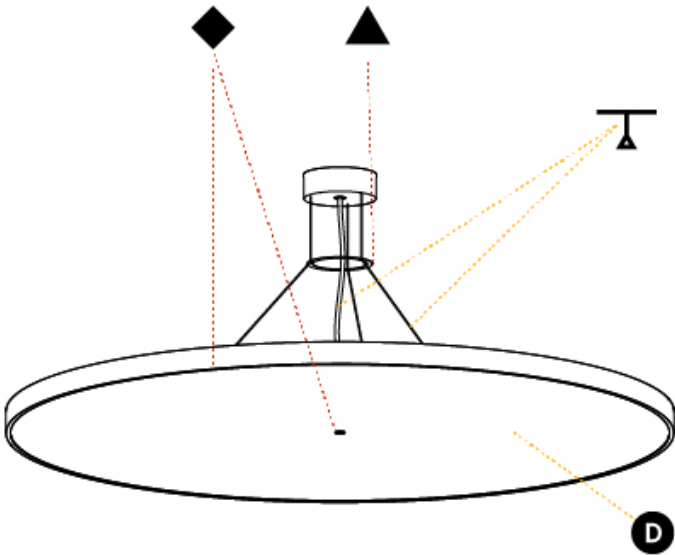

SIGN DIVA SUSPENSION

A300009-

|             |                |                      |                       |                        |          |                 |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finishes<br>(Diamond) | Finishes<br>(Triangle) | Diffuser | Cable<br>Length |
|-------------|----------------|----------------------|-----------------------|------------------------|----------|-----------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 1100

Diameter (in): 43 5/16

Height (mm): 72

Height (in): 2 13/16

Light Distribution: Direct / Indirect

Weight (kg): 20.78

Weight (lbs): 45.81

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 169.4 / 28.6

Total Output Wattage (W): 135 / 24

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600 / 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 20030 / 20610 / 21050 / 21480

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

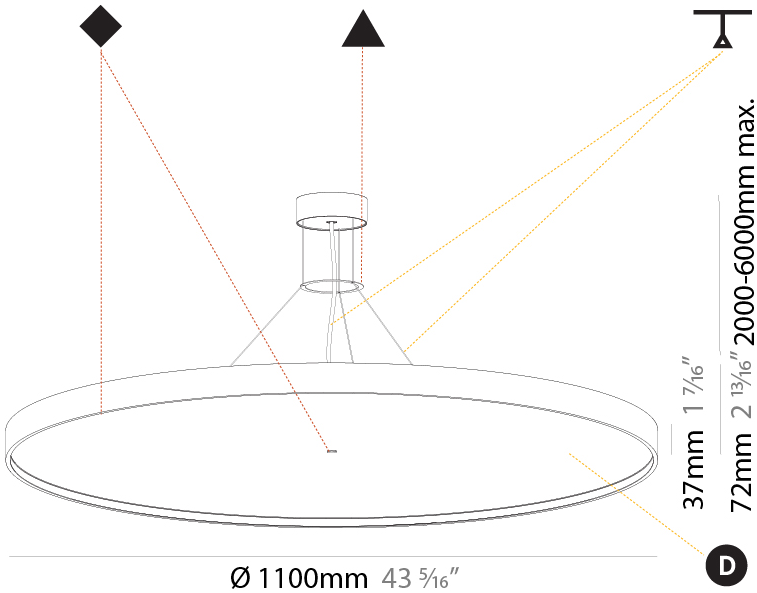

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

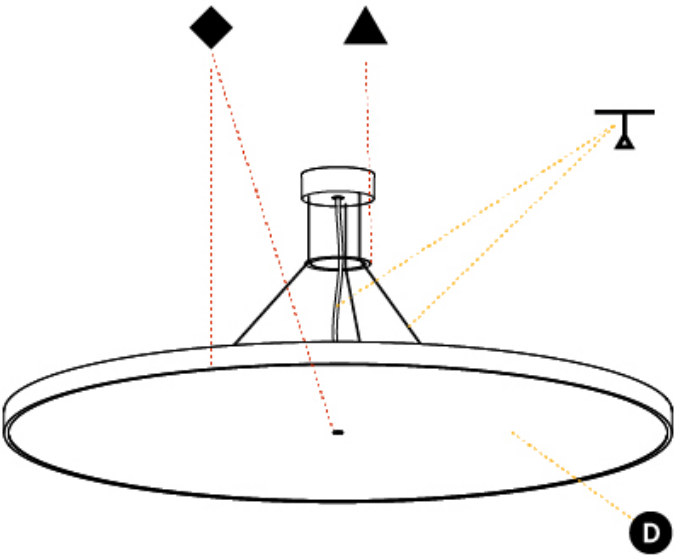

SIGN DIVA KORONA SUSPENSION

A300010-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 200

Diameter (in): 7 7/8

Height (mm): 86

Height (in): 3 3/8

Light Distribution: Direct

Weight (kg): 1.873

Weight (lbs): 4.129

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 11

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 836 / 895 / 903 / 921

Nominal Lumen (lm): 1280 / 1370 / 1382 / 1410

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

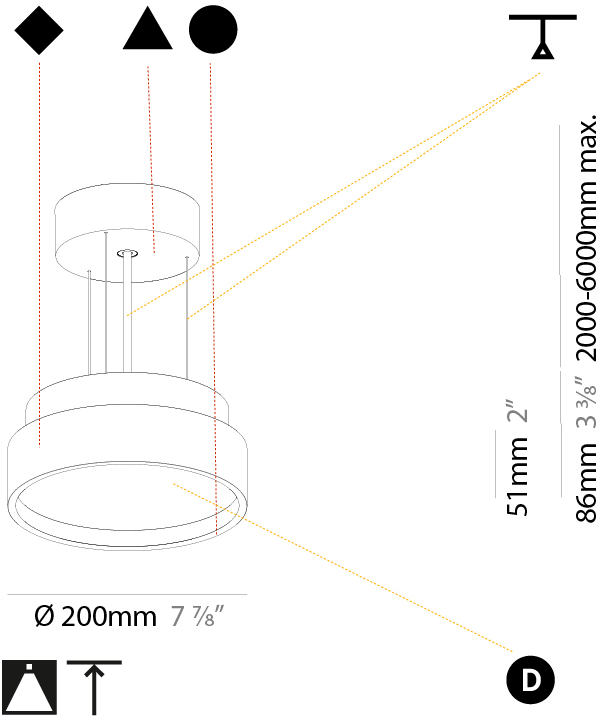

SIGN DIVA KORONA SUSPENSION

A300010-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

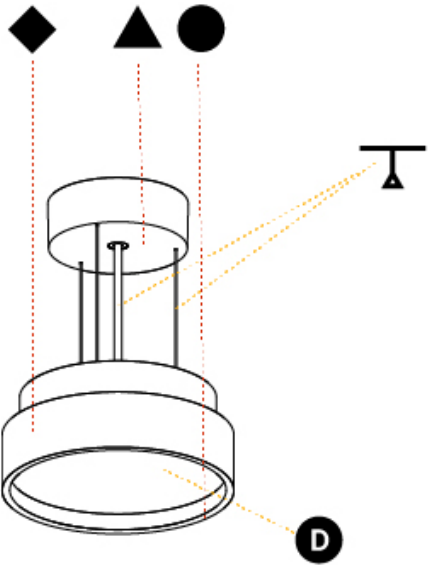

SIGN DIVA KORONA SUSPENSION

A300011-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 400

Diameter (in): 15 3/4

Height (mm): 86

Height (in): 3 3/8

Light Distribution: Direct

Weight (kg): 3.302

Weight (lbs): 7.28

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 17

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1807 / 1943 / 1951 / 1991

Nominal Lumen (lm): 2250 / 2420 / 2430 / 2480

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

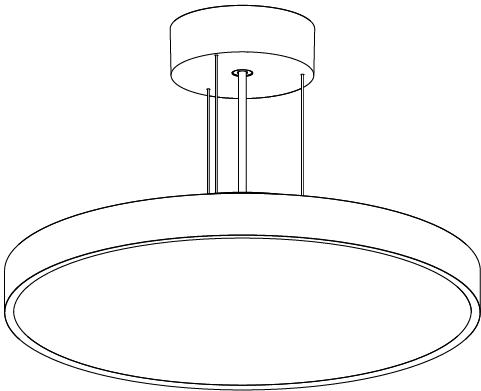

Ø 400mm 15 3/4"




51mm 2"

86mm 3 3/8"

2000-6000mm max.

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

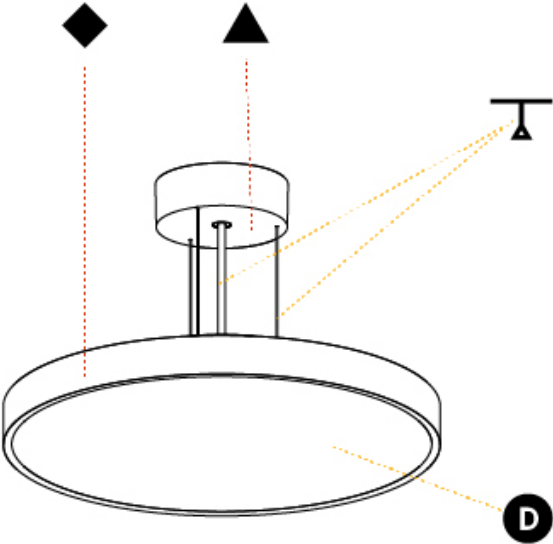

SIGN DIVA KORONA SUSPENSION

A300012-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                             |
|-----------------------------|
| Series: Sign Diva           |
| Subseries: Sign Diva Korona |
| Brand: Prolicht             |
| Division: Architectural     |
| Mounting Type: Suspension   |
| Mounting Location: Ceiling  |
| Subcategory: Pendant        |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 400                                                                                                                                                                    |
| Diameter (in): 15 3/4                                                                                                                                                                 |
| Height (mm): 86                                                                                                                                                                       |
| Height (in): 3 3/8                                                                                                                                                                    |
| Light Distribution: Direct / Indirect                                                                                                                                                 |
| Weight (kg): 3.728                                                                                                                                                                    |
| Weight (lbs): 8.22                                                                                                                                                                    |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial                                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable                                                                                                                  |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 31.1                                                           |
| Total Output Wattage (W): 18 / 13                                                 |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 500 / 350                                                  |

LED


|                                                      |
|------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000    |
| Max. Delivered Lumen (lm): 3049 / 2651 / 2681 / 2736 |
| Nominal Lumen (lm): 4182 / 4142 / 4189 / 4275        |
| CRI: >90 CRI                                         |
| Lamp Life (hrs): 50000                               |

OPTICAL

RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

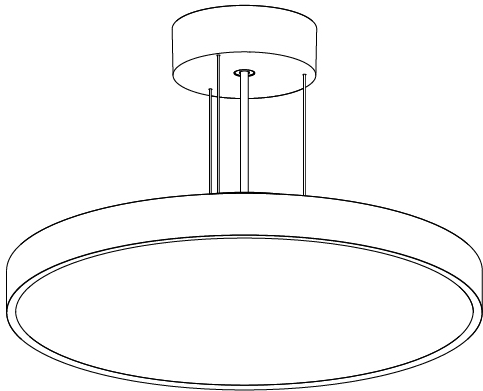

51mm 2"  
86mm 3 3/8"  
2000-6000mm max.


Ø 400mm 15 3/4"



SIGN DIVA KORONA SUSPENSION

A300012-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

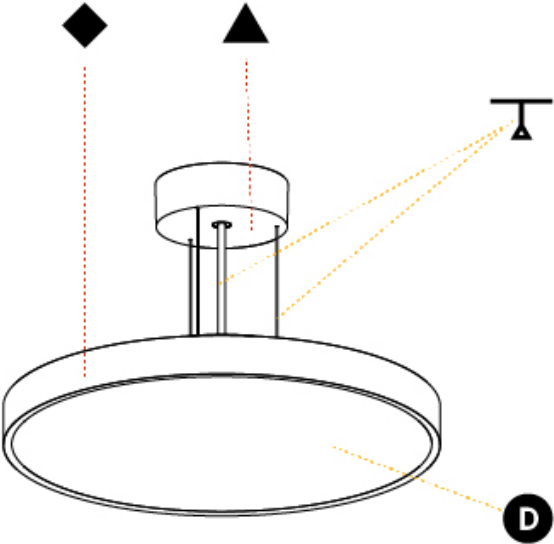

SIGN DIVA KORONA SUSPENSION

A300013-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                             |
|-----------------------------|
| Series: Sign Diva           |
| Subseries: Sign Diva Korona |
| Brand: Prolicht             |
| Division: Architectural     |
| Mounting Type: Suspension   |
| Mounting Location: Ceiling  |
| Subcategory: Pendant        |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 570                                                                                                                                                                    |
| Diameter (in): 22 7/16                                                                                                                                                                |
| Height (mm): 86                                                                                                                                                                       |
| Height (in): 3 3/8                                                                                                                                                                    |
| Light Distribution: Direct                                                                                                                                                            |
| Weight (kg): 8.067                                                                                                                                                                    |
| Weight (lbs): 17.78                                                                                                                                                                   |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial                                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable                                                                                                                  |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 49                                                             |
| Total Output Wattage (W): 46.9                                                    |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 350                                                        |

LED


|                                                      |
|------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000    |
| Max. Delivered Lumen (lm): 4978 / 5337 / 5384 / 5494 |
| Nominal Lumen (lm): 6199 / 6646 / 6705 / 6842        |
| CRI: >90 CRI                                         |
| Lamp Life (hrs): 50000                               |

OPTICAL


RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

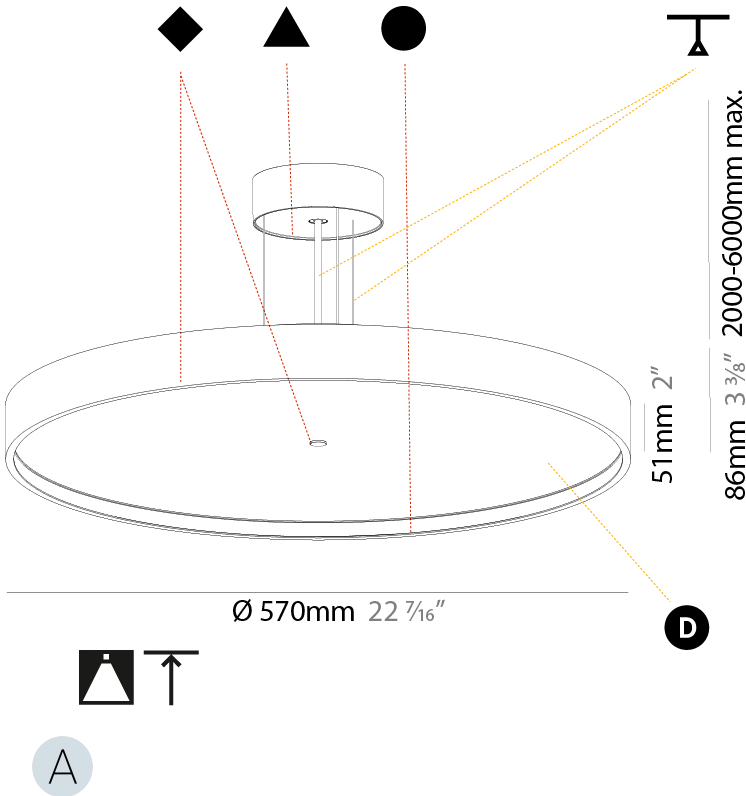

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

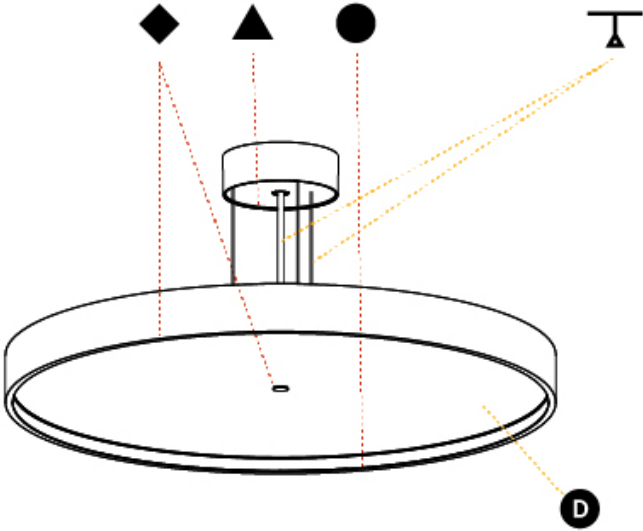

SIGN DIVA KORONA SUSPENSION

A300014-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 570

Diameter (in): 22 7/16

Height (mm): 86

Height (in): 3 3/8

Light Distribution: Direct / Indirect

Weight (kg): 8.812

Weight (lbs): 19.43

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2,000mm/78 3/4" or 6,000mm/236 1/4" Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 67

Total Output Wattage (W): 60.9

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 6632 / 6728 / 6812 / 6951

Nominal Lumen (lm): 9097 / 9229 / 9344 / 9535

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

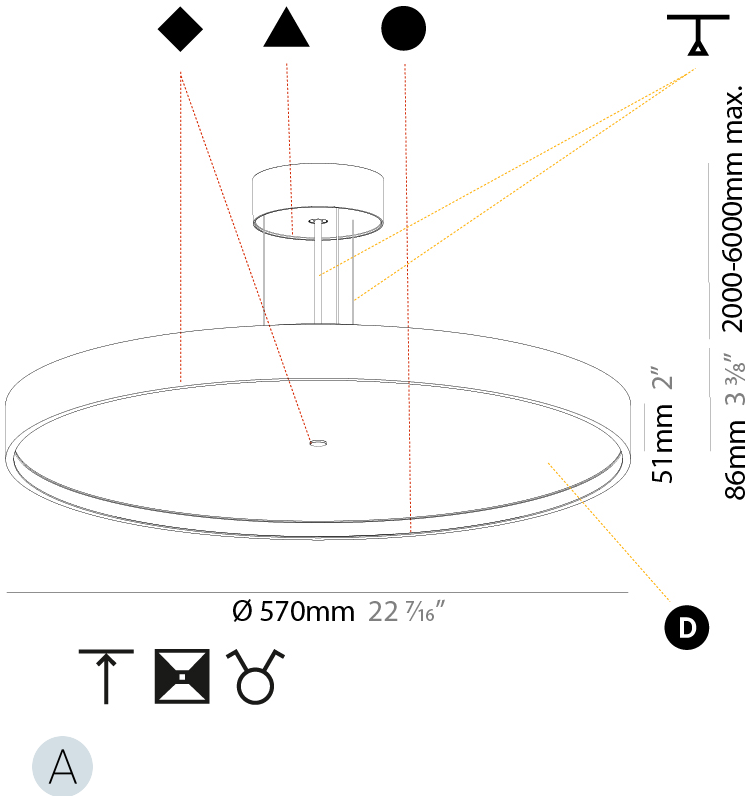

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

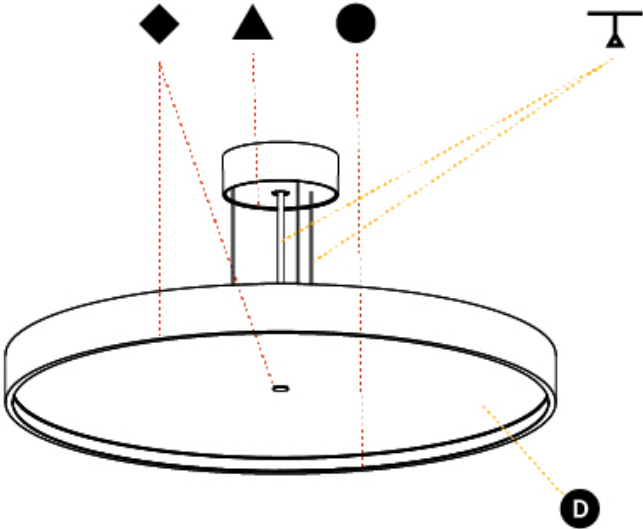

SIGN DIVA KORONA SUSPENSION

A300015-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 850

Diameter (in): 33 7/16

Height (mm): 86

Height (in): 3 3/8

Max. Overall Height (mm): 2086

Max. Overall Height (in): 82 1/8

Light Distribution: Direct

Weight (kg): 14.399

Weight (lbs): 31.74

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2000mm or 6000mm Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 96.8

Total Output Wattage (W): 76.8

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 9094 / 9806 / 11385 / 11617

Nominal Lumen (lm): 10753 / 11596 / 13461 / 13736

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

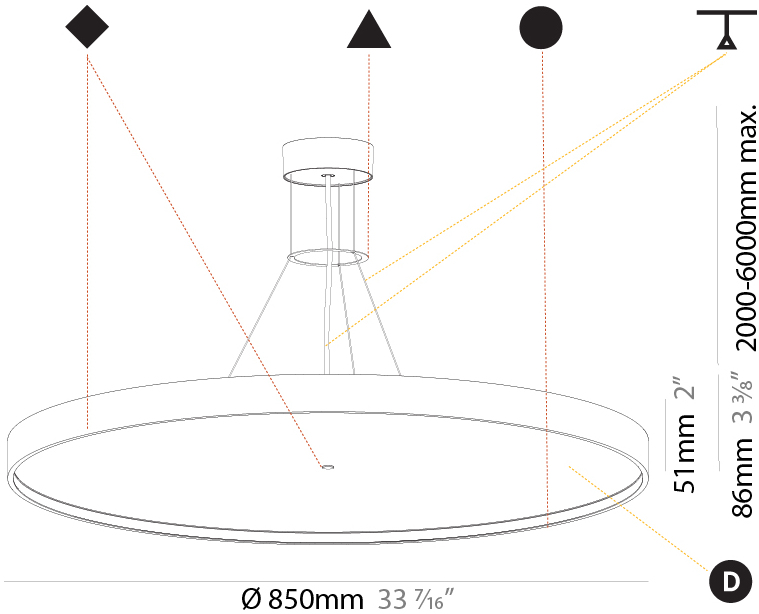

SIGN DIVA KORONA SUSPENSION

A300015-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

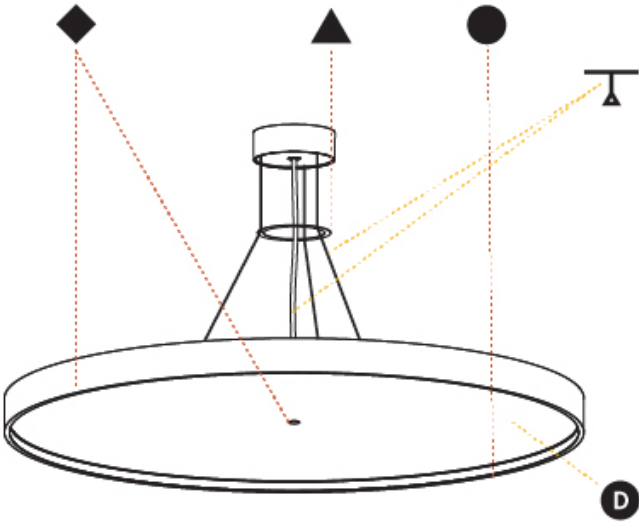

A

SIGN DIVA KORONA SUSPENSION

A300016-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 850

Diameter (in): 33 7/16

Height (mm): 86

Height (in): 3 3/8

Max. Overall Height (mm): 2086

Max. Overall Height (in): 82 1/8

Light Distribution: Direct / Indirect

Weight (kg): 15.251

Weight (lbs): 33.62

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2000mm or 6000mm Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 118.8

Total Output Wattage (W): 76.8 / 18

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600 / 350

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 10450 / 10854 / 12325 / 12577

Nominal Lumen (lm): 13561 / 14178 / 16100 / 16429

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

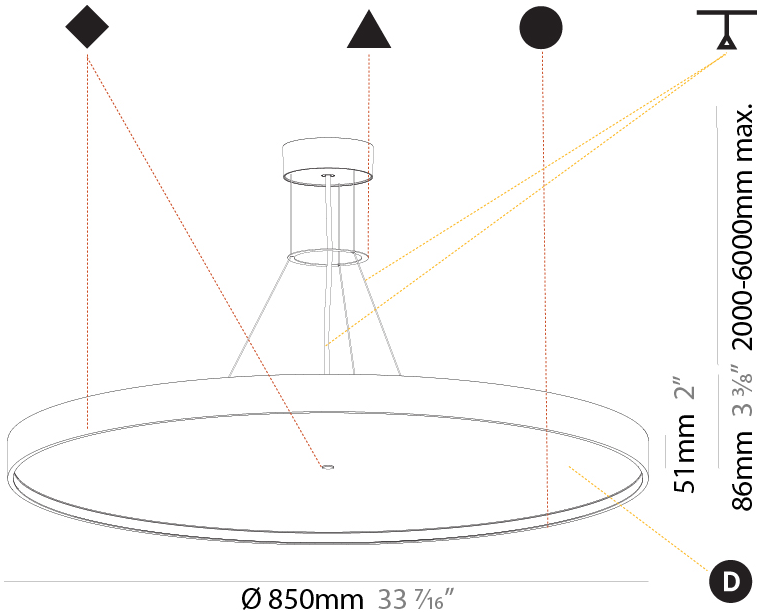

SIGN DIVA KORONA SUSPENSION

A300016-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

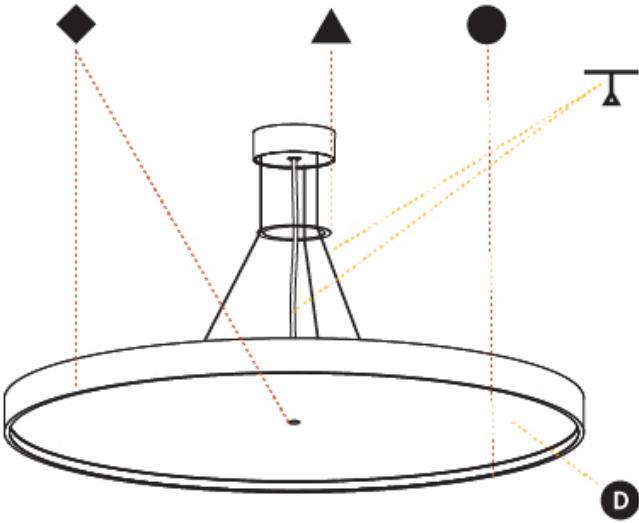

SIGN DIVA KORONA SUSPENSION

A300017-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sign Diva

Subseries: Sign Diva Korona

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 1100

Diameter (in): 43 5/16

Height (mm): 86

Height (in): 3 3/8

Max. Overall Height (mm): 2086

Max. Overall Height (in): 82 1/8

Light Distribution: Direct

Weight (kg): 19.986

Weight (lbs): 44.06

Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum / Steel

Cable Details: 2000mm or 6000mm Transparent Cable

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 145

Total Output Wattage (W): 135

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 600

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 15931 / 17172 / 19937 / 20344

Nominal Lumen (lm): 18837 / 20305 / 23575 / 24056

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

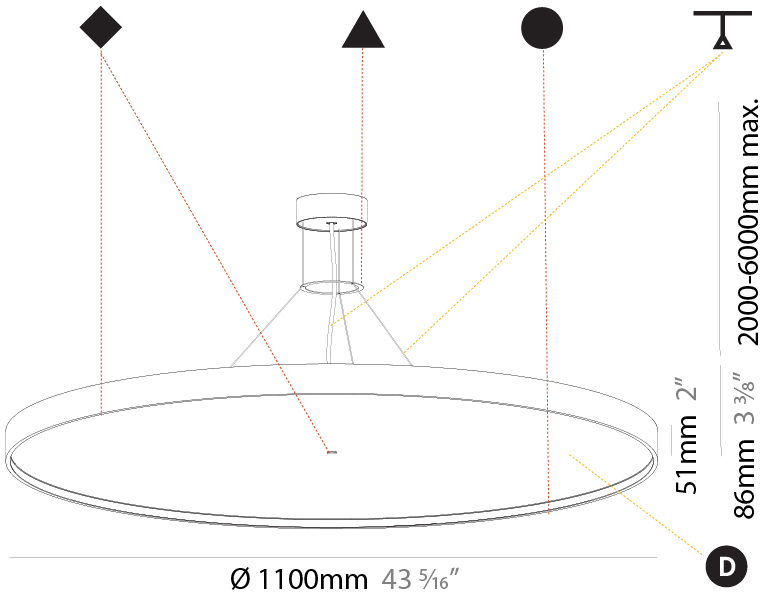

SIGN DIVA KORONA SUSPENSION

A300017-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

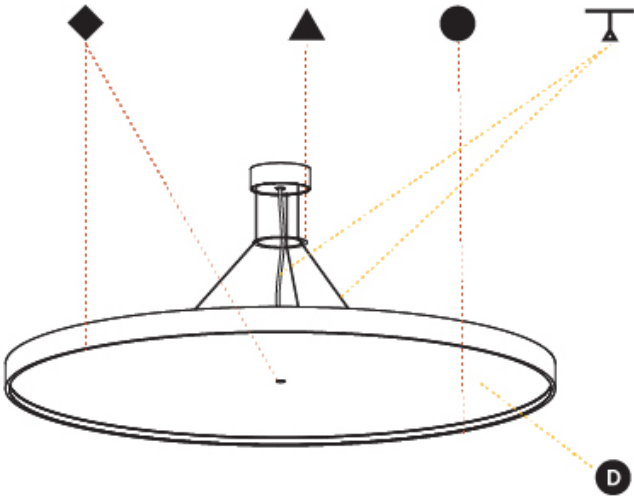

SIGN DIVA KORONA SUSPENSION

A300018-

|             |         |             |           |            |          |          |         |
|-------------|---------|-------------|-----------|------------|----------|----------|---------|
| base number | LED     | Color       | Finishes  | Finishes   | Finishes | Diffuser | Cable   |
|             | Dimming | Temperature | (Diamond) | (Triangle) | (Circle) |          | Options |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                             |
|-----------------------------|
| Series: Sign Diva           |
| Subseries: Sign Diva Korona |
| Brand: Prolicht             |
| Division: Architectural     |
| Mounting Type: Suspension   |
| Mounting Location: Ceiling  |
| Subcategory: Pendant        |

PHYSICAL

|                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape: Round                                                                                                                                                                          |
| Diameter (mm): 1100                                                                                                                                                                   |
| Diameter (in): 43 5/16                                                                                                                                                                |
| Height (mm): 86                                                                                                                                                                       |
| Height (in): 3 3/8                                                                                                                                                                    |
| Max. Overall Height (mm): 2086                                                                                                                                                        |
| Max. Overall Height (in): 82 1/8                                                                                                                                                      |
| Light Distribution: Direct / Indirect                                                                                                                                                 |
| Weight (kg): 21.027                                                                                                                                                                   |
| Weight (lbs): 46.36                                                                                                                                                                   |
| Diffuser: PMMA - Opal / Micro-Prism / Sparkling Secret / Vintage Industrial                                                                                                           |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR |
| Fixture Material: Extruded Aluminum / Steel                                                                                                                                           |
| Cable Details: 2000mm or 6000mm Transparent Cable                                                                                                                                     |

ELECTRICAL

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Lamp Type: LED (Zhaga Standard)                                                   |
| Input Wattage (W): 170                                                            |
| Total Output Wattage (W): 135 / 24                                                |
| Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) |
| Driver Included: Yes                                                              |
| Driver Location: Integrated                                                       |
| Driver Type: Constant Current - Universal                                         |
| Driver Class: Class 2                                                             |
| Input Voltage (V): 120 - 277                                                      |
| Constant Current (MA): 600 / 350                                                  |

LED


|                                                          |
|----------------------------------------------------------|
| Color Temperature (°K): 2700 / 3000 / 3500 / 4000        |
| Max. Delivered Lumen (lm): 17378 / 18180 / 20741 / 21164 |
| Nominal Lumen (lm): 22701 / 23749 / 27094 / 27647        |
| CRI: >90 CRI                                             |
| Lamp Life (hrs): 50000                                   |

OPTICAL

RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

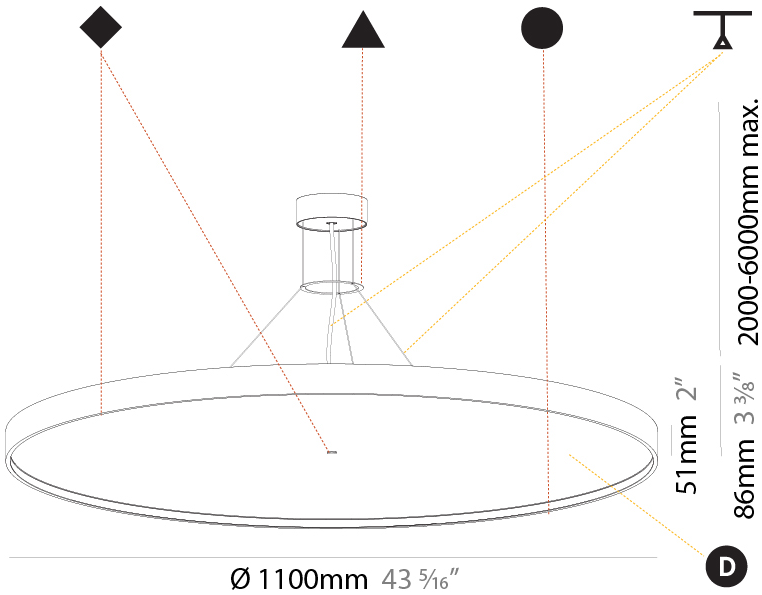

SIGN DIVA KORONA SUSPENSION

A300018-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

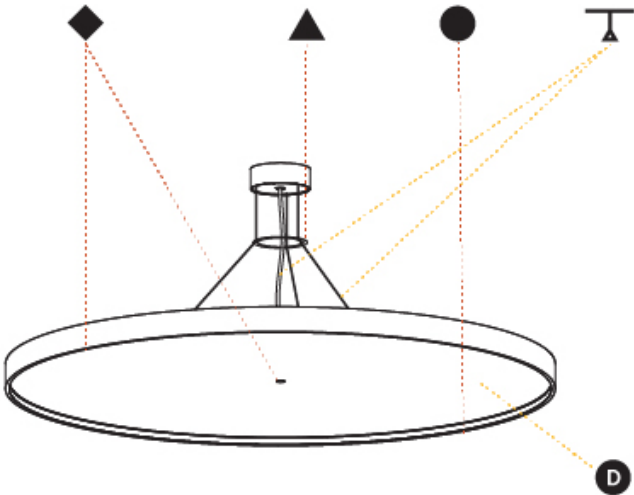

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish

Sparkling Silver - 01 (SSR)

Black Velvet - 02 (BKV)

Crystal White - 03 (CWI)

Creamy - 04 (CRY)

Hampton Bay - 05 (HAB)

Urban Forest - 07 (UFT)

In the Army - 08 (ITA)

Rusty Angel - 09 (RUA)

Fade to Gray - 12 (FTG)

Mysterious Gray - 13 (MYG)

Lost Dream - 15 (LOD)

Purple Sky - 16 (PUS)

Fresh Oh - 17 (FRO)

Funky P. - 18 (FUP)

Kissing Aphrodite - 19 (KIA)

Poseidon's Paradise - 20 (POP)

Blue Sky - 21 (BLS)

Spring Green - 22 (SPG)

Mellow Yellow - 23 (MEY)

Golden Heart - 24 (GOH)

Gun Metal - 25 (GUM)

Champagne Cream - 26 (CHC)

Copper Mine - 27 (COM)

Ancient Bronze - 28 (ABZ)

Jazz Gold - 29 (JAG)

Olive Breeze - 30 (OBR)

Moonlight Silver - 31 (MOS)

Rosewood Red - 32 (ROR)

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.  
**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.  
**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.



### LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

### IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

### IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |