

SIRIO DISC SUSPENSION

D101678-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio

Subseries: Sirio Disc

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Chandelier

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Diameter (mm): 700

Diameter (in): 27 9/16

Height (mm): 300

Height (in): 11 13/16

Max. Overall Height (mm): 2300

Max. Overall Height (in): 90 9/16

Weight (kg): 3.5

Weight (lbs): 7.7

Fixture Finish: NIC / BRA / BBR

Fixture Material: Metal

Cable Details: 2000mm Cable

Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 30

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 12

Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED

Number of LEDs: 50

Color Temperature (°K): 2400 / 2800

Max. Delivered Lumen (lm): 2100 (2800K)

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

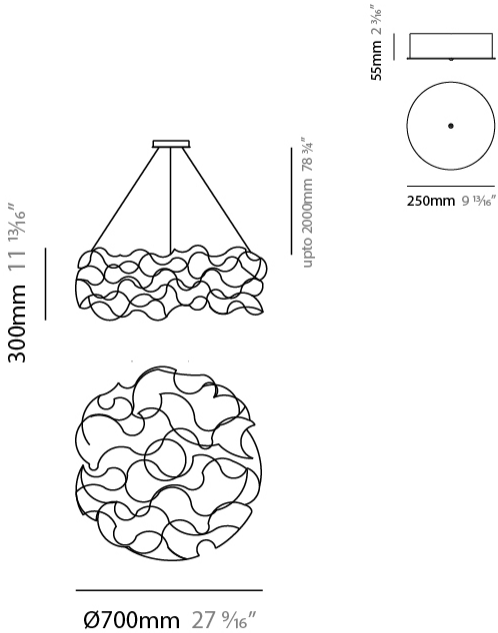

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

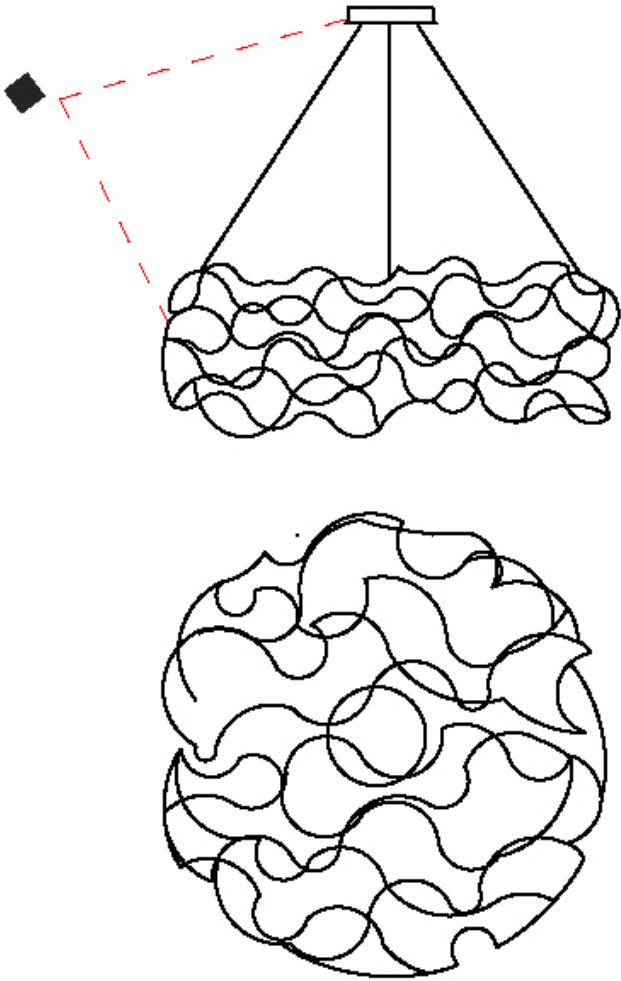

SIRIO DISC SUSPENSION

D101679-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio

Subseries: Sirio Disc

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Chandelier

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Diameter (mm): 1300

Diameter (in): 51 3/16

Height (mm): 400

Height (in): 15 3/4

Max. Overall Height (mm): 2400

Max. Overall Height (in): 94 1/2

Weight (kg): 6.5

Weight (lbs): 14.3

Fixture Finish: NIC / BRA / BBR

Fixture Material: Metal

Cable Details: 2000mm Cable

Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 78

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 12

Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED

Number of LEDs: 130

Color Temperature (°K): 2400 / 2800

Max. Delivered Lumen (lm): 3900 (2800K)

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

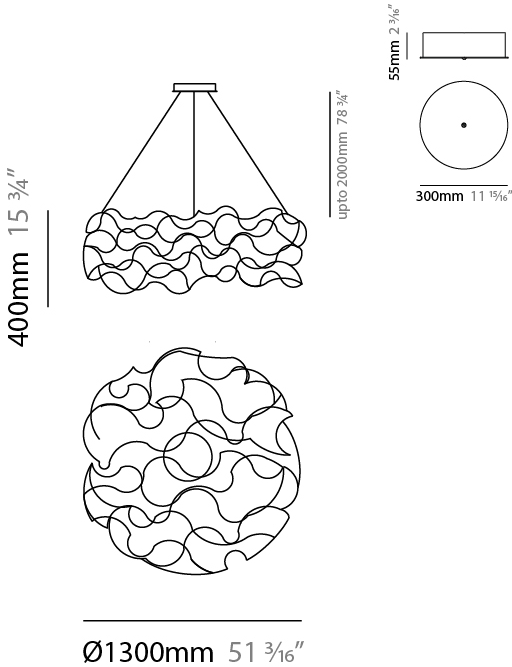

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

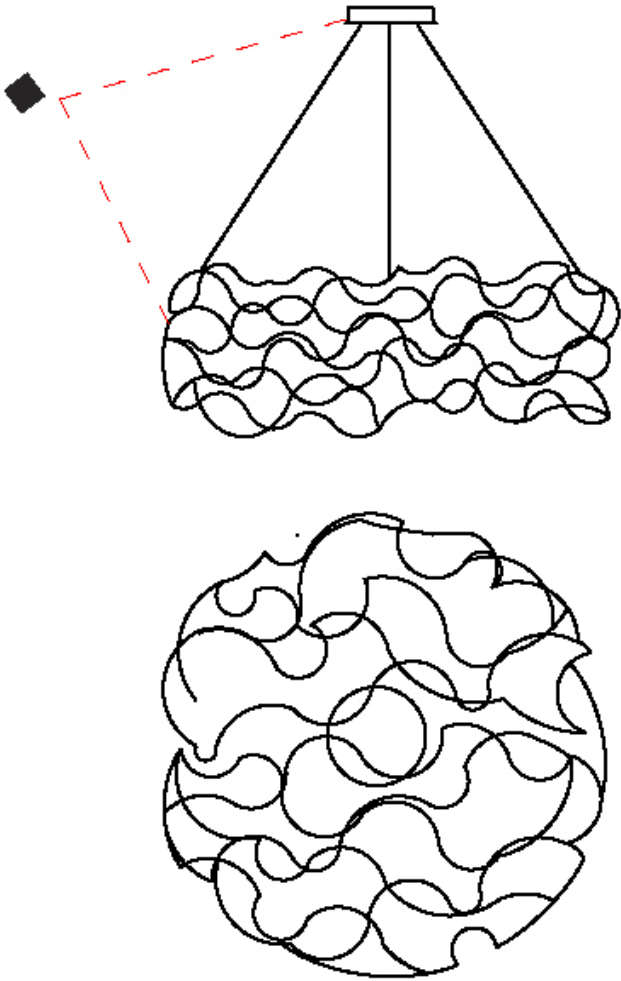

SIRIO DISC SUSPENSION

D101680-

|             |                |                      |                   |
|-------------|----------------|----------------------|-------------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finish<br>Options |
|-------------|----------------|----------------------|-------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Sirio              |
| Subseries: Sirio Disc      |
| Partner: Quasar            |
| Division: Design           |
| Installation: Suspension   |
| Product Type: Chandelier   |
| Mounting Location: Ceiling |

PHYSICAL

|                                  |
|----------------------------------|
| Shape: Abstract                  |
| Diameter (mm): 2000              |
| Diameter (in): 78 3/4            |
| Height (mm): 400                 |
| Height (in): 15 3/4              |
| Max. Overall Height (mm): 2400   |
| Max. Overall Height (in): 94 1/2 |
| Weight (kg): 6                   |
| Weight (lbs): 13.2               |
| Fixture Finish: NIC / BRA / BBR  |
| Fixture Material: Metal          |
| Cable Details: 2000mm Cable      |
| Upon Request: Custom Sizes       |

ELECTRICAL

|                                                    |
|----------------------------------------------------|
| Lamp Type: LED                                     |
| Input Wattage (W): 120                             |
| Dimming: Non-Dimming / Phase Dimming (120vac Only) |
| Driver Included: Yes                               |
| Driver Location: Integrated                        |
| Driver Type: Constant Voltage - 120/277Vac         |
| Driver Class: Class 2                              |
| Input Voltage (V): 120 - 277                       |
| Output Voltage (V): 12                             |

LED


|                                         |
|-----------------------------------------|
| Number of LEDs: 200                     |
| Color Temperature (°K): 2400 / 2800     |
| Max. Delivered Lumen (lm): 6000 (2800K) |
| CRI: >90 CRI                            |
| Lamp Life (hrs): 50000                  |

OPTICAL


RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

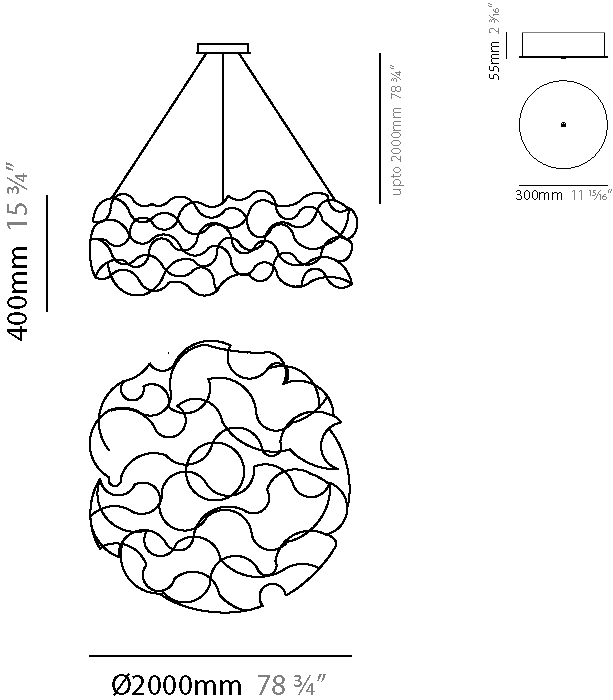

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

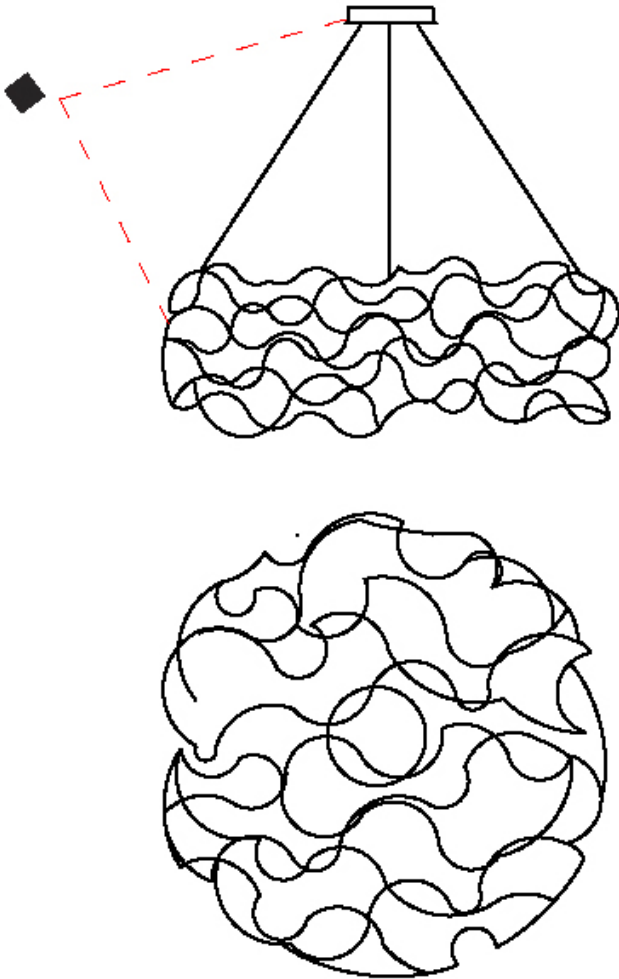

SIRIO ABSTRACT SUSPENSION

D101681-

base number LED Dimming Color Temperature Finish Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio  
Subseries: Sirio Abstract  
Partner: Quasar  
Division: Design  
Installation: Suspension  
Product Type: Chandelier  
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract  
Length (mm): 1250  
Length (in): 49 3/16  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 400  
Height (in): 15 3/4  
Max. Overall Height (mm): 2400  
Max. Overall Height (in): 94 1/2  
Weight (kg): 4  
Weight (lbs): 8.8  
Fixture Finish: NIC / BRA / BBR  
Fixture Material: Metal  
Cable Details: 2000mm Cable  
Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 30  
Dimming: Non-Dimming / Phase Dimming (120vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 12  
Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED


Number of LEDs: 50  
Color Temperature (°K): 2400 / 2800  
Max. Delivered Lumen (lm): 1500 (2800K)  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


PROJECT  
TYPE  
SPECIFIER  
QUANTITY  
DATE

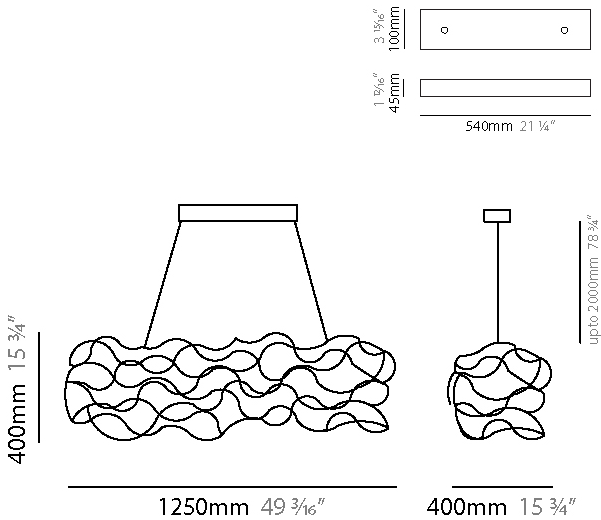

SIRIO ABSTRACT SUSPENSION

D101681-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

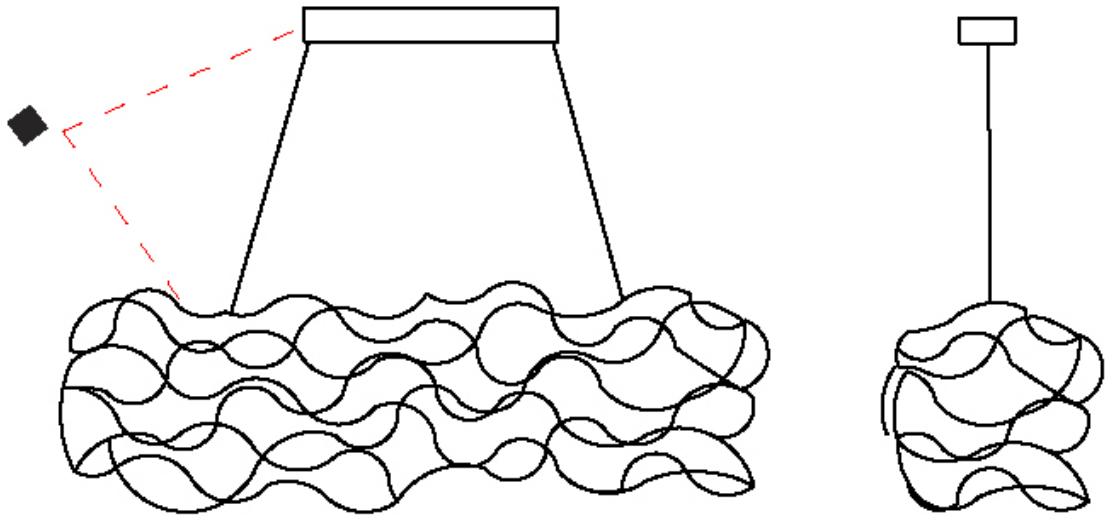



SIRIO ABSTRACT SUSPENSION

D101682-

base number LED Dimming Color Temperature Finish Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio  
Subseries: Sirio Abstract  
Partner: Quasar  
Division: Design  
Installation: Suspension  
Product Type: Chandelier  
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract  
Length (mm): 1800  
Length (in): 70 7/8  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 400  
Height (in): 15 3/4  
Max. Overall Height (mm): 2400  
Max. Overall Height (in): 94 1/2  
Weight (kg): 4.5  
Weight (lbs): 9.9  
Fixture Finish: NIC / BRA / BBR  
Fixture Material: Metal  
Cable Details: 2000mm Cable  
Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 42  
Dimming: Non-Dimming / Phase Dimming (120vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 12  
Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED


Number of LEDs: 70  
Color Temperature (°K): 2400 / 2800  
Max. Delivered Lumen (lm): 2100 (2800K)  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

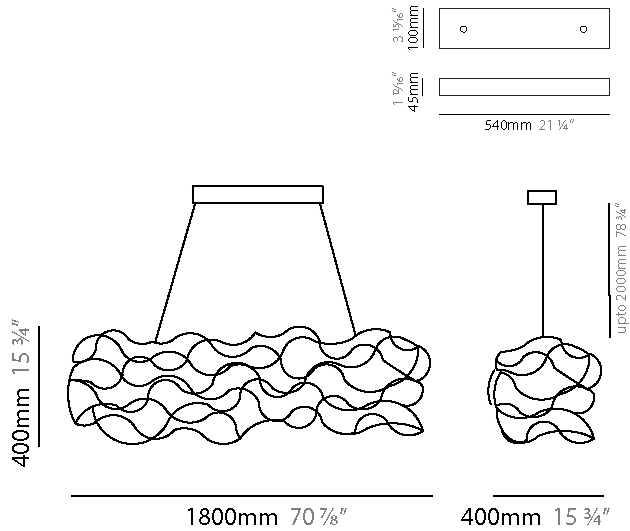

SIRIO ABSTRACT SUSPENSION

D101682-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

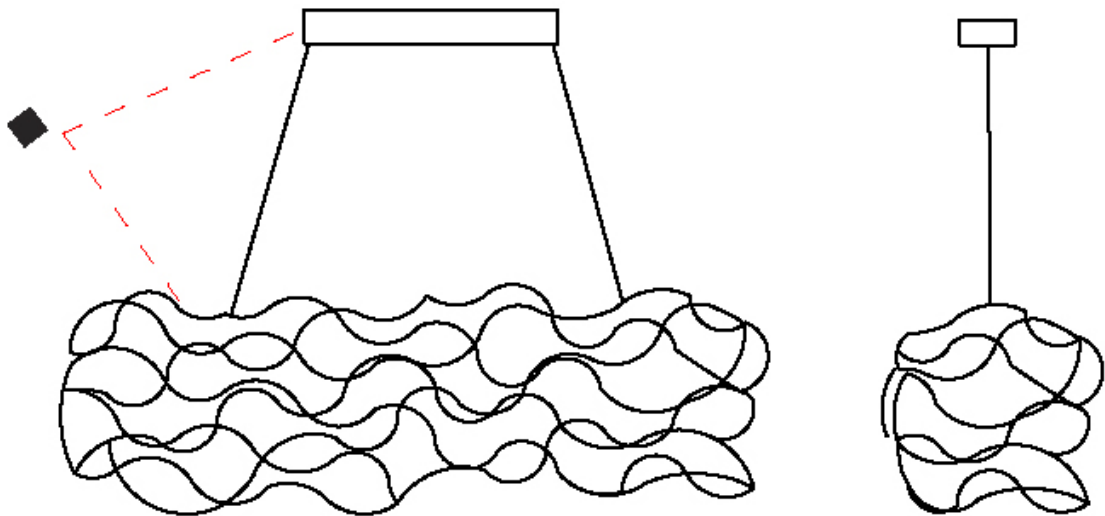

SIRIO ABSTRACT SUSPENSION

D101683-

base number LED Dimming Color Temperature Finish Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio  
Subseries: Sirio Abstract  
Partner: Quasar  
Division: Design  
Installation: Suspension  
Product Type: Chandelier  
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 400  
Height (in): 15 3/4  
Max. Overall Height (mm): 2400  
Max. Overall Height (in): 94 1/2  
Weight (kg): 4.5  
Weight (lbs): 9.9  
Fixture Finish: NIC / BRA / BBR  
Fixture Material: Metal  
Cable Details: 2000mm Cable  
Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 48  
Dimming: Non-Dimming / Phase Dimming (120vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 12  
Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED


Number of LEDs: 80  
Color Temperature (°K): 2400 / 2800  
Max. Delivered Lumen (lm): 2400 (2800K)  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT  
TYPE  
SPECIFIER  
QUANTITY  
DATE

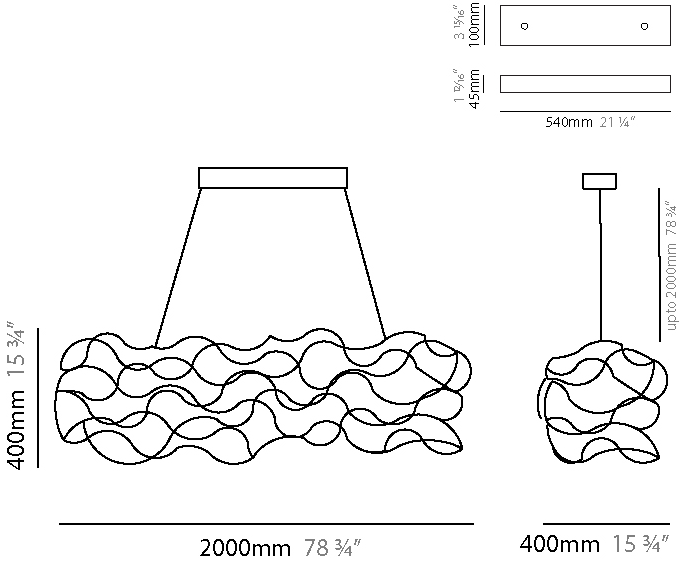

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

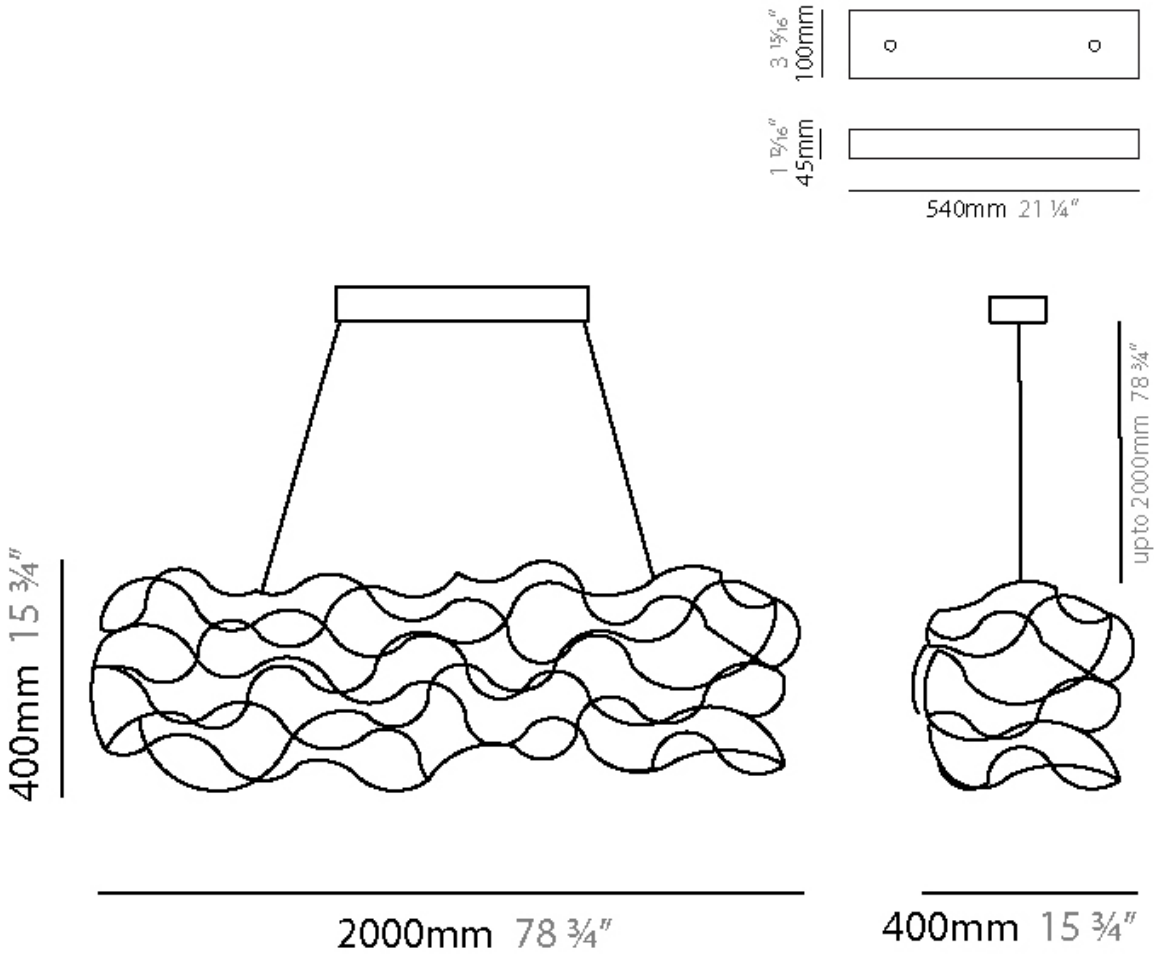

SIRIO DISC SUSPENSION

D101831-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio

Subseries: Sirio Disc

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Chandelier

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Diameter (mm): 700

Diameter (in): 27 9/16

Height (mm): 300

Height (in): 11 13/16

Max. Overall Height (mm): 2300

Max. Overall Height (in): 90 9/16

Weight (kg): 3.5

Weight (lbs): 7.7

Fixture Finish: NIC / BRA / BBR

Fixture Material: Metal

Cable Details: 2000mm Cable

Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 33

Max. Wattage Per Lamp (W): 3

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 12

Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED

Number of LEDs: 50 + 1

Color Temperature (°K): 2400 / 2800

Max. Delivered Lumen (lm): 2100 (2800K)

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

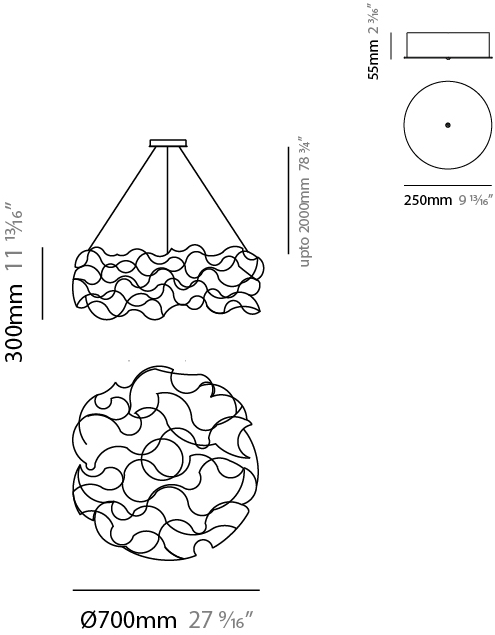

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

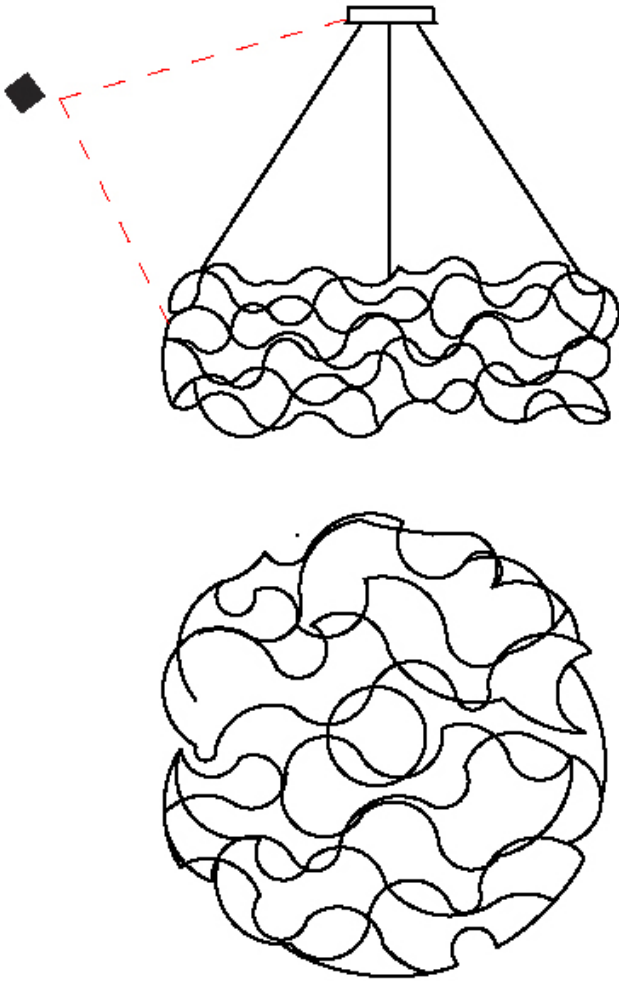

SIRIO DISC SUSPENSION

D101832-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio

Subseries: Sirio Disc

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Chandelier

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Diameter (mm): 1300

Diameter (in): 51 3/16

Height (mm): 400

Height (in): 15 3/4

Max. Overall Height (mm): 2400

Max. Overall Height (in): 94 1/2

Weight (kg): 6.5

Weight (lbs): 14.3

Fixture Finish: NIC / BRA / BBR

Fixture Material: Metal

Cable Details: 2000mm Cable

Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 81

Max. Wattage Per Lamp (W): 3

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 12

Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED

Number of LEDs: 130 + 1

Color Temperature (°K): 2400 / 2800

Max. Delivered Lumen (lm): 3900 (2800K)

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

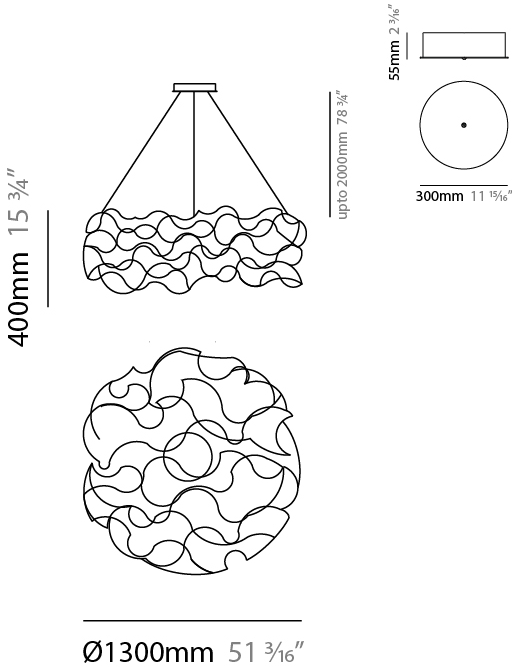

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

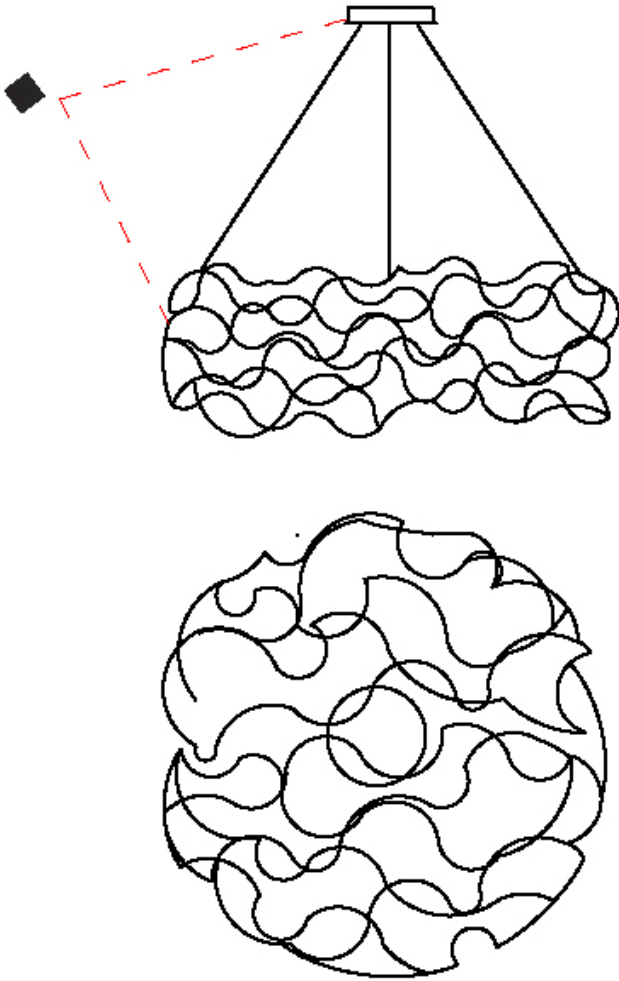



SIRIO DISC SUSPENSION

D101833-

base number LED Dimming Color Temperature Finish Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio

Subseries: Sirio Disc

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Chandelier

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Diameter (mm): 2000

Diameter (in): 78 3/4

Height (mm): 400

Height (in): 15 3/4

Max. Overall Height (mm): 2400

Max. Overall Height (in): 94 1/2

Weight (kg): 6

Weight (lbs): 13.2

Fixture Finish: NIC / BRA / BBR

Fixture Material: Metal

Cable Details: 2000mm Cable

Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 123

Max. Wattage Per Lamp (W): 3

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Voltage - 120/277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 12

Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED

Number of LEDs: 200 + 1

Color Temperature (°K): 2400 / 2800

Max. Delivered Lumen (lm): 6000 (2800K)

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

RATINGS AND CERTIFICATIONS



Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

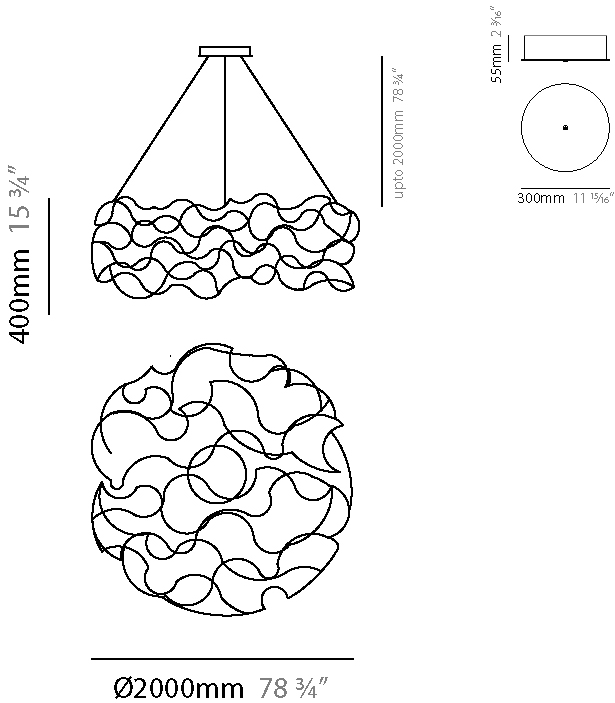

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

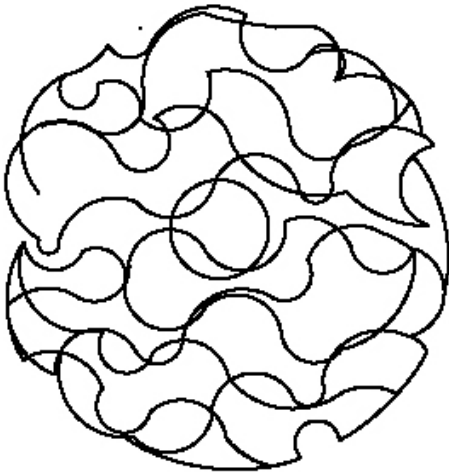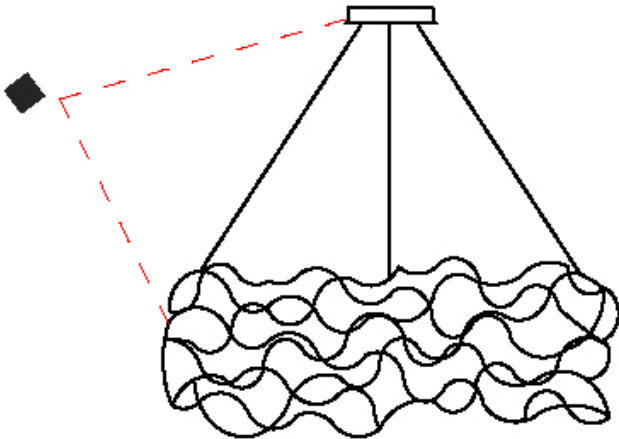

SIRIO ABSTRACT SUSPENSION

D101834-

|             |                |                      |                   |
|-------------|----------------|----------------------|-------------------|
| base number | LED<br>Dimming | Color<br>Temperature | Finish<br>Options |
|-------------|----------------|----------------------|-------------------|

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                            |
|----------------------------|
| Series: Sirio              |
| Subseries: Sirio Abstract  |
| Partner: Quasar            |
| Division: Design           |
| Installation: Suspension   |
| Product Type: Chandelier   |
| Mounting Location: Ceiling |

PHYSICAL

|                                                 |
|-------------------------------------------------|
| Shape: Abstract                                 |
| Length (mm): 1250                               |
| Length (in): 49 3/16                            |
| Width (mm): 400                                 |
| Width (in): 15 3/4                              |
| Height (mm): 400                                |
| Height (in): 15 3/4                             |
| Max. Overall Height (mm): 2400                  |
| Max. Overall Height (in): 94 1/2                |
| Weight (kg): 4                                  |
| Weight (lbs): 8.8                               |
| Fixture Finish: <a href="#">NIC / BRA / BBR</a> |
| Fixture Material: Metal                         |
| Cable Details: 2000mm Cable                     |
| Upon Request: Custom Sizes                      |

ELECTRICAL

|                                                                         |
|-------------------------------------------------------------------------|
| Lamp Type: LED                                                          |
| Input Wattage (W): 33                                                   |
| Max. Wattage Per Lamp (W): 3                                            |
| <a href="#">Dimming: Non-Dimming / Phase Dimming (120vac Only)</a>      |
| Driver Included: Yes                                                    |
| Driver Location: Integrated                                             |
| Driver Type: Constant Voltage - 120/277Vac                              |
| Driver Class: Class 2                                                   |
| Input Voltage (V): 120 - 277                                            |
| Output Voltage (V): 12                                                  |
| Upon Request: (Not included - see components) Integral: 0-10Vdc dimming |

LED


|                                                     |
|-----------------------------------------------------|
| Number of LEDs: 50 + 1                              |
| <a href="#">Color Temperature (°K): 2400 / 2800</a> |
| Max. Delivered Lumen (lm): 1500 (2800K)             |
| CRI: >90 CRI                                        |
| Lamp Life (hrs): 50000                              |

OPTICAL

RATINGS AND CERTIFICATIONS

|                                                      |
|------------------------------------------------------|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

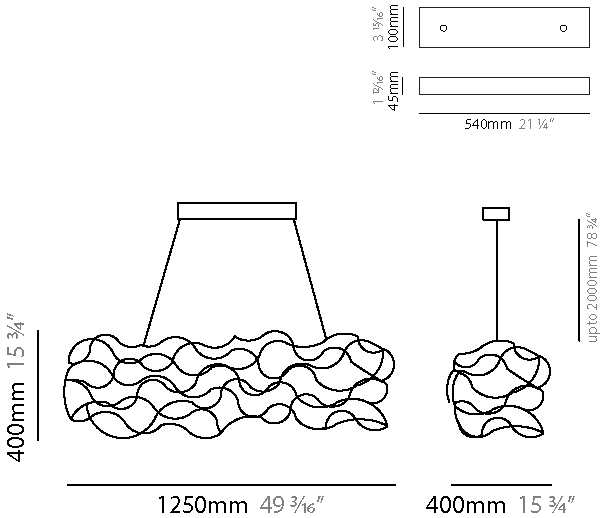

SIRIO ABSTRACT SUSPENSION

D101834-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

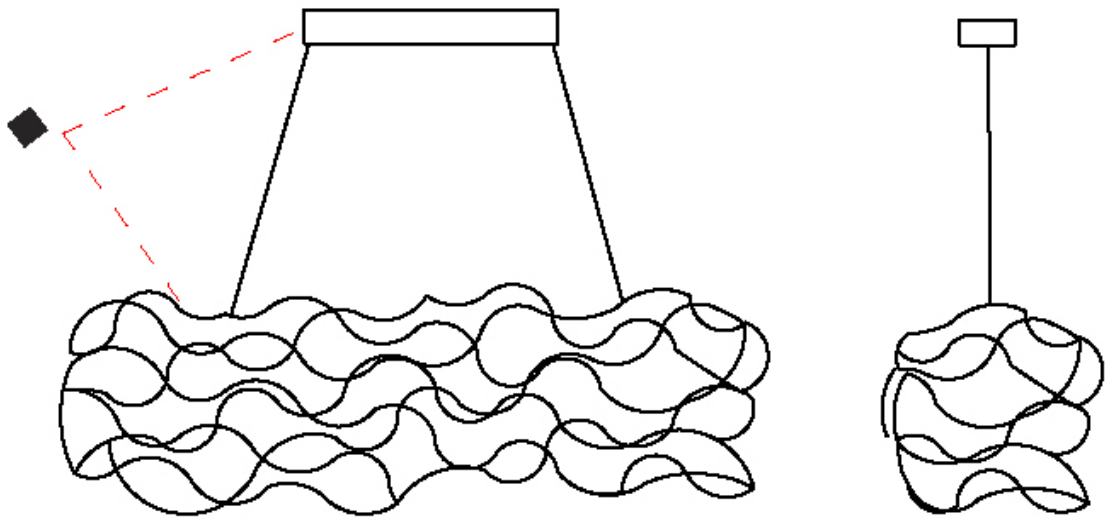

SIRIO ABSTRACT SUSPENSION

D101835-

base number LED Dimming Color Temperature Finish Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio  
Subseries: Sirio Abstract  
Partner: Quasar  
Division: Design  
Installation: Suspension  
Product Type: Chandelier  
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract  
Length (mm): 1800  
Length (in): 70 7/8  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 400  
Height (in): 15 3/4  
Max. Overall Height (mm): 2400  
Max. Overall Height (in): 94 1/2  
Weight (kg): 4.5  
Weight (lbs): 9.9  
Fixture Finish: NIC / BRA / BBR  
Fixture Material: Metal  
Cable Details: 2000mm Cable  
Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 45  
Max. Wattage Per Lamp (W): 3  
Dimming: Non-Dimming / Phase Dimming (120vac Only)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 12  
Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED


Number of LEDs: 70 + 1  
Color Temperature (°K): 2400 / 2800  
Max. Delivered Lumen (lm): 2100 (2800K)  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


PROJECT  
TYPE  
SPECIFIER  
QUANTITY  
DATE

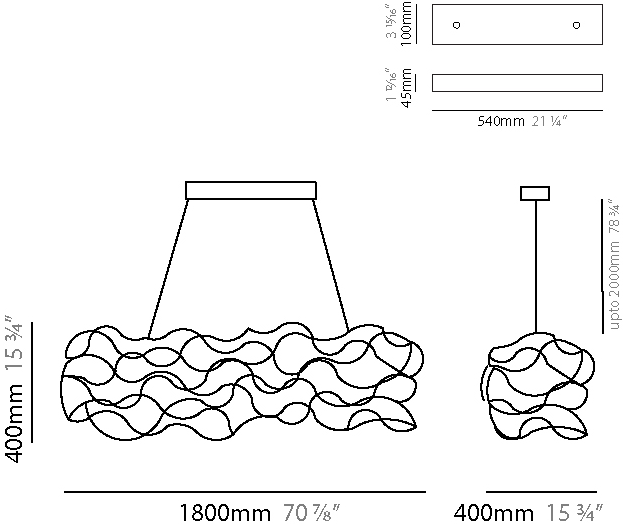

SIRIO ABSTRACT SUSPENSION

D101835-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

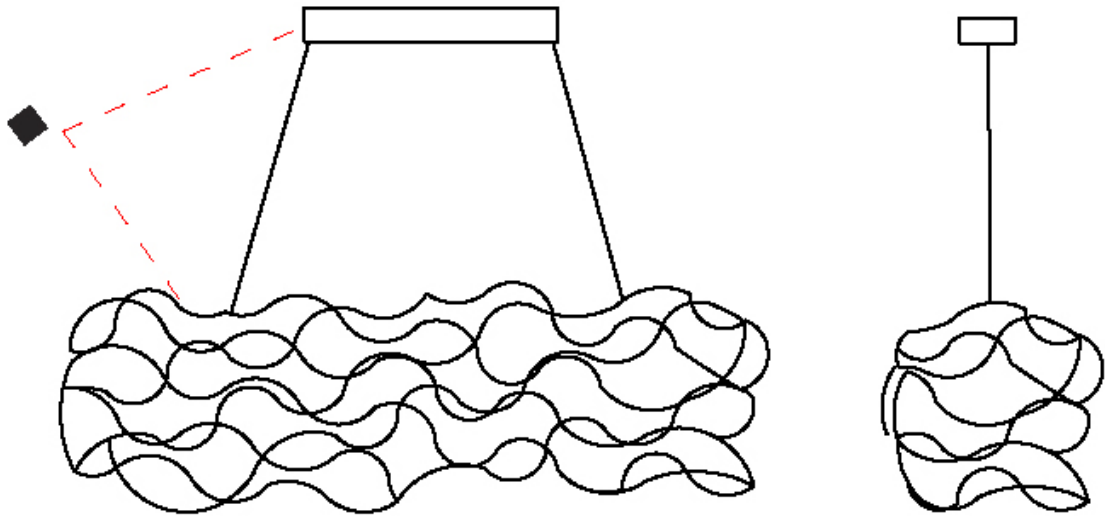

SIRIO ABSTRACT SUSPENSION

D101836-

base number LED Dimming Color Temperature Finish Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Sirio  
Subseries: Sirio Abstract  
Partner: Quasar  
Division: Design  
Installation: Suspension  
Product Type: Chandelier  
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 400  
Width (in): 15 3/4  
Height (mm): 400  
Height (in): 15 3/4  
Max. Overall Height (mm): 2400  
Max. Overall Height (in): 94 1/2  
Weight (kg): 4.5  
Weight (lbs): 9.9  
Fixture Finish: [NIC / BRA / BBR](#)  
Fixture Material: Metal  
Cable Details: 2000mm Cable  
Upon Request: Custom Sizes

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 51  
Max. Wattage Per Lamp (W): 3  
[Dimming: Non-Dimming / Phase Dimming \(120vac Only\)](#)  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 12  
Upon Request: (Not included - see components) Integral: 0-10Vdc dimming

LED


Number of LEDs: 80 + 1  
[Color Temperature \(°K\): 2400 / 2800](#)  
Max. Delivered Lumen (lm): 2400 (2800K)  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20


PROJECT  
TYPE  
SPECIFIER  
QUANTITY  
DATE

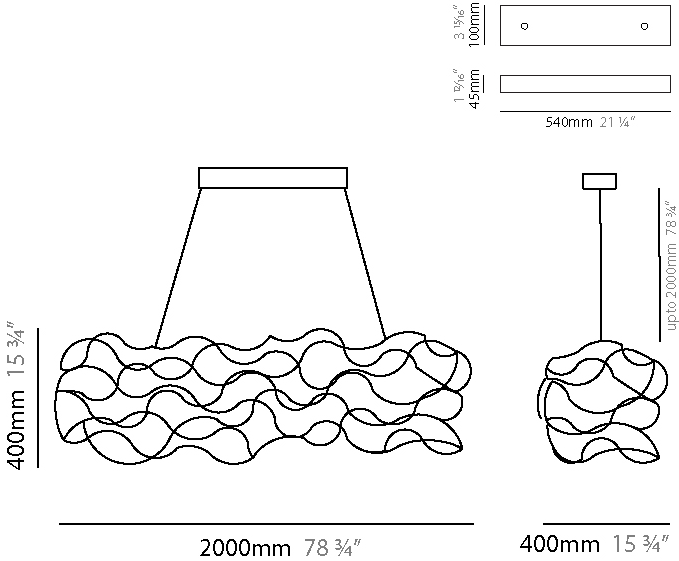

SIRIO ABSTRACT SUSPENSION

D101836-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

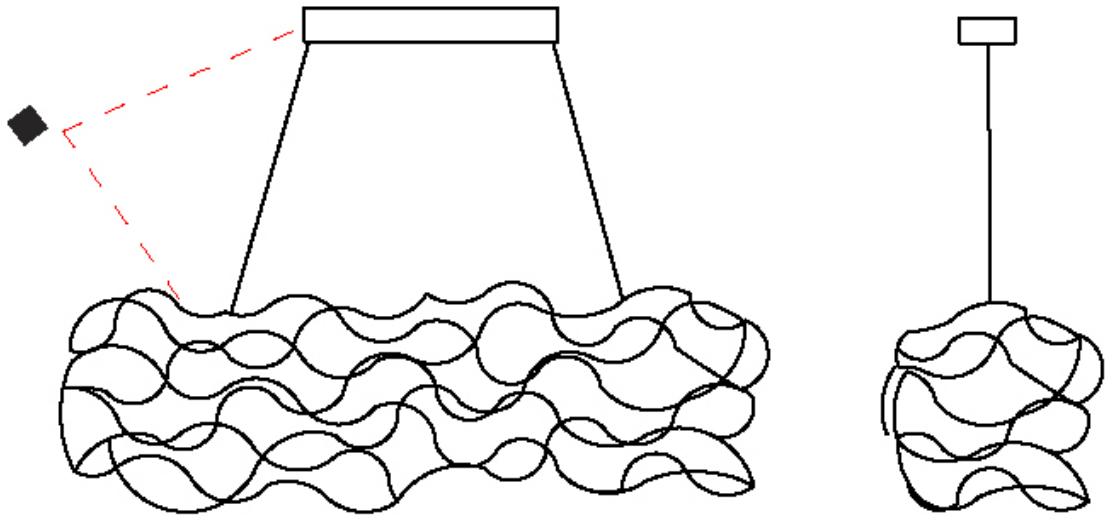



|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

Fixture Finish

Nickel - NIC



Brass - BRA



Black Brass - BBR



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.  
Brass, nickel and copper are natural minerals and can potentially change color and show marks over time. We cannot guarantee the color appearance as the material transforms.



### LEGEND

|  |                                                           |  |                                                              |  |                                                                                                |
|--|-----------------------------------------------------------|--|--------------------------------------------------------------|--|------------------------------------------------------------------------------------------------|
|  | floor-mounted                                             |  | pivotal                                                      |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating                                                     |  | warm dim / natural dimming LED                                                                 |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted                                            |  | rechargeable battery powered                                                                   |
|  | wall-mounted                                              |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)                                                  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index                                                                          |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature                                                                              |
|  | direct/indirect light distribution                        |  | super spot                                                   |  | lumen (luminous flux)                                                                          |
|  | indirect light distribution                               |  | lens                                                         |  | efficacy (lumens per watt)                                                                     |
|  | asymmetric light distribution                             |  | lens pack                                                    |  | Unified Glare Rating (UGR) range from 5-40                                                     |
|  | aura light distribution                                   |  | shine ring                                                   |  | marine grade (AISI 316 stainless steel)                                                        |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on                                                                                        |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on                                                                                       |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |  | Certified for North American Standards                                                         |

### IP RATING

|  |                                                                                                                                                  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

### IK RATING

|  |                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |