

SLASH 30 RECESSED

E12I0048-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 282  
Length (in): 11 1/8  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.46  
Weight (lbs): 1.014  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 7.6  
Total Output Wattage (W): 6  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 640 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

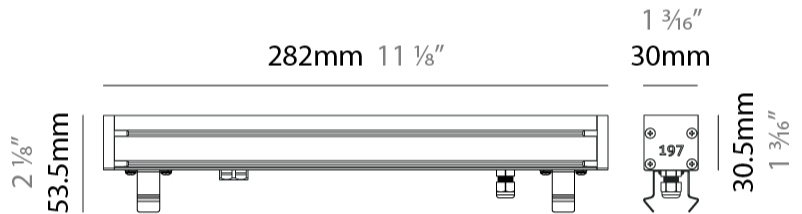

SLASH 30 RECESSED

E12I0049-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 282  
Length (in): 11 1/8  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.46  
Weight (lbs): 1.014  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 16  
Total Output Wattage (W): 12.5  
Dimming: 0-10V Dimming  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Housing: ENCP9  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only)

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 1140 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

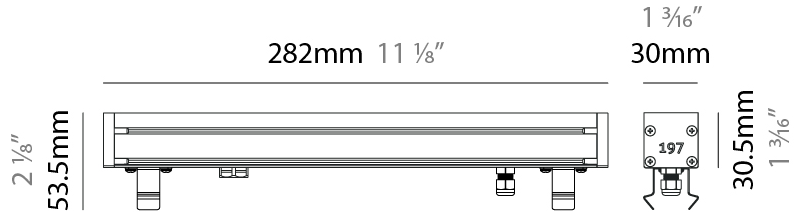

SLASH 30 RECESSED

E12I0051-

-

base number

Color

Temperature

Lens

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30

Brand: Unonovesette

Division: Exterior

Mounting Type: Recessed

Mounting Location: In-Ground

Subcategory: Wallwash

PHYSICAL

Shape: Rectangle

Length (mm): 568

Length (in): 22 3⁄8

Width (mm): 30

Width (in): 1 3⁄16

Height (mm): 53.5

Height (in): 2 1⁄8

Light Distribution: Adjustable / Direct

Weight (kg): 0.46

Weight (lbs): 1.014

Diffuser: Extra clear tempered 6mm

Fixture Finish: ANA

Fixture Material: Extruded Aluminum

Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 32

Total Output Wattage (W): 25

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 2280 (3000K)

CRI: >90 CRI

Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36

Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK06



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

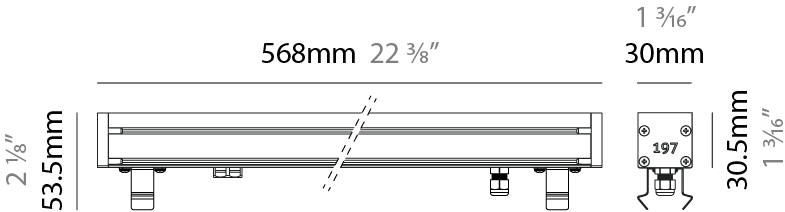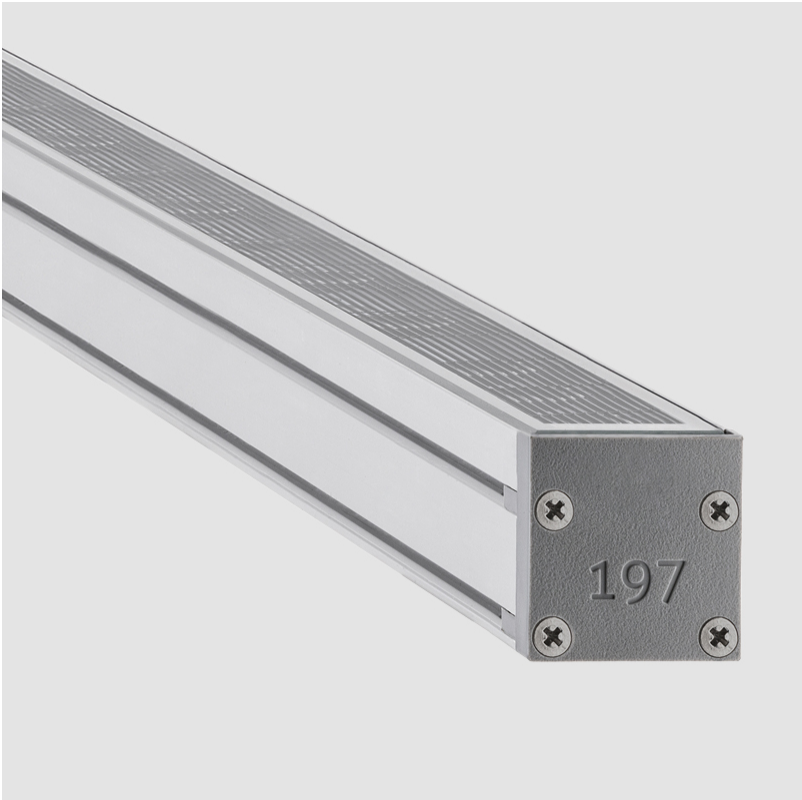

SLASH 30 RECESSED

E12I0052-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 853  
Length (in): 33 3⁄16  
Width (mm): 30  
Width (in): 1 3⁄16  
Height (mm): 53.5  
Height (in): 2 1⁄8  
Light Distribution: Adjustable / Direct  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 22.92  
Total Output Wattage (W): 17.91  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 1890 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000



OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

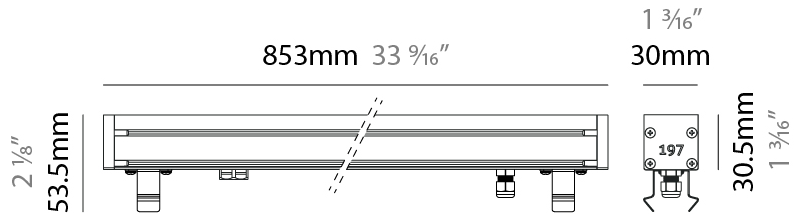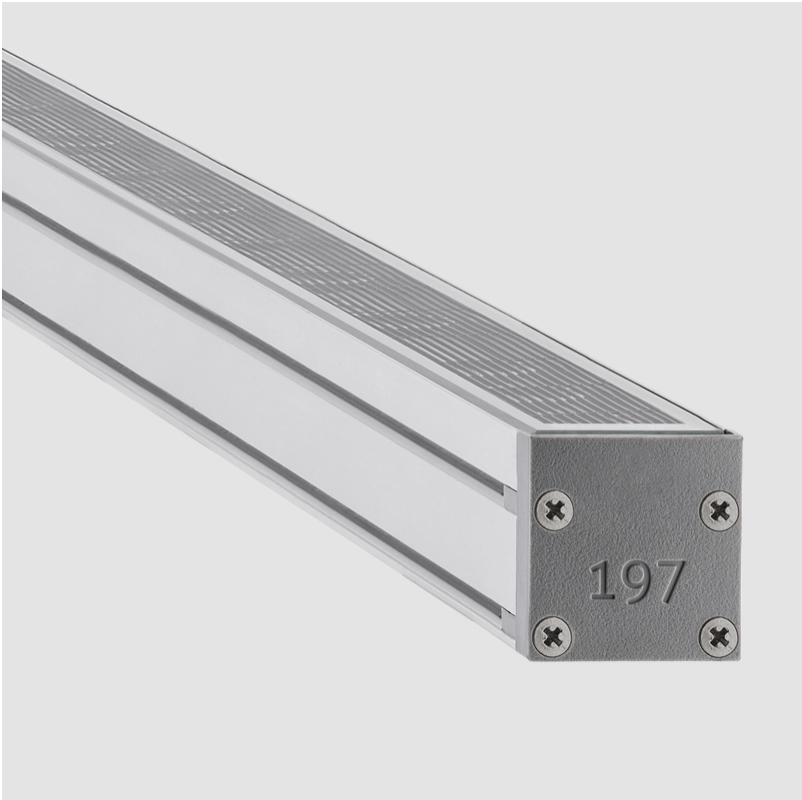

SLASH 30 RECESSED

E12I0053-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 853  
Length (in): 33 3⁄16  
Width (mm): 30  
Width (in): 1 3⁄16  
Height (mm): 53.5  
Height (in): 2 1⁄8  
Light Distribution: Adjustable / Direct  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 48  
Total Output Wattage (W): 37.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 3420 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06


PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

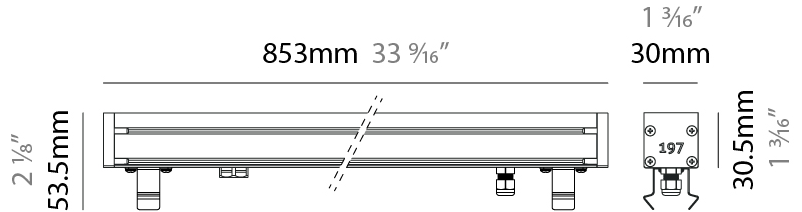

SLASH 30 RECESSED

E12I0054-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 1139  
Length (in): 44 13/16  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 30.5  
Total Output Wattage (W): 23.88  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 2520 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06



PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

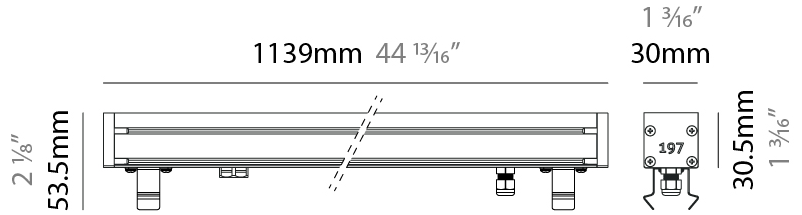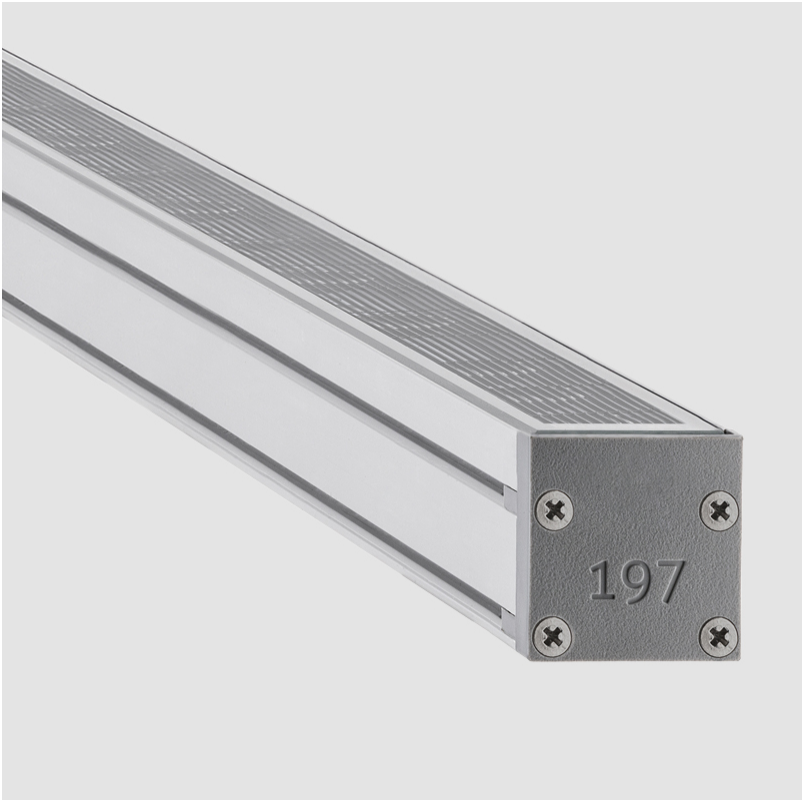



SLASH 30 RECESSED

E12I0055-

base number      Color      Lens  
Temperature      Options

1.To build a product code in our configurator select the specify button on the base model # product page  
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 1139  
Length (in): 44 13/16  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 64  
Total Output Wattage (W): 50  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 4560 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000



OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

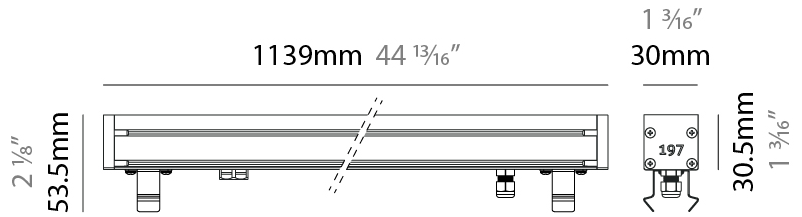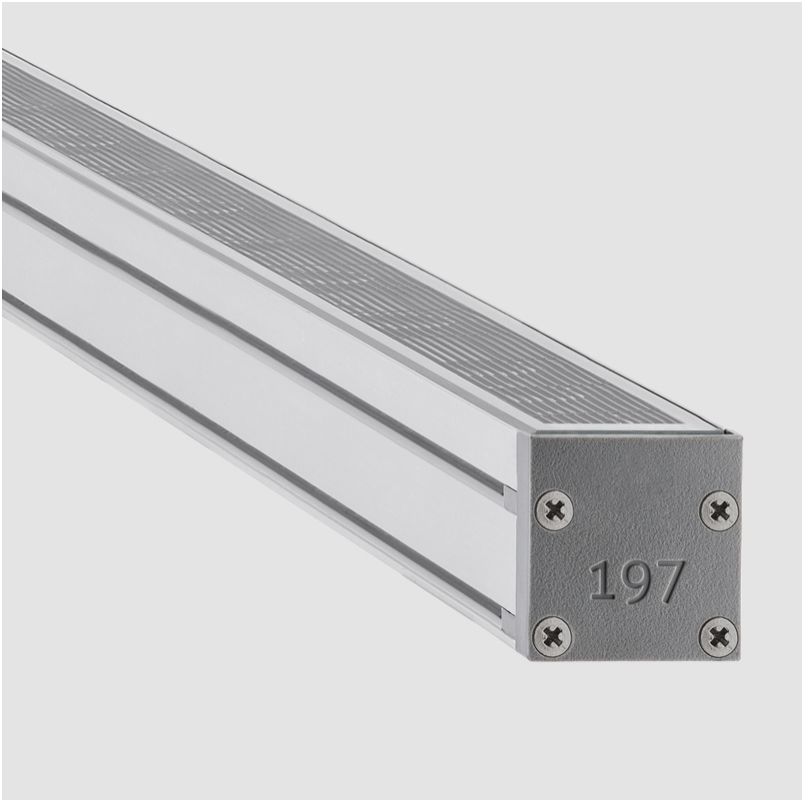

SLASH 30 RECESSED

E12I0056-

base number

Color

Lens

Temperature

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30

Brand: Unonovesette

Division: Exterior

Mounting Type: Recessed

Mounting Location: In-Ground

Subcategory: Wallwash

PHYSICAL

Shape: Rectangle

Length (mm): 282

Length (in): 11 1⁄8

Width (mm): 30

Width (in): 1 3⁄16

Height (mm): 53.5

Height (in): 2 1⁄8

Light Distribution: Adjustable / Direct

Weight (kg): 0.46

Weight (lbs): 1.014

Diffuser: Extra clear tempered 6mm

Fixture Finish: ANA

Fixture Material: Extruded Aluminum

Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 4.18

Total Output Wattage (W): 3.27

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 315 (3000K)

CRI: >90 CRI

Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36

Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK06


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

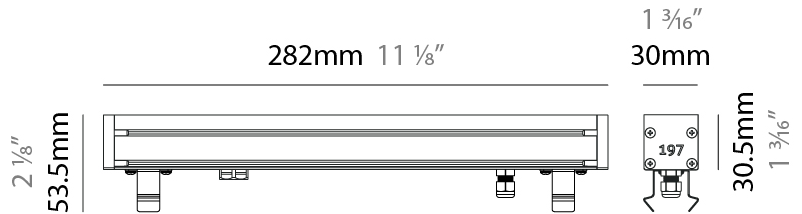



SLASH 30 RECESSED

E12I0057-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 282  
Length (in): 11 1/8  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.46  
Weight (lbs): 1.014  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 8.48  
Total Output Wattage (W): 6.63  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 570 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06


PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

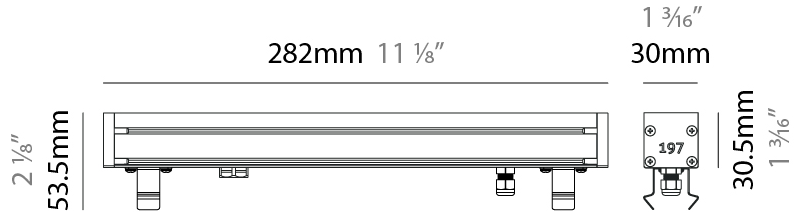

SLASH 30 RECESSED

E12I0058-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 568  
Length (in): 22 3/8  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.46  
Weight (lbs): 1.014  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 8.48  
Total Output Wattage (W): 6.63  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 630 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06



PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

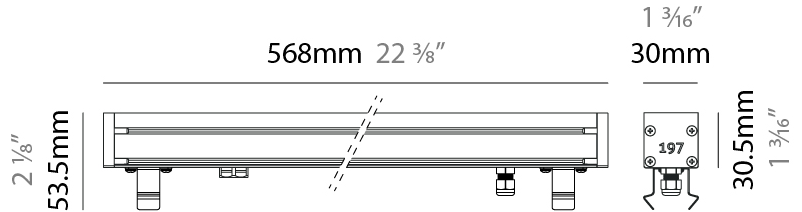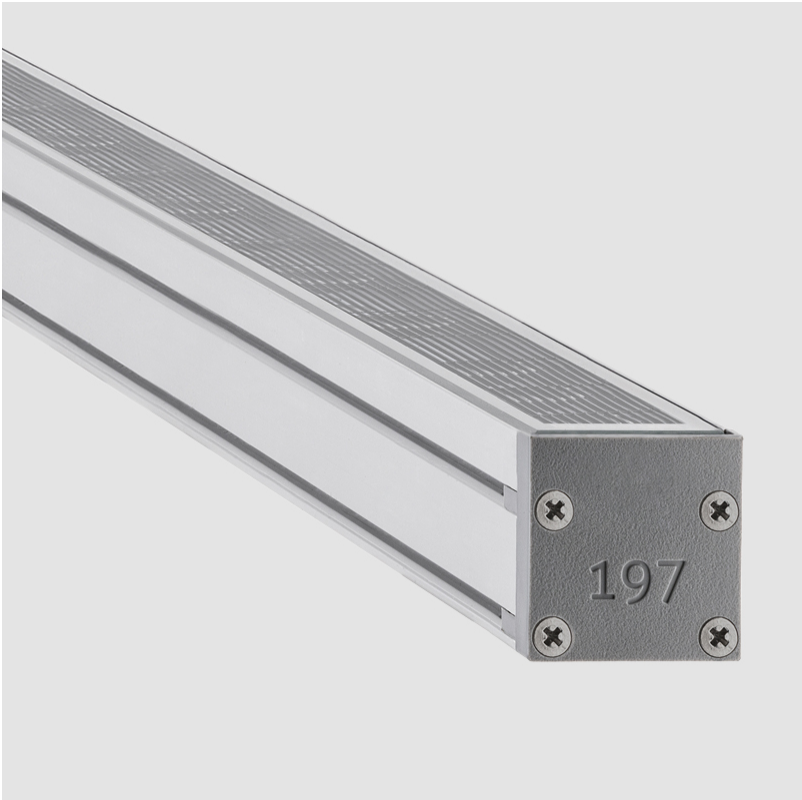

SLASH 30 RECESSED

E12I0059-

base number      Color      Lens  
Temperature      Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 568  
Length (in): 22 3⁄8  
Width (mm): 30  
Width (in): 1 3⁄16  
Height (mm): 53.5  
Height (in): 2 1⁄8  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.46  
Weight (lbs): 1.014  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 16.95  
Total Output Wattage (W): 13.24  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 1140 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06



PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

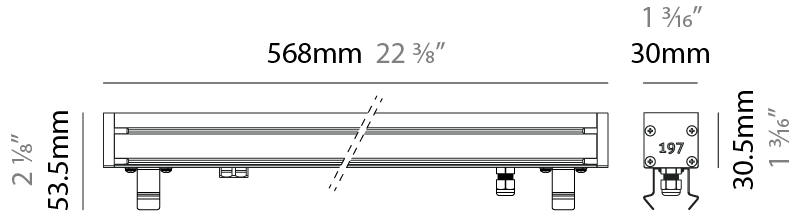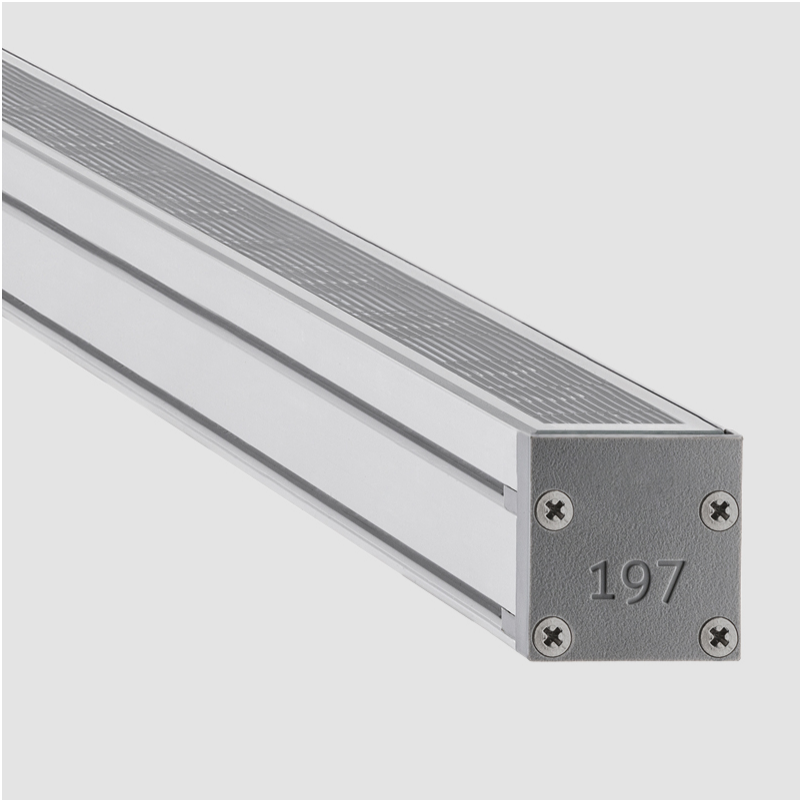

SLASH 30 RECESSED

E12I0060- -

base number

Color

Lens

Temperature

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30

Brand: Unonovesette

Division: Exterior

Mounting Type: Recessed

Mounting Location: In-Ground

Subcategory: Wallwash

PHYSICAL

Shape: Rectangle

Length (mm): 853

Length (in): 33 3⁄16

Width (mm): 30

Width (in): 1 3⁄16

Height (mm): 53.5

Height (in): 2 1⁄8

Light Distribution: Adjustable / Direct

Diffuser: Extra clear tempered 6mm

Fixture Finish: ANA

Fixture Material: Extruded Aluminum

Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 12.53

Total Output Wattage (W): 9.79

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 945 (3000K)

CRI: >90 CRI

Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36

Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK06



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

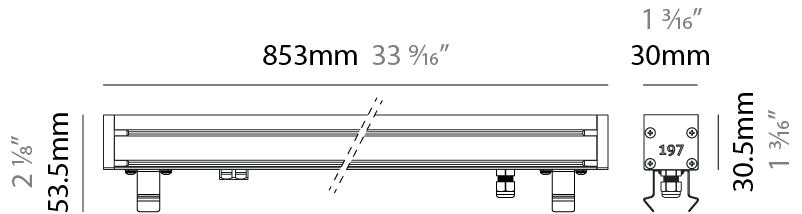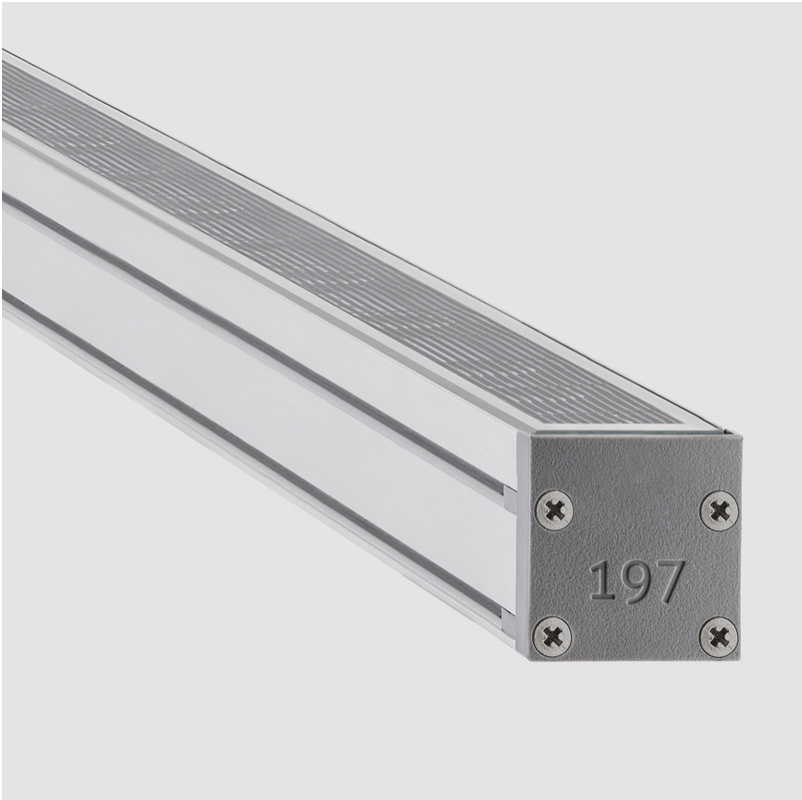

SLASH 30 RECESSED

E12I0061-

-

base number

Color

Lens

Temperature

Options

1.To build a product code in our configurator select the specify button on the base model # product page  
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30

Brand: Unonovesette

Division: Exterior

Mounting Type: Recessed

Mounting Location: In-Ground

Subcategory: Wallwash

PHYSICAL

Shape: Rectangle

Length (mm): 853

Length (in): 33 3⁄16

Width (mm): 30

Width (in): 1 3⁄16

Height (mm): 53.5

Height (in): 2 1⁄8

Light Distribution: Adjustable / Direct

Diffuser: Extra clear tempered 6mm

Fixture Finish: ANA

Fixture Material: Extruded Aluminum

Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 25.43

Total Output Wattage (W): 19.87

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1170 (3000K)

CRI: >90 CRI

Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21 / 31 / 46 / 13x36

Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK06



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

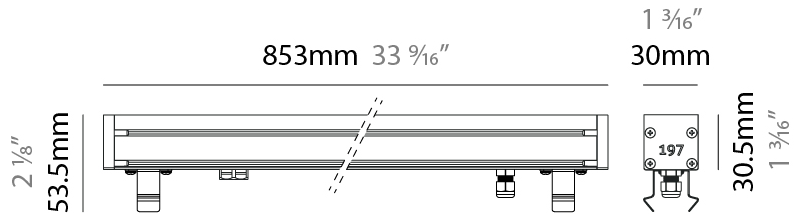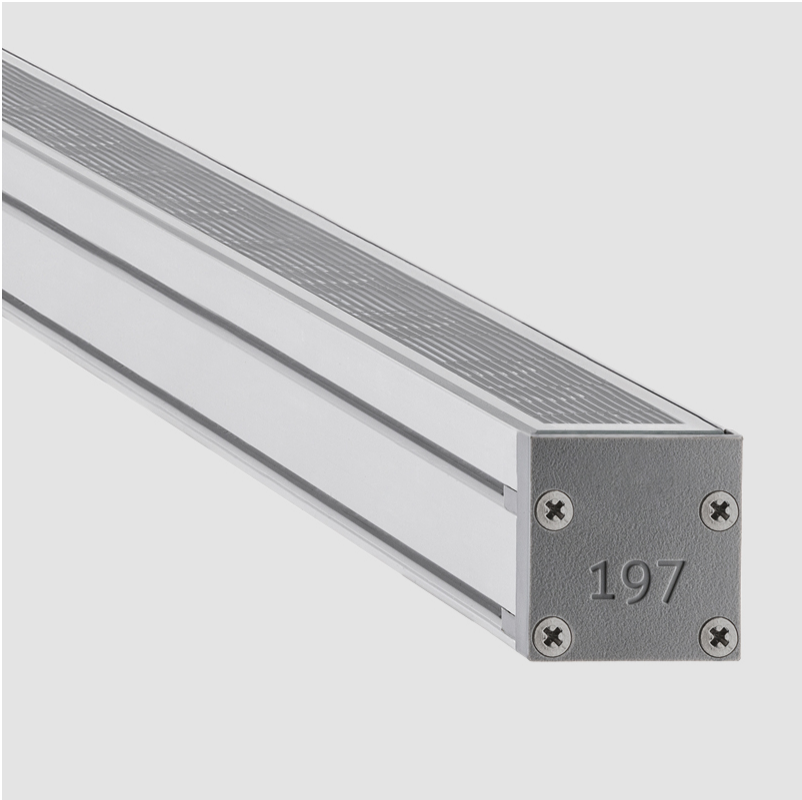

SLASH 30 RECESSED

E12I0062- -

base number

Color

Lens

Temperature

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30

Brand: Unonovesette

Division: Exterior

Mounting Type: Recessed

Mounting Location: In-Ground

Subcategory: Wallwash

PHYSICAL

Shape: Rectangle

Length (mm): 1139

Length (in): 44 <sup>13</sup>/<sub>16</sub>

Width (mm): 30

Width (in): 1 <sup>3</sup>/<sub>16</sub>

Height (mm): 53.5

Height (in): 2 <sup>1</sup>/<sub>8</sub>

Light Distribution: Adjustable / Direct

Diffuser: Extra clear tempered 6mm

Fixture Finish: ANA

Fixture Material: Extruded Aluminum

Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 16.71

Total Output Wattage (W): 13.05

Dimming: 1-10V Dimming

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP9

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Upon Request: Phase Dimming (120Vac only)

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1260 (3000K)

CRI: >90 CRI

Lamp Life (hrs): 100000

OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36

Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP67

IK Rating: IK06



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

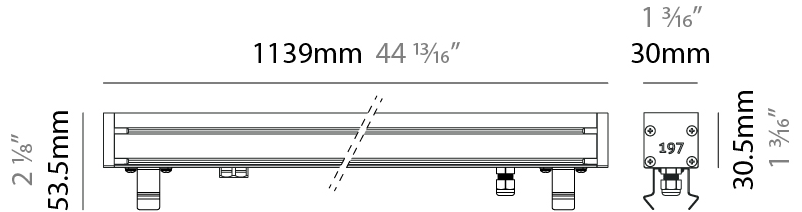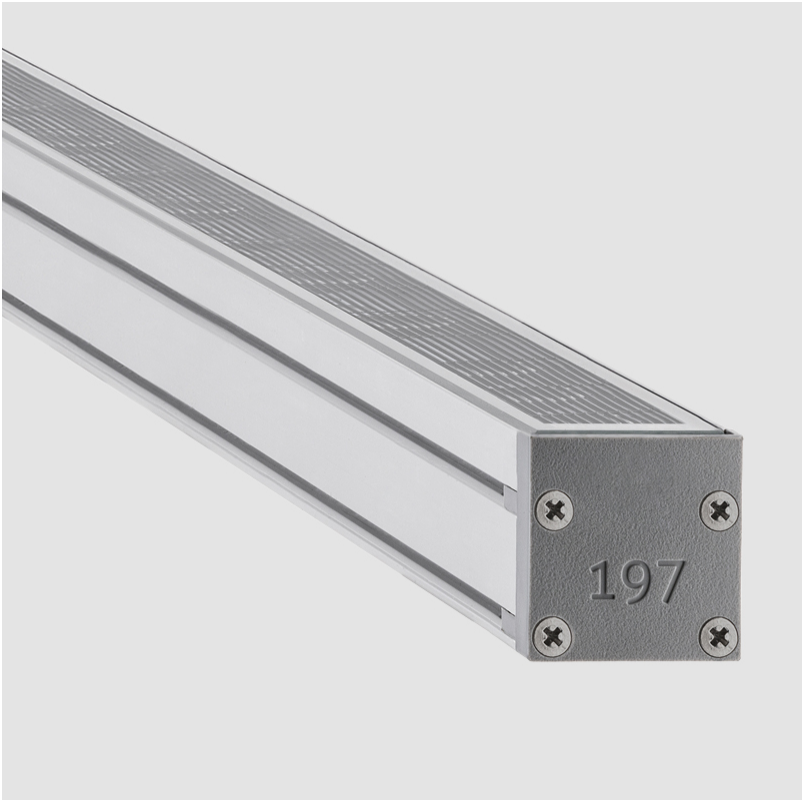



SLASH 30 RECESSED

E12I0063-

base number      Color      Lens  
Temperature      Options

1.To build a product code in our configurator select the specify button on the base model # product page  
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Slash 30  
Brand: Unonovesette  
Division: Exterior  
Mounting Type: Recessed  
Mounting Location: In-Ground  
Subcategory: Wallwash

PHYSICAL

Shape: Rectangle  
Length (mm): 1139  
Length (in): 44 13/16  
Width (mm): 30  
Width (in): 1 3/16  
Height (mm): 53.5  
Height (in): 2 1/8  
Light Distribution: Adjustable / Direct  
Diffuser: Extra clear tempered 6mm  
Fixture Finish: ANA  
Fixture Material: Extruded Aluminum  
Cable Details: IP68 30cm Cable with Easy Lock system

ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 33.92  
Total Output Wattage (W): 26.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Upon Request: Phase Dimming (120Vac only) / 0-10V Dimming

LED

Color Temperature (°K): 2200 / 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 2280 (3000K)  
CRI: >90 CRI  
Lamp Life (hrs): 100000



OPTICAL

Optic°: 12 / 21/ 31 / 46 / 13x36  
Adjustability: Tilt ±20°

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards  
IP rating: IP67  
IK Rating: IK06

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

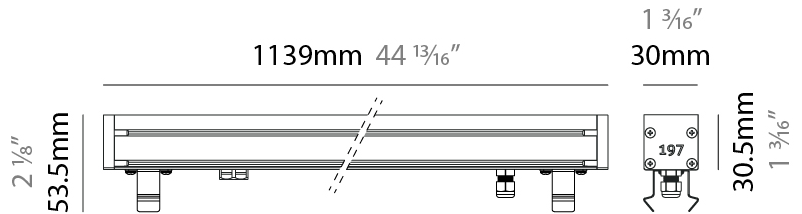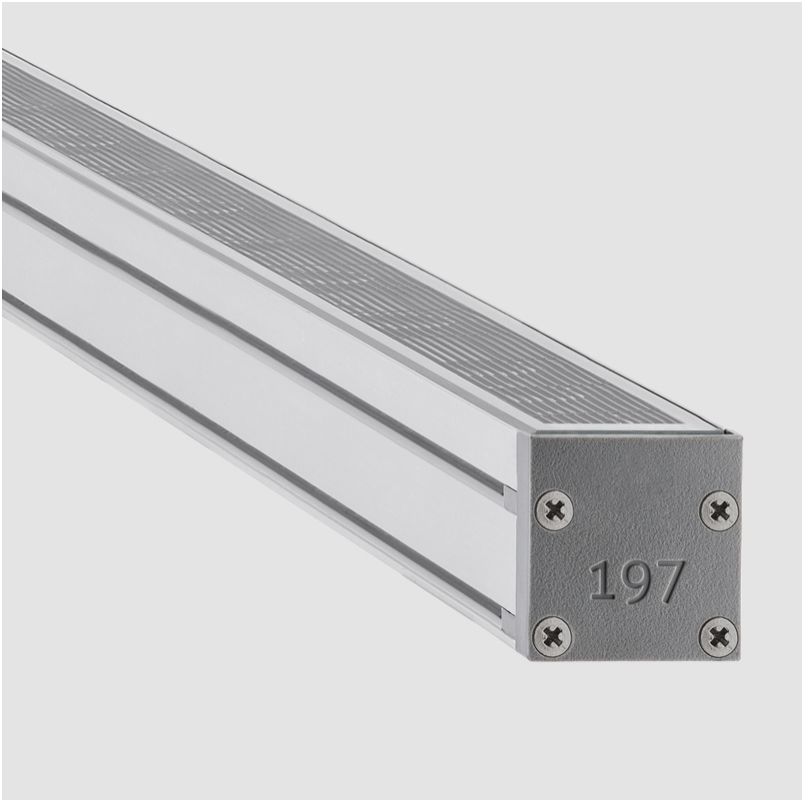

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)