

SNOOKER METAL MONOPOINT SURFACE CANOPY
SUSPENSION

A300390-

base number

LED Dimming

Color Temperature

Beam Angle Options

Cable Color/Length

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Snooker

Subseries: Snooker Metal Monopoint Surface Canopy

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 13/16

Height (mm): 72

Height (in): 2 13/16

Max. Overall Height (mm): 2072

Max. Overall Height (in): 81 9/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 75

Min. Recessing Depth (in): 2 15/16

Weight (kg): 0.597

Weight (lbs): 1.316

Fixture Finish: CHR

Fixture Material: Aluminum Die Cast

Cable Details: 2000mm or 4000mm Cable - Color Options: Black / White / Orange / Red / Green

Cut-out Measurements: 68mm / 2 11/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.6

Total Output Wattage (W): 6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: External

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: ENCP3 w/Quick Connect

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 283 / 300 / 318 / 325

Nominal Lumen (lm): 460 / 487 / 517 / 528

CRI: >90 CRI

Efficiency (%): 60

Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

IP Rating: IP20

Available for international specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

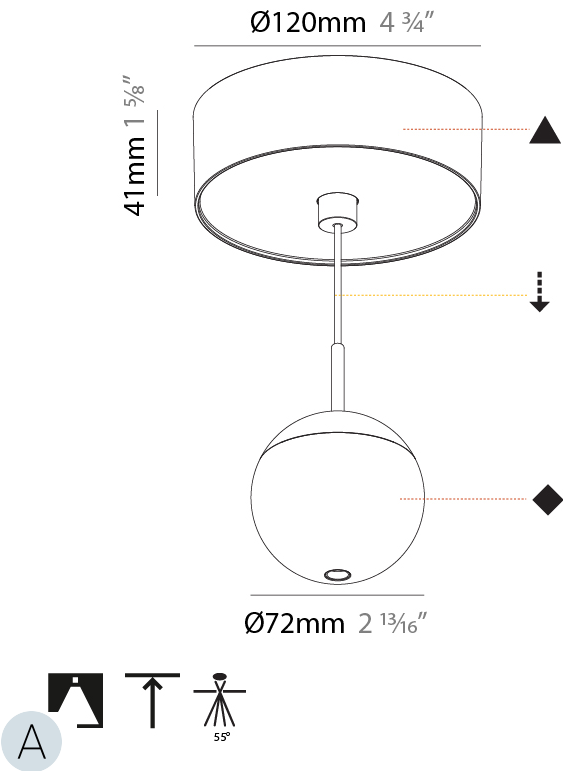

SNOOKER METAL MONOPOINT SURFACE CANOPY
SUSPENSION

A300390-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

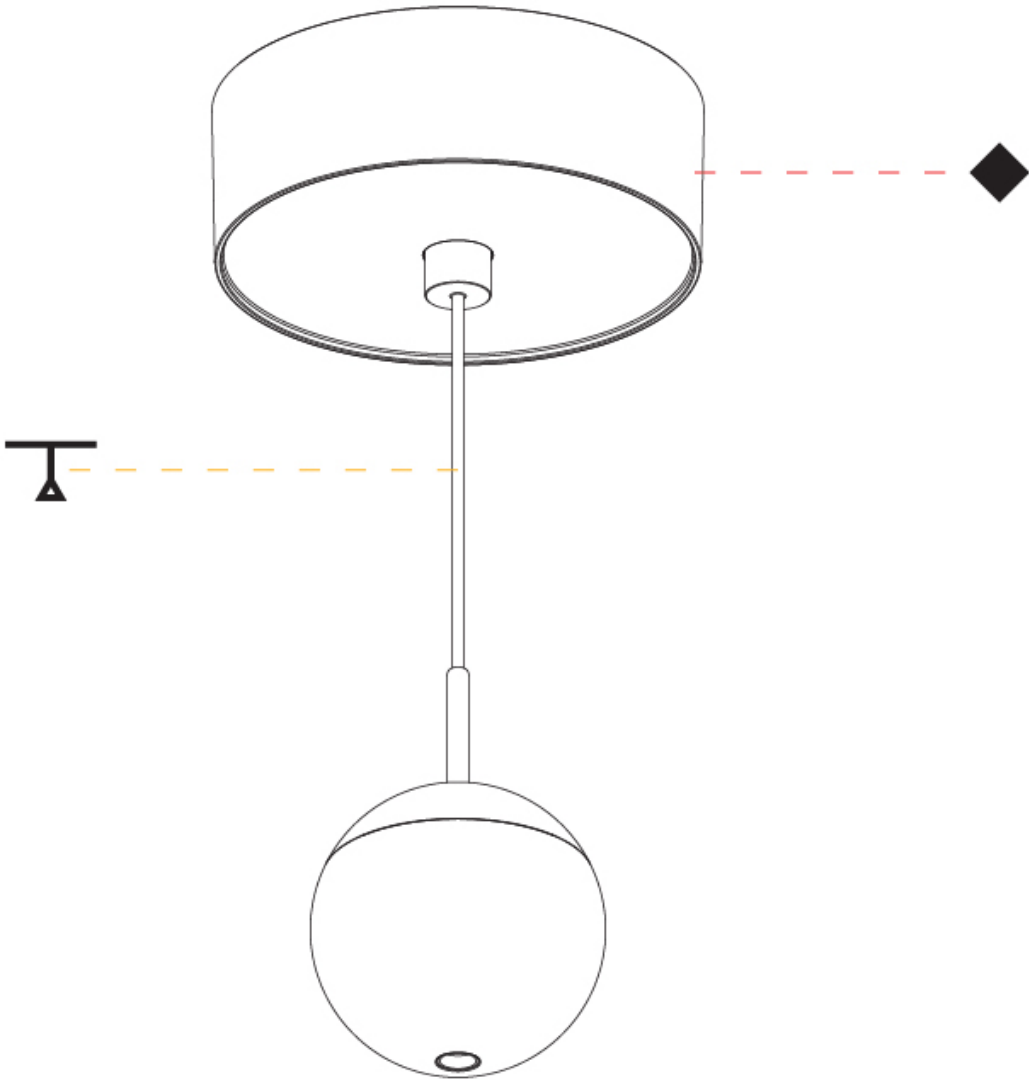

SNOOKER MONOPOINT RECESSED CANOPY
SUSPENSION

A300391-

base number	LED	Color	Shine Ring	Beam Angle	Cable
	Dimming	Temperature		Options	Color/Length

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Snooker
Subseries: Snooker Monopoint Recessed Canopy
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13/16
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 2072
Max. Overall Height (in): 81 7/16
Ceiling Thickness (mm): 10 / 12.5 / 15 / 25
Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1
Min. Recessing Depth (mm): 75
Min. Recessing Depth (in): 2 15/16
Weight (kg): 0.597
Weight (lbs): 1.316
Fixture Finish: CHR
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum Die Cast
Cable Details: 2000mm or 4000mm Cable - Color Options: Black / White / Orange / Red / Green
Cut-out Measurements: 68mm / 2 11/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.6
Total Output Wattage (W): 6
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: Yes
Driver Location: External
Driver Type: Constant Current - Universal
Driver Class: Class 2
Housing: ENCP3 w/Quick Connect
Input Voltage (V): 120 - 277
Constant Current (MA): 500

LED

Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 283 / 300 / 318 / 325
Nominal Lumen (lm): 460 / 487 / 517 / 528
CRI: >90 CRI
Efficiency (%): 60
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
Certified By: Certified for North American Standards
Available for international specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
IP Rating: IP20
If a consent effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

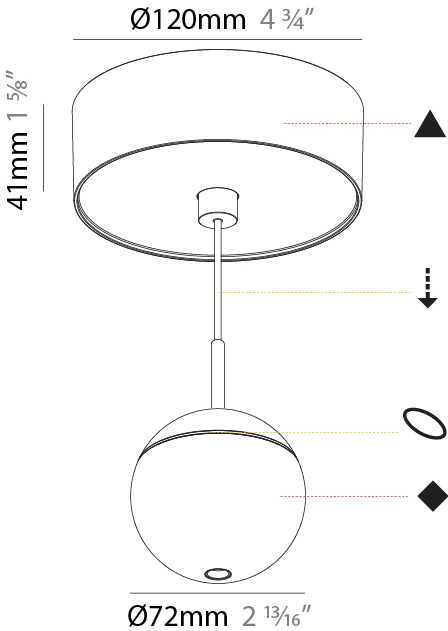

SNOOKER MONOPOINT RECESSED CANOPY
SUSPENSION

A300391-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

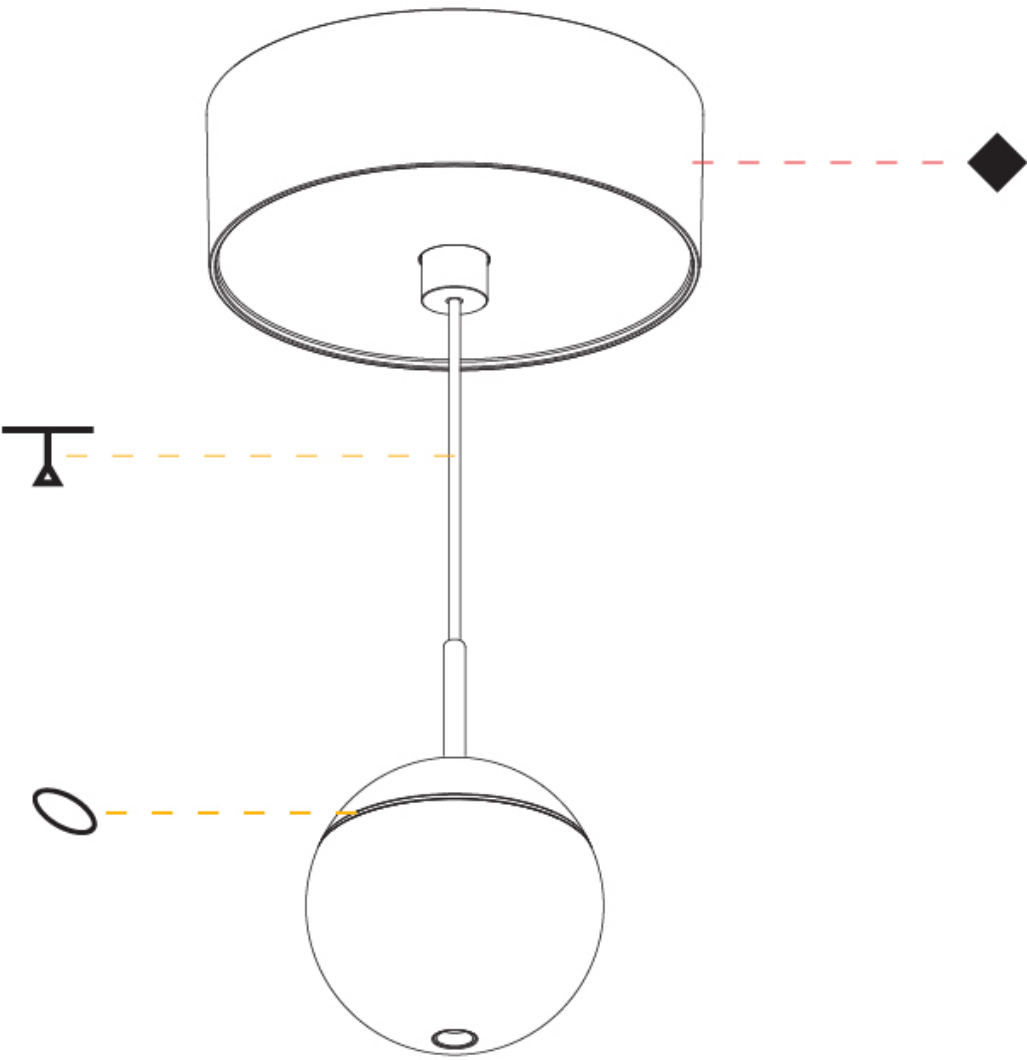

SNOOKER MONOPOINT RECESSED CANOPY
SUSPENSION

A30825-

base number	LED Dimming	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Beam Angle Options	Cable Color/Length	Shine Ring
-------------	-------------	-------------------	--------------------	---------------------	--------------------	--------------------	------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Snooker

Subseries: Snooker Monopoint Recessed Canopy

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 13/16

Height (mm): 72

Height (in): 2 13/16

Max. Overall Height (mm): 2072

Max. Overall Height (in): 81 9/16

Ceiling Thickness (mm): 10 / 12.5 / 15 / 25

Ceiling Thickness (in): 3/8 or 1/2 or 9/16 or 1

Min. Recessing Depth (mm): 75

Min. Recessing Depth (in): 2 15/16

Weight (kg): 0.597

Weight (lbs): 1.316

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

Cable Details: 2000mm or 4000mm Cable - Color Options: Black / White / Orange / Red / Green

Cut-out Measurements: 68mm / 2 11/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.6

Total Output Wattage (W): 6

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: ENCP3 w/Quick Connect

Input Voltage (V): 120 - 277

Constant Current (MA): 500

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Efficiency (%): 60

Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58


RATINGS AND CERTIFICATIONS

UL Listed, ETL Listed, CE, RoHS, FCC, Energy Star, DPA, ENEC, SAA, TUV, VDE, BSI, IEC, ISO, ISO 9001, ISO 14001, ISO 45001, ISO 50001, ISO 26001, ISO 27001, ISO 28001, ISO 29001, ISO 30001, ISO 31001, ISO 32001, ISO 33001, ISO 34001, ISO 35001, ISO 36001, ISO 37001, ISO 38001, ISO 39001, ISO 40001, ISO 41001, ISO 42001, ISO 43001, ISO 44001, ISO 45001, ISO 46001, ISO 47001, ISO 48001, ISO 49001, ISO 50001, ISO 51001, ISO 52001, ISO 53001, ISO 54001, ISO 55001, ISO 56001, ISO 57001, ISO 58001, ISO 59001, ISO 60001, ISO 61001, ISO 62001, ISO 63001, ISO 64001, ISO 65001, ISO 66001, ISO 67001, ISO 68001, ISO 69001, ISO 70001, ISO 71001, ISO 72001, ISO 73001, ISO 74001, ISO 75001, ISO 76001, ISO 77001, ISO 78001, ISO 79001, ISO 80001, ISO 81001, ISO 82001, ISO 83001, ISO 84001, ISO 85001, ISO 86001, ISO 87001, ISO 88001, ISO 89001, ISO 90001, ISO 91001, ISO 92001, ISO 93001, ISO 94001, ISO 95001, ISO 96001, ISO 97001, ISO 98001, ISO 99001, ISO 100001, ISO 101001, ISO 102001, ISO 103001, ISO 104001, ISO 105001, ISO 106001, ISO 107001, ISO 108001, ISO 109001, ISO 110001, ISO 111001, ISO 112001, ISO 113001, ISO 114001, ISO 115001, ISO 116001, ISO 117001, ISO 118001, ISO 119001, ISO 120001, ISO 121001, ISO 122001, ISO 123001, ISO 124001, ISO 125001, ISO 126001, ISO 127001, ISO 128001, ISO 129001, ISO 130001, ISO 131001, ISO 132001, ISO 133001, ISO 134001, ISO 135001, ISO 136001, ISO 137001, ISO 138001, ISO 139001, ISO 140001, ISO 141001, ISO 142001, ISO 143001, ISO 144001, ISO 145001, ISO 146001, ISO 147001, ISO 148001, ISO 149001, ISO 150001, ISO 151001, ISO 152001, ISO 153001, ISO 154001, ISO 155001, ISO 156001, ISO 157001, ISO 158001, ISO 159001, ISO 160001, ISO 161001, ISO 162001, ISO 163001, ISO 164001, ISO 165001, ISO 166001, ISO 167001, ISO 168001, ISO 169001, ISO 170001, ISO 171001, ISO 172001, ISO 173001, ISO 174001, ISO 175001, ISO 176001, ISO 177001, ISO 178001, ISO 179001, ISO 180001, ISO 181001, ISO 182001, ISO 183001, ISO 184001, ISO 185001, ISO 186001, ISO 187001, ISO 188001, ISO 189001, ISO 190001, ISO 191001, ISO 192001, ISO 193001, ISO 194001, ISO 195001, ISO 196001, ISO 197001, ISO 198001, ISO 199001, ISO 200001, ISO 201001, ISO 202001, ISO 203001, ISO 204001, ISO 205001, ISO 206001, ISO 207001, ISO 208001, ISO 209001, ISO 210001, ISO 211001, ISO 212001, ISO 213001, ISO 214001, ISO 215001, ISO 216001, ISO 217001, ISO 218001, ISO 219001, ISO 220001, ISO 221001, ISO 222001, ISO 223001, ISO 224001, ISO 225001, ISO 226001, ISO 227001, ISO 228001, ISO 229001, ISO 230001, ISO 231001, ISO 232001, ISO 233001, ISO 234001, ISO 235001, ISO 236001, ISO 237001, ISO 238001, ISO 239001, ISO 240001, ISO 241001, ISO 242001, ISO 243001, ISO 244001, ISO 245001, ISO 246001, ISO 247001, ISO 248001, ISO 249001, ISO 250001, ISO 251001, ISO 252001, ISO 253001, ISO 254001, ISO 255001, ISO 256001, ISO 257001, ISO 258001, ISO 259001, ISO 260001, ISO 261001, ISO 262001, ISO 263001, ISO 264001, ISO 265001, ISO 266001, ISO 267001, ISO 268001, ISO 269001, ISO 270001, ISO 271001, ISO 272001, ISO 273001, ISO 274001, ISO 275001, ISO 276001, ISO 277001, ISO 278001, ISO 279001, ISO 280001, ISO 281001, ISO 282001, ISO 283001, ISO 284001, ISO 285001, ISO 286001, ISO 287001, ISO 288001, ISO 289001, ISO 290001, ISO 291001, ISO 292001, ISO 293001, ISO 294001, ISO 295001, ISO 296001, ISO 297001, ISO 298001, ISO 299001, ISO 300001, ISO 301001, ISO 302001, ISO 303001, ISO 304001, ISO 305001, ISO 306001, ISO 307001, ISO 308001, ISO 309001, ISO 310001, ISO 311001, ISO 312001, ISO 313001, ISO 314001, ISO 315001, ISO 316001, ISO 317001, ISO 318001, ISO 319001, ISO 320001, ISO 321001, ISO 322001, ISO 323001, ISO 324001, ISO 325001, ISO 326001, ISO 327001, ISO 328001, ISO 329001, ISO 330001, ISO 331001, ISO 332001, ISO 333001, ISO 334001, ISO 335001, ISO 336001, ISO 337001, ISO 338001, ISO 339001, ISO 340001, ISO 341001, ISO 342001, ISO 343001, ISO 344001, ISO 345001, ISO 346001, ISO 347001, ISO 348001, ISO 349001, ISO 350001, ISO 351001, ISO 352001, ISO 353001, ISO 354001, ISO 355001, ISO 356001, ISO 357001, ISO 358001, ISO 359001, ISO 360001, ISO 361001, ISO 362001, ISO 363001, ISO 364001, ISO 365001, ISO 366001, ISO 367001, ISO 368001, ISO 369001, ISO 370001, ISO 371001, ISO 372001, ISO 373001, ISO 374001, ISO 375001, ISO 376001, ISO 377001, ISO 378001, ISO 379001, ISO 380001, ISO 381001, ISO 382001, ISO 383001, ISO 384001, ISO 385001, ISO 386001, ISO 387001, ISO 388001, ISO 389001, ISO 390001, ISO 391001, ISO 392001, ISO 393001, ISO 394001, ISO 395001, ISO 396001, ISO 397001, ISO 398001, ISO 399001, ISO 400001, ISO 401001, ISO 402001, ISO 403001, ISO 404001, ISO 405001, ISO 406001, ISO 407001, ISO 408001, ISO 409001, ISO 410001, ISO 411001, ISO 412001, ISO 413001, ISO 414001, ISO 415001, ISO 416001, ISO 417001, ISO 418001, ISO 419001, ISO 420001, ISO 421001, ISO 422001, ISO 423001, ISO 424001, ISO 425001, ISO 426001, ISO 427001, ISO 428001, ISO 429001, ISO 430001, ISO 431001, ISO 432001, ISO 433001, ISO 434001, ISO 435001, ISO 436001, ISO 437001, ISO 438001, ISO 439001, ISO 440001, ISO 441001, ISO 442001, ISO 443001, ISO 444001, ISO 445001, ISO 446001, ISO 447001, ISO 448001, ISO 449001, ISO 450001, ISO 451001, ISO 452001, ISO 453001, ISO 454001, ISO 455001, ISO 456001, ISO 457001, ISO 458001, ISO 459001, ISO 460001, ISO 461001, ISO 462001, ISO 463001, ISO 464001, ISO 465001, ISO 466001, ISO 467001, ISO 468001, ISO 469001, ISO 470001, ISO 471001, ISO 472001, ISO 473001, ISO 474001, ISO 475001, ISO 476001, ISO 477001, ISO 478001, ISO 479001, ISO 480001, ISO 481001, ISO 482001, ISO 483001, ISO 484001, ISO 485001, ISO 486001, ISO 487001, ISO 488001, ISO 489001, ISO 490001, ISO 491001, ISO 492001, ISO 493001, ISO 494001, ISO 495001, ISO 496001, ISO 497001, ISO 498001, ISO 499001, ISO 500001, ISO 501001, ISO 502001, ISO 503001, ISO 504001, ISO 505001, ISO 506001, ISO 507001, ISO 508001, ISO 509001, ISO 510001, ISO 511001, ISO 512001, ISO 513001, ISO 514001, ISO 515001, ISO 516001, ISO 517001, ISO 518001, ISO 519001, ISO 520001, ISO 521001, ISO 522001, ISO 523001, ISO 524001, ISO 525001, ISO 526001, ISO 527001, ISO 528001, ISO 529001, ISO 530001, ISO 531001, ISO 532001, ISO 533001, ISO 534001, ISO 535001, ISO 536001, ISO 537001, ISO 538001, ISO 539001, ISO 540001, ISO 541001, ISO 542001, ISO 543001, ISO 544001, ISO 545001, ISO 546001, ISO 547001, ISO 548001, ISO 549001, ISO 550001, ISO 551001, ISO 552001, ISO 553001, ISO 554001, ISO 555001, ISO 556001, ISO 557001, ISO 558001, ISO 559001, ISO 560001, ISO 561001, ISO 562001, ISO 563001, ISO 564001, ISO 565001, ISO 566001, ISO 567001, ISO 568001, ISO 569001, ISO 570001, ISO 571001, ISO 572001, ISO 573001, ISO 574001, ISO 575001, ISO 576001, ISO 577001, ISO 578001, ISO 579001, ISO 580001, ISO 581001, ISO 582001, ISO 583001, ISO 584001, ISO 585001, ISO 586001, ISO 587001, ISO 588001, ISO 589001, ISO 590001, ISO 591001, ISO 592001, ISO 593001, ISO 594001, ISO 595001, ISO 596001, ISO 597001, ISO 598001, ISO 599001, ISO 600001, ISO 601001, ISO 602001, ISO 603001, ISO 604001, ISO 605001, ISO 606001, ISO 607001, ISO 608001, ISO 609001, ISO 610001, ISO 611001, ISO 612001, ISO 613001, ISO 614001, ISO 615001, ISO 616001, ISO 617001, ISO 618001, ISO 619001, ISO 620001, ISO 621001, ISO 622001, ISO 623001, ISO 624001, ISO 625001, ISO 626001, ISO 627001, ISO 628001, ISO 629001, ISO 630001, ISO 631001, ISO 632001, ISO 633001, ISO 634001, ISO 635001, ISO 636001, ISO 637001, ISO 638001, ISO 639001, ISO 640001, ISO 641001, ISO 642001, ISO 643001, ISO 644001, ISO 645001, ISO 646001, ISO 647001, ISO 648001, ISO 649001, ISO 650001, ISO 651001, ISO 652001, ISO 653001, ISO 654001, ISO 655001, ISO 656001, ISO 657001, ISO 658001, ISO 659001, ISO 660001, ISO 661001, ISO 662001, ISO 663001, ISO 664001, ISO 665001, ISO 666001, ISO 667001, ISO 668001, ISO 669001, ISO 670001, ISO 671001, ISO 672001, ISO 673001, ISO 674001, ISO 675001, ISO 676001, ISO 677001, ISO 678001, ISO 679001, ISO 680001, ISO 681001, ISO 682001, ISO 683001, ISO 684001, ISO 685001, ISO 686001, ISO 687001, ISO 688001, ISO 689001, ISO 690001, ISO 691001, ISO 692001, ISO 693001, ISO 694001, ISO 695001, ISO 696001, ISO 697001, ISO 698001, ISO 699001, ISO 700001, ISO 701001, ISO 702001, ISO 703001, ISO 704001, ISO 705001, ISO 706001, ISO 707001, ISO 708001, ISO 709001, ISO 710001, ISO 711001, ISO 712001, ISO 713001, ISO 714001, ISO 715001, ISO 716001, ISO 717001, ISO 718001, ISO 719001, ISO 720001, ISO 721001, ISO 722001, ISO 723001, ISO 724001, ISO 725001, ISO 726001, ISO 727001, ISO 728001, ISO 729001, ISO 730001, ISO 731001, ISO 732001, ISO 733001, ISO 734001, ISO 735001, ISO 736001, ISO 737001, ISO 738001, ISO 739001, ISO 740001, ISO 741001, ISO 742001, ISO 743001, ISO 744001, ISO 745001, ISO 746001, ISO 747001, ISO 748001, ISO 749001, ISO 750001, ISO 751001, ISO 752001, ISO 753001, ISO 754001, ISO 755001, ISO 756001, ISO 757001, ISO 758001, ISO 759001, ISO 760001, ISO 761001, ISO 762001, ISO 763001, ISO 764001, ISO 765001, ISO 766001, ISO 767001, ISO 768001, ISO 769001, ISO 770001, ISO 771001, ISO 772001, ISO 773001, ISO 774001, ISO 775001, ISO 776001, ISO 777001, ISO 778001, ISO 779001, ISO 780001, ISO 781001, ISO 782001, ISO 783001, ISO 784001, ISO 785001, ISO 786001, ISO 787001, ISO 788001, ISO 789001, ISO 790001, ISO 791001, ISO 792001, ISO 793001, ISO 794001, ISO 795001, ISO 796001, ISO 797001, ISO 798001, ISO 799001, ISO 800001, ISO 801001, ISO 802001, ISO 803001, ISO 804001, ISO 805001, ISO 806001, ISO 807001, ISO 808001, ISO 809001, ISO 810001, ISO 811001, ISO 812001, ISO 813001, ISO 814001, ISO 815001, ISO 816001, ISO 817001, ISO 818001, ISO 819001, ISO 820001, ISO 821001, ISO 822001, ISO 823001, ISO 824001, ISO 825001, ISO 826001, ISO 827001, ISO 828001, ISO 829001, ISO 830001, ISO 831001, ISO 832001, ISO 833001, ISO 834001, ISO 835001, ISO 836001, ISO 837001, ISO 838001, ISO 839001, ISO 840001, ISO 841001, ISO 842001, ISO 843001, ISO 844001, ISO 845001, ISO 846001, ISO 847001, ISO 848001, ISO 849001, ISO 850001, ISO 851001, ISO 852001, ISO 853001, ISO 854001, ISO 855001, ISO 856001, ISO 857001, ISO 858001, ISO 859001, ISO 860001, ISO 861001, ISO 862001, ISO 863001, ISO 864001, ISO 865001, ISO 866001, ISO 867001, ISO 868001, ISO 869001, ISO 870001, ISO 871001, ISO 872001, ISO 873001, ISO 874001, ISO 875001, ISO 876001, ISO 877001, ISO 878001, ISO 879001, ISO 880001, ISO 881001, ISO 882001, ISO 883001, ISO 884001, ISO 885001, ISO 886001, ISO 887001, ISO 888001, ISO 889001, ISO 890001, ISO 891001, ISO 892001, ISO 893001, ISO 894001, ISO 895001, ISO 896001, ISO 897001, ISO 898001, ISO 899001, ISO 900001, ISO 901001, ISO 902001, ISO 903001, ISO 904001, ISO 905001, ISO 906001, ISO 907001, ISO 908001, ISO 909001, ISO 910001, ISO 911001, ISO 912001, ISO 913001, ISO 914001, ISO 915001, ISO 916001, ISO 917001, ISO 918001, ISO 919001, ISO 920001, ISO 921001, ISO 922001, ISO 923001, ISO 924001, ISO 925001, ISO 926001, ISO 927001, ISO 928001, ISO 929001, ISO 930001, ISO 931001, ISO 932001, ISO 933001, ISO 934001, ISO 935001, ISO 936001, ISO 937001, ISO 938001, ISO 939001, ISO 940001, ISO 941001, ISO 942001, ISO 943001, ISO 944001, ISO 945001, ISO 946001, ISO 947001, ISO 948001, ISO 949001, ISO 950001, ISO 951001, ISO 952001, ISO 953001, ISO 954001, ISO 955001, ISO 956001, ISO 957001, ISO 958001, ISO 959001, ISO 960001, ISO 961001, ISO 962001, ISO 963001, ISO 964001, ISO 965001, ISO 966001, ISO 967001, ISO 968001, ISO 969001, ISO 970001, ISO 971001, ISO 972001, ISO 973001, ISO 974001, ISO 975001, ISO 976001, ISO 977001, ISO 978001, ISO 979001, ISO 980001, ISO 981001, ISO 982001, ISO 983001, ISO 984001, ISO 985001, ISO 986001, ISO 987001, ISO 988001, ISO 989001, ISO 990001, ISO 991001, ISO 992001, ISO 993001, ISO 994001, ISO 995001, ISO 996001, ISO 997001, ISO 998001, ISO 999001, ISO 1000001, ISO 1001001, ISO 1002001, ISO 1003001, ISO 1004001, ISO 1005001, ISO 1006001, ISO 1007001, ISO 1008001, ISO 1009001, ISO 1010001, ISO 1011001, ISO 1012001, ISO 1013001, ISO 1014001, ISO 1015001, ISO 1016001, ISO 1017001, ISO 1018001, ISO 1019001, ISO 1020001, ISO 1021001, ISO 1022001, ISO 1023001, ISO 1024001, ISO 1025001, ISO 1026001, ISO 1027001, ISO 1028001, ISO 1029001, ISO 1030001, ISO 1031001, ISO 1032001, ISO 1033001, ISO 1034001, ISO 1035001, ISO 1036001, ISO 1037001, ISO 1038001, ISO 1039001, ISO 1040001, ISO 1041001, ISO 1042001, ISO 1043001, ISO 1044001, ISO 1045001, ISO 1046001, ISO 1047001, ISO 1048001, ISO 1049001, ISO 1050001, ISO 1051001, ISO 1052001, ISO 1053001, ISO 1054001, ISO 1055001, ISO 1056001, ISO 1057001, ISO 1058001, ISO 1059001, ISO 1060001, ISO 1061001, ISO 1062001, ISO 1063001, ISO 1064001, ISO 1065001, ISO 1066001, ISO 1067001, ISO 1068001, ISO 1069001, ISO 1070001, ISO 1071001, ISO 1072001, ISO 1073001, ISO 1074001, ISO 1075001, ISO 1076001, ISO 1077001, ISO 1078001, ISO 1079001, ISO 1080001, ISO 1081001, ISO 1082001, ISO 1083001, ISO 1084001, ISO 1085001, ISO 1086001, ISO 1087001, ISO 1088001, ISO 1089001, ISO 1090001, ISO 1091001, ISO 1092001, ISO 1093001, ISO 1094001, ISO 1095001, ISO 1096001, ISO 1097001, ISO 1098001, ISO 1099001, ISO 1100001, ISO 1101001, ISO 1102001, ISO 1103001, ISO 1104001, ISO 1105001, ISO 1106001, ISO 1107001, ISO 1108001, ISO 1109001, ISO 1110001, ISO 1111001, ISO 1112001, ISO 1113001, ISO 1114001, ISO 1115001, ISO 1116001, ISO 1117001, ISO 1118001, ISO 1119001, ISO 1120001, ISO 1121001, ISO 1122001, ISO 1123001, ISO 1124001, ISO 1125001, ISO 1126001, ISO 1127001, ISO 1128001, ISO 1129001, ISO 1130001, ISO 1131001, ISO 1132001, ISO 1133001, ISO 1134001, ISO 1135001, ISO 1136001, ISO 1137001, ISO 1138001, ISO 1139001, ISO 1140001, ISO 1141001, ISO 1142001, ISO 1143001, ISO 1144001, ISO 1145001, ISO 1146001, ISO 1147001, ISO 1148001, ISO 1149001, ISO 1150001, ISO 1151001, ISO 1152001, ISO 1153001, ISO 1154001, ISO 1155001, ISO 1156001, ISO 1157001, ISO 1158001, ISO 1159001, ISO 1160001, ISO 1161001, ISO 1162001, ISO 1163001, ISO 1164001, ISO 1165001, ISO 1166001, ISO 1167001, ISO 1168001, ISO 1169001, ISO 1170001, ISO 1171001, ISO 1172001, ISO 1173001, ISO 1174001, ISO 1175001, ISO 1176001, ISO 1177001, ISO 1178001, ISO 1179001, ISO 1180001, ISO 1181001, ISO 1182001, ISO 1183001, ISO 1184001, ISO 1185001, ISO 1186001, ISO 1187001, ISO 1188001, ISO 1189001, ISO 1190001, ISO 1191001, ISO 1192001, ISO 1193001, ISO 1194001, ISO 1195001, ISO 1196001, ISO 1197001, ISO 1198001, ISO 1199001, ISO 1200001, ISO 1201001, ISO 1202001, ISO 1203001, ISO 1204001, ISO 1205001, ISO 1206001, ISO 1207001, ISO 1208001, ISO 1209001, ISO 1210001, ISO 1211001, ISO 1212001, ISO 12130

SNOOKER MONOPOINT RECESSED CANOPY
SUSPENSION

A30825-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

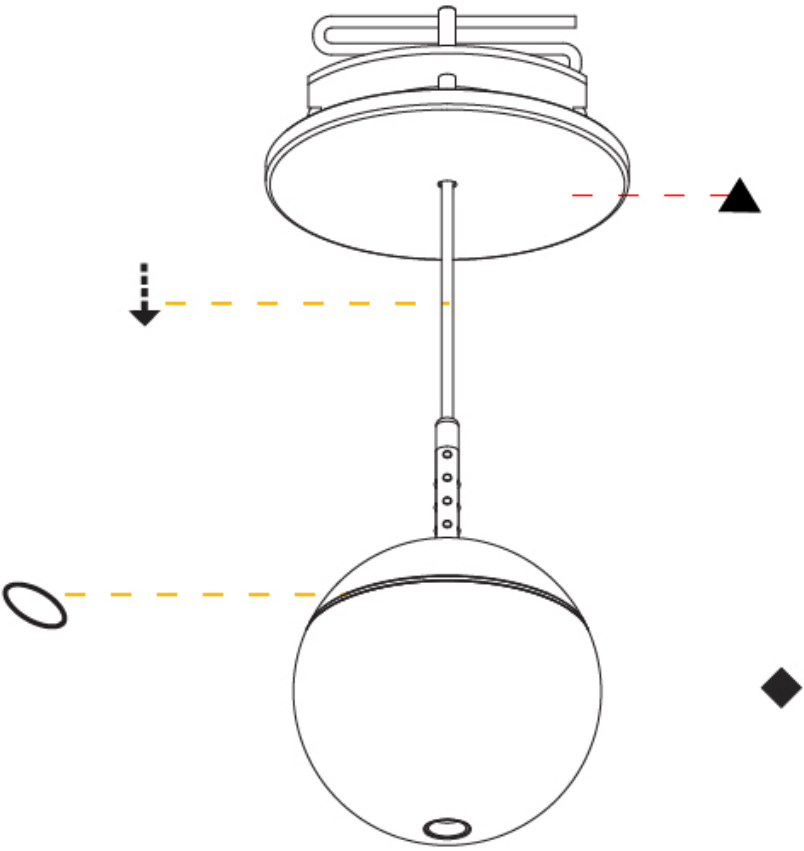

A

SNOOKER MONOPOINT SURFACE CANOPY
SUSPENSION

A30827-

base number	Color Temperature	Finishes (Diamond)	Finishes (Triangle)	Diffuser Options	Lens Options	Cable Color/Length
-------------	----------------------	-----------------------	------------------------	---------------------	-----------------	-----------------------

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Snooker
Subseries: Snooker Monopoint Surface Canopy
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13/16
Height (mm): 72
Height (in): 2 13/16
Max. Overall Height (mm): 2072
Max. Overall Height (in): 81 9/16
Weight (kg): 0.745
Weight (lbs): 1.642
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast
Cable Details: 2000mm or 4000mm Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.6
Total Output Wattage (W): 6
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: Yes
Driver Location: External
Driver Type: Constant Current - Universal
Driver Class: Class 2
Housing: ENCP3 w/quick connect
Input Voltage (V): 120 - 277
Constant Current (MA): 500

LED

Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Efficiency (%): 60
Lamp Life (hrs): 50000


OPTICAL

Optic°: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

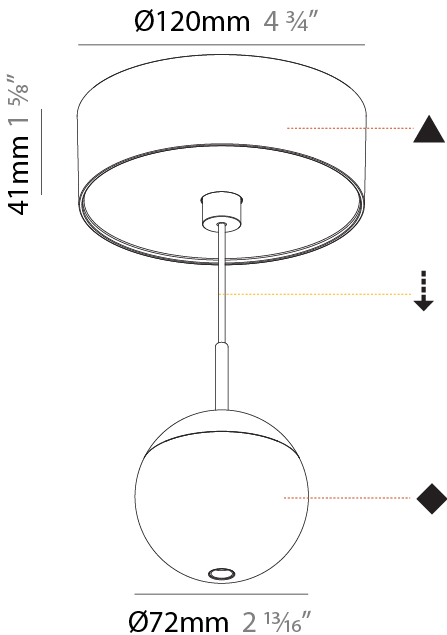

SNOOKER MONOPOINT SURFACE CANOPY
SUSPENSION

A30827-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

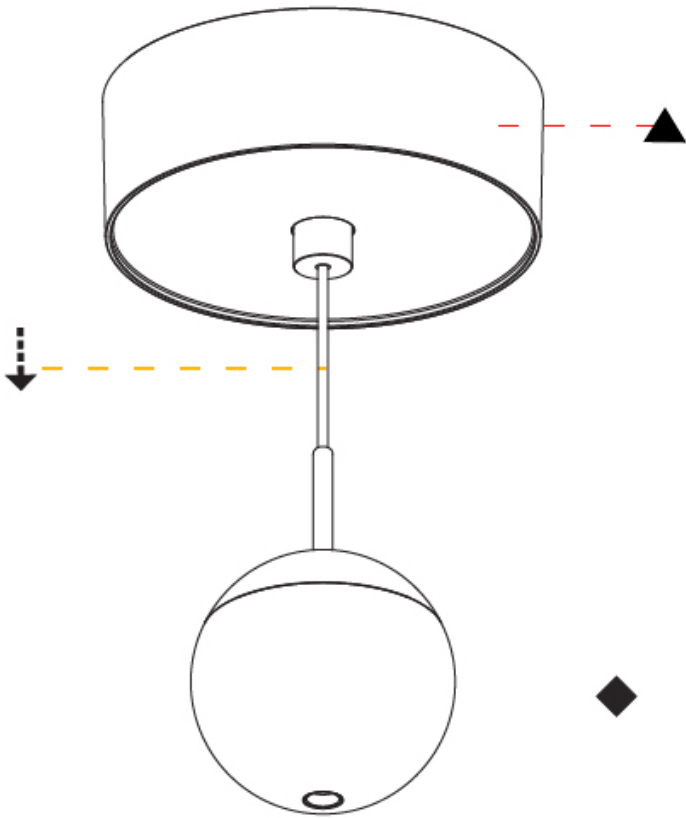

A

SNOOKER
COLOR FINISH CHART

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish

Chrome - (CHR)

Sparkling Silver - 01 (SSR)

Black Velvet - 02 (BKV)

Crystal White - 03 (CWI)

Creamy - 04 (CRY)

Hampton Bay - 05 (HAB)

Urban Forest - 07 (UFT)

In the Army - 08 (ITA)

Rusty Angel - 09 (RUA)

Fade to Gray - 12 (FTG)

Mysterious Gray - 13 (MYG)

Lost Dream - 15 (LOD)

Purple Sky - 16 (PUS)

Fresh Oh - 17 (FRO)

Funky P. - 18 (FUP)

Kissing Aphrodite - 19 (KIA)

Poseidon's Paradise - 20 (POP)

Blue Sky - 21 (BLS)

Spring Green - 22 (SPG)

Mellow Yellow - 23 (MEY)

Golden Heart - 24 (GOH)

Champagne Cream - 26 (CHC)

Copper Mine - 27 (COM)

Ancient Bronze - 28 (ABZ)

Jazz Gold - 29 (JAG)

Olive Breeze - 30 (OBR)

Moonlight Silver - 31 (MOS)

Rosewood Red - 32 (ROR)




SNOOKER METAL MONOPOINT SURFACE
CANOPY,SNOOKER MONOPOINT RECESSED
CANOPY,SNOOKER MONOPOINT SURFACE
CANOPY SUSPENSION

COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Accent Finish

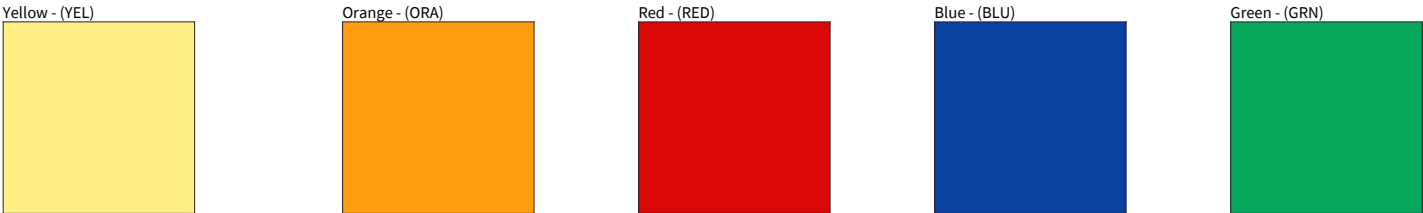

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.
Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)