

SOLIDO POST

E15B000-

base number _____ Color _____
Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
Partner: Diamante _____
Division: Exterior _____
Installation: Post _____
Product Type: Bollard - Mini _____
Mounting Location: Above Ground _____
Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 160 _____
Length (in): 6 ⁵/₁₆ _____
Width (mm): 85 _____
Width (in): 3 ³/₈ _____
Height (mm): 294 _____
Height (in): 11 ⁹/₁₆ _____
Weight (kg): 2.1 _____
Diffuser: PMMA - Opal _____
Fixture Finish: ANB _____
Fixture Material: Aluminum Alloy _____
Cable Details: Supplied with one power supply cable 0.8m in length _____
Upon Request: Bolt Down _____

ELECTRICAL

Lamp Type: LED _____
Input Wattage (W): 2.5 _____
Total Output Wattage (W): 2.1 _____
Dimming: Non-dimming / DALI Dimming / DMX _____
Driver Included: No _____
Driver Location: Remote _____
Driver Type: Constant Voltage - Universal _____
Driver Class: Class 2 _____
Input Voltage (V): 120 - 277 _____
Output Voltage (V): 24 _____
Upon Request: 0-10V Dimming _____

LED



Number of LEDs: 30 _____
Color Temperature (°K): 3000 / 4000 / 6000 _____
Max. Delivered Lumen (lm): 200 / 220 / 240 _____
Nominal Lumen (lm): 325 / 360 / 390 _____
CRI: >80 CRI _____
Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
IP rating: IP66 _____
IK Rating: IK08 _____

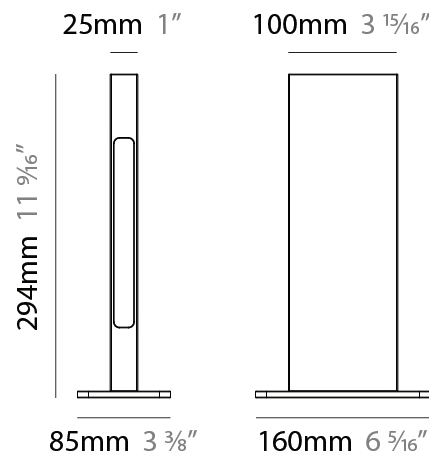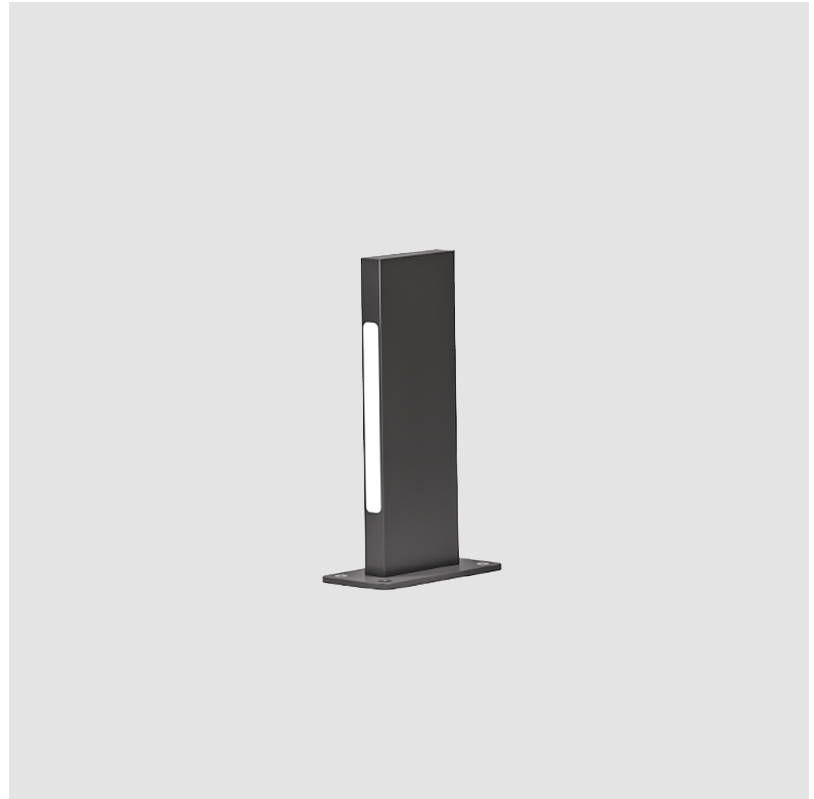

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

SOLIDO POST

E15B001-

base number Color
Temperature

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido
 Partner: Diamante
 Division: Exterior
 Installation: Post
 Product Type: Bollard - Mini
 Mounting Location: Above Ground
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 160
 Length (in): 6 ⁵/₁₆
 Width (mm): 85
 Width (in): 3 ³/₈
 Height (mm): 494
 Height (in): 19 ⁷/₁₆
 Weight (kg): 2.1
 Diffuser: PMMA - Opal
 Fixture Finish: ANB
 Fixture Material: Aluminum Alloy
 Cable Details: Supplied with one power supply cable 0.8m in length
 Upon Request: Bolt Down

ELECTRICAL

Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.1
 Dimming: Non-dimming / DALI Dimming / DMX
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 24
 Upon Request: 0-10V Dimming

LED



Number of LEDs: 72
 Color Temperature (°K): 3000 / 4000 / 6000
 Max. Delivered Lumen (lm): 480 / 530 / 580
 Nominal Lumen (lm): 775 / 860 / 935
 CRI: >80 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK10

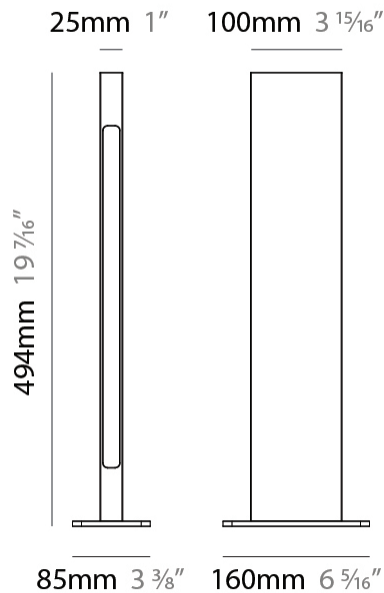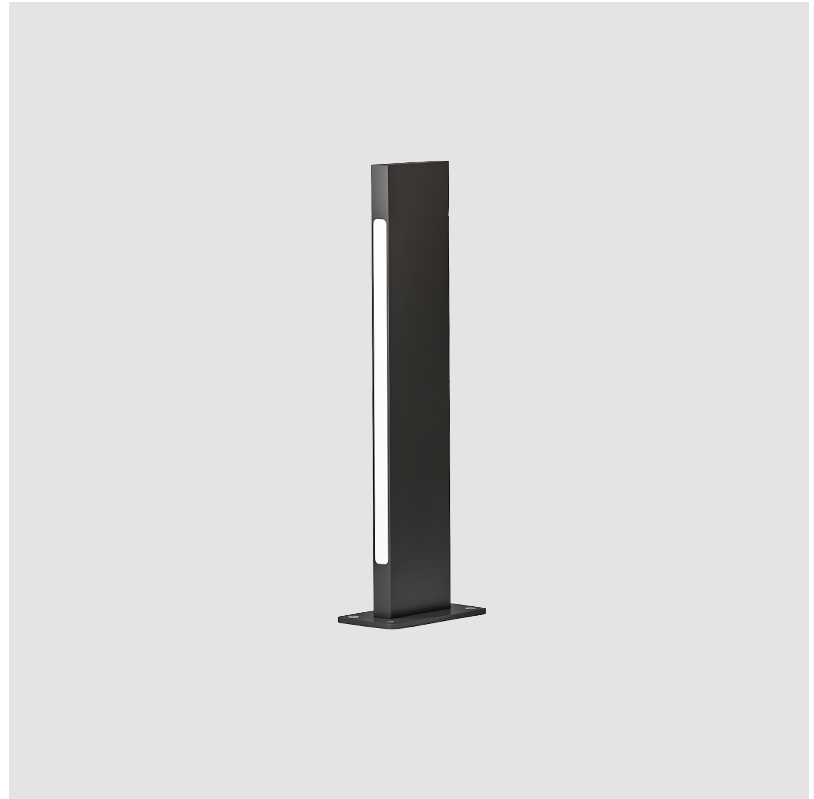

SOLIDO POST

E15B002-

base number _____ Color _____
 Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
 Partner: Diamante _____
 Division: Exterior _____
 Installation: Post _____
 Product Type: Bollard _____
 Mounting Location: Above Ground _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 160 _____
 Length (in): 6 ⁵/₁₆ _____
 Width (mm): 85 _____
 Width (in): 3 ³/₈ _____
 Height (mm): 794 _____
 Height (in): 31 ¹/₄ _____
 Weight (kg): 3.1 _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: ANB _____
 Fixture Material: Aluminum Alloy _____
 Cable Details: Supplied with one power supply cable 0.8m in length _____

ELECTRICAL

Lamp Type: LED _____
 Input Wattage (W): 11 _____
 Total Output Wattage (W): 9.35 _____
 Dimming: Non-dimming / DALI Dimming / DMX _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 24 _____
 Upon Request: 0-10V Dimming _____

LED


Number of LEDs: 132 _____
 Color Temperature (°K): 3000 / 4000 / 6000 _____
 Max. Delivered Lumen (lm): 880 / 975 / 1060 _____
 Nominal Lumen (lm): 1420 / 1575 / 1715 _____
 CRI: >80 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK10 _____

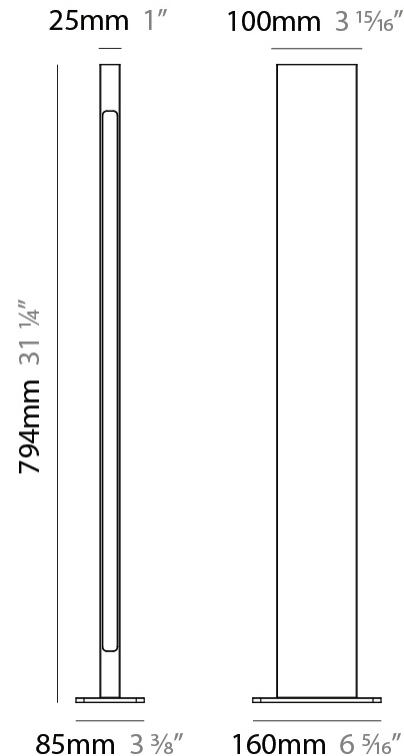

SOLIDO POST

E15B003-

base number _____ Color _____
 Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
 Partner: Diamante _____
 Division: Exterior _____
 Installation: Post _____
 Product Type: Pedestrian Posts _____
 Mounting Location: Above Ground _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 160 _____
 Length (in): 6 ³/₁₆ _____
 Width (mm): 85 _____
 Width (in): 3 ³/₈ _____
 Height (mm): 2206 _____
 Height (in): 86 ⁷/₈ _____
 Weight (kg): 13.5 _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: ANB _____
 Fixture Material: Aluminum Alloy _____
 Cable Details: Supplied with one power supply cable 0.8m in length _____

ELECTRICAL

Lamp Type: LED _____
 Input Wattage (W): 34.5 _____
 Total Output Wattage (W): 29.3 _____
 Dimming: Non-dimming / DALI Dimming / DMX _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 24 _____
 Upon Request: 0-10V Dimming _____

LED


Number of LEDs: 420 _____
 Color Temperature (°K): 3000 / 4000 / 6000 _____
 Max. Delivered Lumen (lm): 2795 / 3100 / 3370 _____
 Nominal Lumen (lm): 4525 / 5020 / 5450 _____
 CRI: >80 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK10 _____

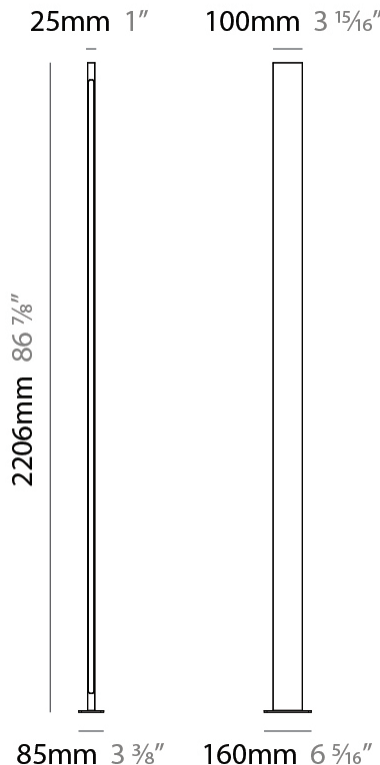

SOLIDO POST

E15B004-

base number _____ Color _____
 Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
 Partner: Diamante _____
 Division: Exterior _____
 Installation: Post _____
 Product Type: Bollard - Mini _____
 Mounting Location: Above Ground _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 160 _____
 Length (in): 6 ⁵/₁₆ _____
 Width (mm): 85 _____
 Width (in): 3 ³/₈ _____
 Height (mm): 294 _____
 Height (in): 11 ⁹/₁₆ _____
 Weight (kg): 2.1 _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: ANB _____
 Fixture Material: Aluminum Alloy _____
 Cable Details: Supplied with one power supply cable 0.8m in length
 Upon Request: Bolt Down _____

ELECTRICAL

Lamp Type: LED _____
 Input Wattage (W): 5 _____
 Total Output Wattage (W): 4.25 _____
 Dimming: Non-dimming / DALI Dimming / DMX _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 24 _____
 Upon Request: 0-10V Dimming _____

LED



Number of LEDs: 60 _____
 Color Temperature (°K): 3000 / 4000 / 6000 _____
 Max. Delivered Lumen (lm): 400 / 445 / 480 _____
 Nominal Lumen (lm): 645 / 715 / 780 _____
 CRI: >80 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK08 _____

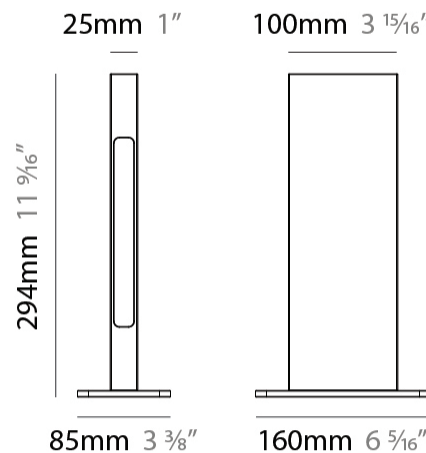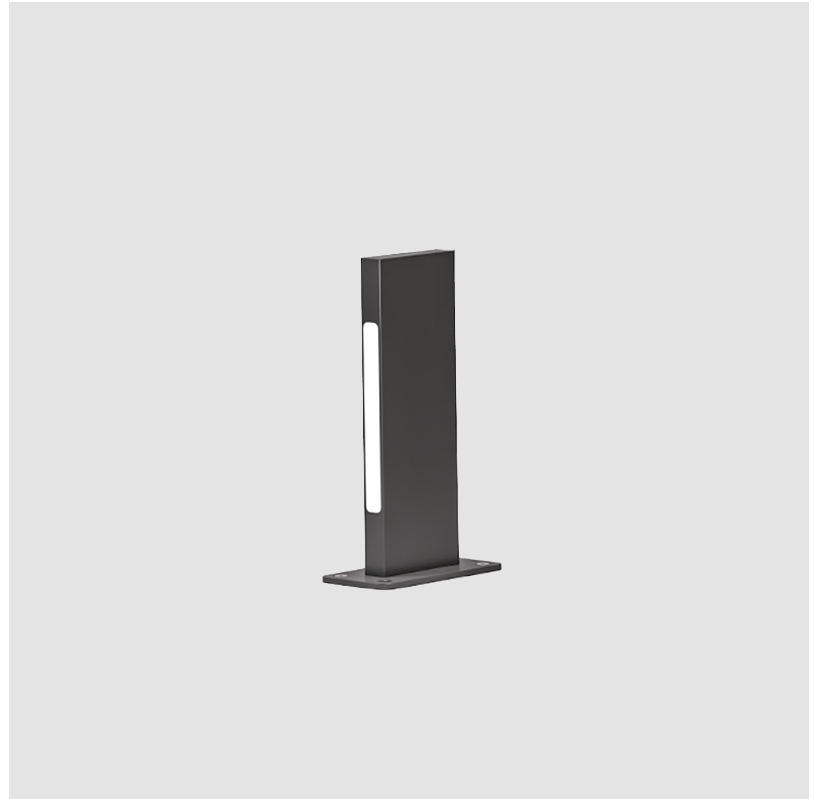

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

SOLIDO POST

E15B005-

base number Color
Temperature

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido
 Partner: Diamante
 Division: Exterior
 Installation: Post
 Product Type: Bollard - Mini
 Mounting Location: Above Ground
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 160
 Length (in): 6 ⁵/₁₆
 Width (mm): 85
 Width (in): 3 ³/₈
 Height (mm): 494
 Height (in): 19 ⁷/₁₆
 Weight (kg): 2.1
 Diffuser: PMMA - Opal
 Fixture Finish: ANB
 Fixture Material: Aluminum Alloy
 Cable Details: Supplied with one power supply cable 0.8m in length
 Upon Request: Bolt Down

ELECTRICAL

Lamp Type: LED
 Input Wattage (W): 12
 Total Output Wattage (W): 10.2
 Dimming: Non-dimming / DALI Dimming / DMX
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 24
 Upon Request: 0-10V Dimming

LED



Number of LEDs: 144
 Color Temperature (°K): 3000 / 4000 / 6000
 Max. Delivered Lumen (lm): 960 / 1065 / 1155
 Nominal Lumen (lm): 1550 / 1720 / 1870
 CRI: >80 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 120

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK10

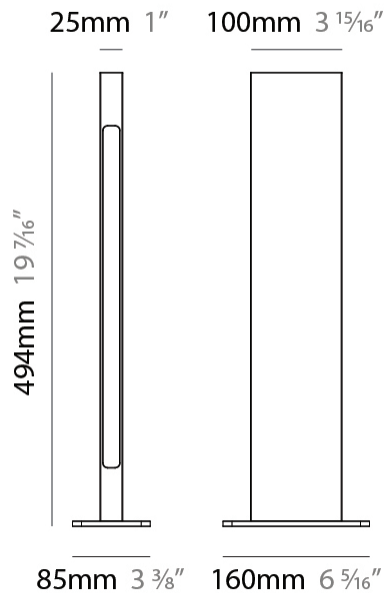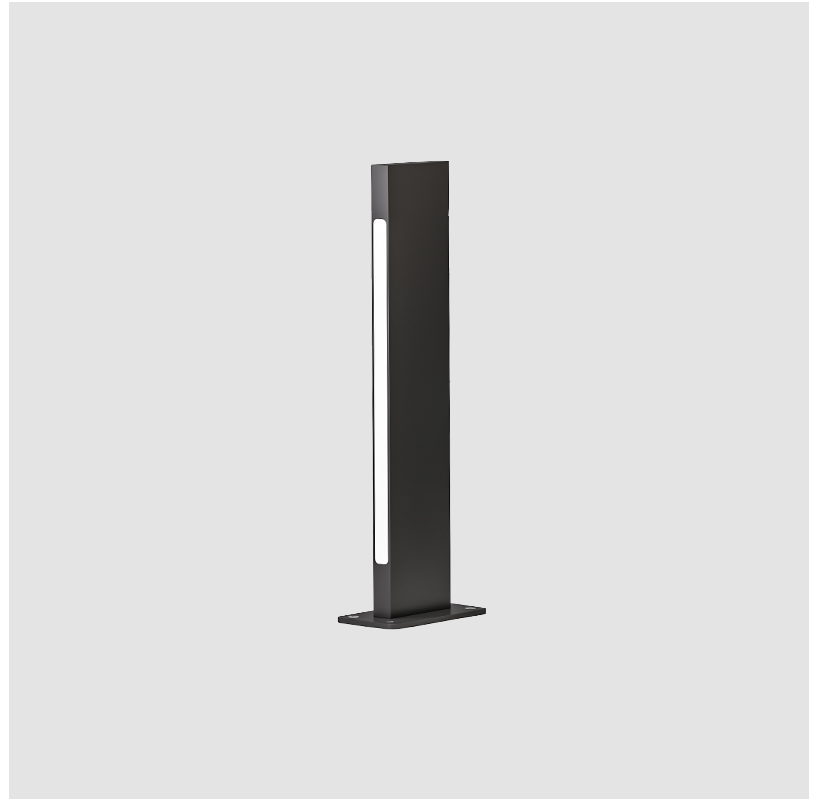

SOLIDO POST

E15B006-

base number _____ Color _____
 Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
 Partner: Diamante _____
 Division: Exterior _____
 Installation: Post _____
 Product Type: Bollard _____
 Mounting Location: Above Ground _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 160 _____
 Length (in): 6 ⁵/₁₆ _____
 Width (mm): 85 _____
 Width (in): 3 ³/₈ _____
 Height (mm): 794 _____
 Height (in): 31 ¹/₄ _____
 Weight (kg): 5 _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: ANB _____
 Fixture Material: Aluminum Alloy _____
 Cable Details: Supplied with one power supply cable 0.8m in length _____

ELECTRICAL

Lamp Type: LED _____
 Input Wattage (W): 22 _____
 Total Output Wattage (W): 18.7 _____
 Dimming: Non-dimming / DALI Dimming / DMX _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 24 _____
 Upon Request: 0-10V Dimming _____

LED


Number of LEDs: 264 _____
 Color Temperature (°K): 3000 / 4000 / 6000 _____
 Max. Delivered Lumen (lm): 1755 / 1950 / 2120 _____
 Nominal Lumen (lm): 2845 / 3155 / 3425 _____
 CRI: >80 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK10 _____

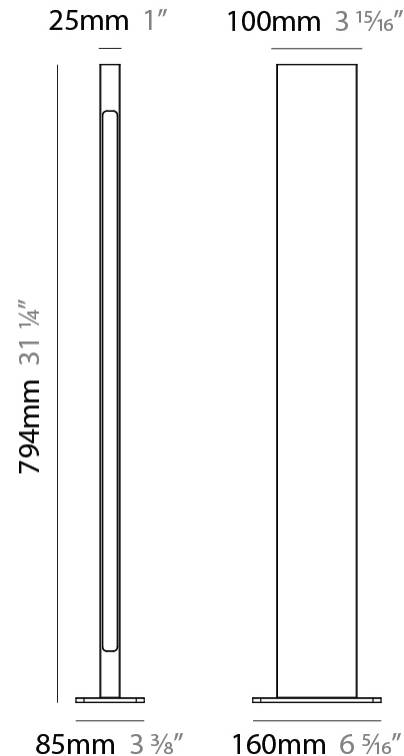

SOLIDO POST

E15B007-

base number _____ Color _____
 Temperature _____

- To build a product code in our configurator select the specify button on the base model # product page
- To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Solido _____
 Partner: Diamante _____
 Division: Exterior _____
 Installation: Post _____
 Product Type: Pedestrian Posts _____
 Mounting Location: Above Ground _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 160 _____
 Length (in): 6 ³/₁₆ _____
 Width (mm): 85 _____
 Width (in): 3 ³/₈ _____
 Height (mm): 2206 _____
 Height (in): 86 ⁷/₈ _____
 Weight (kg): 13.5 _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: ANB _____
 Fixture Material: Aluminum Alloy _____
 Cable Details: Supplied with one power supply cable 0.8m in length _____

ELECTRICAL

Lamp Type: LED _____
 Input Wattage (W): 69 _____
 Total Output Wattage (W): 58.6 _____
 Dimming: Non-dimming / DALI Dimming / DMX _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 24 _____
 Upon Request: 0-10V Dimming _____

LED


Number of LEDs: 840 _____
 Color Temperature (°K): 3000 / 4000 / 6000 _____
 Max. Delivered Lumen (lm): 5590 / 6205 / 6740 _____
 Nominal Lumen (lm): 9050 / 10040 / 10905 _____
 CRI: >80 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 120 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK10 _____

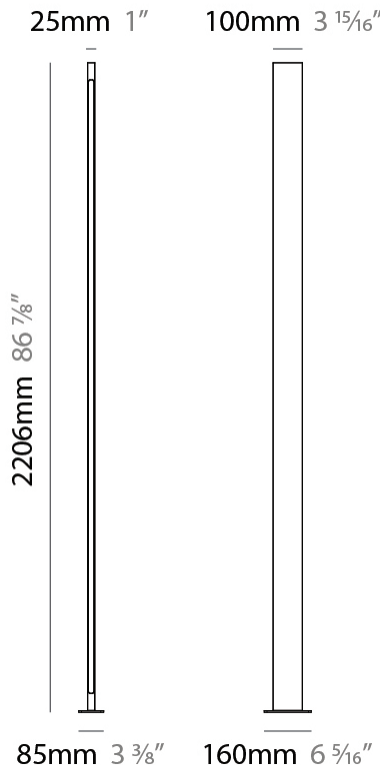

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish






































































Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.













PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	











LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)