

#### D141111-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao
Subseries: Tao Monopoint
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 80
Diameter (in): 3 ½
Height (mm): 300
Height (in): 11 <sup>13</sup> / <sub>16</sub>
Max. Overall Height (mm): 1800
Max. Overall Height (in): 70 $\frac{7}{2}$
Light Distribution: Omnidirectional
Weight (kg): 0.80
Weight (lbs): 1.76
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable

#### ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120
Upon Request: GU24 / 277Vac

#### LED

## OPTICAL

## RATINGS AND CERTIFICATIONS

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	










D141111-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

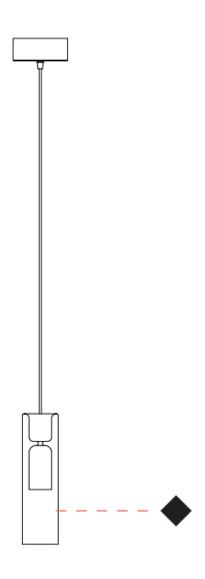





#### D141112-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 15/16
Height (mm): 370
Height (in): 14 1/16
Max. Overall Height (mm): 1870
Max. Overall Height (in): 73 $\frac{5}{8}$
Light Distribution: Omnidirectional
Weight (kg): 1.5
Weight (lbs): 3.31
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable

#### ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8
Lamp Base: E26
Input Voltage (V): 120
Upon Request: GU24 / 277Vac

#### LED

## OPTICAL

## RATINGS AND CERTIFICATIONS

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D141112-

PROJECT	
YPE	
PECIFIER	
QUANTITY	
ATE	_

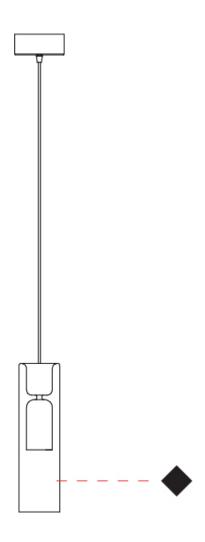





#### D141115-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao 2 Light Swag	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 80
Diameter (in): $3\frac{1}{8}$
Height (mm): 300
Height (in): $11^{13}/_{16}$
Max. Overall Height (mm): 2300
Max. Overall Height (in): 90 1/16
Light Distribution: Omnidirectional
Weight (kg): 1.5
Weight (lbs): 3.31
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal
Cable Details: 2000mm Cable

ELECTRICAL	
Number of Lamps: 2	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 6	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	


#### LED

## OPTICAL

#### **RATINGS AND CERTIFICATIONS**

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



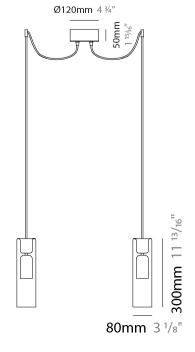






D141115-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE

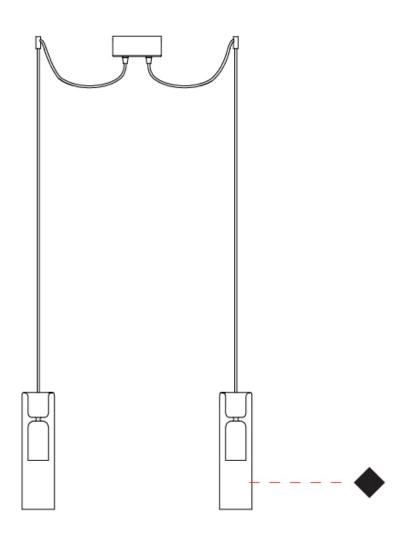





#### D141116-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao 2 Light Swag	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 15/16
Height (mm): 370
Height (in): 14 <sup>9</sup> / <sub>16</sub>
Max. Overall Height (mm): 1870
Max. Overall Height (in): 73 $\frac{5}{8}$
Light Distribution: Omnidirectional
Weight (kg): 3.2
Weight (lbs): 7.05
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 2	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 16	
Max. Wattage Per Lamp (W): 8	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: GU24 / 277Vac	


#### LED

#### OPTICAL

## **RATINGS AND CERTIFICATIONS**

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			



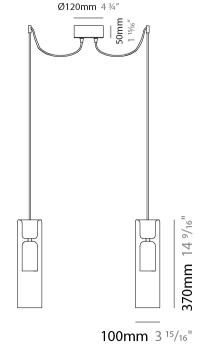






D141116-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

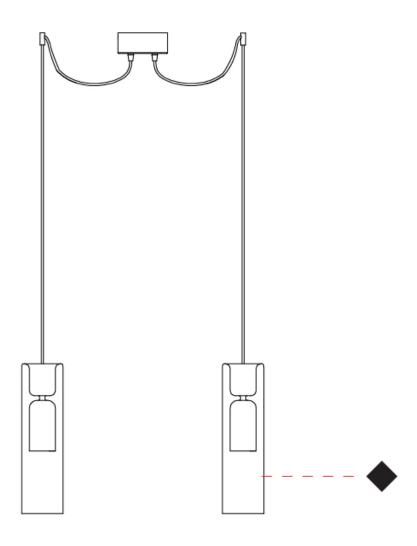





## **TAO 6 LIGHT CLUSTER SUSPENSION**

#### D141117-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao 6 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 270
Diameter (in): 10 ½
Max. Overall Height (mm): 1500
Max. Overall Height (in): 59 ½
Light Distribution: Omnidirectional
Weight (kg): 5.25
Weight (lbs): 11.5
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable
ELECTRICAL

ELECTRICAL	
Number of Lamps: 6	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 18	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	

#### LED

### OPTICAL


## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












## **TAO 6 LIGHT CLUSTER SUSPENSION**

D141117-

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

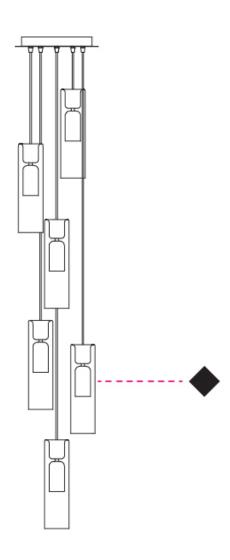





## **TAO 3 LIGHT CLUSTER SUSPENSION**

#### D141118-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao 3 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Diameter (mm): 270
Diameter (in): 10 ½
Height (mm): 1500
Height (in): 59 ½
Light Distribution: Omnidirectional
Weight (kg): 5.60
Weight (lbs): 12.34
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable
ELECTRICAL

Cable Details: 1500mm Cable
ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 24
Max. Wattage Per Lamp (W): 8
Lamp Base: G9
Input Voltage (V): 120

#### LED

### OPTICAL


## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20












## **TAO 3 LIGHT CLUSTER SUSPENSION**

D141118-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

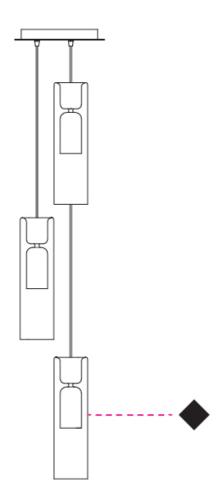





## **TAO 3 LIGHT LINEAR SUSPENSION**

#### D141120-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Subseries: Tao 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Subcategory: Pendant
PHYSICAL
Shape: Cylinder
Length (mm): 700
Length (in): 27 % 16
Height (mm): 1500
Height (in): 59 ½
Light Distribution: Omnidirectional
Weight (kg): 6.90
Weight (lbs): 15.21
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: PSS
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable
ELECTRICAL

Cable Details, 200011111 Cable	
ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 24	
Max. Wattage Per Lamp (W): 8	
Lamp Base: G9	
Input Voltage (V): 120	


#### LED

### OPTICAL

# RATINGS AND CERTIFICATIONS





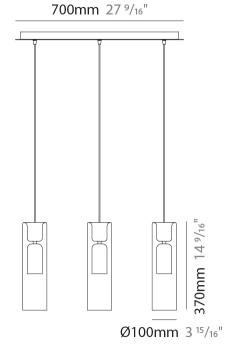






## **TAO 3 LIGHT LINEAR SUSPENSION**

D141120-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

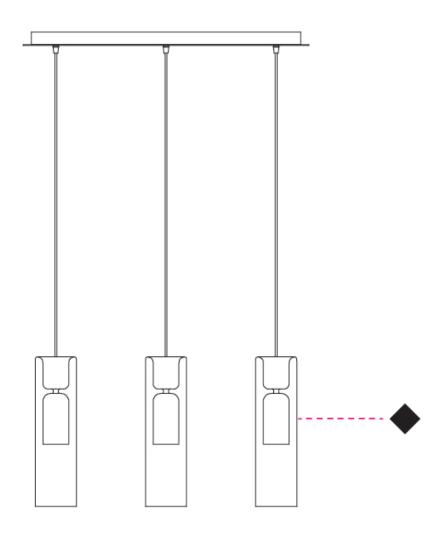



# **ZANEEN**®

## **TAO SURFACE**

#### D143018-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$ 

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 80
Diameter (in): 3 1/8
Height (mm): 330
Depth (mm): 160
Height (in): 13
Depth (in): 6 <sup>5</sup> / <sub>16</sub>
Extension (mm): 160
Extension (in): 6 ½
Light Distribution: Omnidirectional
Weight (kg): 1.075
Weight (lbs): 2.37
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal

#### ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120


#### LED

#### OPTICAL


#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

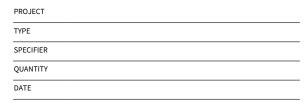










D143018-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	_
DATE	

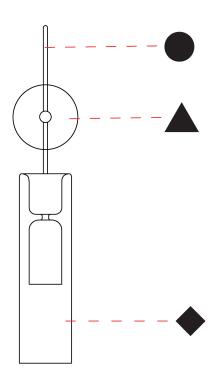





#### D143019-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$ 

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 15/16
Height (mm): 370
Height (in): 14 1/16
Light Distribution: Omnidirectional
Weight (kg): 0.90
Weight (lbs): 1.98
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal
ELECTRICAL

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	


#### LED

## OPTICAL


#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

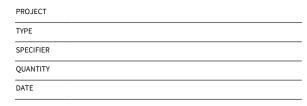










D143019-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

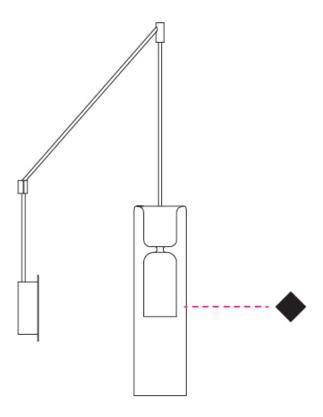





#### D143020-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Tao	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	_
Subcategory: Ambient	_

## PHYSICAL


Shape: Cylinder
Diameter (mm): 100
Diameter (in): 3 15/16
Height (mm): 370
Height (in): 14 %
Light Distribution: Omnidirectional
Weight (kg): 2.40
Weight (lbs): 5.29
Fixture Finish: AMB / GRN / PNK / RUB / SMK / TOB / TRA / RGD / TIM
Holder Finish: CHR
Fixture Material: Glass / Metal

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 9	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	


#### LED

## OPTICAL

# RATINGS AND CERTIFICATIONS












D143020-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_

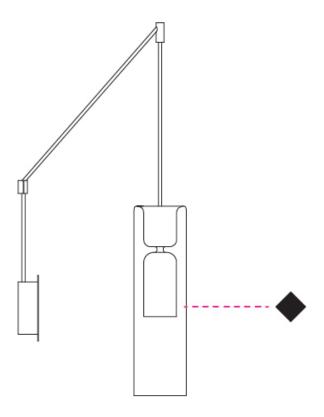





## **TAO SUSPENSION**

#### **D14TAO-MOD-SYS**

base number

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Tao	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Modular	

#### **PHYSICAL**


#### **ELECTRICAL**

Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

#### LED

#### OPTICAL

#### **RATINGS AND CERTIFICATIONS**









## **TAO**

COLOR FINISH CHART

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

#### **Fixture Finish**



















## **Holder Finish**





**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





## **TAO**

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

## **LEGEND**

П		_			special LED (upon request) RGR_RGRW_tunable
	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	<b>(K)</b>	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩ <u></u>	efficacy (lumens per watt)
	asymmetric light distribution	$\otimes$	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
7	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□+,</b> +	minimum distance (meters) lamp - object	<b>•</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
<b></b>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>♦</b> ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
<b>₹</b>	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>(1)</b>	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	O	direct diffuser	։ (Մ) ու	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	<b>(1)</b>	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	<b>(Z</b> )	Certified for North American Standards

## **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

## **IK RATING**

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm