

WHIRL SUSPENSION

D181006-

-

base number

Color

Finish

Temperature

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Whirl

Partner: Artigia

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Teardrop

Diameter (mm): 150

Diameter (in): 5 7/8

Height (mm): 1400

Height (in): 55 1/8

Fixture Finish: BBS / BUB / ABR / DRB / DUB / AGD/ LBB / DBZ / BBN / PCH / PGO / PBN / WHI / BLK

Fixture Material: Metal

Primary Material: Brass

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15

Dimming: Dali Dimming / Phase Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

LED

Number of LEDs: 5

Color Temperature (°K): 2700 / 3000 / 4000

Nominal Lumen (lm): 1500 / 1565 / 1660

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

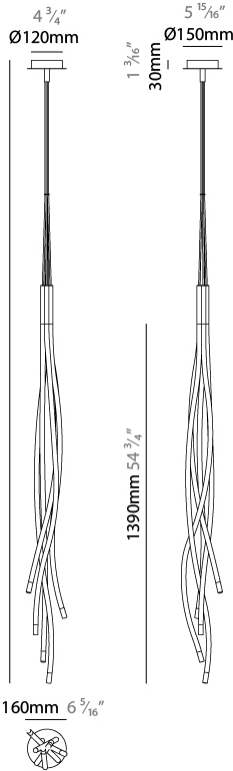

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

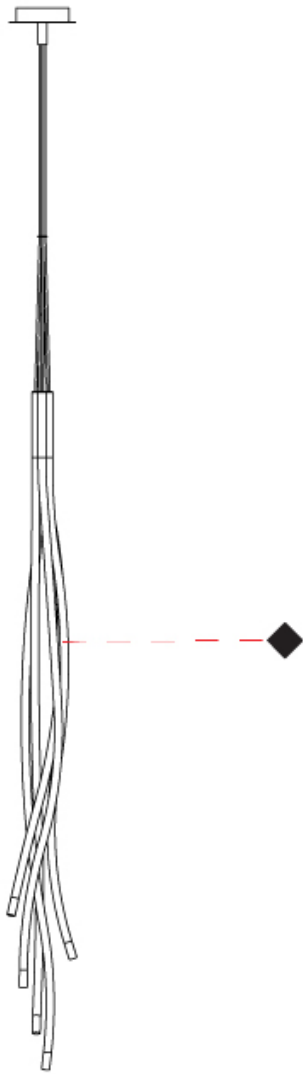

WHIRL SURFACE

D182003-

-

base number

Color

Temperature

Finish

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Whirl

Partner: Artigia

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Diameter (mm): 150

Diameter (in): 5 7/8

Height (mm): 1400

Height (in): 55 1/8

Fixture Finish: BBS / BUB / ABR / DRB / DUB / AGD/ LBB / DBZ / BBN / PCH / PGO / PBN / WHI / BLK

Fixture Material: Metal

Primary Material: Brass

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 15

Dimming: Dali Dimming / Phase Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

LED

Number of LEDs: 5

Color Temperature (°K): 2700 / 3000 / 4000

Nominal Lumen (lm): 1500 / 1565 / 1660

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

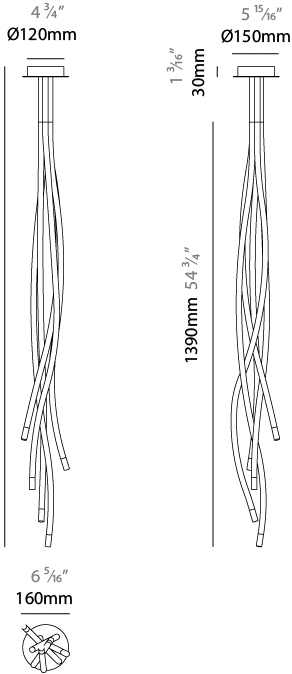

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

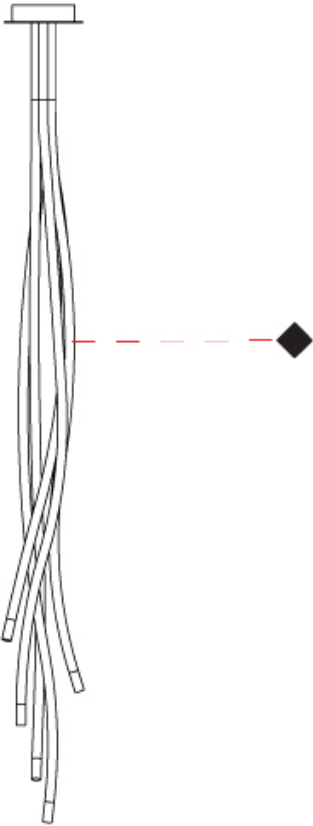

WHIRL SURFACE

D182004-

-

base number

Color

Temperature

Finish

Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Whirl

Partner: Artigia

Division: Design

Installation: Surface

Product Type: Ceiling Surface

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Teardrop

Diameter (mm): 450

Diameter (in): 17 11⁄16

Height (mm): 1400

Height (in): 55 1⁄8

Fixture Finish: BBS / BUB / ABR / DRB / DUB / AGD/ LBB / DBZ / BBN / PCH / PGO / PBN / WHI / BLK

Fixture Material: Metal

Primary Material: Brass

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 45

Dimming: Dali Dimming / Phase Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

LED

Number of LEDs: 15

Color Temperature (°K): 2700 / 3000 / 4000

Nominal Lumen (lm): 4500 / 4695 / 4980

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

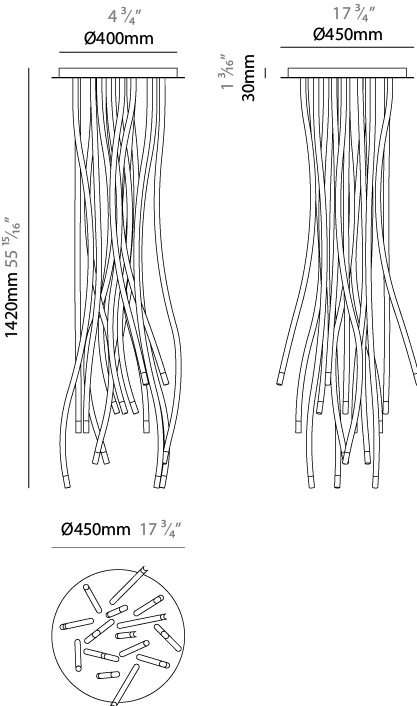

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

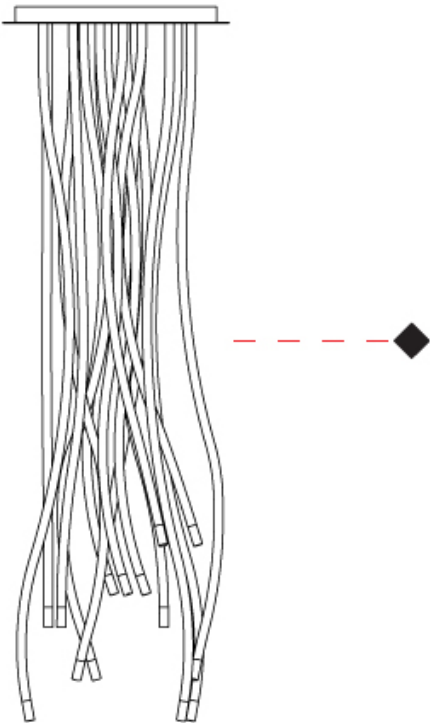

WHIRL SURFACE

D182005- -
base number Color Finish
Temperature Options

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Whirl
Partner: Artigia
Division: Design
Installation: Surface
Product Type: Ceiling Surface
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Teardrop
Diameter (mm): 1850
Diameter (in): 72 13/16
Width (mm): 250
Width (in): 9 13/16
Height (mm): 1400
Height (in): 55 1/8
Fixture Finish: BBS / BUB / ABR / DRB / DUB / AGD/ LBB / DBZ / BBN / PCH / PGO / PBN / WHI / BLK
Fixture Material: Metal
Primary Material: Brass

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 159
Dimming: Dali Dimming / Phase Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Class: Class 2
Input Voltage (V): 120
Output Voltage (V): 24
Upon Request: 0-10V Dimming

LED


Number of LEDs: 53
Color Temperature (°K): 2700 / 3000 / 4000
Nominal Lumen (lm): 15900 / 16589 / 17596
Lamp Life (hrs): 50000

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

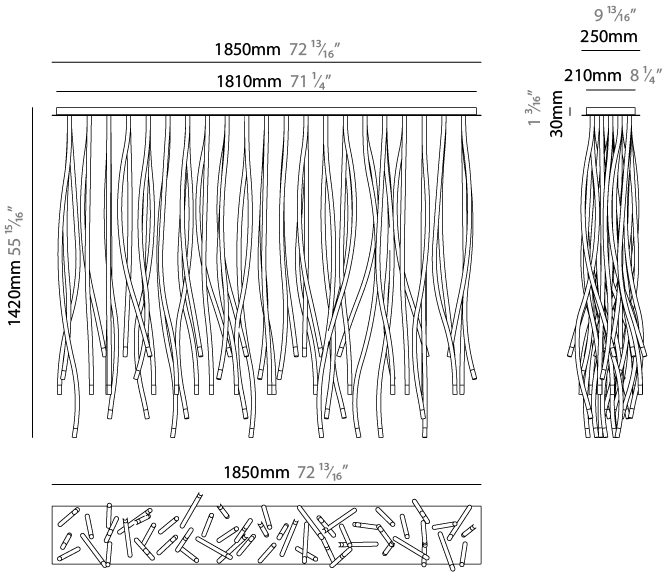

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

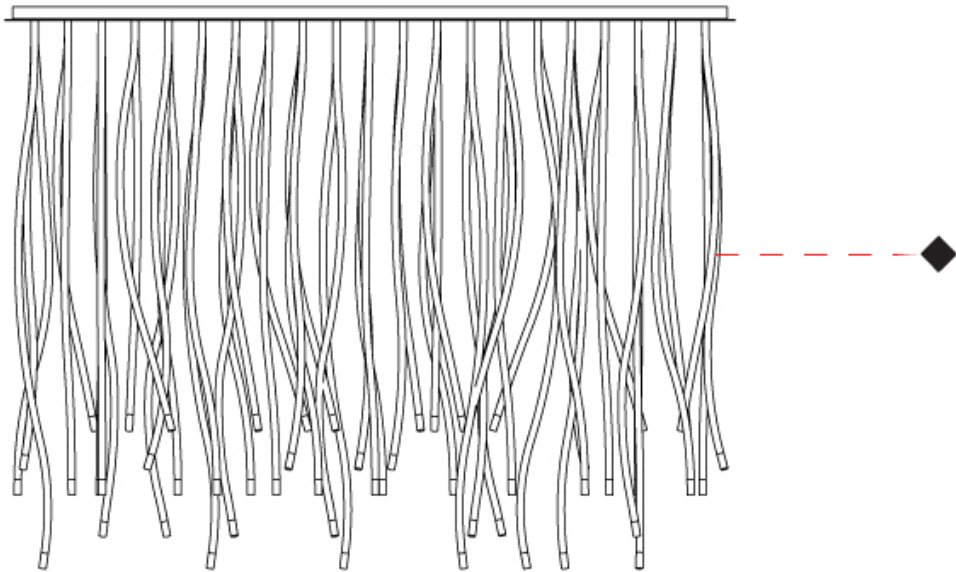

WHIRL PORTABLE

D184000-

base number

Color

Finish

Temperature

Options

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Whirl

Partner: Artigia

Division: Design

Installation: Portable

Product Type: Floor

Mounting Location: Floor

Light Distribution: Indirect

PHYSICAL

Shape: Teardrop

Length (mm): 300

Length (in): 11 13/16

Width (mm): 300

Width (in): 11 13/16

Height (mm): 1400

Height (in): 55 1/8

Fixture Finish: BBS / BUB / ABR / DRB / DUB / AGD / LBB / DBZ / BBN / PCH / PGO / PBN / WHI / BLK

Fixture Material: Metal

Primary Material: Brass

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 21

Dimming: Dali Dimming / Phase Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 01-10V Dimming

LED

Number of LEDs: 7

Color Temperature (°K): 2700 / 3000 / 4000

Nominal Lumen (lm): 2100 / 2191 / 2324

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE


SPECIFIER

QUANTITY

DATE

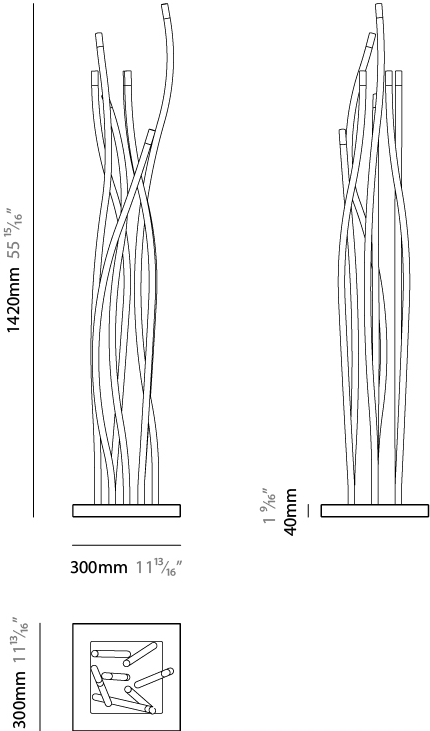

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

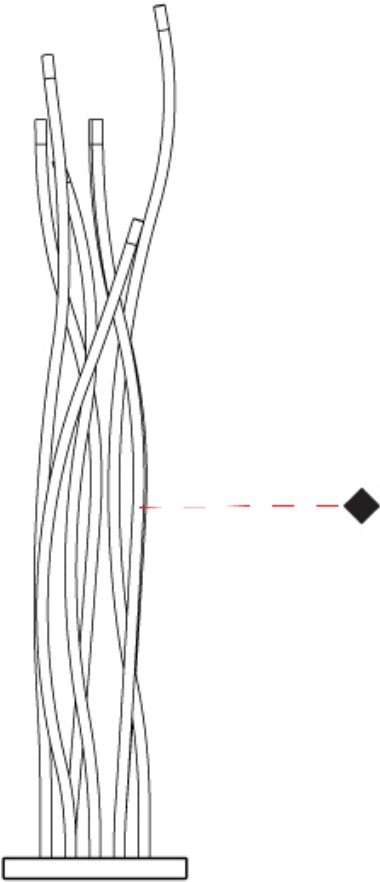

WHIRL
COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish

Antique Brass - ABR



Brushed Black Nickel - BBN



Polished Chrome - PCH



Polished Black Nickel - PBN



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.
Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)