

D141177-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Diameter (mm): 160
Diameter (in): 6 ⁵ / ₁₆
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 0.79
Weight (lbs): 1.74
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	












D141177-

PROJECT		
TYPE		_
SPECIFIER		_
QUANTITY		_
DATE		

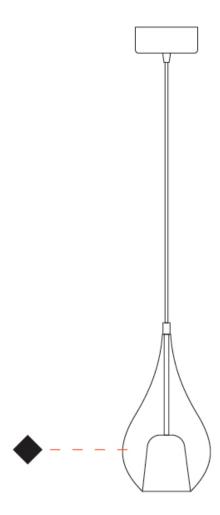





D141178-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series	s: Zoe
Subse	eries: Zoe Vincent - Monopoint
Branc	d: Cangini & Tucci
Divisi	on: Design
Moun	nting Type: Suspension
Moun	iting Location: Ceiling
Subc	ategory: Pendant

Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Diameter (mm): 220
Diameter (in): 8 11/16
Height (mm): 380
Height (in): 14 15/16
Max. Overall Height (mm): 1880
Max. Overall Height (in): 74
Light Distribution: Omnidirectional
Weight (kg): 1.51
Weight (lbs): 3.33
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm cable

FI FCTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 16
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





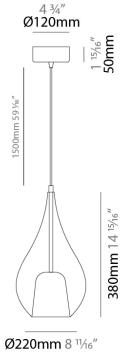






D141178-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

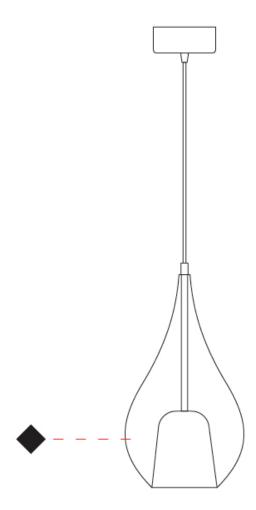





D141179-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent - Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Diameter (mm): 300
Diameter (in): 11 ¹³ / ₁₆
Height (mm): 530
Height (in): 20 $\frac{7}{8}$
Max. Overall Height (mm): 2030
Max. Overall Height (in): 79 15/16
Light Distribution: Omnidirectional
Weight (kg): 2.50
Weight (lbs): 5.51
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm Cable

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 16
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D141179-

ROJECT
YPE
PECIFIER
UANTITY
ATE

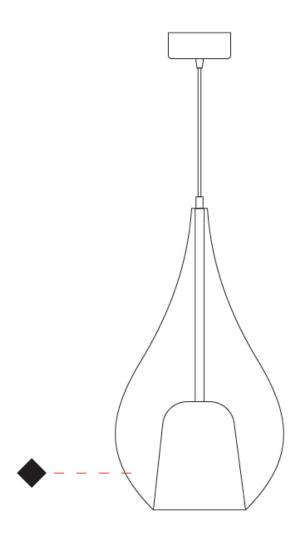





D141249-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Cub astronom Bandant	

mounting Location octung
Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Length (mm): 1000
Length (in): 39 3/8
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 2.90
Weight (lbs): 6.39
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm cable


ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 15	
Max. Wattage Per Lamp (W): 5	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

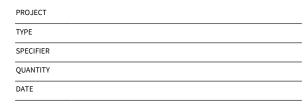



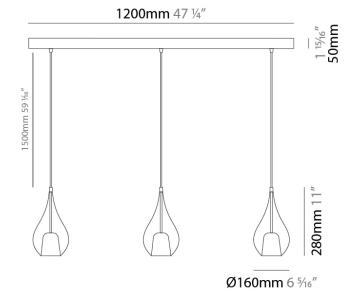






D141249-

ROJECT	
YPE	
PECIFIER	
DUANTITY	
ATE	

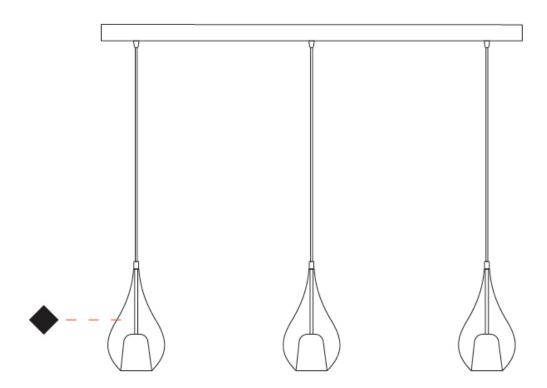





D141249-: D141249-TRS

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Length (mm): 1000
Length (in): 39 3/8
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 2.90
Weight (lbs): 6.39
Diffuser: Glass - Opal
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm cable
TI TOTALONI

ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 15	
Max. Wattage Per Lamp (W): 5	
Lamp Base: G9	
Input Voltage (V): 120	


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





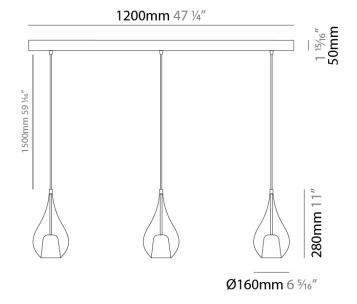






D141249-: D141249-TRS

PROJECT	
YPE	_
PECIFIER	_
QUANTITY	_
ATE	_
	_

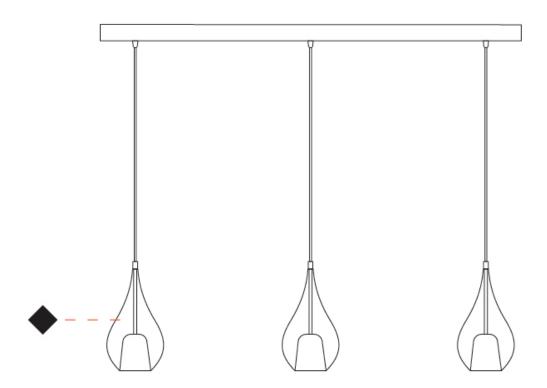





D141250-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subsatagen # Dondant	

Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Teardrop
Length (mm): 1200
Length (in): 47 1/ ₄
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 5.59
Weight (lbs): 12.32
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal
Cable Details: 1500mm cable


ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Total Output Wattage (W): 48
Max. Wattage Per Lamp (W): 16
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





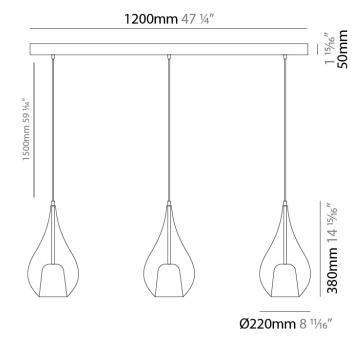






D141250-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

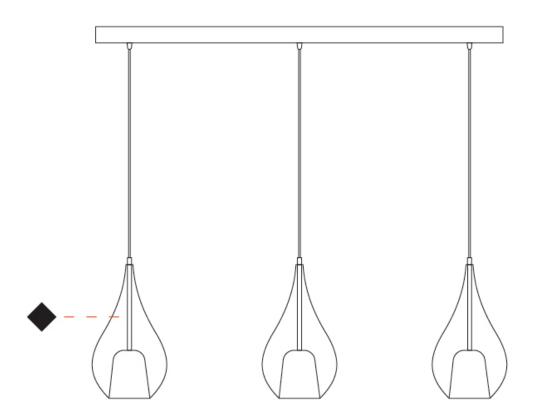





D141251-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe
Subseries: Zoe Vincent 3 Light Cluster
Brand: Cangini & Tucci
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL	
Shape: Teardrop	
Diameter (mm): 430	
Diameter (in): 16 ¹⁵ / ₁₆	
Height (mm): 1500	
Height (in): 59 15/16	
Light Distribution: Omnidirectional	
Weight (kg): 6.48	
Weight (lbs): 14.29	
Diffuser: Glass - Opal	
Fixture Finish: MSB / MBS / TRS	
Holder Finish: BLK	
Fixture Material: Glass / Metal	
Cable Details: 1500mm cable	

Cable Details. 1300iiiii Cable
ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Total Output Wattage (W): 37
Max. Wattage Per Lamp (W): 16 + 5
Lamp Base: E26 + G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards








Ø300mm 11 13/16"





D141251-

ROJECT
YPE
PECIFIER
UANTITY
ATE

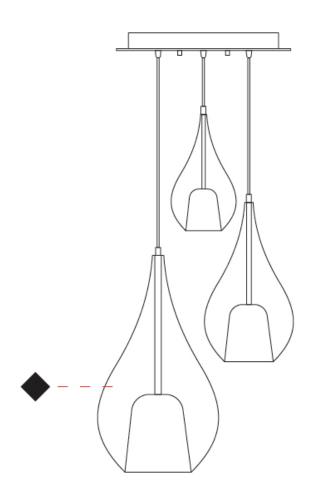





ZOE VINCENT SURFACE

D143032-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	

Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Teardrop
Diameter (mm): 160
Diameter (in): 6 $\frac{5}{16}$
Height (mm): 280
Depth (mm): 200
Height (in): 11
Depth (in): 7 1/8
Max. Overall Height (mm): 780
Max. Overall Height (in): 30 ¹¹ / ₁₆
Extension (mm): 200
Extension (in): 7 78
Light Distribution: Omnidirectional
Weight (kg): 0.875
Weight (lbs): 1.93
Diffuser: Glass - Opal
Fixture Finish: MSB / MBS / TRS
Holder Finish: BLK
Fixture Material: Glass / Metal

ELECTRICAL


Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20












ZOE VINCENT SURFACE

D143032-

ROJECT	
YPE	
PECIFIER	
UANTITY	_
ATE	

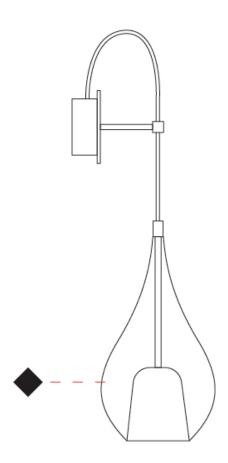





D144028-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe
Subseries: Zoe Vincent - Portable
Brand: Cangini & Tucci
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Ambient

Mounting Type: Portable
Mounting Location: Table
Subcategory: Ambient
PHYSICAL
Shape: Teardrop
Diameter (mm): 250
Diameter (in): 9 13/16
Height (mm): 430
Height (in): 16 15/16
Light Distribution: Omnidirectional
Weight (kg): 1.10
Weight (lbs): 2.43
Diffuser: Glass - Opal
Fixture Finish: MSB / TRA
Holder Finish: BLK
Fixture Material: Glass / Metal
ELECTRICAL
Number of Lamps: 1

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED + LED Retrofit
Input Wattage (W): 4.3
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 3
Lamp Base: E12
Dimming: Non-Dimmable
Input Voltage (V): 120

LED

Number of LEDs: 1
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 350
Nominal Lumen (lm): 350


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		











D144028-









D144029-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe	
Subseries: Zoe Vincent - Portable	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Ambient	

=
Mounting Type: Portable
Mounting Location: Table
Subcategory: Ambient
PHYSICAL
Shape: Teardrop
Diameter (mm): 400
Diameter (in): 15 ¾
Height (mm): 580
Height (in): 22 ¹³ / ₁₆
Light Distribution: Omnidirectional
Weight (kg): 1.92
Weight (lbs): 4.23
Diffuser: Glass - Opal
Fixture Finish: MSB / TRA
Holder Finish: BLK
Fixture Material: Glass / Metal
ELECTRICAL
Number of Lamps: 1


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED + LED Retrofit
Input Wattage (W): 4.3
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8
Lamp Base: E26
Dimming: Non-Dimmable
Input Voltage (V): 120

LED	
Number of LEDs: 1	
Color Temperature (°K): 3000	
Max. Delivered Lumen (lm): 350	
Nominal Lumen (lm): 350	


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D144029-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

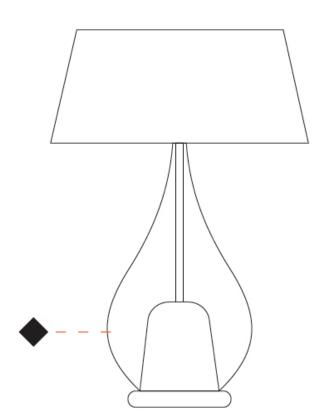





D144030-

base number

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Zoe
Subseries: Zoe Vincent - Portable
Brand: Cangini & Tucci
Division: Design
Mounting Type: Portable
Mounting Location: Table

Mounting Type: Portable

Mounting Location: Table

Subcategory: Ambient

PHYSICAL

Shape: Teardrop

Diameter (mm): 500

Diameter (in): 19 11/16

Height (mm): 780

Height (in): 30 11/16

Light Distribution: Omnidirectional

Weight (kg): 3.435

Weight (lbs): 7.57

Diffuser: Glass - Opal

Fixture Finish: MSB / TRA

Holder Finish: BLK

Fixture Material: Glass / Metal

ELECTRICAL

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED + LED Retrofit

Input Wattage (W): 4.3

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 8

Lamp Base: E26

Dimming: Non-Dimmable

Input Voltage (V): 120

LED

Number of LEDs: 1
Color Temperature (°K): 3000
Max. Delivered Lumen (Im): 350
Nominal Lumen (Im): 350

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards












D144030-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

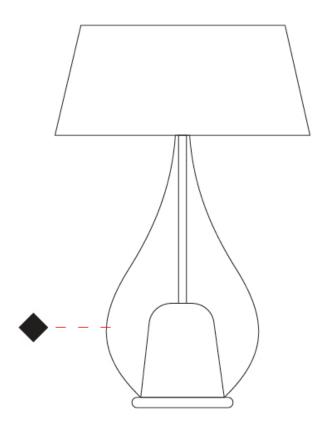





ZOE

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish



Holder Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





ZOE

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

=-	oor-mounted	T			
✓ wa		¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	all and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
↑ ce	eiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
→ wa	all-mounted	I	color of suspension cable	THEO	fixture with natural vivid LED (upon request)
on	mni-directional light distribution	←····	length of suspension cable	CRI	color rendering index
dir	irect light distribution	\Box	reflector degree selection	(K)	color temperature
dir	irect/indirect light distribution	s s	super spot	(<u>A</u>	lumen (luminous flux)
ind	direct light distribution	*	lens	₹	efficacy (lumens per watt)
as	symmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
au	ura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
₯ ro	ound wall or ceiling cut-out	\odot	integrated shine ring with diffuser	3	walk on
√ sq	quare wall or ceiling cut-out		free individual colors 01-29	②	drive on
ද්දී th	ne supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d ⊷ mi	ninimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u></u> re	ecessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
‡ ce	eiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1 ce	eiling thickness selection		luminaire part to be colored (F4)		acoustic material
st (st	immable DP (phase), DV (0-10V), DD (dali), DS tep-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
ind co	icluded or excluded LED driver/transformer/ ontrol gear	•	color of 3-circuit adaptor		protection class II, protection insulation
රි se	eparately switchable	\odot	indirect diffuser	. (11)	ETL Certified to UL and CSA Standards
•் y se	ensor	0	direct diffuser	շ (Մ) տ	UL Certified to UL and CSA Standards
[re	emote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
J av	vailable upon request	0	accessory	(\mathbf{Z})	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm