

DOMINO SUSPENSION

D81045-WHI

GENERAL

Series: Domino
Brand: Panzeri

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Length (mm): 110

Length (in): 4 $\frac{5}{1_{16}}$ Width (mm): 80

Width (in): 3 $\frac{1}{8}$ Height (mm): 260

Height (in): 10 $\frac{1}{4}$ Max. Overall Height (mm): 2260

Max. Overall Height (in): 89

Diffuser: Matte White Blown Glass

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / Halogen

Bulb Included: Bulb Not Included

Total Output Wattage (W): 13 / 60

Max. Wattage Per Lamp (W): 13 / 60

Lamp Base: G9

Input Voltage (V): 120


LED

OPTICAL


Weight (kg): 1.23 Weight (lbs): 2.71

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

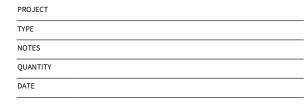









DOMINO SUSPENSION

D81048-BLK

GENERAL
Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Length (mm): 140
Length (in): 5 ½
Width (mm): 90
Width (in): 3 ⁹ / ₁₆
Height (mm): 290
Height (in): 11 ⁷ / ₁₆
Max. Overall Height (mm): 2290
Max. Overall Height (in): 90 $^{3}\!\!/_{16}$
Weight (kg): 1.23
Weight (lbs): 2.71

ELECTRICAL Number of Lamps: 1 Lamp Type: LED Retrofit / Halogen Bulb Included: Bulb Not Included Total Output Wattage (W): 13 / 60 Max. Wattage Per Lamp (W): 13 / 60 Lamp Base: G9


LED

OPTICAL


RATINGS AND CERTIFICATIONS

Diffuser: Black Blown Glass

Certified By: CSA Certified to UL and CSA Standards

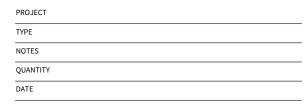



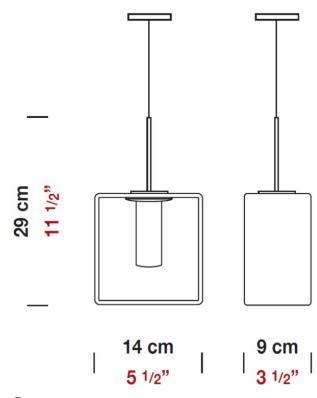





D82033-BLK

GENERAL

Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient

Mounting Location: Ceiling Subcategory: Ambient **PHYSICAL** Shape: Rectangle Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): 5 1/8 Extension (in): 5 1/8 Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 1 Lamp Type: LED Retrofit / Halogen Bulb Included: Bulb Not Included Total Output Wattage (W): 3 / 35 Max. Wattage Per Lamp (W): 3 / 35 Lamp Base: G9

LED


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

Input Voltage (V): 120











D82033-WHI

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	


Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 110
Length (in): 4 ⁵ / ₁₆
Width (mm): 80
Width (in): 3 1/8
Height (mm): 130
Height (in): $5\frac{1}{8}$
Extension (in): 5 ½
Light Distribution: Direct / Indirect
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Matte White Blown Glass
Fixture Material: Glass / Aluminum
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4

Number of Lamps: 1	
Lamp Type: LED Retrofit / Halogen	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 13 / 60	
Max. Wattage Per Lamp (W): 13 / 60	
Lamp Base: G9	
Input Voltage (V): 120	


LED

OPTICAL

RATINGS AND CERTIFICATIONS Certified By: CSA Certified to UL and CSA Standards

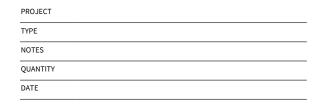









D82036-WHI

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
DINGIGAL	

Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 140
Length (in): 5 ½
Width (mm): 90
Width (in): 3 % 16
Height (mm): 160
Height (in): $6\frac{5}{16}$
Light Distribution: Direct / Indirect
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Matte White Blown Glass
Fixture Material: Glass / Aluminum
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen


Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 3 / 35 Lamp Base: G9 Driver Included: No

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards IP rating: IP40











D82074

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	

Mounting Type: Surface
Mounting Location: Ceiling
PHYSICAL
Shape: Cube
Length (mm): 230
Length (in): 9
Width (mm): 230
Width (in): 9
Height (mm): 160
Height (in): 6 1/4
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 4
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: T4


ELECTRICAL	
Number of Lamps: 2	
Lamp Type: LED Retrofit	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 6	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

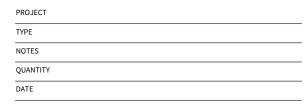



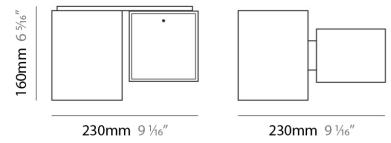





D82075

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 330
Length (in): 13
Width (mm): 90
Width (in): 3 ½
Height (mm): 130
Height (in): $5\frac{1}{8}$
Light Distribution: Downlight
Weight (kg): 2.3
Weight (lbs): 5
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL

Diffuser: Frosted Wiffle Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 21 / 105
Max. Wattage Per Lamp (W): 7 / 35
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards IP rating: IP40

PROJECT
ТҮРЕ
NOTES
QUANTITY
DATE









D83103

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Sconce	

PHYSICAL
Width (mm): 140
Width (in): 5 ½
Height (mm): 159
Height (in): 6 1/4
Extension (mm): 98
Extension (in): 3 1/8
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Orange Glass
Fixture Material: Metal
EL ECTRICAL

ELECTRICAL


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 18 / 75
Max. Wattage Per Lamp (W): 18 / 75
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





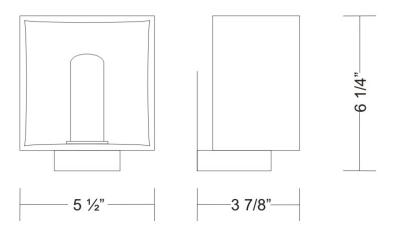





D84079

ENERAL	
eries: Domino	
rand: Panzeri	
vision: Design	
ounting Type: Portable	
ounting Location: Table	
ıbcategory: Table	
HYSICAL	
nape: Cube	
ength (mm): 110	
ength (in): 4 ⁵ / ₁₆	

Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional

Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Matte White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum

ELECTRICAL

Width (mm): 80 Width (in): $3\frac{1}{8}$

Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards IP rating: IP40

PROJECT TYPE NOTES QUANTITY DATE







130mm 5 1/8"

80mm 3 1/8"





D84080

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable

Mounting Location: Table Subcategory: Table **PHYSICAL** Shape: Cube Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 1 Lamp Type: LED Retrofit


Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards









130mm 5 1/8"

110mm 4 5/16"

80mm 3 1/8"





D84082

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable Mounting Location: Floor Subcategory: Floor **PHYSICAL** Shape: Cube Length (mm): 250 Length (in): 9 $\frac{1}{8}$

Width (mm): 160 Width (in): 6 1/4 Height (mm): 1650 Height (in): 65

Light Distribution: Omnidirectional Weight (kg): 0.5 Weight (lbs): 1

Diffuser: White & White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum

ELECTRICAL


Number of Lamps: 2 Lamp Type: LED Retrofit Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 6 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





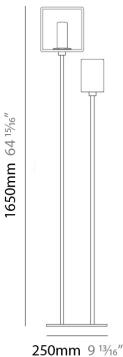







D84084

GENERAL

Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

PHYSICAL

Length (mm): 232
Length (in): 9 1/8
Width (mm): 165
Width (in): 6 ½
Height (mm): 1650
Height (in): 65
Weight (kg): 1.23
Weight (lbs): 2.7
Diffuser: Matte White Printed Pyrex
Fixture Material: Metal

ELECTRICAL


ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 28 / 120
Max. Wattage Per Lamp (W): 13 / 60
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





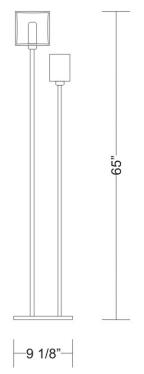



LEGEND

_					·
<u></u>	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	J	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	<u></u>	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution	Δ	reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
\(\sigma\)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
द्धि	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ +,*	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)	8	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
4	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
४	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c(UL) us	UL Certified to UL and CSA Standards
	remote control	\odot	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
[P40]	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

ІКО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)