

DOMINO SUSPENSION

D81045-WHI

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Suspension Mounting Location: Ceiling Subcategory: Pendant **PHYSICAL** Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 260 Height (in): 10 1/4 Max. Overall Height (mm): 2260 Max. Overall Height (in): 89 Weight (kg): 1.23 Weight (lbs): 2.71

Diffuser: Matte White Blown Glass

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / Halogen

Bulb Included: Bulb Not Included

Total Output Wattage (W): 13 / 60

Max. Wattage Per Lamp (W): 13 / 60

Lamp Base: G9


Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











DOMINO SUSPENSION

D81048-BLK

GENERAL	
Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Length (mm): 140	
Length (in): 5 ½	
Width (mm): 90	
Width (in): 3 ⁹ / ₁₆	
Height (mm): 290	
Height (in): 11 $\frac{7}{16}$	
Max. Overall Height (mm): 2290	
Max. Overall Height (in): 90 $\frac{3}{16}$	

ELECTRICAL Number of Lamps: 1 Lamp Type: LED Retrofit / Halogen Bulb Included: Bulb Not Included Total Output Wattage (W): 13 / 60 Max. Wattage Per Lamp (W): 13 / 60 Lamp Base: G9


LED

OPTICAL


Weight (kg): 1.23 Weight (lbs): 2.71 Diffuser: Black Blown Glass

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

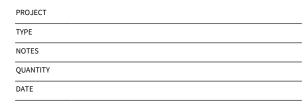



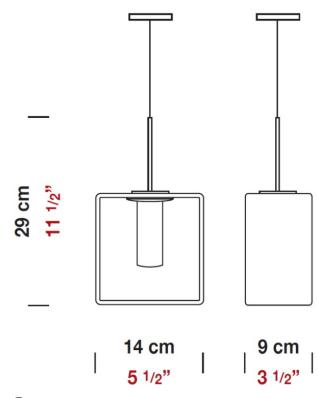





D82033-BLK

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	
DHACICVI	

Shape: Rectangle

Length (mm): 110 Length (in): $4^{\frac{5}{16}}$ Width (mm): 80 Width (in): $3^{\frac{1}{6}}$ Height (mm): 130 Height (in): $5^{\frac{1}{6}}$ Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass Fixture Material: Glass / Aluminum	
Width (mm): 80 Width (in): $3\frac{1}{8}$ Height (mm): 130 Height (in): $5\frac{1}{8}$ Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass	Length (mm): 110
Width (in): 3 ½ Height (mm): 130 Height (in): 5 ½ Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass	Length (in): 4 5/16
Height (mm): 130 Height (in): 5 1/8 Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass	Width (mm): 80
Height (in): 5 ½ Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass	Width (in): $3\frac{1}{8}$
Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass	Height (mm): 130
Weight (lbs): 2.7 Diffuser: Black Blown Glass	Height (in): $5\frac{1}{8}$
Diffuser: Black Blown Glass	Weight (kg): 1.23
	Weight (lbs): 2.7
Fixture Material: Glass / Aluminum	Diffuser: Black Blown Glass
	Fixture Material: Glass / Aluminum

ELECTRICAL


LEECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3 / 35
Max. Wattage Per Lamp (W): 3 / 35
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards IP rating: IP40











D82033-WHI

GENERAL

OLIVE CONTRACTOR CONTR
Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL

Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 110
Length (in): 4 ⁵ / ₁₆
Width (mm): 80
Width (in): 3 ½
Height (mm): 130
Height (in): 5 ½
Light Distribution: Direct / Indirect
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Matte White Blown Glass
Fixture Material: Glass / Aluminum
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4

Input Voltage (V): 120 **LED**

OPTICAL

RATINGS AND CERTIFICATIONS

Bulb Included: Bulb Not Included
Total Output Wattage (W): 13 / 60
Max. Wattage Per Lamp (W): 13 / 60


Certified By: Certified for North American Standards

IP rating: IP20

Lamp Base: G9











D82074

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	

Mounting Location: Ceiling
PHYSICAL
Shape: Cube
Length (mm): 230
Length (in): 9
Width (mm): 230
Width (in): 9
Height (mm): 160
Height (in): 6 1/4
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 4
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit


ELECTRICAL	
Number of Lamps: 2	
Lamp Type: LED Retrofit	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 6	
Max. Wattage Per Lamp (W): 3	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





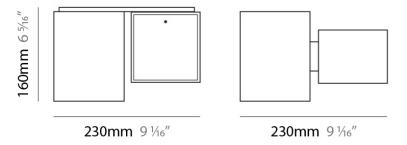





D82075

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	
DIIVEICAL	

Mounting Type. Surface
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 330
Length (in): 13
Width (mm): 90
Width (in): 3 ½
Height (mm): 130
Height (in): 5 1/8
Light Distribution: Downlight
Weight (kg): 2.3
Weight (lbs): 5
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 2


Fixture Material: Stainless Steel	
ELECTRICAL	
Number of Lamps: 3	
Lamp Type: LED Retrofit / Halogen	
Lamp Shape: T4	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 21 / 105	
Max. Wattage Per Lamp (W): 7 / 35	
Lamp Base: G9	
Input Voltage (V): 120	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











D83103

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Sconce	

PHYSICAL
Width (mm): 140
Width (in): 5 ½
Height (mm): 159
Height (in): 6 1/4
Extension (mm): 98
Extension (in): 3 1/8
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Orange Glass
Fixture Material: Metal

EL ECTDICAL


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 18 / 75
Max. Wattage Per Lamp (W): 18 / 75
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





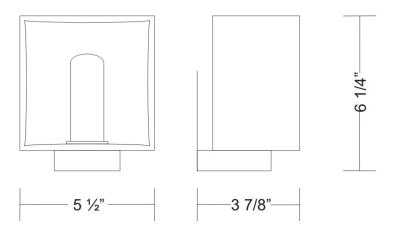





D84079

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable Mounting Location: Table Subcategory: Table **PHYSICAL**

Shape: Cube Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Matte White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL**


Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards









130mm 5 1/8"

110mm 4 5/16"

80mm 3 1/8"





D84080

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable Mounting Location: Table

Subcategory: Table **PHYSICAL** Shape: Cube Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL**


Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards









130mm 5 1/8"

80mm 3 1/8"





D84082

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable

Mounting Location: Floor Subcategory: Floor **PHYSICAL** Shape: Cube Length (mm): 250 Length (in): 9 $\frac{1}{8}$ Width (mm): 160 Width (in): 6 1/4 Height (mm): 1650 Height (in): 65 Light Distribution: Omnidirectional Weight (kg): 0.5 Weight (lbs): 1 Diffuser: White & White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 2 Lamp Type: LED Retrofit Lamp Shape: T4


Bulb Included: Bulb Not Included Total Output Wattage (W): 6 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











D84084

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	

PHYSICAL

Length (mm): 232
Length (in): 9 1/8
Width (mm): 165
Width (in): 6 ½
Height (mm): 1650
Height (in): 65
Weight (kg): 1.23
Weight (lbs): 2.7
Diffuser: Matte White Printed Pyrex
Fixture Material: Metal

ELECTRICAL


ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 28 / 120
Max. Wattage Per Lamp (W): 13 / 60
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





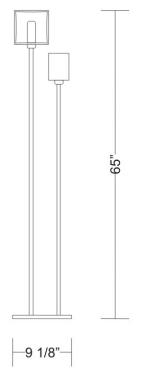



LEGEND

<u></u>	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	æ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	T	color of suspension cable	<u></u>	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	S	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	9	drive on
4	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d *.*	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
४	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c∰.	UL Certified to UL and CSA Standards
	remote control	\oplus	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm abov the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm abov the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm abov the surface)